


Device Specification

Serial	MX-CF-069-0074
Product Code	MX-HS-S-16-L
Firmware / ConsolePlus Version	iMini Ver_01_48 11/22/2013 / ConsolePlus:1.16.06
Mem. Size	16K Rec.
Temperature / Humidity	-40/+80 (°C) 0-100%
Battery	High
Trip #	11
Description	
Unit Mode Programmed	Celsius (°C)
Program: Start At:	2015/08/19 12:00
Program: Start button after:	-
Program: Stop At:	-
Program: Stop after # records:	16000
Program: Interval:	00h03m00s
Program: Continuous Logging:	-
Program: Stop button enabled:	Yes
Program: Stop after # records:	-
Program: Memory Used:	99%
Number of Records	15998
Started Time:	19/08/2015 12:00:02
Stopped Time:	05/09/2015 03:55:32
Configured / Downloaded by	-

MX-CF-069-0074 MX-HS-S-16-L

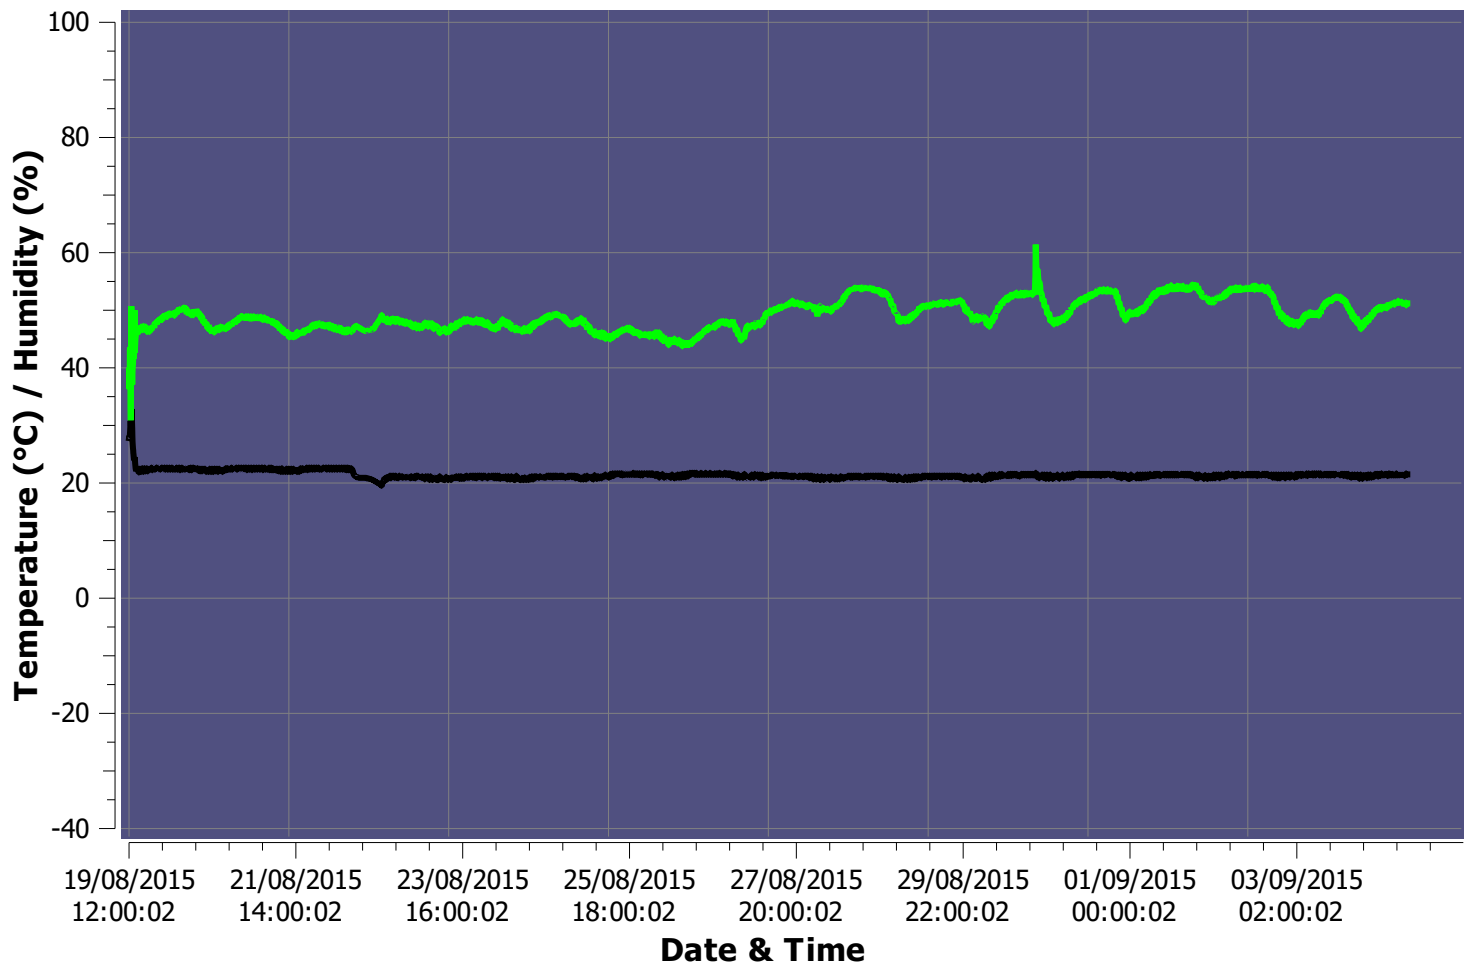


— MX-CF-069-0074 Int. Temp.(Digital) — MX-CF-069-0074 Int. Hum.(Digital)

Device Specification

Serial	MX-CE-105-0524
Product Code	MX-HS-S-16-L
Firmware / ConsolePlus Version	iMini Ver_01_54 06/16/2015 / ConsolePlus:1.16.06
Mem. Size	16K Rec.
Temperature / Humidity	-40/+80 (°C) 0-100%
Battery	High
Trip #	5
Description	
Unit Mode Programmed	Celsius (°C)
Program: Start At:	2015/08/19 12:00
Program: Start button after:	-
Program: Stop At:	-
Program: Stop after # records:	16000
Program: Interval:	00h03m00s
Program: Continuous Logging:	-
Program: Stop button enabled:	Yes
Program: Stop after # records:	-
Program: Memory Used:	99%
Number of Records	15998
Started Time:	19/08/2015 12:00:00
Stopped Time:	05/09/2015 03:55:30
Configured / Downloaded by	-

MX-CE-105-0524 MX-HS-S-16-L

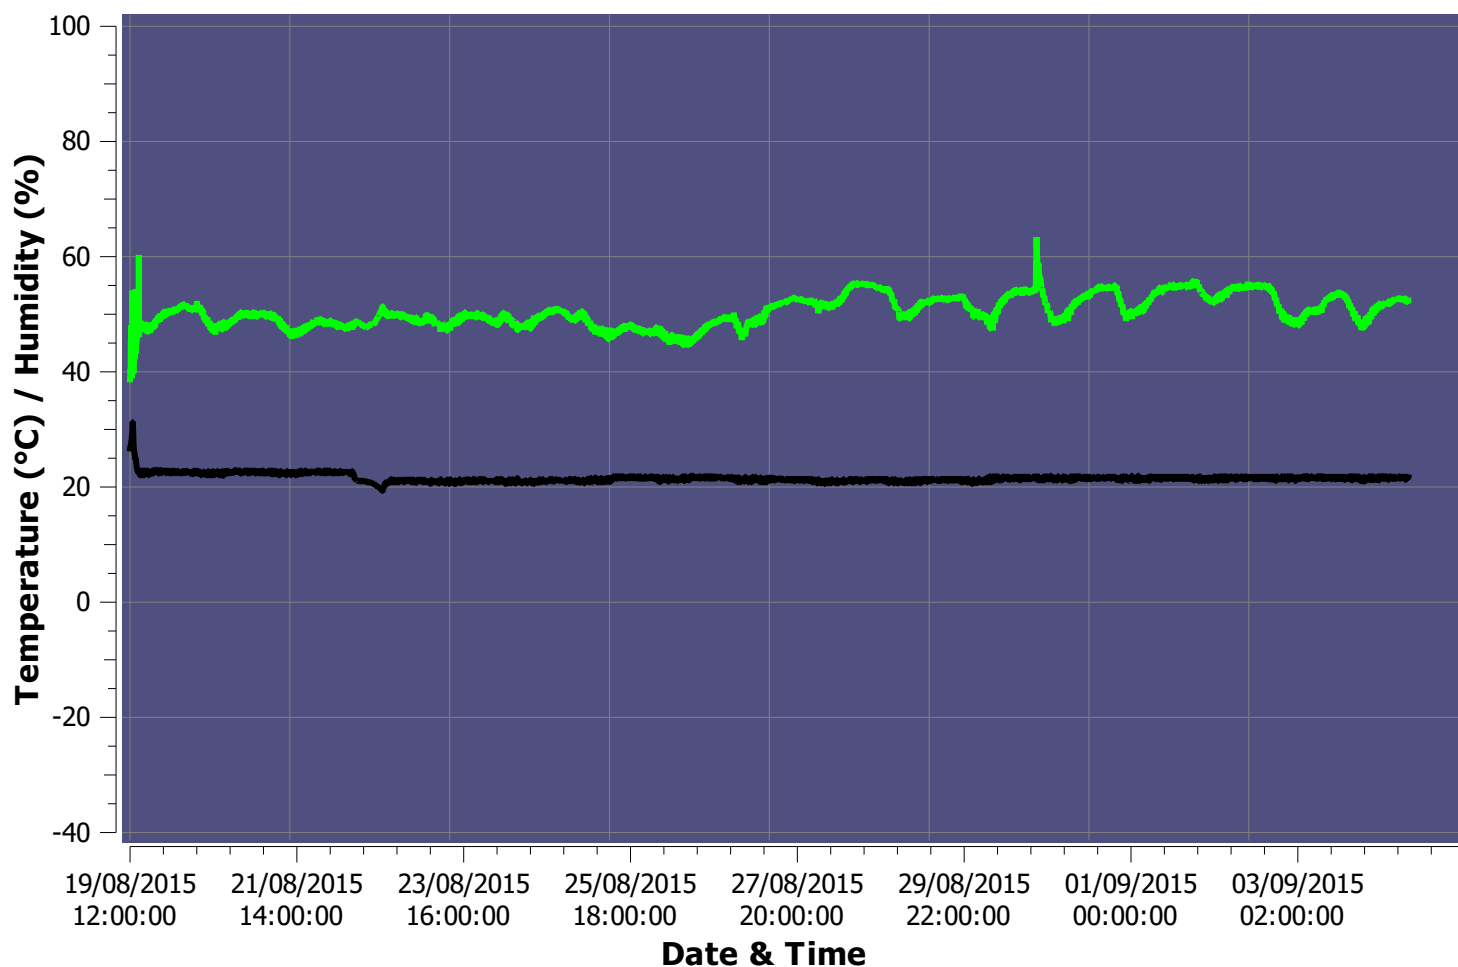


— MX-CE-105-0524 Int. Temp.(Digital) — MX-CE-105-0524 Int. Hum.(Digital)

Device Specification

Serial	MX-CE-106-0451
Product Code	MX-HS-S-16-L
Firmware / ConsolePlus Version	iMini Ver_01_48 11/22/2013 / ConsolePlus:1.16.06
Mem. Size	16K Rec.
Temperature / Humidity	-40/+80 (°C) 0-100%
Battery	High
Trip #	16
Description	
Unit Mode Programmed	Celsius (°C)
Program: Start At:	2015/08/19 12:00
Program: Start button after:	-
Program: Stop At:	-
Program: Stop after # records:	16000
Program: Interval:	00h03m00s
Program: Continuous Logging:	-
Program: Stop button enabled:	Yes
Program: Stop after # records:	-
Program: Memory Used:	99%
Number of Records	15998
Started Time:	19/08/2015 12:00:02
Stopped Time:	05/09/2015 03:55:32
Configured / Downloaded by	-

MX-CE-106-0451 MX-HS-S-16-L

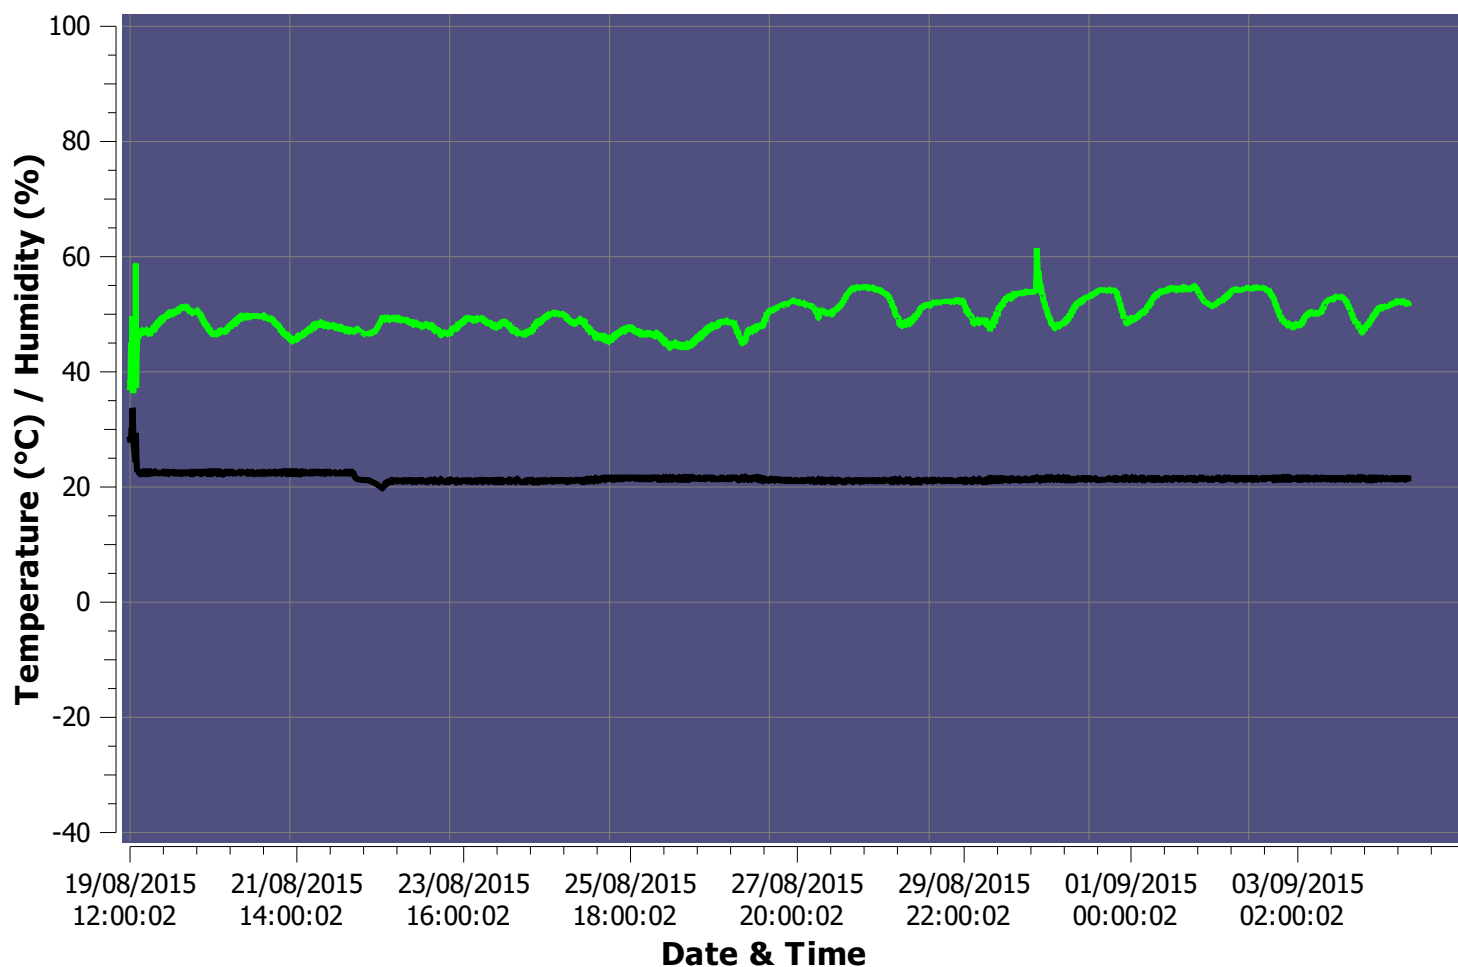


— MX-CE-106-0451 Int. Temp.(Digital) — MX-CE-106-0451 Int. Hum.(Digital)

Device Specification

Serial	MX-CF-069-0097
Product Code	MX-HS-S-16-L
Firmware / ConsolePlus Version	iMini Ver_01_48 11/22/2013 / ConsolePlus:1.16.06
Mem. Size	16K Rec.
Temperature / Humidity	-40/+80 (°C) 0-100%
Battery	High
Trip #	12
Description	
Unit Mode Programmed	Celsius (°C)
Program: Start At:	2015/08/19 12:00
Program: Start button after:	-
Program: Stop At:	-
Program: Stop after # records:	16000
Program: Interval:	00h03m00s
Program: Continuous Logging:	-
Program: Stop button enabled:	Yes
Program: Stop after # records:	-
Program: Memory Used:	99%
Number of Records	15998
Started Time:	19/08/2015 12:00:02
Stopped Time:	05/09/2015 03:55:32
Configured / Downloaded by	-

MX-CF-069-0097 MX-HS-S-16-L

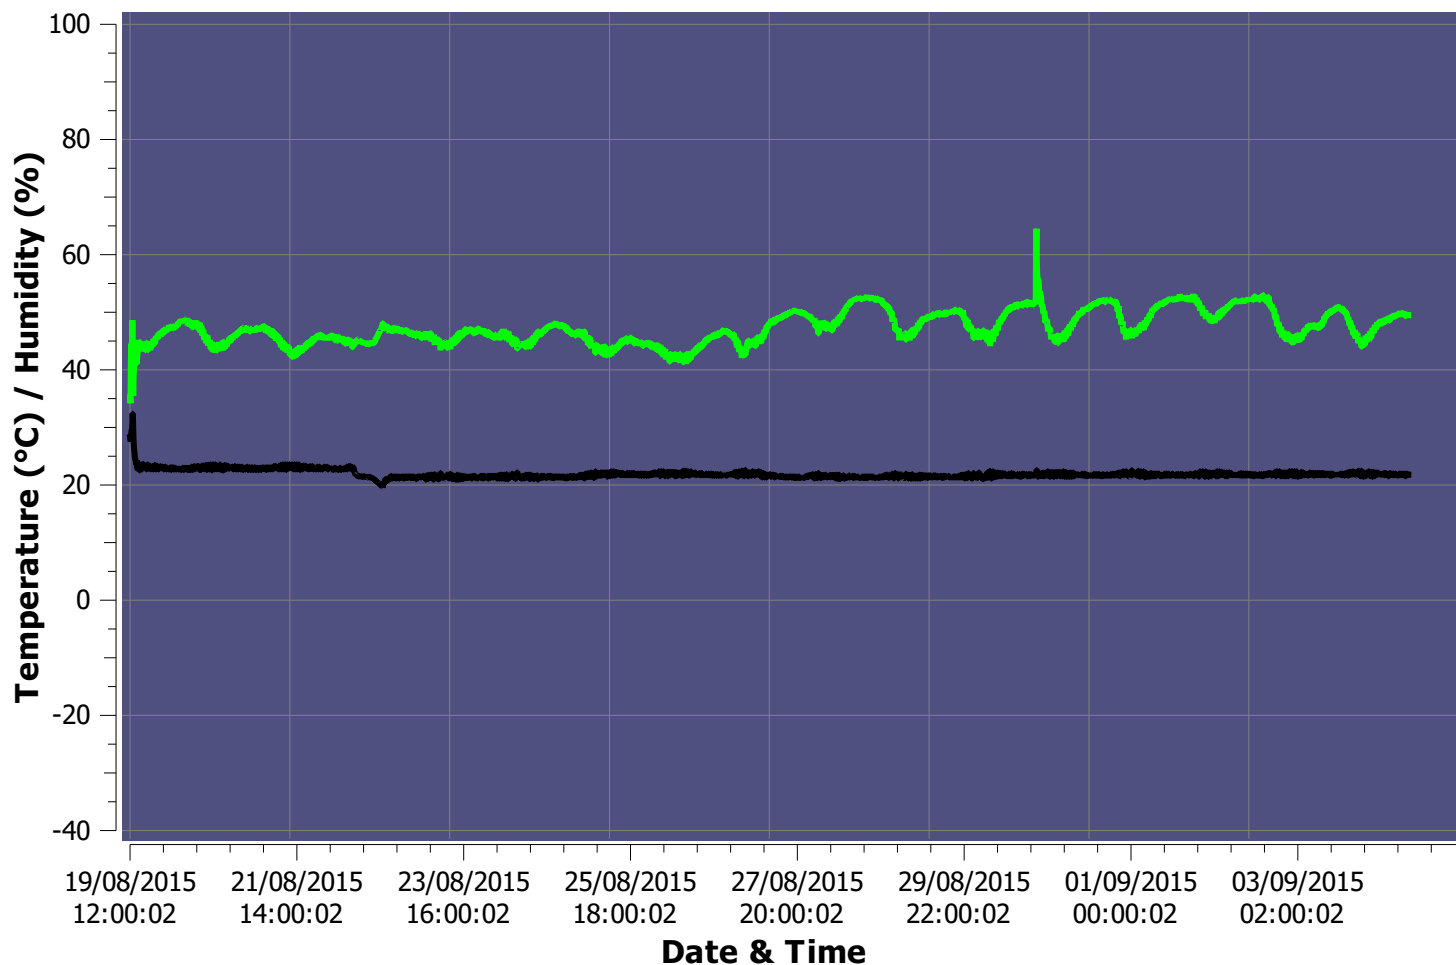


— MX-CF-069-0097 Int. Temp.(Digital) — MX-CF-069-0097 Int. Hum.(Digital)

Device Specification

Serial	MX-CE-106-0453
Product Code	MX-HS-S-16-L
Firmware / ConsolePlus Version	iMini Ver_01_48 11/22/2013 / ConsolePlus:1.16.06
Mem. Size	16K Rec.
Temperature / Humidity	-40/+80 (°C) 0-100%
Battery	High
Trip #	18
Description	
Unit Mode Programmed	Celsius (°C)
Program: Start At:	2015/08/19 12:00
Program: Start button after:	-
Program: Stop At:	-
Program: Stop after # records:	16000
Program: Interval:	00h03m00s
Program: Continuous Logging:	-
Program: Stop button enabled:	Yes
Program: Stop after # records:	-
Program: Memory Used:	99%
Number of Records	15998
Started Time:	19/08/2015 12:00:02
Stopped Time:	05/09/2015 03:55:32
Configured / Downloaded by	-

MX-CE-106-0453 MX-HS-S-16-L

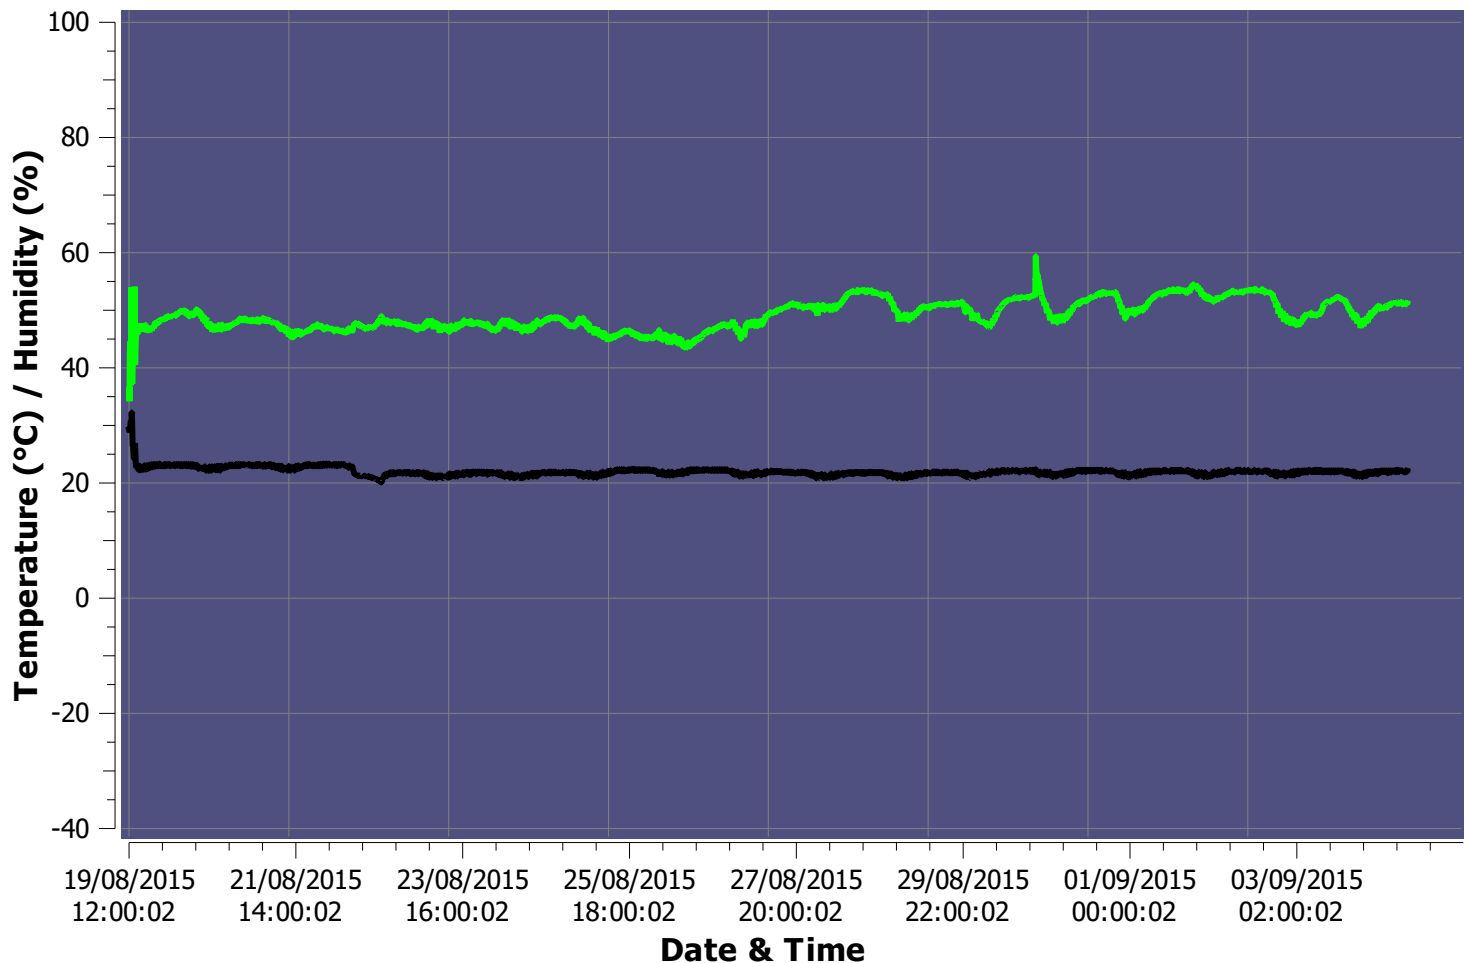

— MX-CE-106-0453 Int. Temp.(Digital) — MX-CE-106-0453 Int. Hum.(Digital)