



Shopping mall design

Case studies/compilations of earlier student work

Shift from high street to a mall-based retail culture

Source: <https://www.indiaretailing.com/2014/01/13/shopping-centre/what-makes-a-successful-shopping-mall/>



“design must aim to remove every barrier between the customer and the merchandise”

Alfred Taubman

Consumers should be able to reach as many of the retailers as possible.

Developers earn income through:

rentals

revenue sharing(food courts, parking facilities and multiplexes)

investment

Tenants:

Anchor store(big retailers, multiplexes, food courts, large specialty stores)

Vanilla stores

Design consultations regarding:

Parking grids, shop depths, location, zoning of tenants, floor-to-floor heights, services access, floor loading, connectivity between floors, accessibility, waste management and building maintenance.

Source: <https://www.indiaretailng.com/2014/01/13/shopping-centre/what-makes-a-successful-shopping-mall/>



Individualistic personalized experience

Success of a mall is defined by:

variety, diversity, comfort comprehensiveness, convenience, safety (from traffic), security, ambiance, parking and ease of access

Source: <https://www.indiaretailng.com/2014/01/13/shopping-centre/what-makes-a-successful-shopping-mall/>

Retail store layout

Use of space to influence the customer experience

Customer interaction with merchandise affects purchase behavior

Store Design:

floor plans and space management(furniture, displays, fixtures, lighting, and signage)

(similar to (UX) researchers for apps and websites)

Customer Flow:

customer navigation pattern through store (analytics software and in-store video and the wifi signal data)

Source: <https://www.smartsheet.com/store-layout>



Transition zone/decompression zone

People need time to adjust
new lighting, smells, music, and other visual stimulation

Customers turn right?

Most people reach for products with right hand and gets drawn towards right side

Or,

People move in shops based on the side of the road they drive

Product categorization and visibility probably plays a bigger role

Never narrow aisles.

Shoppers turn at 45 degree

More visible stores are more accessible

Never narrow aisles.

Different retail store layouts

Source: <https://www.smartsheet.com/store-layout>




Design Guidelines

General Layout objectives

- Layout should form unique and interesting place that is convenient, safe and enjoyable to use
- It should be easy to understand
- The arrangement should establish strong pedestrian flows which will allow customers to pass along all the retail frontages
- Anchor stores and other major attractions should be positioned to generate and reinforce pedestrian flow

- at the end of a run of shops, thereby drawing customers past the shopfronts
- located at a change of direction in the layout in a way which is clearly visible and draws customers in from both directions
- strategically positioned to form a focus and point of punctuation in a large complex layout.

Anchor stores should be located in positions that are easily understood and achieve good visibility within the internal layout and have an external presence.

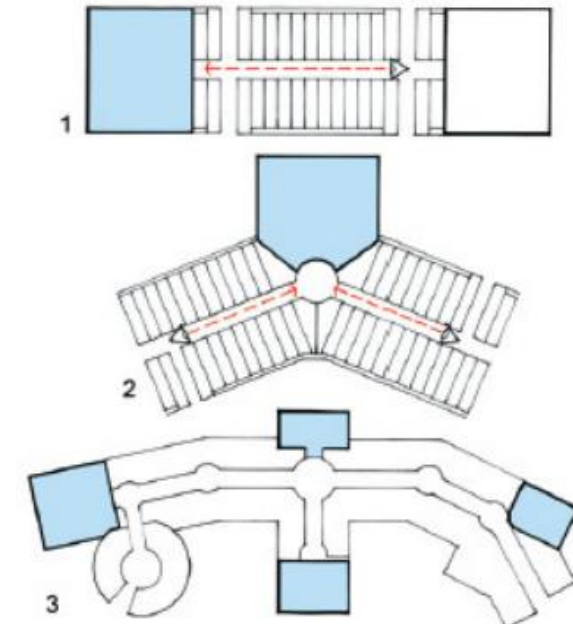

Slide taken from:

Source: https://www.icsc.com/uploads/event_presentations/DesignPrinciplesAndPractices_MadeleineGravell.pdf



Design Guidelines

Shop Units

Size requirements


- Majority of tenants (63%) seek floor space of 95-380m²
- Strong preferences for units in range 190-325m²
- Small proportion (19%) require unit less than 95m²
- A proportion (18%) require larger than 380m²

For large and regional shopping centers to be viable ideal proportion of unit shops to the total should range between 55-70% of GLA


Slide taken from:

Source: https://www.icsc.com/uploads/event_presentations/DesignPrinciplesAndPractices_MadeleineGravell.pdf

Min proportion of GLA

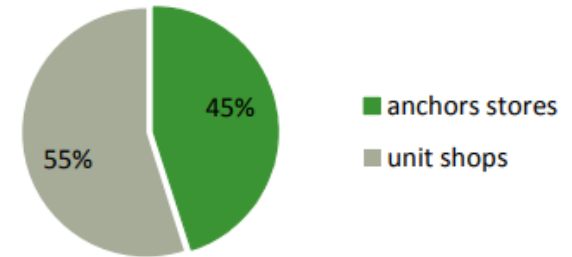

Ideal proportion of GLA

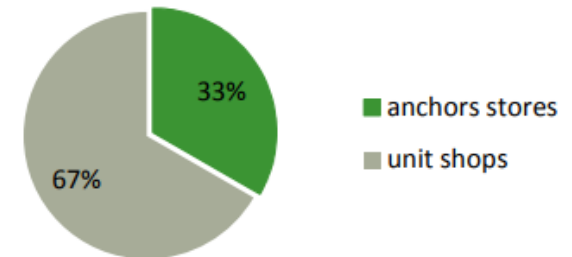








Design Guidelines

Shop Units

Frontage Module

Another key consideration in shop unit planning will be the dimension of the frontage module. Frontage size has similarly increased with the evolution of shopping centres. The typical shop unit frontage accepted today by tenants is a module between 7.5 and 8 m (24-26.2 ft).

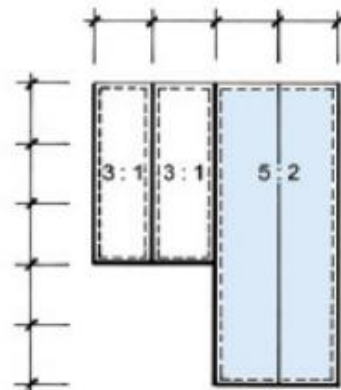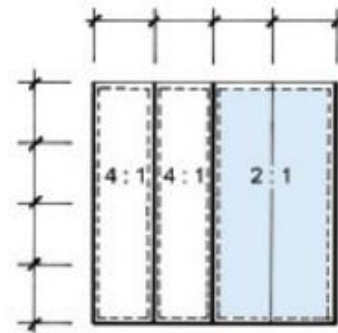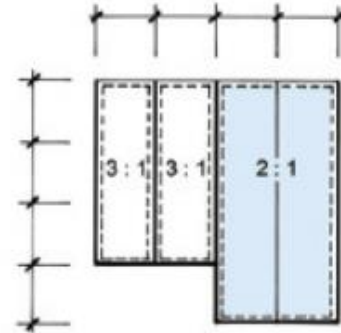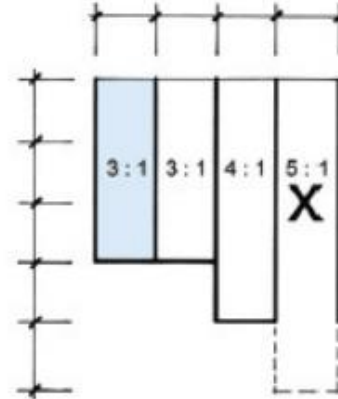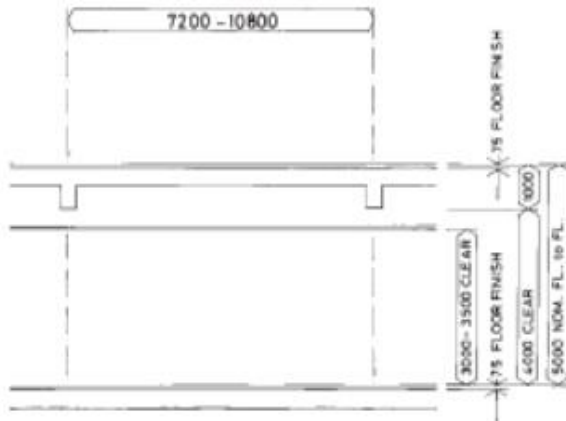

Typical shop unit proportions: single shop unit width to depth proportions should not exceed 3:1 or 4:1. Where units are combined to make larger units these proportions still apply. (Source: Peter Coleman)


Slide taken from:

Source: https://www.icsc.com/uploads/event_presentations/DesignPrinciplesAndPractices_MadeleineGravell.pdf





Design Guidelines

Vertical visibility

Dimensional requirements

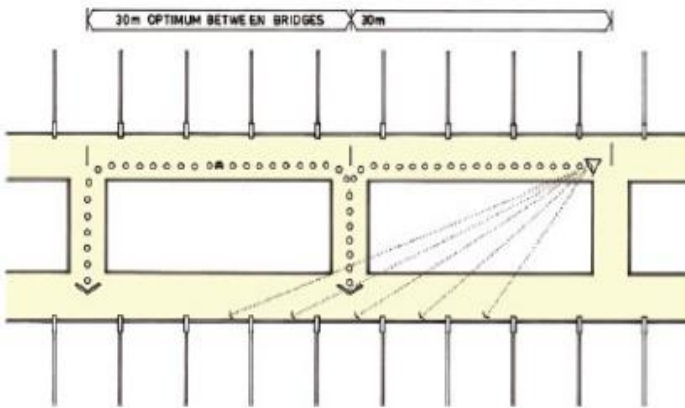

The optimum spacing of bridges for convenient crossovers between gallery walkways. (Source: Peter Coleman)

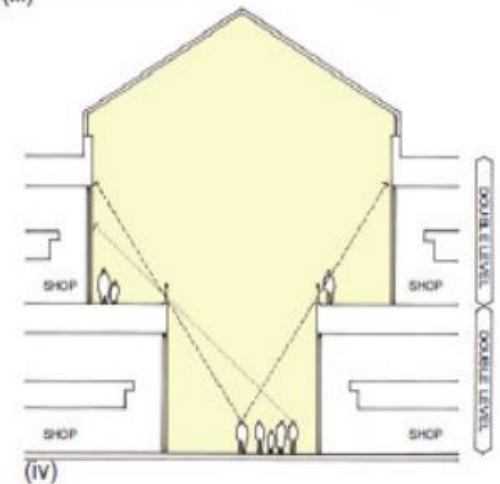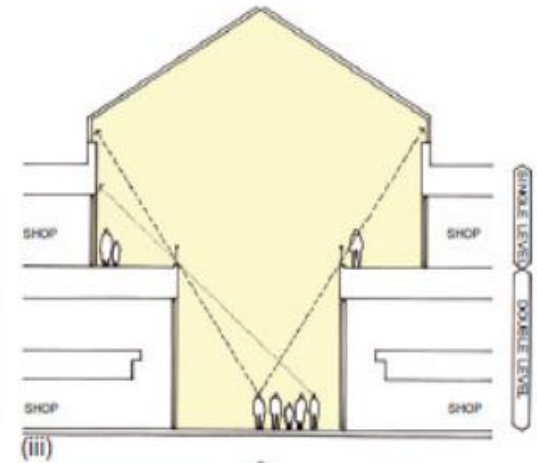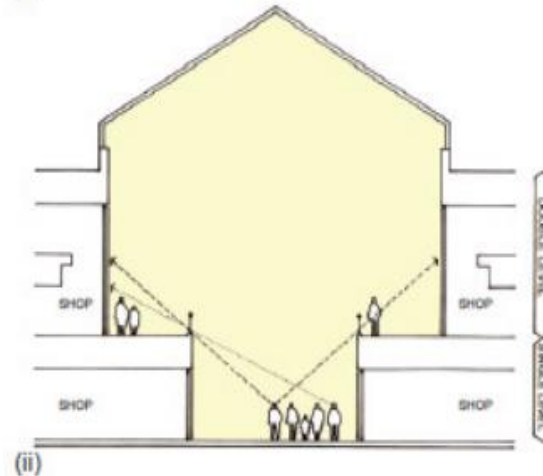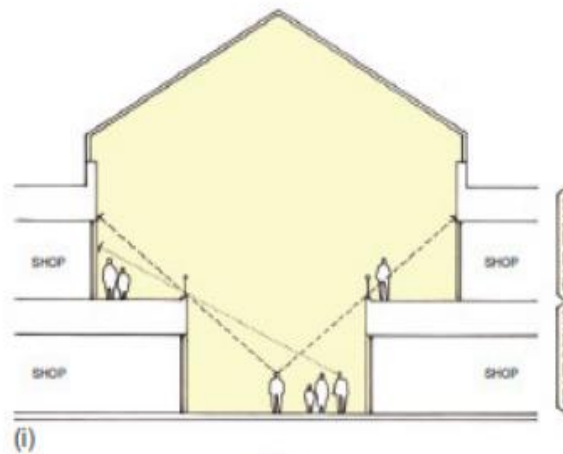



Shopping center designs

<https://www.archdaily.com/search/projects/categories/shopping-centers?page=2>

ICSC European Retail Property School

Design Principles and Practices

History and evolution

https://www.icsc.com/uploads/event_presentations/DesignPrinciplesAndPractices_MadeleineGravell.pdf