


Parking

Average parking areas:

Cars	2.3X5	11.5 m ²
Motorcycles/scooter	2X1	2 m ²
Cycles	0.5X2	1 m ²





Car turning circle radius for an entrance drive $\geq 5-6.50$ m

*Turning circle radius = 5 - 6.5 m

*Minimum width of ramp required = 3.5 m for one way and 7 m for two way movement


- Reflective paint signage depicting all the major pedestrian access points & external major roads and buildings.
- Ventilation is quite important ; CO detectors can be installed & 100% exhaust air coordinated with supply of fresh air.

Types of parking:

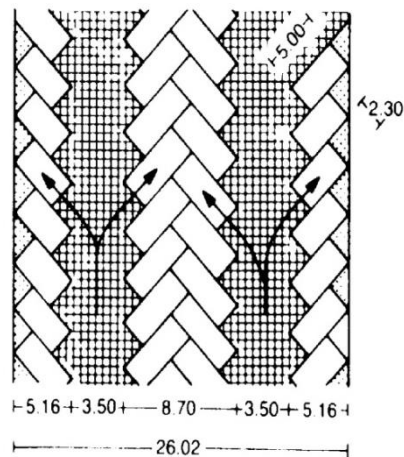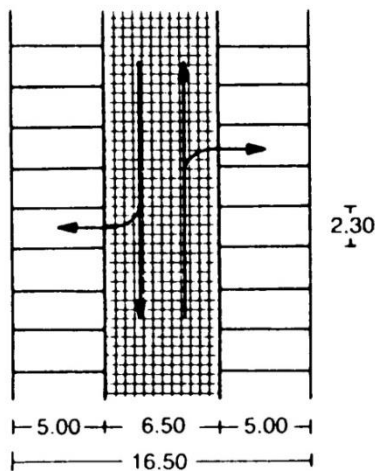


Types of vertical vehicular movement:


Straight, parallel, continuous ramps with intermediate landings with separate ramps for up and down traffic located at opposite ends.

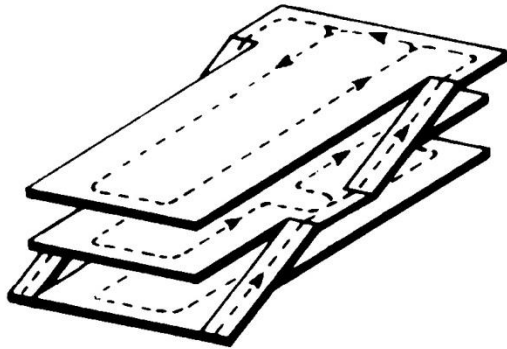


⑦ **Multi-storey structure with full ramps**

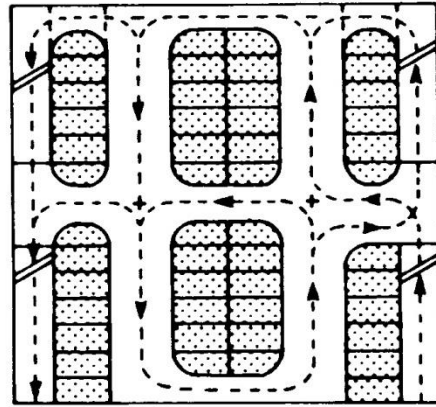

⑧ **Plan view → ⑦**

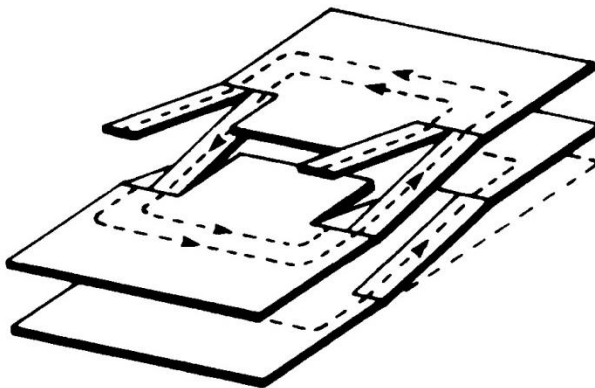


⑪ **Half-storey ramp car-park (D'Humy system)**

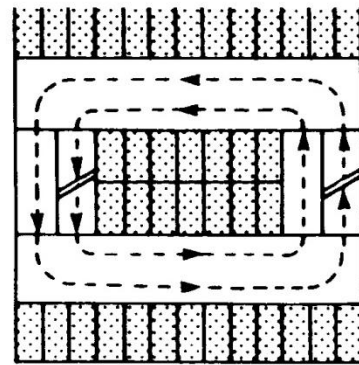

⑫ **Plan view → ⑪**

- The slope of the ramp is dependent on the clear headroom (2.1m minimum) and the structural zone.
- Typical ramp slopes range from 1:6 to 1:10.

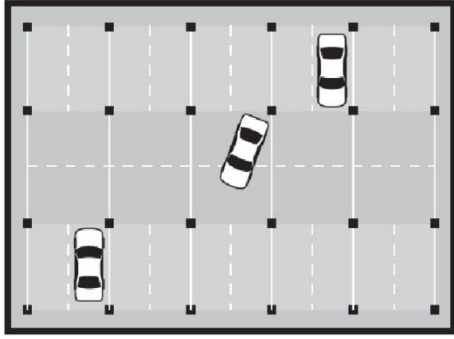

Column layout

The design loading for car parks is given in BS 6399, which specifies an imposed loading of 2.5kN/m^2 for the parking areas and ramps.

- Corners are usually not used for parking so this space is generally utilised for service units like emergency/fire exits, electrical, hvac rooms, storage etc.
- Security aspects: proper lighting, CCTV cameras, card reader access control, exposed pipe sprinkler system.

Surface Parking

- Minimal visual impact- Should not dominate bldg. Site.
- Generally located to rear side of the bldg. Away from street.
- Site improvement directly related to surface parking which can include Storm water handling, plantations & ground cover etc.