

Advance Computer network PCS223

Assignment-5

Pranav Bhardwaj 8025320073

Q.1 Objective: Configure Static Route in Cisco packet tracer

Physical Topology (for Packet Tracer)

Devices required:


2 × Routers (e.g., 2811)


2 × Switches (2960)

2 × PCs

Serial DCE cable between routers

Copper straight-through cables for LAN

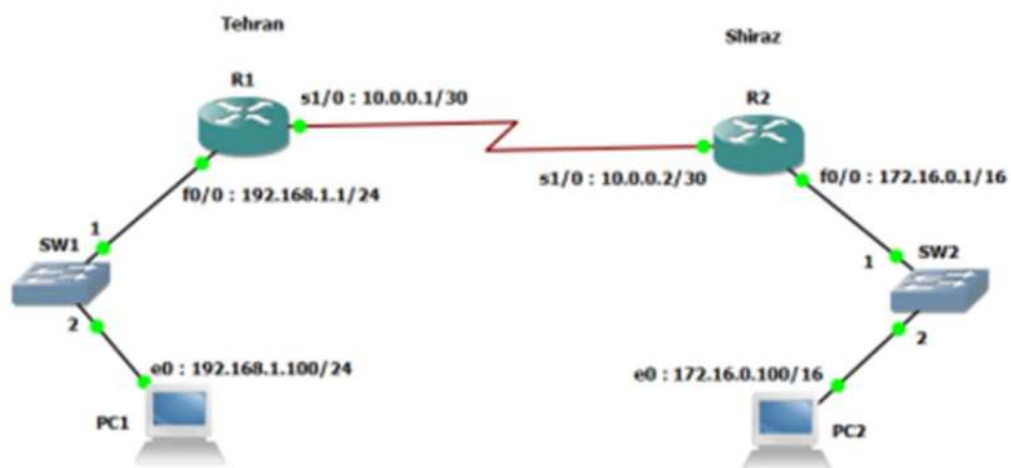

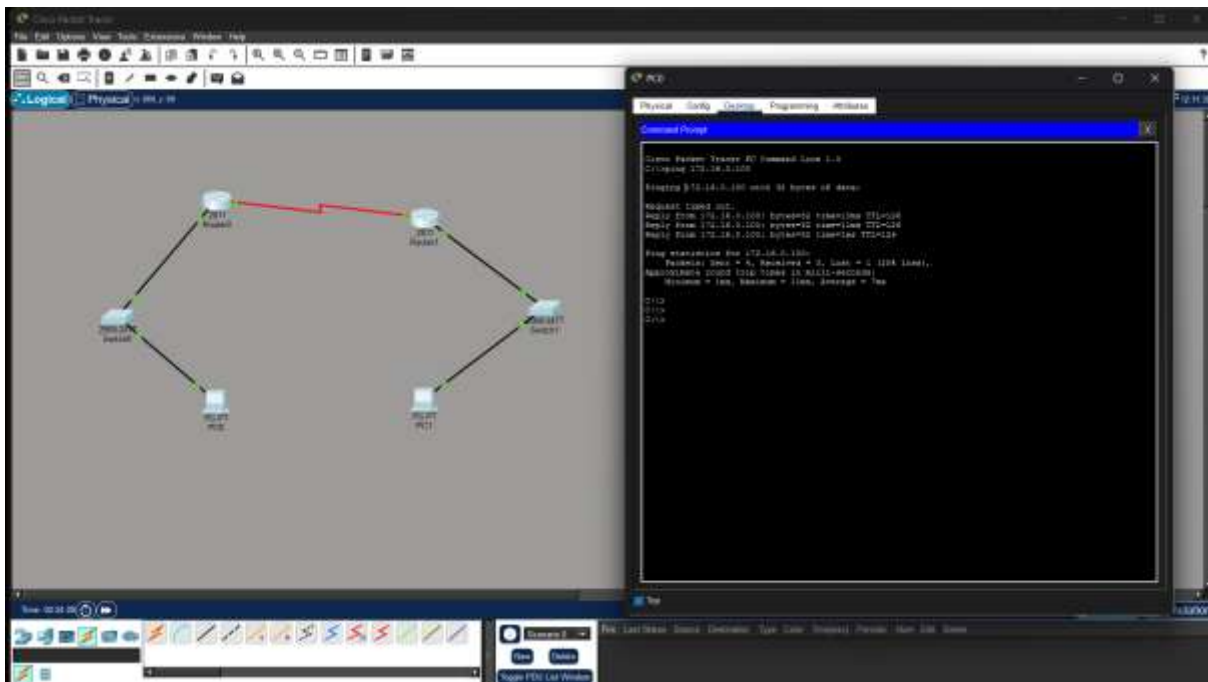

Router#

```

Router# configure terminal
Router(config)# interface gigabitEthernet 0/0/0
Router(config-if)# ip address 172.16.1.1 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit
Router#

Router# configure terminal
Router(config)# interface gigabitEthernet 0/0/0
Router(config-if)# ip address 172.16.1.2 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit
Router#

Router# configure terminal
Router(config)# interface gigabitEthernet 0/0/0
Router(config-if)# ip address 172.16.1.3 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit
Router#

Router# configure terminal
Router(config)# interface gigabitEthernet 0/0/0
Router(config-if)# ip address 172.16.1.4 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit
Router#
  
```

Router#

```


Router# configure terminal
Router(config)# interface gigabitEthernet 0/0/0
Router(config-if)# ip address 172.16.1.1 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit
Router#

Router# configure terminal
Router(config)# interface gigabitEthernet 0/0/0
Router(config-if)# ip address 172.16.1.2 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit
Router#

Router# configure terminal
Router(config)# interface gigabitEthernet 0/0/0
Router(config-if)# ip address 172.16.1.3 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit
Router#

Router# configure terminal
Router(config)# interface gigabitEthernet 0/0/0
Router(config-if)# ip address 172.16.1.4 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit
Router#
  
```

Q.2 Suppose you want to create 3 subnets of a network having network address 198.168.1.0. In another network with network address 220.168.2.0, you want to create 2 subnets. For this scenario configure the end devices and routers accordingly. Connect two different networks (both are subnetted) through static routing and show the message transmission among hosts of the two networks.

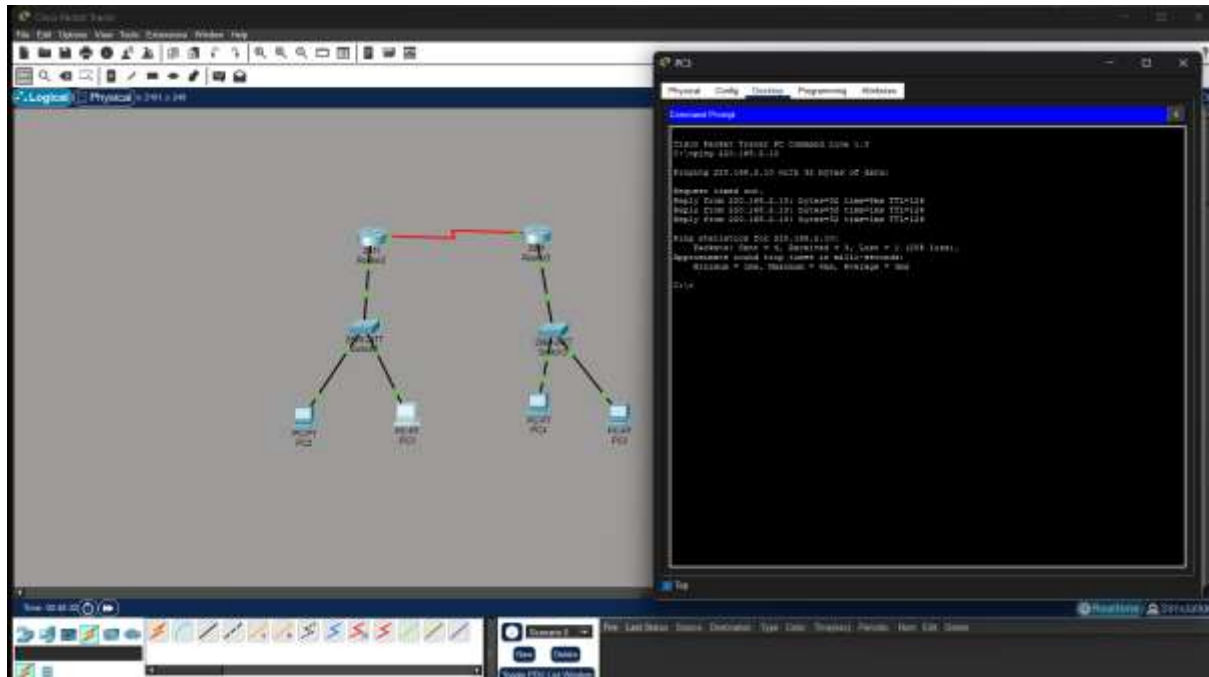

[illegible]