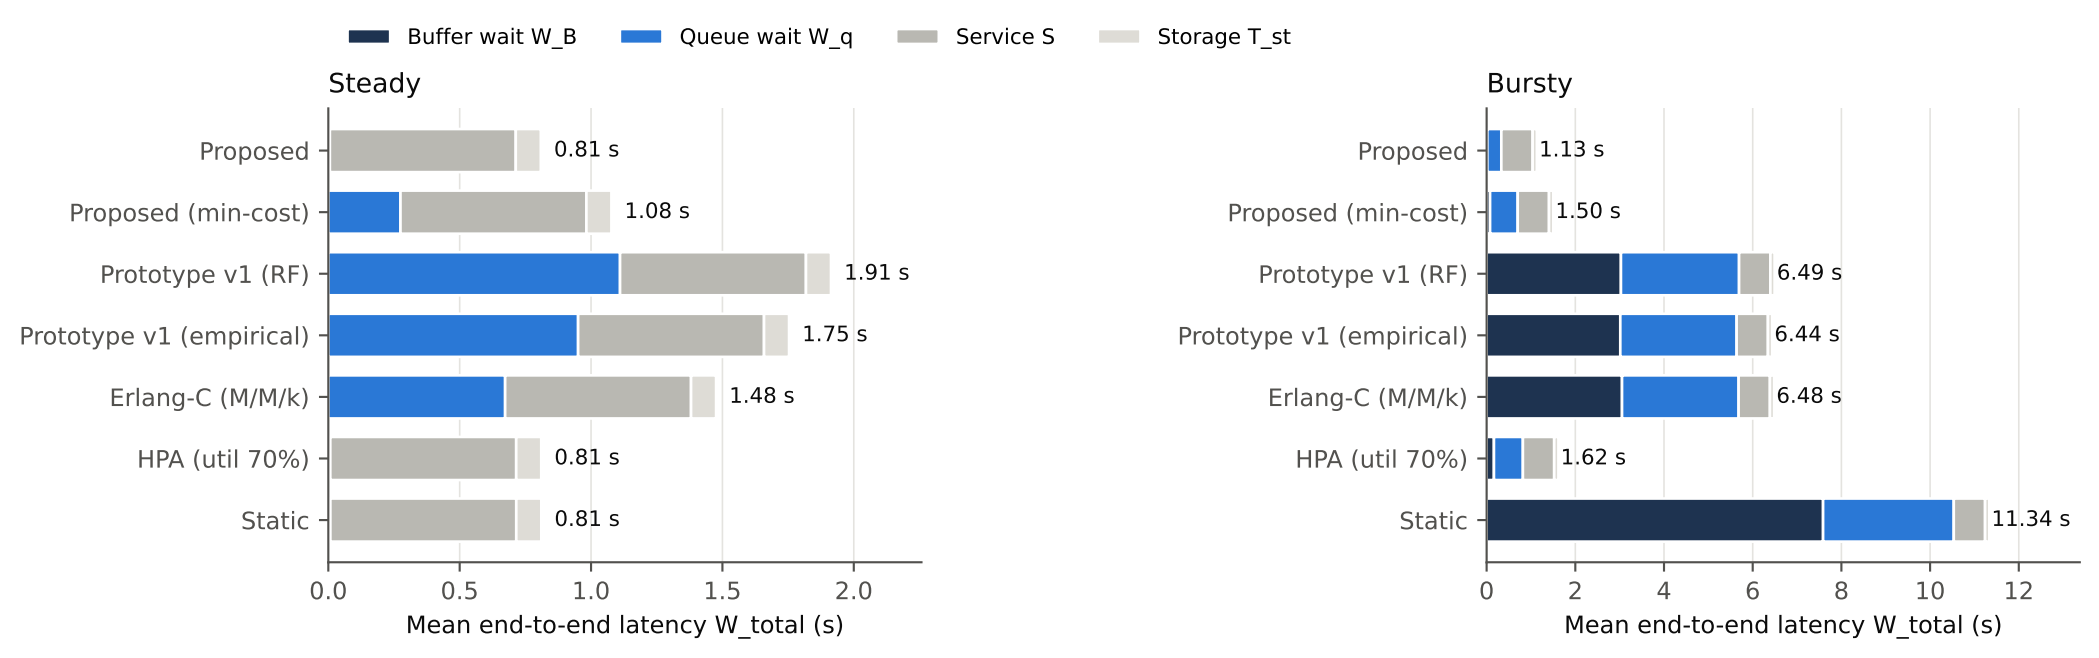
Buffer wait W_B
Queue wait W_q
Service S
Storage T_st
Steady
Proposed
Proposed (min-cost)
Prototype v1 (RF)
Prototype v1 (empirical)
Erlang-C (M/M/k)
HPA (util 70%)
Static
0.81 s
1.08 s
1.91 s
1.75 s
1.48 s
0.81 s
0.81 s
0.0
0.5
1.0
1.5
2.0
Mean end-to-end latency W_total (s)
Bursty
Proposed
Proposed (min-cost)
Prototype v1 (RF)
Prototype v1 (empirical)
Erlang-C (M/M/k)
HPA (util 70%)
Static
1.13 s
1.50 s
6.49 s
6.44 s
6.48 s
1.62 s
11.34 s
0
2
4
6
8
10
12
Mean end-to-end latency W_total (s)