

·
A

PROJECT REPORT ON
**"IOT BASED SMART ENERGY MONITORING AND
CONTROLLING DEVICE"**

Submitted

in partial fulfillment of the requirements for the degree of

Bachelor of Technology

by

Name	Exam Seat No.
1) Sonali Mali (E&TC)	1605042
2) Priyanka More (CS)	1603055
3) Prasad Khandake (IT)	1404019

Under the Guidance of

Prof. R.T.PATIL



Interdisciplinary Project under NETRA-RIT

by

**DEPARTMENT OF ELECTRONICS & TELECOMMUNICATION
DEPARTMENT OF COMPUTER SCIENCE & ENGINEERING DEPARTMENT
OF INFORMATION TECHNOLOGY**

**RAJARAMBAPU INSTITUTE OF TECHNOLOGY,
RAJARAMNAGAR**

(AN AUTONOMOUS INSTITUTE, Affiliated to Shivaji University, Kolhapur) Year

2019-2020

CERTIFICATE

This is to certify that the project report entitled
**"IOT BAESD SMART ENERGY MONITORING AND
CONTROLLING DEVICE"**

Submitted To

**DEPARTMENT OF ELECTRONICS AND TELECOMMUNICATION
DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING
DEPARTMENT OF INFORMATION TECHNOLOGY
RAJARAMBAPUINSTITUTE OF TECHNOLOGY, RAJARAMNAGAR**

has been completed under my guidance and supervision. To the best of my knowledge and belief, the matter presented in this project report is original and has not been submitted elsewhere for any other purpose.

Submitted by

Name	Exam Seat No.
1) Sonali Mali	1605042
2) Priyanka More	1603055
3) Prasad Khandake	1404019

R.T.PATIL

Guide

Dr. M. S. Patil

Head E&TC Dept

Dr. N. V. Dharwadkar

Head CS Dept

Dr. A. C. Adamuthe

Head IT Dept

Dr.S.S.Kulkarni

Director

External Examiner(s)

Sign

1.

2.

ACKNOWLEDGEMENT

It is our foremost duty to express our deep sense of gratitude and respect to the guide **Mr. R.T.PATIL** for his uplifting tendency and inspiring us for taking up this project work successful.

We are also grateful to **Dr. M. S. Patil** (Head of Department, Electronics & Telecommunication) sir, **Dr. N. V. Dharwadkar** (Head of Department, Computer Science Engineering) sir, **Dr. A. C. Adamuthe** (Head of Department, Information Technology) sir for providing all necessary facilities to carry out the project work and whose encouraging part has been a perpetual source of information.

We are highly indebted to **Dr. Mrs. S. S. Kulkarni** for their guidance and constant supervision as well as for providing necessary information regarding the project and also for their support in completing the project.

We also grateful to **Mr. Vivek Sabnis** (CEO, RIT-NETRA) sir, **Dr. A. B. Kakade** (Dean R&D) sir, **Dodmise** (RIT-NETRA) sir, for all necessary facilities to carry out the project work. Their timely help, which help us in completing of our project work.

We also thank all staff members of our Department for their timely help and encouragement, which help us in completing of our project work.

We are indebted to the library personnel's for offering all the help in completing the project work.

Last but not only the least we are thankful to our colleagues and those helped us directly or indirectly throughout this project work.

DECLARATION

We the undersigned, hereby declare that the project report entitled "**IOT BASED SMART ENERGY MONITORING AND CONTROLLING DEVICE**" written and submitted by us to **Electronics & Telecommunication, Computer Science & Engineering, Information Technology Department** under the guidance of **Mr. R.T.PATIL** is our original work. The empirical results in this project report are based on the data collected by us.

Name

Signature

1) Sonali Mali

2) Priyanka More

3) Prasad Khandake

ABSTRACT

The main objective of this project is to reduce penalty charges comes into account by using energy beyond limit. Huge amount of energy is used by big institutions such as colleges. State electricity board has given us certain limit to use electricity. If we use electricity beyond this limit penalty charges are fined. The basic aim of our project is to reduce penalty charges of organizations that are fined by electricity board because of limitless but required use of energy. In our institute also we are facing this problem which comes to economic loss to our institute. We are developing device which helps to reduce penalty charges by using concept of load balancing. The basic aim of this system to design an effective and secure technique for load balancing and also this product to monitor and control the energy usage.

Since energy management is required to define the amount of consumed energy in a specific period of time, utilization of smart energy meters is essential. It is possible to measure the consumed energy by using a simple energy meters, but sometimes the limited functionality of these meters restricts their area of application. Effective use of available energy by proper monitoring energy consumption is the best remedy. For this we are implementing method of energy monitoring and controlling using Internet of Things (IoT). Thus System continuously records the reading and the live meter reading can be displayed on webpage to the consumer on request. This system also can be used to disconnect the power supply of the house when needed. Android application is a user interface which displays the realtime readings which energy meter shows. Automatic on/off of meter is possible. Threshold value setting and sending of notification is the additional task that we are performing. Switch on/off buttons also provided in the android application to control nodes.

Keywords: Smart Energy Meter, IOT, Android Application, .

Index

Contents

Table of Content	vii
List of Tables	viii
List of Figures	ix
1 INTRODUCTION	1
1.1 Project Motivation	1
1.2 Objective of the project.	1
1.3 Project Scope	1
1.4 Basic Overview Diagram	2
2 Literature Overview	4
3 Internet of Things	6
3.1 Use of programming languages & cloud IOT	7
3.1.1 Usage of programming languages in IOT	7
3.1.2 Cloud Platform	9
3.2 JAVA Language, C and CPP	10
3.3 Working of IoT	11
3.4 Advantages of IoT.	11
3.5 Arduino IDE information	12
3.5.1 Benefits of Arduino IDE	13
4 Overview of project	16
4.1 Project Architecture	16
4.2 Building blocks of Project	17
4.2.1 Project Functional Description	17
4.3 Project (Hardware/Software) Specifications	18
4.3.1 NodeMCU H/W	18
4.3.2 Current Transformer	19
4.3.3 LCD 16x2	20
4.3.4 Relay Module	20
4.3.5 Pic Microcontroller	21
4.3.6 PICKIT	21
4.4 Software Specification	22
4.4.1 Arduino programming	22
4.4.2 Specifications of Android studio	22
4.4.3 MPLAB Software	23
4.4.4 Proteus Software	23
4.4.5 Algorithm.	24

5	Project Implementation view	35
5.1	Design methodology of the project	35
5.1.1	Project requirement.....	35
5.1.2	System Architecture of Project.....	36
5.1.3	Collection of Controllers & sensors.....	36
5.1.4	Software Design of Project.....	37
5.1.5	Hardware design of Project.....	37
5.1.6	Hardware and software program integration of Project.....	37
5.1.7	Cloud connectivity and Mobile App improvement.....	37
5.2	Project Flowchart.....	38
5.3	Design Specifications of Connections.....	38
5.4	Serial communication.....	39
6	RESULTS & DISCUSSIONS OF THE PROJECT	41
6.1	Firebase result.....	41
6.2	Android App result.....	41
6.3	Analysis of actual reading.....	44
7	Conclusion and future Advancements	46
7.1	Future Directions of the Project.....	46
7.2	References of the Project.....	46

Publication

Appendix

A. Microcontroller datasheet

B. CT sensor datasheet

C. ESP8266 datasheet

D. Pickit3 datasheet

E. Firebase Database datasheet

F. Cloud Functions datasheet

List of Tables

1 Connections.....39

List of Figures

1	Basic Overview Diagram of Smart energy monitoring and controlling device . . .	2
2	basic structure of Iot	6
3	Javascript for Iot and android application	9
4	Simple Cloud platform.....	10
5	IoT Basic sections.....	12
6	Arduino IDE Editor Image.....	13
7	System Overview.....	17
8	NodeMCU.....	18
9	CT Sensor.....	19
10	Image of pickit.....	21
11	Design Methodology.....	35
12	System Architecture.....	36
13	Project Flowchart & Serial communication.....	38
14	Firebase results.....	41
15	App Log in form.....	42
16	App Registration form.....	42
17	Automatic Mode.....	43
18	Manual Mode.....	43
19	Reading Snapshot.....	44
20	Reading Snapshot.....	44

Introduction

1 INTRODUCTION

The Internet of things (IOT) idea enables us to interact with the typical everyday gadgets with one another over the internet. The gadgets connected through IOT idea can be analyzed distantly. So the IOT idea gives the fundamental foundation and chances to shape an association within the physical world and PC own frameworks. The idea has been picking up significance with an ever increasing number of remote gadgets that are expanding quickly in the market. equipment gadgets are associated with one another over the web.

Presently everyday the interest for power is expanding at a consistent manner in the populace & is being used for different usages viz, farming, ventures, family purposes, emergency clinics etc. So, it is turning out to be increasingly more confused to deal with the power upkeep and necessities. In this manner, there is a prompt necessity to spare however much power as could be expected. As the interest from the more up to date ages of populace for power is expanding so in alongside it the innovation improvement is required.

The proposed framework gives a specialized curve to the ordinary vitality meters utilizing the IOT innovation. There are issues that we need to address, for example, punishment charges has been fined to different associations for utilizing power past edge esteem which thus produce monetary misfortune to the specific association.

1.1 Project Motivation

Colossal measure of vitality is utilized by large establishments, for example, universities. State Electricity board has given us certain breaking point to utilize power. On the off chance that we use power past this cutoff punishment charges are fined. The fundamental point of our task is to diminish punishment charges of associations that are fined by MSEB in light of boundless yet required utilization of vitality. In our organization likewise we are confronting this difficult which create monetary misfortune to our establishment. We are creating gadget which assists with diminishing punishment charges by utilizing idea of burden adjusting. The fundamental point of this framework to plan a compelling and secure strategy for load adjusting and furthermore send this item to screen and control the vitality utilization.

1.2 Objective of the project

- To utilize power in change way.
- To give robotized load vitality readings on a moment, premise.
- To screen vitality and overseeing vitality as per information gathered.
- To computerize lab rooms to proper utilization of electricity.

1.3 Project Scope

Vitality necessity of different associations is high. There is additionally wastage of vitality. Such carelessness may happen because of unusual strategies for observing power which day by day clients can't comprehend. So legitimate observing is required. Additionally, by sending this venture we can ready to diminish financial loss of associations.

1.4 Basic Overview Diagram

The data is collected by sensors from electrical appliances. A current transformer is used for this purpose. Data collected by sensors is sent to pic controller for further processing of data As shown in figure 1. The actual current of devices is collected by our sensors and is recorded in controller. Calculation of power is done via controller as we have actual current and voltage of device. We used PIC as micro-controller for this purpose. The main purpose we used PIC is because of it's durability and easy to use. The logical code present in our controller is inputted to our board externally. An electronic display is used to display the overall result we want to display in digital format. We have used LCD display to showcase the result we want to display. The controller is connected to NodeMCU module which have ESP8266 Wi-Fi module. The goal here is to connect our micro-controller to internet. We have used Firebase which is widely famous for its IOT functionalists. Controller is being connected to Firebase. Wi-Fi module allows us to connect our controller to Firebase.

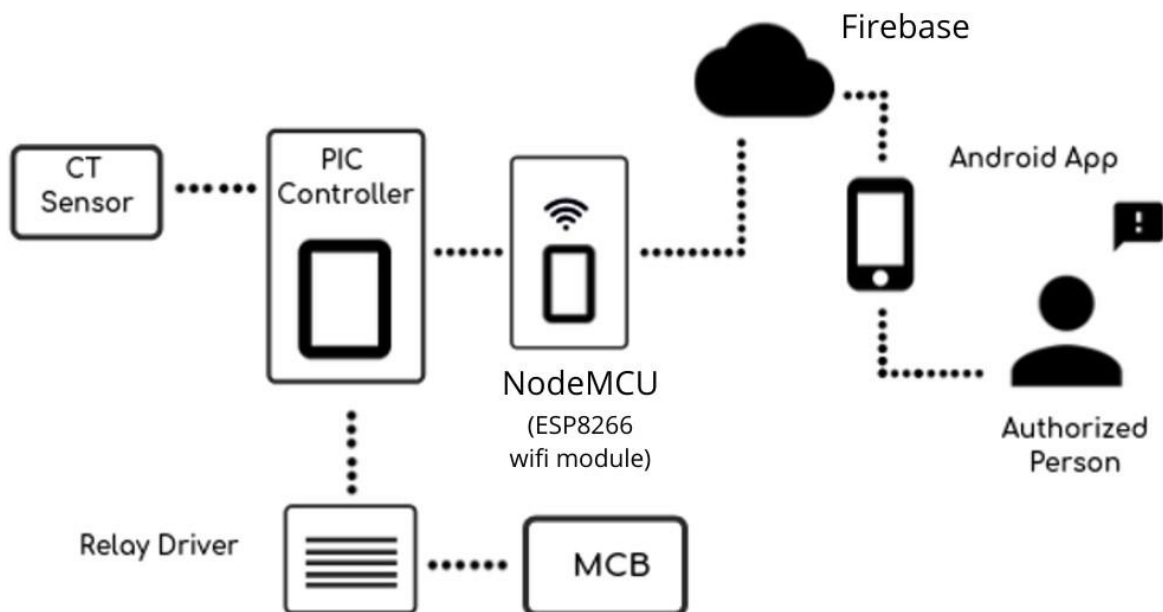


Figure 1: Basic Overview Diagram of Smart energy monitoring and controlling device

Data collected by sensors is passed to controller where data processing is done and this processed data is sent to Firebase where data is stored in raw format in the form of JSON object. This data stored in Firebase is accessed to specially designed android application. The data is passed from cloud to our application via json parsing. Data is shown in our app in numerical as well as in text format. A relay circuit is connected to controller. We can give On/Off signals to our controller from mobile app. Controller sends signal to relay circuit which gives On/Off command to devices. Thus devices can be controlled via app directly by authorized person.

Literature Overview

2 Literature Overview

2.1 Survey checking from, "*Design and implementation of Bluetooth energy meter*", (2012) By P. Shum, Y. C. Tong, Y. H. Sng, P. H. Chong and H. W. Kuek.

In above project report they defined present day electricity power dimension is constantly changing electronically and mechanical meters particularly in India and China. A wi-fi virtual power meter could simply extra green and handy to the meter analyzing task. Bluetooth era is taken into consideration as conversation era in above machine. And similarly they enforce it. By the usage of this machine person acquire information of power on the Bluetooth community wirelessly.

2.2 Gobinath. S, Gunasundari. N and Gowthami. P Worked on "*IOT Based Energy Meter*" PIC Microcontroller calculating price & displayed in Liquid Crystil Display and serial communique has been used to interface with the digital.

In this paper the method provides the communication between the Electricity Board section and the consumer section using Internet of things (IOT) for transmitting the customer's electricity consumption and bill information that is calculated using ARM7 microcontroller . The power fluctuations are monitored using the voltage sensor and current sensor are fed to the microcontroller which indicates it to the Electricity Board. Whenever there is power theft identified can be sent from the Electricity Board section to cut the supply to the customer.

2.3 It is from "*IoT based energy meter reading, theft detection and Disconnection the use of Power optimization & PLC modem* ", (Vol. 4, Issue 7, July 2015). By "Darshan Iyer N student of PES College of Engineering, Mandya, Karnataka, India".

In above paper explains the machine include PIC Microcontroller. The provided Energy meter machine minimize or almost removes the human dependcy in Electricity Checking. It is likewise useful in time period of pay of power invoice due to vital server is there. The consumer can screen and managed power intake in gadgets from an internet interface via way of means of supplying IP deal with of devices. This machine additionally for Theft detection of power meter & it's tampering and It is especially focussing of power usages consumes and ship robbery locate records via way of means of the use of PLC modem.

2.4 Birendra Kumar Sahani 1, Tejashree Ravi 2, Aqib Javed Tamboli 3, Ranjeet Pisal four They posted IRJET on April four 2017.

In this paper the concept of clever electricity meter the usage of IoT and Arduino had been introduced. In this method we are using Arduino because it is energy efficient i.e. it consume less power, it is fastest and has two UARTS. In this paper, energy meters which is already installed at our houses are not replaced, but a small modification on the already installed meters can change the existing meters into smart meters. The use of GSM module provides a feature of notification through SMS.

Introduction to Project

3 Internet of Things

The marketplace for Internet utility increase could be very excessive these days. The IoT is a huge era that permits us to create more than a few advantages to net packages. So, IoT is a group in which all connected gadgets are related to the internet over community gadgets, routers for exchange of information. As shown in figure 2, IoT permits artifacts to be remotely operated thru present community infrastructure. IoT is a completely powerful and insightful approach that gets rid of each human attempt and convenient get entry to to bodily gadgets. In addition, this method has an self reliant control function wherein no human touch might be managed via way of means of any gadget.

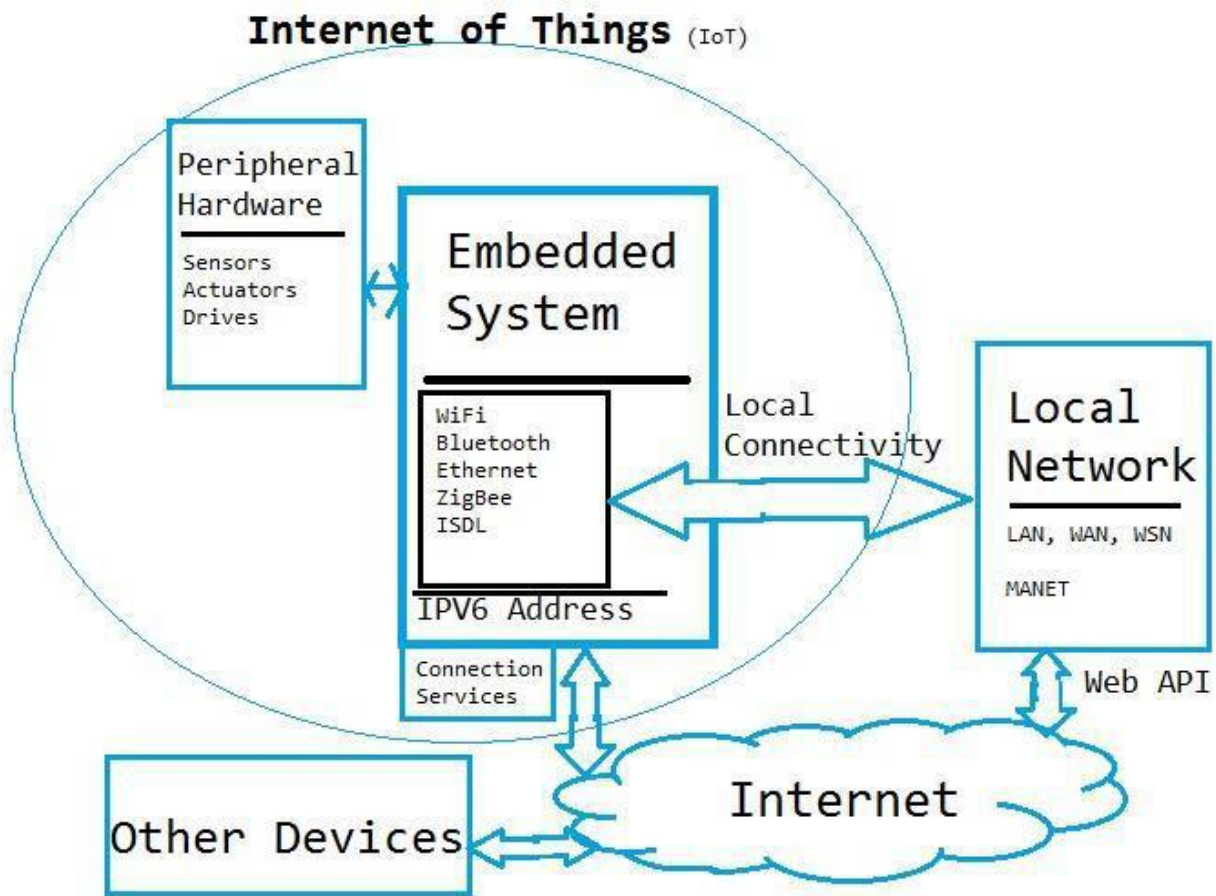


Figure 2: basic structure of IoT

The better than the discern demonstrates the houses of the special internet-primarily based totally equipment and the sharing of statistics among them. Higher than the variety, consequently, is the property of the planet throughout diverse modern-day technology.

”Things” With inside the IoT context is a combination of software, hardware, information, and offerings.”Stuff” might be addressed with an excellent fashion of gadgets which includes de- oxyribonucleic acid evaluation equipment for environmental checking, electric clamps in coastal waters, Arduino chips in domestic development, and lots of others. These gadgets collect beneficial statistics with the resource of plenty of present technology and percentage this statistic among special gadgets. Examples encompass the Home-automation Program, which makes use of Wi-Fi or Bluetooth to percentage statistics among diverse domestic gadgets.

Features of IOT

Analysing: After connecting all of the applicable items, it takes a time period to evaluate the statistics amassed and use it to make enterprise intelligence efficient. When we’ve got an sincere view into the statistics amassed from those issues, then we opt to agree whether our software functions an excellent gadget.

Connectivity: Connectivity refers back to the dedication of the suitable relation among all IoT and IoT community gadgets that need to be server or cloud. When connecting IoT gadgets, excessive-pace digital conversation among gadgets and the cloud is needed to allow efficient, stable and both direction conversation.

Integrating: To raise the person revel in in addition to the IoT integrated into the special models.

Sensing: Detector gadgets utilized in IoT era notification and stay any extrade within the context of the gadget and document on their status. IoT era transforms passive networks into energetic networks.

Connectivity: Connectivity refers back to the dedication of the suitable relation among all IoT and IoT community gadgets that need to be server or cloud. When connecting IoT gadgets, excessive-pace digital conversation among gadgets and the cloud is needed to allow efficient, stable and bi-directional conversation.

Active Engagement: The related era is created via way of means of IOT, or offerings for energetic conversation with every different.

3.1 Use of programming languages & cloud IOT

3.1.1 Usage of programming languages in IOT

The IoT is these days one of the maximum well-known fields in era. Innovations in this location are too smooth to maintain up, due to the fact increasingly more gadgets are being related to the Internet each unmarried hour. We realize that those machines speak and switch information to and from different computer systems over the Internet, however how do they perform internally? How and in what language are those equipment configured to paintings simply as they need to be? IoT apps need to now no longer use any difficult to understand languages that we've got by no means heard of. Usually, they use not unusualplace languages to function, considering the fact that they normally use micro-computer systems which includes Raspberry PI.

C language

One of the maximum critical programming languages withinside the IoT gadget is the C. This may be a certainly reasonably-priced layer of pc code on the lowest of the hardware. C has been the inspiration of plenty of special languages writing commitments over the year. This makes the information critical for all people in the IoT to return back. The reasoning at the back of this will be that there may be no want for masses of method control. C is offered for nearly any superior embedded device platform. C is procedural in preference to item-orientated because it has no essential capabilities.

Java language

Java is a programming language and it is very famous withinside the programming net- work. It's the equal function that creates Java a top notch programming language for IoT projects. Com country that Java is the maximum famous language of IoT builders. Once a Java software is written, it is able to be run on any gadget that helps JVM, which includes smart- phones, computers or even very small gadgets. The introduction of the JME or the micro version has boosted the variety of builders. The important cognizance of Java IoT builders as of these days is the Java SE Embedded, which could be very near the standard version.

Features of JAVA

Object Oriented Java may be effortlessly prolonged due to the fact it's far primarily based totally on an item model. Almost the entirety in Java is an item.

Simple Java is supposed to be smooth to discover out. If you're aware about the crucial concept of OOP Java, it is probably smooth to master.

Portable Being architecture-impartial and having no implementation-established aspects of the specification makes Java moveable.

Architecture-neutral Java compiler creates an architecture-impartial item file format in which it creates the compiled code achievable on more than one processors, with the presence of a Java runtime gadget.

Platform Independent Unlike special programming languages in addition to C and C++, as soon as Java is compiled, it isn't always compiled right into a platform-particular system, however rather right into a platform-impartial pc reminiscence unit code. This pc reminiscence unit code is allotted on line and brought from the Java Virtual Machine (JVM) on any platform on which it's far running.

Secure Java is stable function permits the improvement of virus-loose, tamper-loose systems. Authentication strategies Quadratic degree supported public-key mystery writing.

Robust Java makes a tribulation to do away with mistakes via way of means of accentuating on assemble time mistakes exams and runtime exams withinside the important.

Javascript In 90s JavaScript evolved as a site-forming synthetic language. Brendan Eich advanced JavaScript as syntax look like C, so no person imagined that JavaScript might play a extreme position withinside the improvement of monetary software As shown in figure 3. JavaScript turned into created via way of means of ECMA International in 1997.

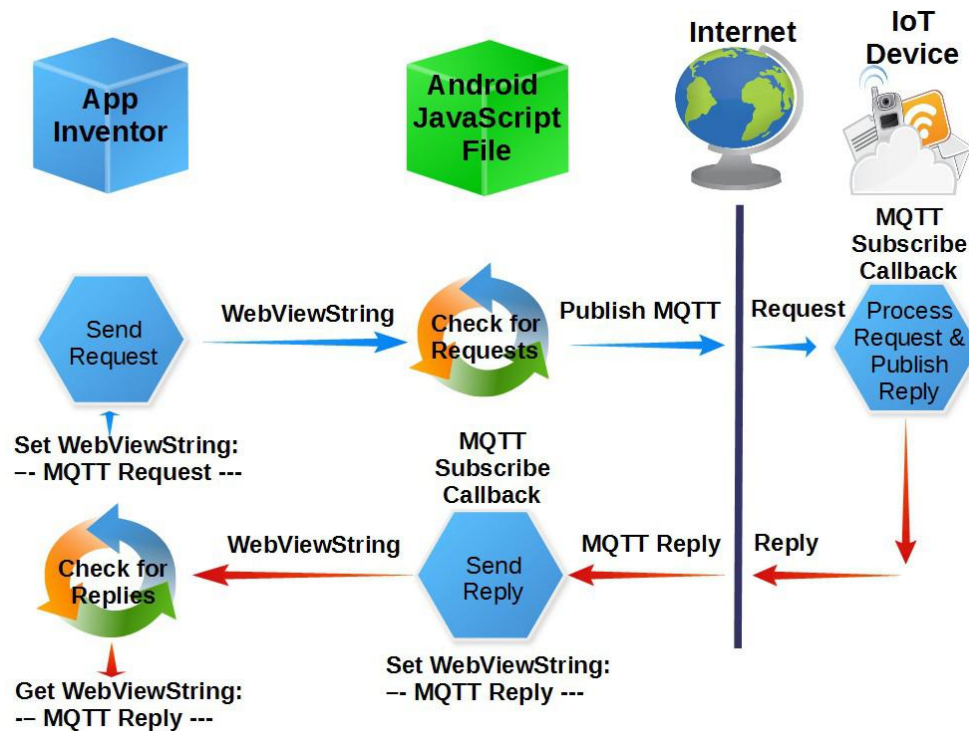


Figure 3: Javascript for IoT and android application

- Creation of the Standard Object Notations of JavaScript (JSON).
- Introduction of Node.js in 2009 via way of means of Ryan Dahl. Node.js performed a critical position in building JavaScript internet servers the use of Google's super-rapid JavaScript V8 engine. JavaScript is now extensively utilized in cellular apps, internet pages and IoT systems.

3.1.2 Cloud Platform

The Internet of Things is starting to remodel the day by day obligations of rectangular degree completed. The community of gadgets (IoT) includes normal gadgets – bodily gadgets, vehicles, etc. With integrated bodily science, software, sensors, and community assets, letting them collect, ship and obtain information. The IoT generates an substantial quantity of big information, and this successively locations an substantial pressure at the internet infrastructure As shown in figure 4. As a result, this forces corporations to searching for answers to reduce strain and clear up their disadvantage to transferring big quantities of information.

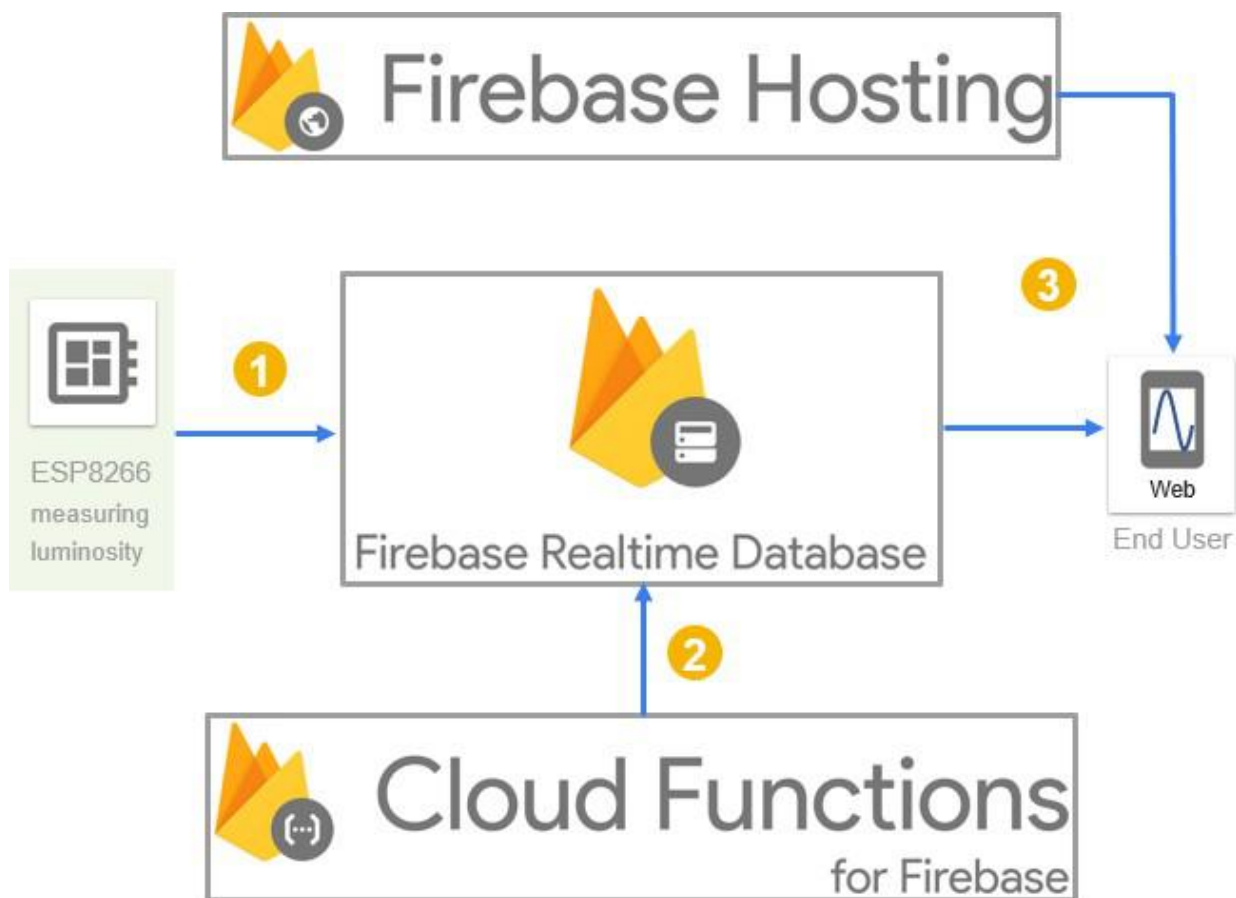


Figure 4: Simple Cloud platform

Cloud computing has brought the concept of information era, presenting quantifiability with- inside the shipping of organization packages and as a Service (SaaS) package. Corp. rectangular measures are presently transferring their information working to the cloud. Some cloud com- panies will go away your information to be transferred both thru your historical community affiliation or thru a fervent direct hyperlink. The benefit of a direct hyperlink to the cloud can ensure that your information is undisputed that the site visitors does now no longer pass the internet and consequently the exceptional of provider is often managed.

3.2 JAVA Language, C and CPP

Most IoT initiatives require the usage of a microcontroller or a pc tool. You want to software this tool / microcontroller to attain the goal / output of your venture through operating sure tasks. Then nearly all microcontrollers or different pc gadgets to be had at the market assist C- language programming both solely or with assist for different languages such as python. Another choice to software the tool is to apply meeting language, however it's going to be a totally time- eating task. In a way. That shows, in case you realize C programming, so you could software nearly any microcontroller efficiently.

In latest times, the IOT has grow to be omnipresent and is presently a desired area in the developer network. According to Statista's analysis, 1/2 of a dozen.21 million IoT builders and five.36 million IoT builders are predicted to feature IoT withinside the subsequent 1/2 of-dozen months. If you need to induce IoT to begin and are curious that the synthetic language will begin, right here can be a listing of 11 not unusualplace programming languages used in IoT. C is the programming language that become initially evolved for the programming of smartphone switches, can be a dependable and cheap opportunity for the improvement of embedded structures. It's fantastic due to its proximity to device language.

It is a language of method and the program is checked and now no longer taken. The program written in C could be very dependable and ascending, and processor independence creates it a robust rival to IoT improvement. As a end result of C now no longer being a contract platform, it permits IoT builders to reprocess code that may run on maximum structures. With the assist of suggestions, gaining access to and modifying addresses in C is straightforward.

C++ is designed with a bias in the direction of device programming, embedded programming, resourcerestricted gadgets, and massive structures.

C++ can be a not unusualplace opportunity to the name of the game writing of embedded builders for Linux structures.

Java is an related object-orientated language, and there are just a few hardware dependencies withinside the compiler that make it unmovable. Security is the primary problem in IoT; with GCF 8, Java's Access Purpose API affords the brand new safety requirements and additionally the very best degree of networked coding and authentication that guarantees privacy. All the Java object references are implicit suggestions that cannot be changed through the software program. This routinely excludes the capacity chance of operational infringements which may necessarily reason the related software to save you all of as soon. In addition, connectivity on the relevant degree of the IoT device is truly treated in Java with a complete set of Apes genes, every of that's commonplace and freely to be had via open deliver.

3.3 Working of IoT

The IoT device includes web-connected touchy gadgets that use embedded processors, sensors and communicate hardware to gather, ship and act at the statistics they use from their environments. IoT gadgets percentage the sensing detail statistics they acquire through connect- ing to an related IoT entryway or a exclusive facet tool anyplace statistics is both despatched to the cloud to be checked regionally As shown in figure 5. so those gadgets speak with a form of related gadgets and act at the statistics they get from every different. Devices do maximum of the paintings even as now no longer human intervention, despite the fact that humans circulate with gadgets — for example, line them up, offer guidelines to them, or get entry to statistics.

Networking and communicate protocols used with those web-enabled gadgets depend, for the maximum part, at the specific IoT programs deployed.



Figure 5: IoT Basic sections

3.4 Advantages of IoT

The IoT gives lots of advantages to organizations, sanctioning them:

- tracking their enterprise workings
- enhancing purchaser engagement
- saving money and also time
- enhancing employee quality of work
- combining and adapting enterprise devices and system
- making better enterprise decisions and
- producing loads of revenue.

3.5 Arduino IDE information

- Arduino IDE is an companion diploma open-supply software program bundle this is often used for writing and assembling code into the Arduino module As shown in figure 6.
- It is a politician Arduino software program bundle, developing code analyzing too easy so that even an ordinary individual and not using a preceding technical statistics gets their toes moist with the academic approach.
- A Range of Arduino modules on hand in addition to Arduino Uno, Mega, carver, Arduino small and masses of additional.
- Every of this carries a microcontroller at the board that is definitely coded and accepts the statistics in the form of program.
- In this we can create program then we can compile it and then thecode will be added in arduino board.
- This placing helps every C and C++ languages.

The IDE surrounding overview of Arduino IDE

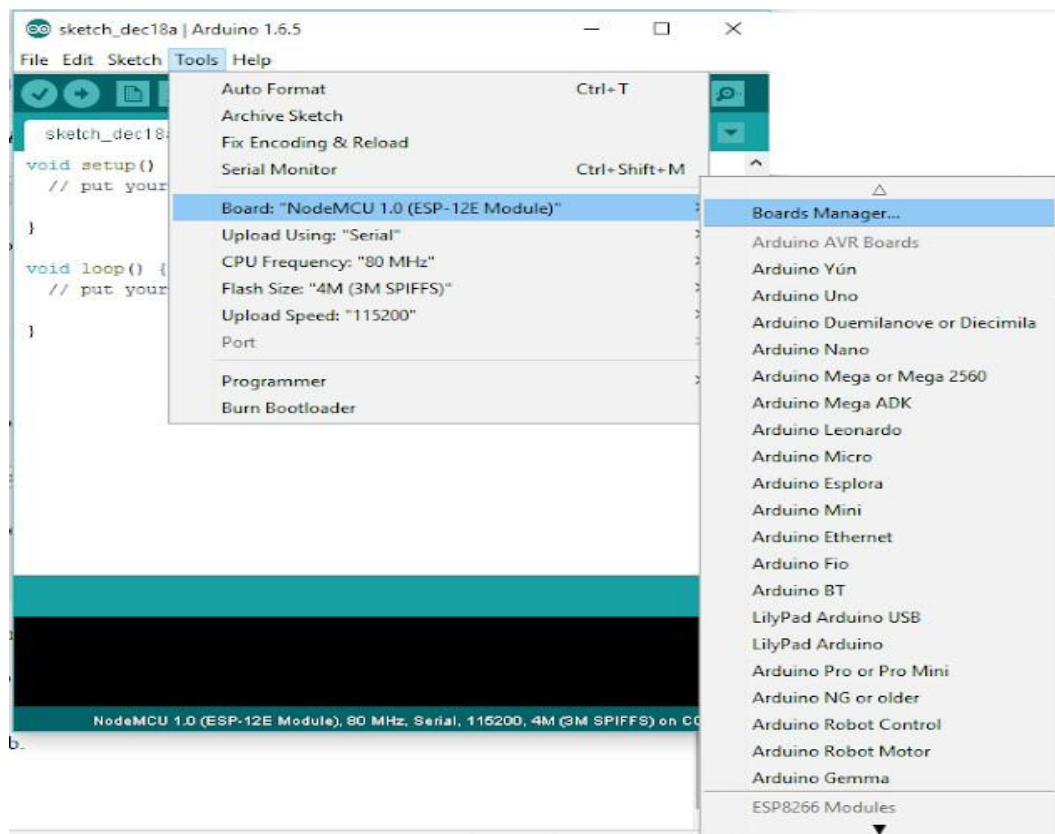


Figure 6: Arduino IDE Editor Image

3.5.1 Benefits of Arduino IDE

Multi-Platform Application

Arduino IDE works on 3 desired working structures: Windows OS, Linux and Mac OS. In these whatever packages we want we can add it into this on any operating system.

Board Management

Arduino IDE contains a board control module with anyplace customers select the board, microprocessor they want to paintings with instantly. If they need to alternate it, they're simply going to do it from the drop-down menu. Modifying their desire collectively routinely updates the PORT data with the statistics they've at the relevance of the brand new board.

Straight forward Sketching

With Arduino IDE, customers will produce packages called sketches of a textual content editor designed place unit. The approach can be an smooth one, despite the fact that it's loads of bells and whistles that create loads of interactive expertise.

Vast Library

Arduino IDE has over seven-hundred integrated libraries. These had been written and shared through contributors of the Arduino network who can be utilized by exclusive customers for his or her very own purposes even as now no longer having to installed. This permits coders to have a unique size to their programs. While Arduino IDE is supposed especially for Arduino , it at the same time helps thirdparty hardware connections. This makes the usage of the equipment lots greater in-intensity than restrained to proprietary boards.

Project Design Flow

4 Overview of project

The IOT idea permits consumer to attach the traditional everyday gadgets with each other to the web internet. The gadgets linked thru concept of iot are regularly analyzed from anywhere. The iot concept presents the essential infrastructure and possibilities to create a connection among the bodily international and computers - primarily based totally systems. The concept has been getting significance with plenty of and plenty of wi-fi gadgets which can be increasing in a timely fashion in the market. The hardware gadgets are linked with each other anywhere in the internet. The E.S.P. 8266 Wi-Fi module applied withinside the gadget presents the connections with the internet within the gadget.

This mission describes the upgradation of load power utilization readings on the internet. The deliberate gadget layout removes the involvement of human in power maintenance. The consumer will display power intake in watts from a web site via way of means of supplying a channel identityntification for the burden. It can be used in anywhere for development, security, making life more easy. Wi-Fi unit plays IOT operation via way of means of inflicting power facts of the burden to the web site which may be accessed thru the channel identityntification of the device. in the projected gadget, consumer will do electricity control via way of means of understanding power utilization time to time. This projected gadget makes use of an Arduino controller. The unit this is generated might be displayed at the web site thru the Wi-Fi module.

4.1 Project Architecture

Project design mainly consists of Hardware units namely (controller, sensor, relay, wifi module), cloud and mobile application As shown in figure 7. Hardware setup used to collect sensor data and send it to the cloud and after that mobile application downloads that data and displays it in a standard format And is able to send signal from the app to the network over the Internet.

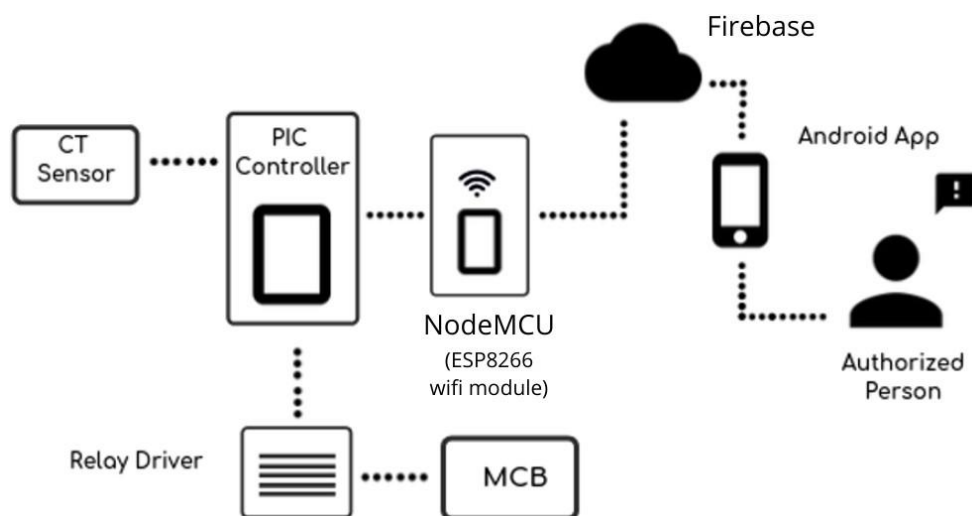


Figure 7: System Overview

4.2 Building blocks of Project

This strategic specific incorporates 3 developing square 1.hardware 2.Cloud 3. Portable utility. We interface sensor, transfer and LCD with the controller. ESP module through method of methods for the utilization of sequential Communication Send measurements to the cover over a net. What's more, bring insights in android utility the use of an unmistakable library.

4.2.1 Project Functional Description

This crucial split into 3 components explicitly equipment arrangement, cloud and cell utility. Equipment arrangement specifically incorporates controller, WiFi module, sensor circuit, hand-off circuit and LCD. Controller well interfaced with all unique factor of circuit. We have utilized current transformer for detecting current. Hand-off circuit with ULN 2003 transfer main impetus IC for controlling computerized on/off contraptions. Correspondence among Wifi module and controller is built up through sequential correspondence. Code is written in NodeMCU controller for power computation and moving the insights to cloud.

Firebase is open flexibly cloud transporter in which we have made channel. It creates channel ID with look at and compose API keys. Two fields withinside the channel are utilized for power and On/off controlling of gadget.

Android studio is utilized for utility turn of events. In that Volley, Lecho and Firebase libraries are utilized. Card see is utilized to set up 4 basic games explicitly on/off, Readings and About. Information is brought in android utility with the help of compose and examine keys.

4.3 Project (Hardware/Software) Specifications

Hardware development of system consist of hardware components selection and interfacing them together and develop real time system. For that purpose different data sheets are referred. Hardware development include real time data acquisition of proposed system.

4.3.1 NodeMCU H/W

NodeMCU is an open-gracefully firmware and improvement bundle that encourages you to model or develop IoT devices. This comprises of the firmware that runs at the Espressif Systems ESP8266 Wi-Fi SoC and the equipment this is principally founded absolutely on the ESP-12 board. The product program utilizes the language of the Lua content.

There's also 128 KB of RAM and four MB of Flash memory (for application and records stockpiling) essentially adequate to address the huge strings that make up the web pages, the JSON/XML documents, and the entire parcel we're setting on IoT devices today.

The ESP8266 incorporates 802.11b/g/n HT40 Wi-Fi handset all together that it can't handiest interface with a WiFi people group and talk with the Internet, anyway additionally can establishment its very own network, allowing various devices to append quickly to it As shown in figure 8.

Force is given to the ESP8266 NodeMCU through an on-board MicroB USB connector.

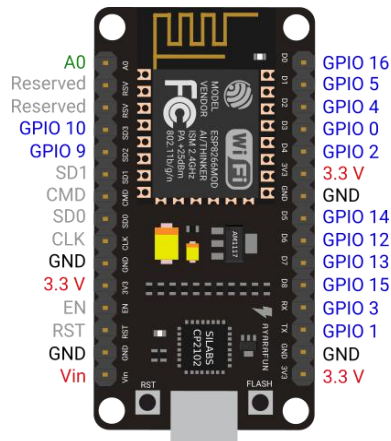


Figure 8: NodeMCU

The ESP8266 NodeMCU has a total of 17 GPIO pins harmed out to the pin headers on every aspects of the improvement board. Such pins can be assigned to all method of fringe errands, including:

ADC channel – A 10-bit ADC channel.

SPI, I2C and I2S interface – SPI and I2C interface to connect a wide range of sensors and peripherals.

I2S interface – I2S interface on the off chance that you need to add sound to your venture.

The NodeMCU has buttons. The different FLASH button withinside the backside left nook is the down load button used to improve the firmware.

4.3.2 Current Transformer

The Current Transformer CT is a sort of "gadget transformer" that is built up to give a rotating current in its auxiliary winding that is corresponding to the advanced being estimated in its main windings As shown in figure 9. Current transformers diminish the unnecessary voltage flows to a far less- ening cost and offer a green way of ably following the genuine electric present day streaming in an AC transmission line the utilization of a mainstream current meter. The first of working of an essential present day transformer is common particular from that of an ordinary voltage transformer.

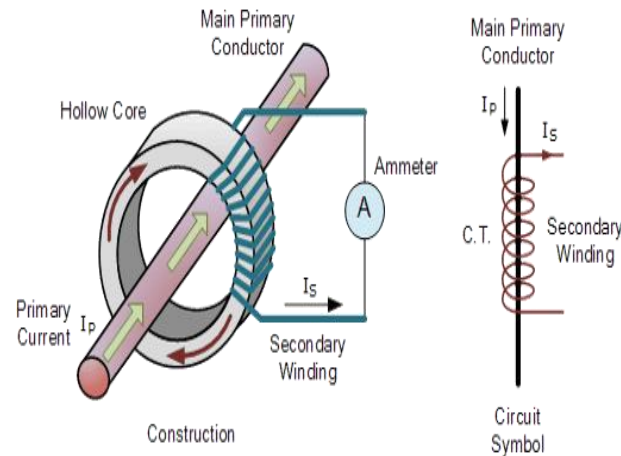


Figure 9: CT Sensor

Current transformers can "step-down" present day stages from many amperes right down to a well known yield of a perceived proportion to both five Amps or 1 Amp for common activ- ity. Along these lines, little also, right gadgets and control contraptions might be utilized with CT's because of this they are protected farfar from any over the top voltage vitality follows. There are some of metering applications what's more, utilizes for present day transformers like with Wattmeter's, vitality thing meters, watt-hour meters, securing transfers, venture loops in attractive circuit breakers and MCB's.

key notes of Current transformer

- Test voltage For Ring (Window) kind CT is 4KV 50 Hz for 1 min (besides for 50/30 CTtype and 50/50 CT type in which check voltage is 3KV 50 Hz for 1 min) For Wound kind CT is 3KV 50 Hz for 1 min.
- Operating frequency is 50Hz / 60 Hz.
- Rated number one score is 1Ato 7500A.
- Rated secondary output is 5Astandard (1Aon request)
- Rated burden is 1, 1.25, 1.five, 2.five, three.75, five, 7.five, 10, 12.five, 15, 20, 30, 45, 60, a hundred VA

4.3.3 LCD 16x2

Liquid Crystal Display show is an advanced show module and find some of uses. A 16x2 LCD shows are essential module and are regularly used in different contraptions and computerized circuits. These modules are chosen more than seven portions and diverse available multi stage LEDs. The intentions are LCDs are efficient, without trouble programmable, have no issue of demonstrating remarkable or even custom characters rather than in seven portions, movements what's more, a lot of more prominent. A 16x2 LCD way it's miles used to show sixteen characters with regards to line and there are 2 such follows to be had. In this LCD each individual is shown in 5x7 frameworks of pixels. This LCD has registers which can be Command and Data.

Key points of LCD

- Operating Voltage 4.7V to five.3V
- Current intake 1mA with out backlight.
- Alphanumeric LCD show module, manner can show alphabets and numbers.
- Consists of such rows and every row can print sixteen characters
- Each person is constructed via way of means of a five x eight field pixel
- It can paintings eight-bit and 4-bit mode

4.3.4 Relay Module

Transfer is a switch, that opens and shuts the circuit electrically. It utilizes truth of electromagnetism from little voltage to offer better voltages. It has 2 essential contacts i.e. NO Normally Open and NC Normally Closed. When enter voltage is executed all through transfers loops, Normally Closed changes in accordance with Normally Open and Normally Open acclimations to Normally Closed. When enter voltage is actualized, the hand-off is invigorated. Hand-off has various capacities e.g. it can be utilized for exchanging better voltage devices to littler voltage devices. In any case, it have to now never again be used in vitality ingesting contraptions. It has a gigantic assortment of utilizations. It might be applied in household machines, advanced circuits in which there's an interest of security, mechanical autonomy for controlling its engines from the correct development and diverse more prominent.

Key points of relay module

- Contact current 10A and 250V AC or 30V DC.
- Each channel has sign LED.
- Loop voltage 12V with regards to channel.
- Unit running voltage five-12 V
- Information sign three-five V for each channel.
- Three pins for ordinarily open and shut for each channel.

4.3.5 Pic Microcontroller

PIC (normally said as "pick") is an own hover of family members of microcontrollers made through method of methods for Microchip Technology, got from the PIC1650 from the outset advanced by means of method of methods of GIMD. The call PIC as a matter of first impor- tance refered to Peripheral Interface Controller, and is as of now expanded as Programmable Intelligent Computer. The principal parts of the own hover of family members have been to be had in 1976; by means of method of methods for 2013 the association had dispatched more prominent than twelve billion man segments, used in a broad kind of installed frameworks.

4.3.6 PICKIT

The PICKit three developer/debugger is a straightforward, low-cost in- circuit debugger this is overseen through method of methods for a PC running MPLAB IDE (v8.20 or more noteworthy) programming program on a Windows R stage As shown in figure 10.



Figure 10: Image of Pickit 3

The PICkit three developer/debugger is a fundamental a piece of the improvement architect's toolsuite. The product usage can extend from programming program improvement to equipment combination.

The PICkit three developer/debugger is a debugger gadget utilized for equipment and programming program improvement of Microchip PIC R microcontrollers (MCUs) and dsPIC R Digital Signal Controllers (DSCs) which can be fundamentally founded absolutely on In-Circuit Serial Programming™ (ICSPTM) and Enhanced In-Circuit Serial Programming 2-rope sequential interfaces. Notwithstanding debugger works, the PICkit three software engineer/debugger gadget moreover can be utilized as an improvement developer.

The debugger gadget executes code like a genuine instrument as it utilizes an apparatus with builtin copying hardware, instead of a one of a kind debugger chip, for imitating. All to be had elements of a given instrument are close by intelligently, and might be set and changed by means of method of methods for the MPLAB IDE interface.

The PICkit 3 debugger was developed for emulating embedded processors with debug facilities. The PICkit 3 features include:

- Full-speed USB support using Windows standard drivers
- Real-time execution
- Processors run at maximum speeds
- Built-in over-voltage/short circuit monitor
- Low voltage to 5V (1.8-5V range)
- Diagnostic LEDs (power, active, status)
- Read/write program and data memory of microcontroller
- Erase of all memory types (EEPROM, ID, configuration and program) with verification
- Peripheral freeze at breakpoint

4.4 Software Specification

4.4.1 Arduino programming

Arduino applications are composed withinside the Arduino Integrated Development Environment (IDE). Arduino IDE is an extraordinary programming program running to your machine that allows in you to carefully record outlines (equivalent word for programming in Arduino language) for elite Arduino sheets. The Arduino programming language is principally founded absolutely on a totally simple equipment programming language known as handling, that is a lot of like the C language. After the funny cartoon is composed withinside the Arduino IDE, it should be transferred at the Arduino board for execution.

The initial phase in programming the Arduino board is downloading and placing in the Arduino IDE. The open flexibly Arduino IDE runs on Windows OS, Mac OS X, and Linux. The NodeMCU is a improvement board offering the famous ESP8266 WiFi chip. As it turns out, you could software the ESP8266 much like another microcontroller. Its apparent gain over the Arduino or PIC is that it is able to with ease hook up with the Internet through WiFi. However, the ESP8266 breakout board has restricted pins despite the fact that the chip itself has a whole lot of output ports. The NodeMCU solves this trouble via way of means of offering 10 GPIO pins every able to the use of PWM, I2C and 1-cord interface.

4.4.2 Specifications of Android studio

Android Studio is the widely recognized IDE for Android software improvement, primarily based totally on IntelliJ IDEA of improvement . On pinnacle of IntelliJ's powerful code editor and developer gear, Android Studio offers even greater capabilities that boom your productive- ness while constructing Android apps.

Key points of Android Studio

- A bendy Gradle-primarily based totally constructing machine.
- A speedy in addition to feature-wealthy emulator.
- A unified surroundings in which consumer can increase for all Android devices.
- Instant Run to push modifications to customers jogging app with out constructing a brand new APK.
- Code templates in addition to GitHub integration that will help you construct not unusu- alplace app capabilities and import pattern coding.
- Extensive trying out gear or frameworks.

4.4.3 MPLAB Software

The PIC microcontroller programming is accomplished through 'MP-Lab' software program. It is used for pic microcontroller to simulate the working circuit of pic controller. In this software we can write code for pic controller and simulate the function of controller. we can also debug the code of program of pic and we can push the code of pic into pic by using this software and connector.

We use MP-Lab software for programming PIC-Microcontroller. MP-Lab is integrated development environment and microchip is integrated within MP-Lab. Microchip Software and hardware tools embedded in microchip. Components of MPLab IDE

Since MPLab has variety of software and hardware tools for system configuration MPLAB has built-in components and plug-in models.

Project Manager: It is a communicator between the IDE and language tools. It provides integration.

Editor: It is a text editor used by programmers that serves as a window into the debugger.

Linker: for linking single file we can use assembler or it can be used with linker to build project from separate source files. Linker set the compiled code into memory area.

Debugger- The Microchip debugger permits breakpoints, single venturing, watch windows and all the highlights of a cutting edge debugger for the MPLAB IDE. It works related to the manager to reference data from the objective being fixed back to the source code.

Execution Engines: They are software simulators.

4.4.4 PROTEUS Software

The Proteus Design Suite software program is a proprietary software program device suite used broadly speaking for digital layout and automation. The software program is used in particular via way of means of the digital designers engineers in addition to technicians for growing schematics and digital prints to fabricate published circuitboards PCB's.

The PCB Layout module is routinely given connectivity facts within the shape of a netlist from the schematic seize module. It applies this facts, collectively with the consumer

distinctive layout regulations and diverse layout automation gear, to help with blunders unfastened board layout. PCB's of as much as sixteen copper layers may be produced with layout length restricted via way of means of product configuration.

4.4.5 Algorithm

Step 1: Create Project on Firebase.

Step 2: Add Host Name to Arduino Sketch

Step 3: Add Database Secret Key to Arduino Sketch

Step 4: Add Router Name and Password

Change line with your WiFi router name and password

```
#define WIFI_SSID "Wifi Router Name"
#define WIFI_PASSWORD "Router Password"
```

Step 5: Download Following Code in Arduino

```
#include<stdio.h>
#include<conio.h>

// Set these to run example.

#define FIREBASE_HOST "fir-app-example.firebaseio.com"
#define FIREBASE_AUTH "examplesd2asdadasdasd2asd3asd2asd2as32das3d2as2da3"
#define WIFI_SSID "Wifi Router Name"
#define WIFI_PASSWORD "Router Password"
#define LED 2

void setup() {

pinMode(LED,OUTPUT);

digitalWrite(LED,0);

Serial.begin(9600);

WiFi.begin(WIFI_SSID, WIFI_PASSWORD);

Serial.print("connecting");

while (WiFi.status() != WL_CONNECTED) {

Serial.print(".");

delay(500);

}

Serial.println();

Serial.print("connected: ");

Serial.println(WiFi.localIP());

Firebase.begin(FIREBASE_HOST, FIREBASE_AUTH);

Firebase.setInt("LEDStatus",0);
```

```
}  
  
void loop() {  
  
  if(Firebase.getInt("LEDStatus"))  
  
  {  
  
    digitalWrite(LED,HIGH);  
  
  }  
  
  else  
  
  {  
  
    digitalWrite(LED,LOW);  
  
  }  
  
  if (Firebase.failed()) // Check for errors {  
  
    Serial.print("setting /number failed:");  
  
    Serial.println(Firebase.error());  
  
    return;  
  
  }  
  
  delay(1000);  
  
}
```

Step 6: Restart ESP8266

After reseting ESP8266check serial terminal whether the ESP is get connected with your router and got IP adress.

Goto <https://console.firebase.google.com/project/fir-app-9adb8/database/data> you can now see the new variable created in database.

Project Implementations

5 Project Implementation view

5.1 Design methodology of the project

By using CT sensor we are going to measure current flowing through a wire from which we can calculate the power consumption by using the formula:

$$\text{Power} = \text{current(Rms)} \times \text{voltage(Rms)}$$

For that we need to calibrate CT sensor first, after calibration of sensor it can be interfaced to the microcontroller. We need to convert analog data coming from CT sensor to Digital using ADC (Analog to Digital convertor) microcontroller.

Based upon threshold the microcontroller will priorities each electric node and control them so that power consumption will not exceeds. Collected records is displayed on LCD and despatched to the cloud for evaluation and observation. Later we fetch records in an android software and displayed it.

For monitoring and controlling system by using android app As shown in figure 11. We are connecting android app with cloud with use of authentication token and api key of cloud. To show Power Consumption.

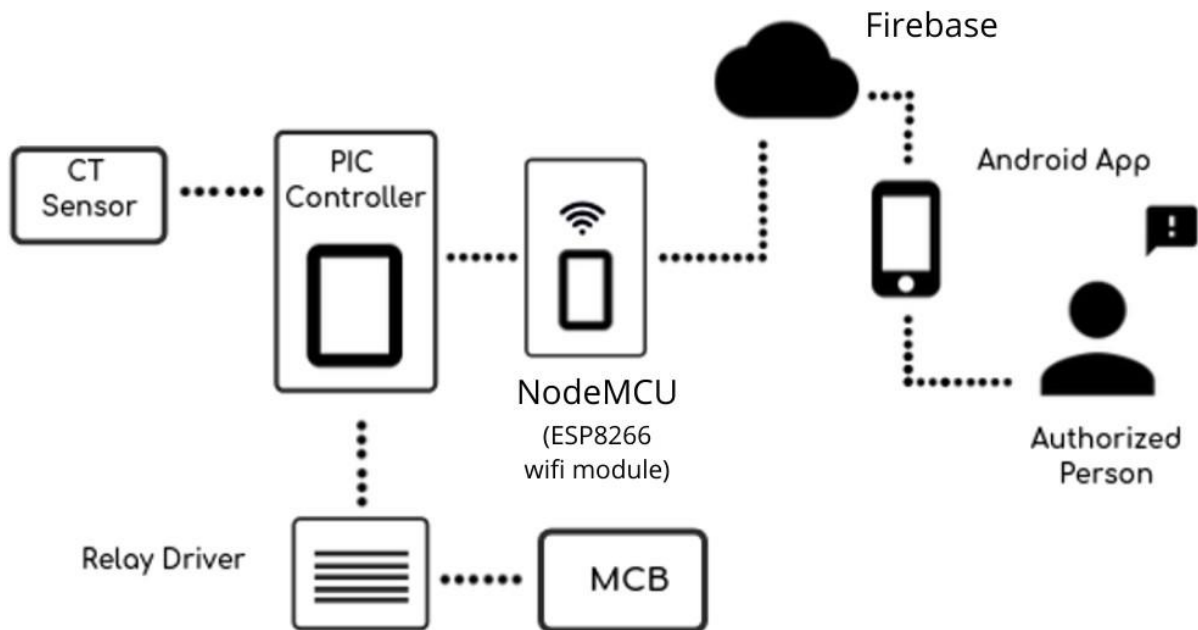


Figure 11: Design Methodology

5.1.1 Project requirement

The primary challenge necessities are a computer or laptop with eight GB of RAM and an OS hooked up. Android cell model five.0(Lollipop) and above. Android Studio model 3.6 for the improvement of applications. Arduino IDE model 1.eight.10 hooked up on laptop. MP lab

5.1.4 Software Design of Project

- Initialize the enter output pin of the pic controller.
- Initialize SSID and NodeMCU Password.
- Initialization of Firebase Channel Keys.
- Initiate the LCD.
- Sensor calibration (Sensor value= Sensor value/1.five).
- Transmit your information to Firebase.
- Serial conversation among the NodeMCU and the controller.

5.1.5 Hardware design of Project

- Interface sensor and LCD to pic controller.
- Set up serial conversation among the NodeMCU and the controller.
- Design of the circuit of the relay driver.
- Sensor calibration.
- Integrating general hardware.

5.1.6 Hardware and software program integration of Project

- Dump the Pic code to the controller.
- Connect Pic with NodeMCU.
- Dump firebase connection code in NodeMCU.
- Create your Firebase channel.
- Using this write and examine API keys date is despatched to Firebase.

5.1.7 Cloud connectivity and Mobile App improvement

- Retrieve information from the Firebase app this is saved in a real-time database.
- Use the write key and examine key with the right channel ID.
- Create the primary display screen for the utility with the emblem at the flash display screen.
- Main pastime with 4 alternatives On / Off, strength reading, notification, etc.
- Shows usages in card view.
- On/Off pastime- two buttons with excessive and coffee enter API write keys.
- Reading pastime-Calculation of strength for each 1 second.

5.2 Project Working Architecture

In Project working architecture we have shown how connection has been done As shown if figure 13.

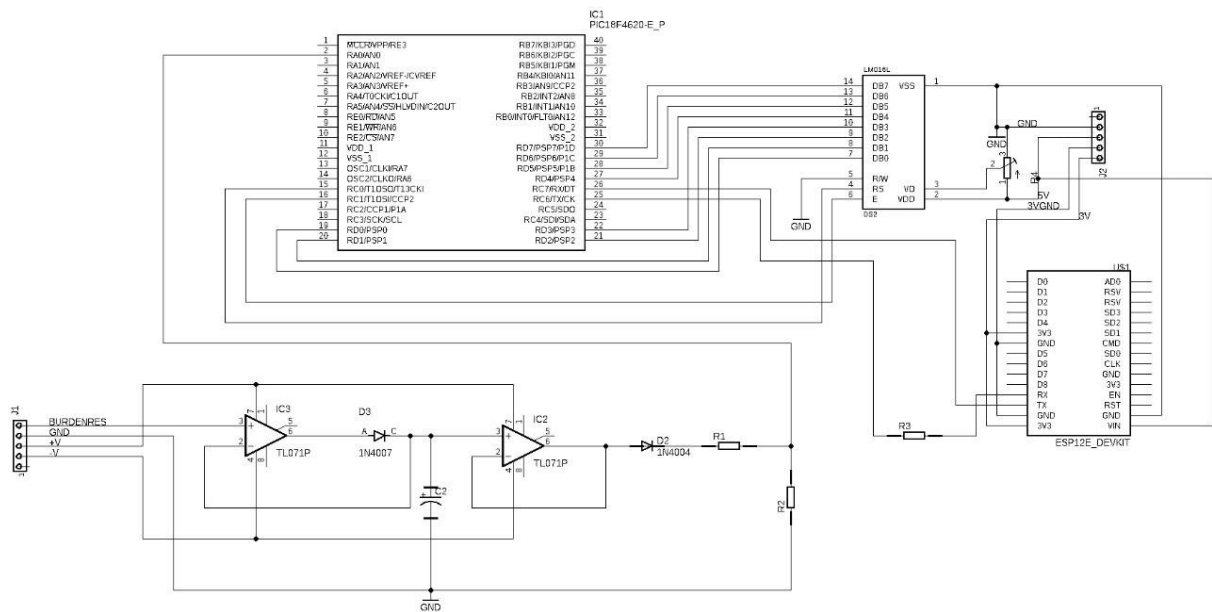


Figure 13: Project Flowchart & Serial communication

5.3 Design Specifications of Connections

- Use Firebase, LCD, software program serial libraries for Pic controller.
- By Connecting sensors to analog (A1) enter pin of controller.
- Connect NodeMCU module Rx and Tx to Tx and Rx pin of controller.
- Connect LCD pins to virtual output pins 1 to five and 11, 12.
- Digital out pin thirteen to ULN IC (Relay driver).
- Use flash display in android app.
- Card view for interest display.
- Use lecho library and graph view.
- Use volley library and Firebase library.

5.4 Serial communication

Connection of pins to PIC controller and the NodeMCU is as given in table. [Table 1]

In data transmission, serial communication is the process of sending data one bit at a time, sequentially, over a communication channel or computer bus. This is in contrast to parallel communication, where several bits are sent as a whole, on a link with several parallel channels.

Serial communication is used for all long-haul communication and most computer networks, where the cost of cable and synchronization difficulties make parallel communication impractical.

Serial computer buses are becoming more common even at shorter distances, as improved signal integrity and transmission speeds in newer serial technologies have begun to outweigh the parallel bus's advantage of simplicity (no need for serializer and deserializer, or SerDes) and to outstrip its disadvantages (clock skew, interconnect density).

Connections:

Connection of pins to PIC controller and the NodeMCU is as given in table As shown in table 1. Serial communication takes place between pic microcontroller and NodeMCU.

PIC	NodeMCU
VCC	CHPD
GND	GND
3.3V	VCC
VCC	Reset
Rx	Tx
Tx	Rx

Table 1: Connections

RESULTS & DISCUSSIONS

6 RESULTS & DISCUSSIONS OF THE PROJECT

Once we activate the mains, the gadget will start. All electric gadget might be on and the contemporary sinter will sense the contemporary in analog form. We can put up it to the picture. Pic has integrated ADC (analog to virtual converter). The quantity of energy is measured and despatched to the firebase the use of NodeMCU. Firebase records is then acquired withinside the android software and visible withinside the cart from those readings.

6.1 Firebase result

We create a channel in the Firebase interface and create two fields. According to the data submitted, the results are displayed in the real-time database As shown in figure 14. Like users data, calculated power & controller nodes.

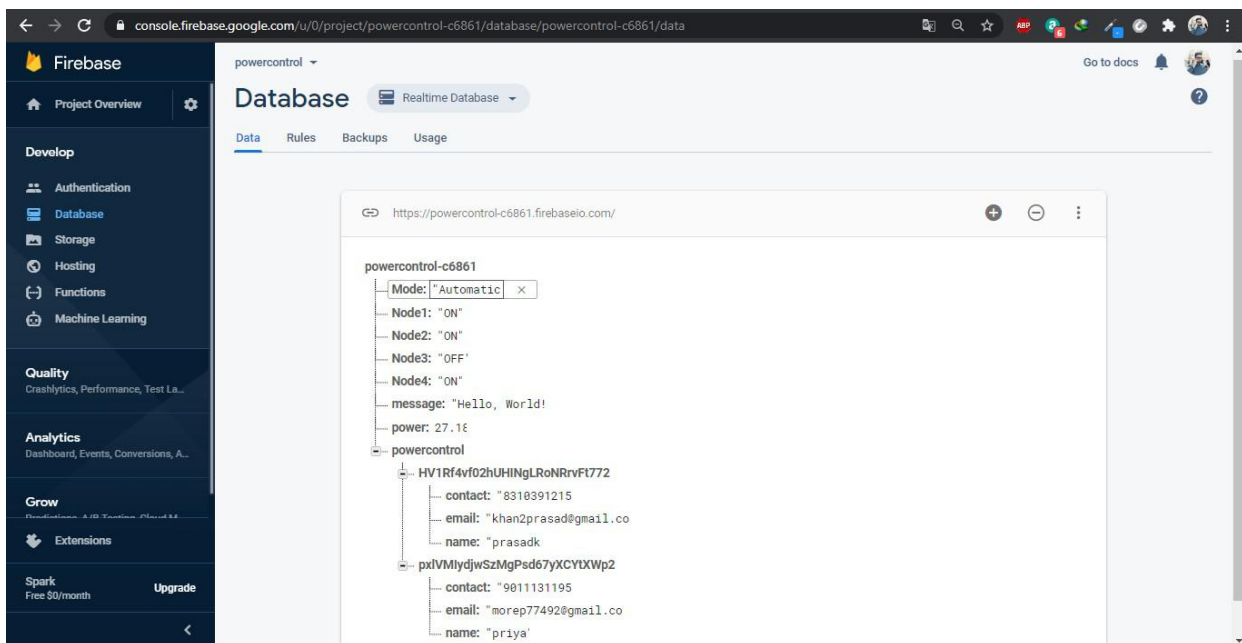


Figure 14: Firebase results

6.2 Android App result

The Android application fetches the Firebase data as a read and displays it under the read tab of the Android application. We use read api kThe Android software fetches the Firebase records as a study and presentations it below the study tab of the Android software. We use study api key to study the records. The following facts display all of the results of the android applications. And we also can controller the strength utilization through the usage of controller node buttons.ey to read the data. The following statistics show all the outcomes of the android applications. And we can also controller the power usage by using controller node buttons.

In below figure you can see the interface of login page. Where you can login in app using your email id and password As shown in figure 15. But before login to app for first time you have to register using sign up page. If you have forgotten your password you can get it back using forgot password with simple email verification.

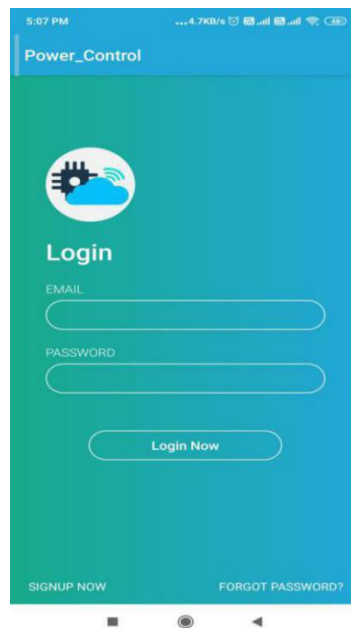


Figure 15: App Log inform

In below figure you can see the interface of sign-up page. Where you can register yourself to use app by the help of this form. Here you have to fill your details like username, email, password and phone number As shown in figure 16. If you are already registered in app you can use option for login by selecting already registered? Login here.

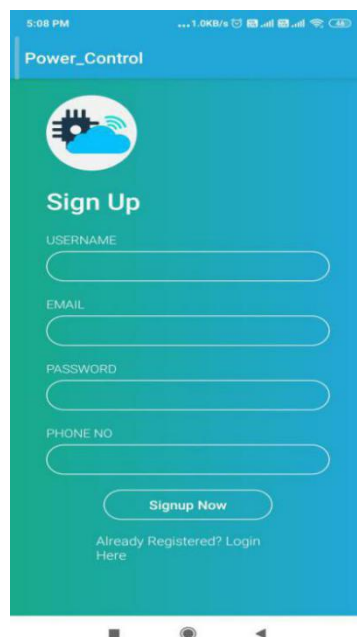


Figure 16: App Registration form

In main window by selecting automatic made the power is controlled by relay driver to keep below threshold value As shown in figure 17.



Figure 17: Automatic Mode

By selecting manual mode you can control power by selecting nodes through android app As shown in figure 18. The authorized person can decide which node to make it ON & which is to be OFF to keep power consumption below threshold value.

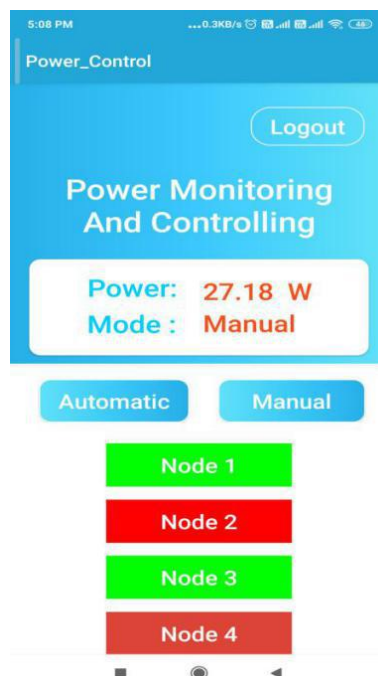


Figure 18: Manual Mode

6.3 Analysis of actual reading

All below figures have realtime snapshot of readings As shown in figure 19,20.

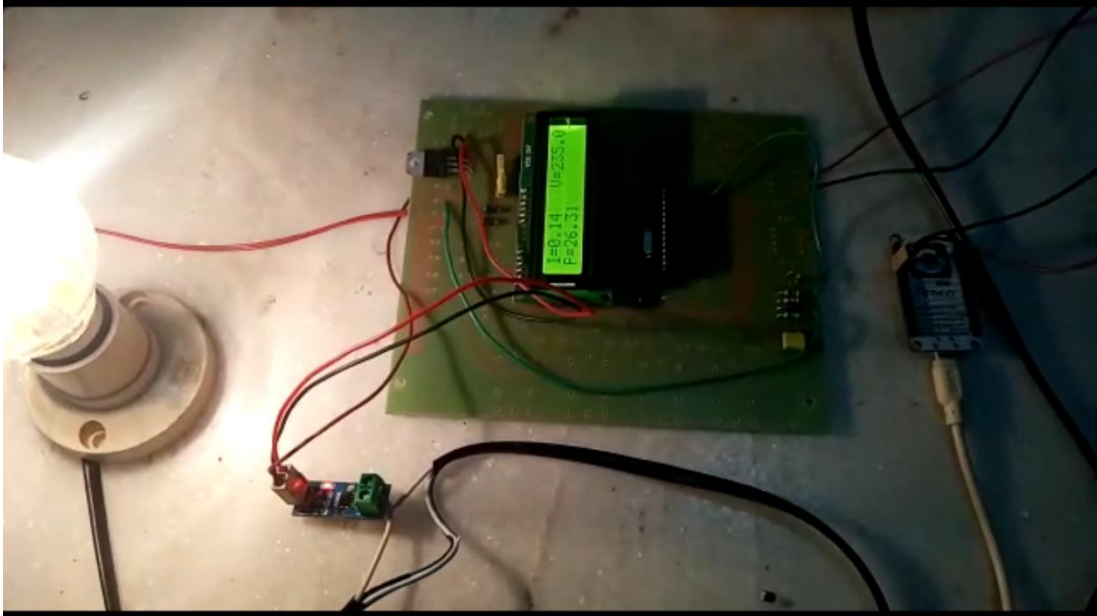


Figure 19: Reading Snapshot 1

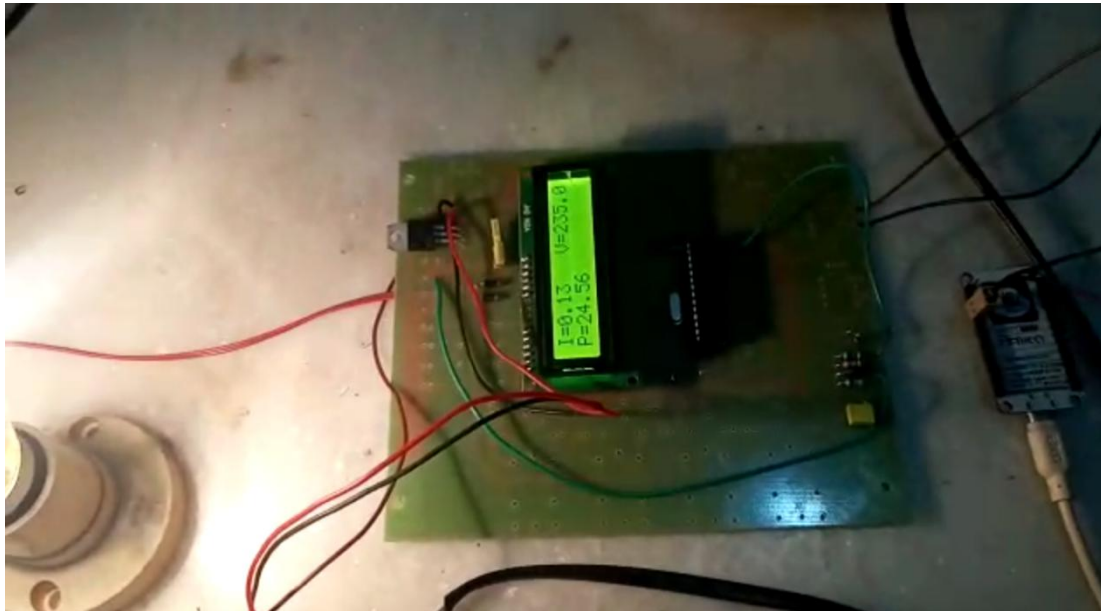


Figure 20: Reading Snapshot 2

Conclusion & Future Directions

7 Conclusion and future Advancements

Smart electricity tracking and controlling machine primarily based totally on IoT is a modern software of this virtual era. The evolved machine offer a example energy calculation along side each day energy intake file along side faraway tracking of electrical home equipment and controlling it.

For contemporary detecting we right here used Current transformer evaluate to different gadgets it green and we will switch information to firebase cloud the use of NodeMCU.

Firebase cloud offer a great UI additionally shops information in xml and json layout as a result fetching that information in android software end up smooth via way of means of the use of numerous extraordinary library of android studio (IDE for cellular software development).

Present machine notify consumer approximately energy utilization and facility of remotely on/off however destiny change make it lots green and reliable.

7.1 Future Directions of the Project

- Efficiency may be elevated the use of uses like gallileo boards and texas board.
- Enhance the machine via way of means of including functions like price of invoice from android software.
- The graphical data concerning the electricity utilization will be despatched to the consumer in a less difficult layout with the assist of device learning.
- Use device and AI and advocate manner of energy intake for a selected area.
- The machine will be to be had for industrial reason for massive scale.

7.2 References of the Project

7.2.1 We referd papar which is Design and implementation of Bluetooth energy meter (2012) By P. Shum, H. W. Kuek. for understanding the cenario of electricity usages and consumption. Where they used for digital meter for checking energy usages And all the collected data can be collected by user sending data by using bluetooth wirelessly.

7.2.2 Survey checking from IoT Based Energy Meter Reading, Theft Detection and Disconnection the use of PLC modem and Power optimization”, (Vol. 4, Issue 7, July 2015). The given energy meter machine reduces or almost removes the human involvement in electricity management. It is likewise useful in time period of pay of power invoice due to vital server is there. The consumer can screen and managed power intake in gadgets from an internet interface via way of means of supplying IP deal with of devices. this machine additionally can be used for detection theft of power and tempering with power checking meter.

7.2.3 Birendra Kumar Sahani 1, Tejashree Ravi 2, Aqib Javed Tamboli 3, Ranjeet Pisal four They posted IRJET on April four 2017.

7.2.4 Gowthami. P Gunasundari. N and Gobinath. S Worked on IOT Based Energy Meter PIC Microcontroller calculating price and displayed in display board and serial communique has been used to interface with the digital terminal.

Publication

Appendix