GRACE FERRO EXPORTS PVT LTD
Trustful Exporters

EXPORT CATALOGUE

PURITY

PVC TARPAULIN

Double-side PVC-coated tarpaulin for heavy outdoor use: truck and cargo covers, construction, agriculture, events and shelters.



400	430	550	650	760
GSM	GSM	GSM	GSM	GSM

ROLLS 1.5 m × 50 m **SHEETS** 15′ × 12′ to 30′ × 18′

THE EXPORTER

GRACE FERRO EXPORTS

A Coimbatore-based export house supplying overseas buyers. We are the distributor and exporter of Purity PVC tarpaulin.

We handle your order end to end: specification, sampling, export packing, documentation and shipment from Indian ports. Grace Ferro exports to 16 countries across Europe, the Gulf, Asia, Africa and North America.

IEC | GST | MSME | FIEO member | APEDA | ISO quality assurance | DUNS 931865379 | REX registered

THE PRODUCT

PURITY PVC TARPAULIN


A strong base fabric sealed in PVC on both faces. The result is a heavy, waterproof sheet for covers that work outdoors all year.

Purity comes in five weights from 400 to 760 GSM. Buy it in 1.5 m × 50 m rolls to make your own covers, or as ready-made sheets in four standard sizes.

CONSTRUCTION

COATED ON BOTH SIDES

The base fabric carries the load. The PVC coating seals it from water, dirt and sunlight. Because both faces are coated, either side can face the weather.

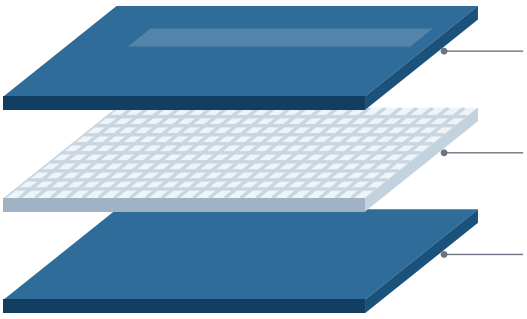

Illustrative exploded view, not to scale.



Purity sheet: smooth PVC face, hemmed edge and metal eyelets.

5 grades
400 to 760 GSM

75 m²
per roll (807 sq ft)

1.5 × 50 m
standard roll

4 sizes
of ready-made sheet

WHY PVC-COATED

MADE FOR HARD OUTDOOR WORK

WATERPROOF
The PVC coating forms a continuous seal, so goods, stock and equipment stay dry through monsoon rain.

UV-STABILISED
UV stabilisers in the coating help the sheet resist fading and loss of strength in strong sun.

STRONG AND TEAR-RESISTANT
The base fabric copes with wind load, repeated folding, rough transport and installation.

WIDE TEMPERATURE RANGE
Stays flexible in the cold and does not turn soft in summer heat. Generally rated from −30 °C to +70 °C.

EASY TO CLEAN
The smooth coated surface wipes clean, which keeps a sheet in service for longer.

FIRE-RETARDANT ON REQUEST
An FR version is available for warehouses, factories and other sensitive sites.

APPLICATIONS

WHERE IT IS USED

TRANSPORT
Truck covers, container covers and cargo protection on long hauls.

CONSTRUCTION
Site covers, temporary shelters and machinery protection in rain and dust.

AGRICULTURE
Crop and hay covers, equipment shelter and livestock shade.

EVENTS
Outdoor shelters that protect guests and rented equipment.

SPORTS GROUNDS
Pitch and ground covers that keep playing surfaces usable.

TENTS AND SHELTERS
Ridge tents and relief shelters.



Ridge tent made from blue Purity PVC tarpaulin.

PRODUCT RANGE

FIVE GRADES, 400 TO 760 GSM

Every grade is coated on both sides. A higher GSM means more fabric and PVC in each square metre, giving a heavier, tougher sheet for longer outdoor use. Lighter grades are easier to lift, fold and tie down.

400 GSM	430 GSM	550 GSM	650 GSM	760 GSM
WEIGHT 400 g/m² 11.8 oz/yd²	WEIGHT 430 g/m² 12.7 oz/yd²	WEIGHT 550 g/m² 16.2 oz/yd²	WEIGHT 650 g/m² 19.2 oz/yd²	WEIGHT 760 g/m² 22.4 oz/yd²
PER ROLL 30.0 kg	PER ROLL 32.3 kg	PER ROLL 41.3 kg	PER ROLL 48.8 kg	PER ROLL 57.0 kg

LIGHTER, EASIER TO HANDLE — HEAVIER, TOUGHER

MATERIAL

Construction	Base fabric with PVC coating on both sides
Coating	UV-stabilised PVC, smooth wipe-clean surface
Service temperature	Generally rated −30 °C to +70 °C
Fire retardant	FR version on request
Colour	Blue shown; ask for available colours

NEED TEST DATA FOR YOUR TENDER?

Ask us for the manufacturer's datasheet for your grade. It covers the base fabric, thickness, tensile and tear strength, coating adhesion, available colours and, for the FR version, the fire test report.

Typical values; confirm with order. Weights per roll are nominal, calculated as GSM × area, and exclude packing.

SUPPLY FORMS

ROLLS OR READY-MADE SHEETS


ROLLS

For converters and fabricators who cut, weld and finish their own truck covers, tents and shelters.

READY-MADE SHEETS

For distributors and end users who need a cover that is ready to tie down.

ROLLS 1.5 m × 50 m

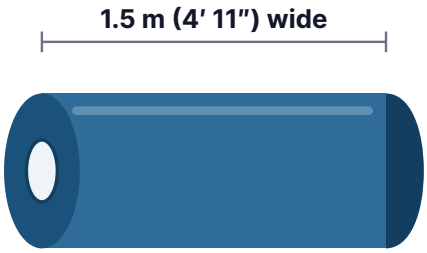

1.5 m
width (4′ 11″)

50 m
length (164′)

75 m²
per roll (807 sq ft)

30–57 kg
per roll, by grade

Grade	400	430	550	650	760
Roll weight	30.0 kg	32.3 kg	41.3 kg	48.8 kg	57.0 kg

READY-MADE SHEETS four standard sizes

			Nominal weight per sheet in kg, by GSM				
Size (ft)	Size (m)	Area	400	430	550	650	760
15′ × 12′	4.57 × 3.66 m	16.7 m² (180 sq ft)	6.7	7.2	9.2	10.9	12.7
18′ × 15′	5.49 × 4.57 m	25.1 m² (270 sq ft)	10.0	10.8	13.8	16.3	19.1
24′ × 18′	7.32 × 5.49 m	40.1 m² (432 sq ft)	16.1	17.3	22.1	26.1	30.5
30′ × 18′	9.14 × 5.49 m	50.2 m² (540 sq ft)	20.1	21.6	27.6	32.6	38.1

Nominal weights, calculated as GSM × area; they exclude hems and eyelets. Confirm finished sizes with your order.



FINISHING

Shown: a Purity sheet with a hemmed edge and metal eyelets for roping down.

When you enquire, tell us the eyelet spacing, hem finish and any size you need beyond the four standard sheets.

ORDERING FOR EXPORT

FROM ENQUIRY TO YOUR PORT

PRICE	On request. We reply to quotation requests within 24 hours.
INCOTERMS	FOB or CIF, quoted per order.
PORTS OF LOADING	Chennai, Mumbai or Nhava Sheva; other Indian ports on request.
PAYMENT	30% advance, 70% against scanned B/L · D/P · D/A · LC (usance / UPAS).
MOQ & LEAD TIME	Quoted with each enquiry, by grade, form and quantity.
SAMPLES	Available. The buyer pays the sample cost and courier.
DOCUMENTS	Relevant certificates and export documents with each shipment.

FOR A FAST QUOTATION, TELL US

1. GSM grade
2. Rolls or sheets
3. Size
4. Colour
5. Quantity
6. Destination port

REQUEST A QUOTATION

PHONE / WHATSAPP
+91 74189 99378
+91 74189 99379

EMAIL
sales@graceferroexports.com
info@graceferroexports.com

OFFICE
Door No 29-12, 2nd Floor, RS Plaza,
Palakkad Main Road, Kuniamuthur,
Coimbatore 641008, Tamil Nadu, India

HOURS
Mon–Sat, 9:00–18:00 IST

WEB
www.graceferroexports.com

SCAN FOR PRODUCT PAGE

Purity is a trademark of its respective owner. Grace Ferro Exports Pvt Ltd is a distributor and exporter, not the manufacturer.