GRACE FERRO
EXPORTS PVT LTD
Trustful Exporters



CROSSPAULIN™
A product of PANKAJ®

Cross-Laminated Multilayer Tarpaulin

Waterproof, UV-stabilised sheets that stay light in the hand and tough in the field. For agriculture, transport, storage and construction.

90 GSM | **120** GSM | **150** GSM | **200** GSM

THE EXPORTER

Grace Ferro Exports

A Coimbatore-based export house supplying overseas buyers. We are the bulk distributor and exporter of Crosspaulin™ tarpaulins.

We handle your order end to end: specification, sampling, export packing, documentation and shipment from Indian ports. Grace Ferro exports to 16 countries across Europe, the Gulf, Asia, Africa and North America.

IEC · GST · MSME · FIEO member · APEDA · ISO quality assurance · DUNS 931865379 · REX registered

THE MANUFACTURER

Crosspaulin™ by PANKAJ®


Crosspaulin is a multilayer cross-laminated tarpaulin made by PANKAJ®. It is built for people who need a cover that lasts more than one season.

It is made from 100% virgin LDPE, LLDPE and plastomer in two to four cross-laminated layers, with UV stabilisers. It is BIS-licensed under IS 14611:2024 and made in an ISO 9001:2015 certified plant. It comes in several weights, sizes and colours, with custom specifications and private labelling for bulk orders.

THE TECHNOLOGY

What cross-lamination does

An ordinary tarpaulin is woven from flat plastic tapes and then coated. Crosspaulin is made differently: oriented film layers are bonded at crossed angles into one sheet. Strength runs in more than one direction, and there is no weave to open up, fray or let water through.

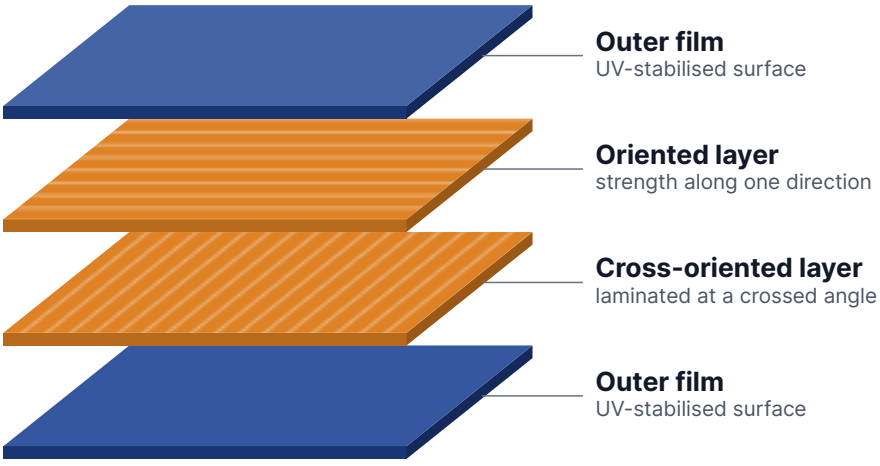

Illustrative exploded view, not to scale. Layer count varies by grade.



Up close

The fine texture comes from the laminated layers, not from a weave. Each sheet is printed with its GSM and brand mark.

WHY CROSSPAULIN

Built to outlast ordinary tarps

5×

Higher tensile strength than woven tarpaulins

Multilayer cross-lamination gives a sheet that resists tearing, punctures and harsh weather far longer than ordinary tarpaulins. You replace covers less often.

Manufacturer-stated comparison.

100% waterproof

A continuous laminated film with no weave gaps protects goods, harvests and equipment from rain and moisture.

UV-stabilised

Made with UV stabilisers for long outdoor exposure in sun, rain, wind and snow.

Tear and puncture resistant

Crossed layers hold up against tearing and punctures far longer than ordinary tarpaulins.

Lightweight

Easy to carry, spread and tie down, even for large covers.

Folds without cracking

Stays flexible, so it can be folded, stored and reused season after season.

Multi-year life

Designed for multi-year outdoor use, which lowers your replacement cost.

Eco-safe

100% recyclable, non-toxic material that is safe for crops and storage.

BIS-licensed, 100% virgin

Licensed under IS 14611:2024 and made from virgin LDPE, LLDPE and plastomer. Independent laboratory test reports on request.

PRODUCT RANGE

Four standard grades

Choose by weight. Heavier grades are for longer outdoor exposure and rougher handling. Every grade is cross-laminated and UV-stabilised.



90 GSM

LIGHT DUTY

Shown in natural. IS 14611 light-duty band (60–100 GSM).



120 GSM

MEDIUM DUTY

Shown in green. IS 14611 medium-duty band (110–150 GSM).



150 GSM

MEDIUM DUTY

Shown in blue. IS 14611 medium-duty band (110–150 GSM).



200 GSM

HEAVY DUTY

Shown in black/silver. IS 14611 heavy-duty band (200–250 GSM).

More weights

70 GSM and 250 GSM are also available. Sheets come in standard cut sizes, in rolls up to 2.75 m wide and 1,000 m long, or cut to your size.

Colours

Blue, yellow, red, olive green, black & silver, black, natural and milky white. Custom colours for bulk orders.







Duty classes follow the IS 14611 weight bands: light 60–100, medium 110–150, heavy 200–250 GSM.

TECHNICAL DATA

Specifications

Grade	90 GSM	120 GSM	150 GSM	200 GSM
Weight (±5%)	90 g/m²	120 g/m²	150 g/m²	200 g/m²
Duty class (IS 14611 band)	Light (LN)	Medium (MN)	Medium (MN)	Heavy (HN)
MATERIAL				
Construction	2 to 4 cross-laminated layers			
Raw material	100% virgin LDPE, LLDPE and plastomer, UV-stabilised			
Thickness	0.10 mm or 0.12 mm (by grade [TBC])			
Maximum width / roll length	2.75 m / 1,000 m			
MECHANICAL (ALL GRADES)				
Tensile strength, MD / TD	250 / 200 kg/cm²			
Elongation at break, MD / TD	400% / 300%			
Tear strength, dart impact	As per IS 14611:2024 for the grade			
Puncture resistance	Pass			
WEATHERING & WATERPROOFING				
UV exposure (IS 14611:2024)	192 h · tensile retained 65.2% MD / 67.5% TD · elongation retained 66.0% MD / 66.3% TD			
Accelerated ageing	IS 7016 (Part 8), 168 h at 70 °C: pass			
Flex resistance	50,000 cycles: pass			
Waterproofing	IS 7016 (Part 7), 1 h: pass			
FABRICATION				
Seams	Heat-sealed, hot-wedge welded			
Hems	55 mm folded hem, two sealing bands 10 mm apart; reinforced			
Eyelets	Ultrasonic, 35 mm diameter, every 0.9 m (3 ft); rope options available			

Certification

BIS-licensed under IS 14611:2024 (multilayered cross-laminated tarpaulins). Tested by an independent laboratory, November 2025 to January 2026. Manufactured under an ISO 9001:2015 quality management system. Licence and certificate details and test reports are available on request.

Manufacturer-declared values. Typical values; confirm with order. Specifications may change without notice.

STANDARD SIZES & PACKING

54 ready-cut sizes

Quantity per pack by grade, unit **[TBC: pcs per bale / bundle]**. Sizes are in feet, with metres in grey. Custom sizes are cut to order.

			Qty per pack, by GSM			
#	Size (ft)	Size (m)	90	120	150	200
1	**6′ × 4′**	1.8 × 1.2 m	50	50	50	50
2	**6′ × 6′**	1.8 × 1.8 m	50	40	30	25
3	**9′ × 6′**	2.7 × 1.8 m	40	30	30	20
4	**9′ × 9′**	2.7 × 2.7 m	30	25	20	15
5	**10′ × 8′**	3.0 × 2.4 m	30	25	20	15
6	**10′ × 7′**	3.0 × 2.1 m	30	25	20	16
7	**12′ × 6′**	3.7 × 1.8 m	30	25	24	15
8	**12′ × 9′**	3.7 × 2.7 m	25	20	15	12
9	**12′ × 10′**	3.7 × 3.0 m	20	18	14	10
10	**12′ × 12′**	3.7 × 3.7 m	20	15	12	9
11	**15′ × 9′**	4.6 × 2.7 m	20	15	12	8
12	**15′ × 10′**	4.6 × 3.0 m	18	14	10	8
13	**15′ × 12′**	4.6 × 3.7 m	15	12	10	7
14	**15′ × 15′**	4.6 × 4.6 m	12	10	8	6
15	**18′ × 12′**	5.5 × 3.7 m	12	10	8	6
16	**18′ × 15′**	5.5 × 4.6 m	10	8	7	5
17	**20′ × 8′**	6.1 × 2.4 m	18	14	10	8
18	**21′ × 12′**	6.4 × 3.7 m	10	8	7	5
19	**21′ × 14′**	6.4 × 4.3 m	8	7	5	4
20	**21′ × 18′**	6.4 × 5.5 m	8	6	5	3
21	**24′ × 8′**	7.3 × 2.4 m	15	12	10	7
22	**24′ × 12′**	7.3 × 3.7 m	10	8	6	4
23	**24′ × 15′**	7.3 × 4.6 m	8	6	5	3
24	**24′ × 16′**	7.3 × 4.9 m	8	5	4	3
25	**24′ × 18′**	7.3 × 5.5 m	7	5	4	3
26	**24′ × 21′**	7.3 × 6.4 m	6	4	3	2
27	**27′ × 12′**	8.2 × 3.7 m	8	6	5	4

			Qty per pack, by GSM			
#	Size (ft)	Size (m)	90	120	150	200
28	**27′ × 15′**	8.2 × 4.6 m	7	5	4	2
29	**27′ × 16′**	8.2 × 4.9 m	6	4	3	2
30	**27′ × 18′**	8.2 × 5.5 m	5	4	3	2
31	**27′ × 21′**	8.2 × 6.4 m	5	4	3	2
32	**27′ × 24′**	8.2 × 7.3 m	4	3	3	2
33	**30′ × 18′**	9.1 × 5.5 m	5	4	3	2
34	**30′ × 20′**	9.1 × 6.1 m	4	3	3	2
35	**30′ × 21′**	9.1 × 6.4 m	4	3	3	2
36	**30′ × 24′**	9.1 × 7.3 m	4	3	2	2
37	**30′ × 27′**	9.1 × 8.2 m	3	2	2	1
38	**30′ × 30′**	9.1 × 9.1 m	3	2	2	1
39	**33′ × 27′**	10.1 × 8.2 m	3	2	2	1
40	**36′ × 18′**	11.0 × 5.5 m	4	3	2	1
41	**36′ × 21′**	11.0 × 6.4 m	3	3	2	1
42	**36′ × 24′**	11.0 × 7.3 m	3	2	2	1
43	**36′ × 30′**	11.0 × 9.1 m	2	2	1	1
44	**40′ × 30′**	12.2 × 9.1 m	2	2	1	1
45	**40′ × 36′**	12.2 × 11.0 m	2	1	1	1
46	**40′ × 40′**	12.2 × 12.2 m	2	1	1	1
47	**45′ × 30′**	13.7 × 9.1 m	2	1	1	1
48	**45′ × 36′**	13.7 × 11.0 m	2	1	1	1
49	**45′ × 40′**	13.7 × 12.2 m	1	1	1	1
50	**50′ × 50′**	15.2 × 15.2 m	1	1	1	1
51	**54′ × 54′**	16.5 × 16.5 m	1	1	1	1
52	**60′ × 40′**	18.3 × 12.2 m	1	1	1	1
53	**60′ × 60′**	18.3 × 18.3 m	1	1	1	1
54	**80′ × 60′**	24.4 × 18.3 m	1	1	1	1

APPLICATIONS

One sheet, many jobs



Grain & fumigation covers
Bagged grain stacks in storage



Truck & cargo covers
Weather protection in transit



Fodder & hay storage
Hoop-house and stack covers



Pond & pit lining
Farm ponds and water storage



Shade & canopy
Arched shelters and sun cover

- Agricultural covers and harvest protection
- Industrial covering sheets
- Construction sites and building materials
- Ground covers and storage covers
- Truck and container covers
- Temporary weather protection

Some images are illustrative.

ORDERING FOR EXPORT

From enquiry to your port



Order & sample
GSM, size, colour confirmed

Production
approx. 35–40 days

Export packing
bulk, palletised or shrink-wrapped

Shipment
FOB / CIF from Chennai, Mumbai or Nhava Sheva

Minimum order	24 MT, about one 40 ft container.
Lead time	Approx. 35–40 days of production after order confirmation, plus ocean transit.
Incoterms & ports	Usually FOB Mumbai; CIF on request. Loading from Chennai, Mumbai or Nhava Sheva, or other Indian ports on request.
Payment	LC (usance / UPAS) · 50% advance, 50% against scanned B/L · 30% advance, 70% on D/P.
Container loading	200 GSM rolls (100 m × 6 ft): about 300–320 rolls (11.5–12 MT) per 20 ft, or 600–640 rolls (23–24 MT) per 40 ft. Varies with GSM, size and packing.
Packaging	Heavy-duty brown paper, wooden boxes, palletised, shrink-wrapped, retail-ready, or custom export packing.
Customisation	Private labelling, custom printing, custom colours and custom sizes.
HS code	3926 90 99
Samples	Available. Cost refunded against a qualifying bulk order; buyer pays courier.

For a fast quotation, tell us

1. GSM grade
2. Size (cut size or roll)
3. Colour
4. Quantity
5. Destination port
6. Packing preference

Request a quotation

PHONE / WHATSAPP
+91 74189 99378
+91 74189 99379

EMAIL
sales@graceferroexports.com
info@graceferroexports.com

OFFICE
Door No 29-12, 2nd Floor, RS Plaza,
Palakkad Main Road, Kuniamuthur,
Coimbatore 641008, Tamil Nadu, India

HOURS
Mon–Sat, 9:00–18:00 IST

WEB
www.graceferroexports.com

Scan for product page

Crosspaulin™ and PANKAJ® are trademarks of their respective owner. Grace Ferro Exports Pvt Ltd is a distributor and exporter, not the manufacturer.