


Model: GAS-CY-UTS-G

Automated UT System

Gantry Scanner GAS Cylinder UT System

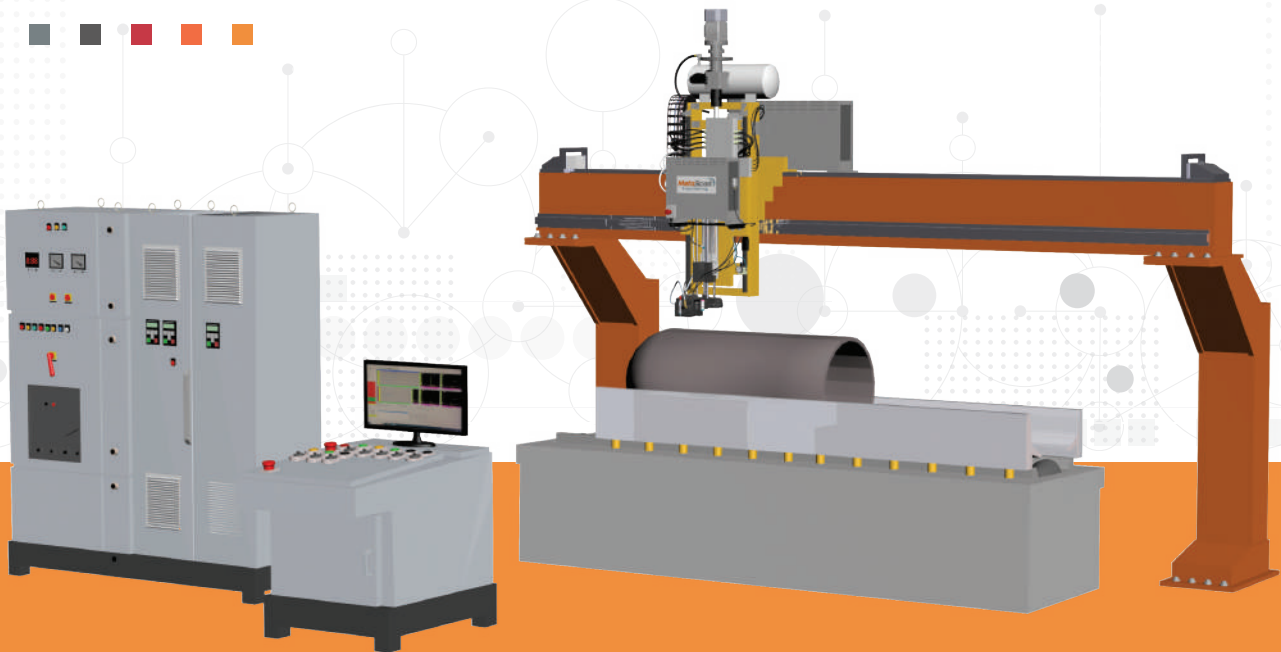

GAS Cylinder UT System is used for the volumetric defect inspection of parallel section of the cylinder body. It uses conventional ultrasonic method and water block technique for the inspection.



Features:

- Fully automated gantry based Ultrasonic Testing System.
- Localised water block technique for minimised testing water consumption.
- Typical inspection speeds 1.2-2.4m/min configuration.
- Advanced digital data acquisition and reporting system.
- Optional cylinder handling system (unscrambler, feeding table, reference, infeed, outfeed conveyor, accept/reject cradles, singling & Transfer mechanism with automation).

Specifications:

- Cylinder dimensions : 200mm to 500mm OD
- Thickness : 5 to 15mm
- length : 500 to 2500mm
- Weight : 30 Kg to 220 Kg
- Testing temperature : Ambient temperature

Water Block Probe Holder & Testing Head:

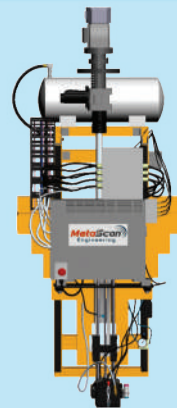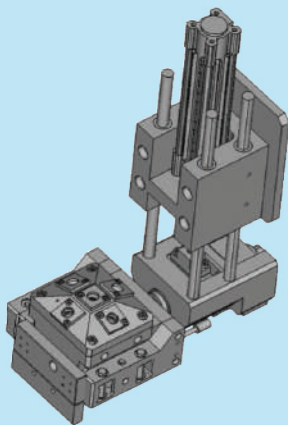

Data Acquisition Software:



Direct your enquire to:

E-mail: sales@metascan.co.in

MetaScan Engineering LLP
Kohinoor World Tower, 1001 and 1002,
10th Floor, Tower 2, Old Mumbai - Pune Hwy,
Pimpri, Pune, Maharashtra 411018