
DIGITAL SCCI ENGINEERING / ARTIFICIAL SIGNALS / nRF5340 CONTROLLER CARRIER

46 actual GPIO, explicit common CNV/rearm and physical 32-bit health/readback chain. Radio remains disabled.









processor

File: processor.kicad_sch

handoff

File: handoff.kicad_sch

defaults

File: defaults.kicad_sch

power

File: power.kicad_sch

handoff_2

File: handoff_2.kicad_sch

defaults_2

File: defaults_2.kicad_sch

sideband

File: sideband.kicad_sch

handoff_3

File: handoff_3.kicad_sch

defaults_3

File: defaults_3.kicad_sch

Native module carrier; physical execution and assembly qualification remain

Project SCCI RH

Sheet: /


File: controller_carrier.kicad_sch

Title: Project SCCI RH S4 / Controller carrier / interface index

Size: A2	Date: 2026-10-14	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 1/10

DIGITAL SCCI ENGINEERING / ARTIFICIAL SIGNALS / nRF5340 CONTROLLER CARRIER

46 actual GPIO, explicit common CNV/rearm and physical 32-bit health/readback chain. Radio remains disabled.

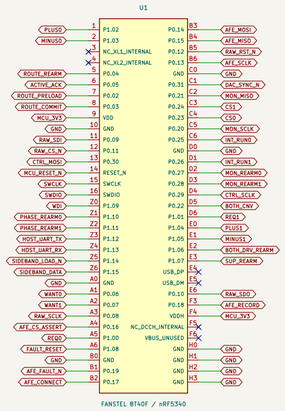

All labels are native electrical connections. Digital artificial-load interface; no clinical, chronic or body-radio qualification.

Hardware permissions and terminal guards remain independent of transport. Loss of data rejects the observation.

Native module carrier; physical execution and assembly qualification remain

Project SCCI RH

Sheet: /processor/
File: processor.kicad_sch


Title: Project SCCI RH S4 / BT40F / actual nRF5340 physical pads


Size: A2	Date: 2026-10-14	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 2/10

DIGITAL SCCI ENGINEERING / ARTIFICIAL SIGNALS / nRF5340 CONTROLLER CARRIER


46 actual GPIO, explicit common CNV/rearm and physical 32-bit health/readback chain. Radio remains disabled.

















All labels are native electrical connections. Digital artificial-load interface: no clinical, chronic or body-radio qualification.

Hardware permissions and terminal guards remain independent of transport. Loss of data rejects the observation.

Native module carrier; physical execution and assembly qualification remain

Project SCCI RH


Sheet: /power/
File: power.kicad_sch

Title: Project SCCI RH S4 / Module normal-voltage supply and SWD


Size: A2	Date: 2026-10-14	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 3/10

DIGITAL SCCI ENGINEERING / ARTIFICIAL SIGNALS / nRF5340 CONTROLLER CARRIER


46 actual GPIO, explicit common CNV/rearm and physical 32-bit health/readback chain. Radio remains disabled.


















All labels are native electrical connections. Digital artificial-load interface: no clinical, chronic or body-radio qualification.

Hardware permissions and terminal guards remain independent of transport. Loss of data rejects the observation.

Native module carrier; physical execution and assembly qualification remain

Project SCCI RH


Sheet: /sideband/
File: sideband.kicad_sch


Title: Project SCCI RH S4 / Four physical 165 devices / parallel observation


Size: A2	Date: 2026-10-14	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 4/10


DIGITAL SCCI ENGINEERING / ARTIFICIAL SIGNALS / nRF5340 CONTROLLER CARRIER

46 actual GPIO, explicit common CNV/rearm and physical 32-bit health/readback chain. Radio remains disabled.









All labels are native electrical connections. Digital artificial-load interface; no clinical, chronic or body-radio qualification.

Hardware permissions and terminal guards remain independent of transport. Loss of data rejects the observation.

Native module carrier; physical execution and assembly qualification remain

Project SCCI RH


Sheet: /handoff/
File: handoff.kicad_sch


Title: Project SCCI RH S4 / Matched peripheral handoff connectors


Size: A2	Date: 2026-10-14	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 5/10


DIGITAL SCCI ENGINEERING / ARTIFICIAL SIGNALS / nRF5340 CONTROLLER CARRIER

46 actual GPIO, explicit common CNV/rearm and physical 32-bit health/readback chain. Radio remains disabled.









All labels are native electrical connections. Digital artificial-load interface: no clinical, chronic or body-radio qualification.

Hardware permissions and terminal guards remain independent of transport. Loss of data rejects the observation.

Native module carrier; physical execution and assembly qualification remain

Project SCCI RH


Sheet: /handoff_2/
File: handoff_2.kicad_sch


Title: Project SCCI RH S4 / Matched peripheral handoff connectors / 2


Size: A2	Date: 2026-10-14	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 6/10

DIGITAL SCCI ENGINEERING / ARTIFICIAL SIGNALS / nRF5340 CONTROLLER CARRIER

46 actual GPIO, explicit common CNV/rearm and physical 32-bit health/readback chain. Radio remains disabled.







All labels are native electrical connections. Digital artificial-load interface: no clinical, chronic or body-radio qualification.

Hardware permissions and terminal guards remain independent of transport. Loss of data rejects the observation.

Native module carrier; physical execution and assembly qualification remain

Project SCCI RH

Sheet: /handoff_3/
File: handoff_3.kicad_sch

Title: Project SCCI RH S4 / Matched peripheral handoff connectors / 3


Size: A2	Date: 2026-10-14	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 7/10

DIGITAL SCCI ENGINEERING / ARTIFICIAL SIGNALS / nRF5340 CONTROLLER CARRIER

46 actual GPIO, explicit common CNV/rearm and physical 32-bit health/readback chain. Radio remains disabled.






























All labels are native electrical connections. Digital artificial-load interface: no clinical, chronic or body-radio qualification.

Hardware permissions and terminal guards remain independent of transport. Loss of data rejects the observation.

Native module carrier; physical execution and assembly qualification remain

Project SCCI RH

Sheet: /defaults/
File: defaults.kicad_sch


Title: Project SCCI RH S4 / Passive reset defaults / explicit recovery

Size: A2	Date: 2026-10-14	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 8/10


DIGITAL SCCI ENGINEERING / ARTIFICIAL SIGNALS / nRF5340 CONTROLLER CARRIER

46 actual GPIO, explicit common CNV/rearm and physical 32-bit health/readback chain. Radio remains disabled.































All labels are native electrical connections. Digital artificial-load interface: no clinical, chronic or body-radio qualification.

Hardware permissions and terminal guards remain independent of transport. Loss of data rejects the observation.

Native module carrier; physical execution and assembly qualification remain

Project SCCI RH

Sheet: /defaults_2/
File: defaults_2.kicad_sch

Title: Project SCCI RH S4 / Passive reset defaults / explicit recovery / 2

Size: A2	Date: 2026-10-14	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 9/10

DIGITAL SCCI ENGINEERING / ARTIFICIAL SIGNALS / nRF5340 CONTROLLER CARRIER

46 actual GPIO, explicit common CNV/rearm and physical 32-bit health/readback chain. Radio remains disabled.



























All labels are native electrical connections. Digital artificial-load interface: no clinical, chronic or body-radio qualification.

Hardware permissions and terminal guards remain independent of transport. Loss of data rejects the observation.

Native module carrier; physical execution and assembly qualification remain

Project SCCI RH

Sheet: /defaults_3/
File: defaults_3.kicad_sch

Title: Project SCCI RH S4 / Passive reset defaults / explicit recovery / 3

Size: A2	Date: 2026-10-14	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 10/10