CONTINUED FROM PART- 1

Publication After 18 Months:

The following Patent Applications have been published under Section 11A (3) of The Patents (Amendment) Act, 2005. Any Person may file representation by way of opposition to the Controller of Patents at the appropriate office against the grant of the patent in the prescribed manner under section 25(1) of the Patents (Amendment) Act, 2005 read with the rule 55 of The Patents (Amendment) Rules, 2006:

(12) PATENT APPLICATION PUBLICATION

(21) Application No.202511033668 A

(19) INDIA

(22) Date of filing of Application :07/04/2025

(43) Publication Date : 06/11/2026

(54) Title of the invention : SMART STAPLER ALERT SYSTEM FOR EMPTY PIN

(51) International classification	:G06Q0010100000, G06Q0010063300, A61B0017072000, B25C0005160000, G08G0001160000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Kavya Singh
Address of Applicant :A102 Sector 9, New Vijay Nagar Ghaziabad Uttar Pradesh India Ghaziabad Uttar Pradesh India
2)Ridhima Singh
(72)**Name of Inventor :**
1)Kavya Singh
2)Ridhima Singh

(57) Abstract :
The present invention relates to an intelligent system for detecting and notifying users about staple depletion in a stapler. The system integrates smart monitoring technology to detect staple availability and provide real-time alerts through various notification methods, including visual indicators, sound alerts, mobile notifications, and remote communication platforms. This ensures seamless workflow efficiency, reducing interruptions and preventing unnecessary stapling attempts. The system is designed for manual, electric, and industrial staplers, making it a versatile and scalable solution for offices, schools, and institutional environments. Additionally, it can be integrated with workplace management systems to automate supply tracking and facilitate timely replenishment. By reducing paper waste and improving document handling, the invention enhances office automation and contributes to sustainability. Refer to Figure 1

No. of Pages : 13 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :07/04/2025

(21) Application No.202511033669 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Smart doorbell switch with floor indication

(51) International classification	:H01H9/18, G08B3/10
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Munity Labs OPC Private Limited
Address of Applicant :375, Bilayan, Jalaun Uttar Pradesh India 285201 Jalaun Uttar Pradesh India
(72)**Name of Inventor :**
1)Shreyan Kushwaha
2)Mohini Kushwaha

(57) Abstract :
Smart doorbell switch with floor indication The doorbell switch with an integrated floor number display addresses a longstanding issue in multi-story buildings, offering a modern, efficient, and user-friendly solution. The switch incorporates floor indication through methods such as engraving, printing, or attaching three-dimensional numbers. Its design reduces miscommunication, enhances usability, and improves operational efficiency, making it a valuable invention for residential and commercial buildings.

No. of Pages : 17 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :07/04/2025
(21) Application No.202511033778 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR SECURED CHARGING OF A VEHICLE

(51) International classification	:B60L0053160000, H04L0009400000, H02J0007000000, H04L0009320000, H04M0015000000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Mercedes-Benz Group AG
Address of Applicant :Mercedesstraße 120, Stuttgart, 70372, Germany.
Stuttgart Germany
(72)**Name of Inventor :**
1)Sourabh Mehndiratta
2)Swapna Satyanarayan
3)Neeraja Lakshmi Ajoy Kumar
4)Gobikumaar Sivagnanam
5)Bharath Raj Sree Ramulu

(57) Abstract :
A system (102) and a method (600) for secured charging is configured to receive vehicle parameters from user devices (106) corresponding to the vehicles (310). Further, the system (102) is configured to prioritize the vehicles (310) to trigger an overhead charging arm (308) to move towards a location of the vehicles (310). Upon prioritizing, performing a first-level authentication using a Radio Frequency Identification (RFID) reader (412) and a Radio Frequency (RF) identifier (410) to actuate a charging flap (402). Upon successful first-level authentication, performing a second-level authentication by enabling a charging gun of the overhead charging arm (308) to emit Infrared (IR) signals to activate IR sensors (408) for actuating a charging lid (404). Further, coupling the charging gun to a charging port (406) based on the successful first-level and second-level authentication to perform charging operations. The system (102) incorporates multifactor authentication, ensuring efficient and reliable charging operations.

No. of Pages : 30 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :07/04/2025
(21) Application No.202511033784 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ITERATIVE EXPLAINABILITY REPORTING FOR MACHINE LEARNING FEATURES

(51) International classification	:H04L 41/147, H04L 41/14, G06N 20/00, H04L 41/16, H04W 24/10, H04W 8/22, H04W 8/24
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, FI – 02610 Espoo, FINLAND Finland
(72)**Name of Inventor :**
1)AFEF FEKI
2)ISTVÁN ZSOLT KOVÁCS
3)BHARATH RAMESH KASHYAP
4)MAHMOOD REZA ALIZADEH ASHRAFI
5)FAHAD SYED MUHAMMAD
6)GERALD LEHMANN

(57) Abstract :
A method includes transmitting, by a user equipment (UE) to a network node, an indication of a capability of the UE to iterate with the network node to determine an explainability report (ER) configuration, and iteratively communicating with the network node to determine an ER configuration for reporting on a machine learning (ML)-enabled feature implemented at the UE

No. of Pages : 66 No. of Claims : 22

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :07/04/2025
(21) Application No.202511033799 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ITERATIVE EXPLAINABILITY REPORTING FOR MACHINE LEARNING FEATURES

(51) International classification	:G06N0005045000, H04W0008240000, H04W0012041000, H04W0072045300, H04B0007060000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, FI – 02610 Espoo, FINLAND Finland
(72)**Name of Inventor :**
1)AFEF FEKI
2)ISTVÁN ZSOLT KOVÁCS
3)BHARATH RAMESH KASHYAP
4)MAHMOOD REZA ALIZADEH ASHRAFI
5)FAHAD SYED MUHAMMAD
6)GERALD LEHMANN

(57) Abstract :
A method includes transmitting, by a user equipment (UE) to a network node, an indication of a capability of the UE to iterate with the network node to determine an explainability report (ER) configuration; and iteratively communicating with the network node to determine an ER configuration for reporting on a machine learning (ML) feature implemented at the UE, where the iteratively communicating includes receiving, by the UE from the network node, at least two ER configuration requests and at least one configuration switching timer.

No. of Pages : 69 No. of Claims : 30

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :07/04/2025

(21) Application No.202511033855 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : FIELD-DEPLOYABLE COLORIMETRIC DETECTION SYSTEM FOR IDENTIFICATION OF CALCIUM CARBIDE IN AGRICULTURAL PRODUCE

(51) International classification	:G01N0021780000, G01N0031220000, B01L0003000000, G01N0033520000, G01N0033020000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Beejapuri Fresh Products Private Limited
Address of Applicant :Unit 547-550, 5th floor, JMD Megapolis, Sohna Road, Sector-48, Gurgaon, Haryana- 122018 Haryana India
(72)**Name of Inventor :**
1)Dr. Shankar Ashok Gaware
2)Mr. Malkeet Singh

(57) Abstract :
The present invention discloses a field-deployable colorimetric detection system and method for the qualitative identification of calcium carbide induced artificial ripening in agricultural produce. The system comprises a porous, cellulose-based substrate, preferably Whatman filter paper, uniformly coated with a phenolphthalein reagent. The detection mechanism relies on the chemical reaction between the indicator and calcium hydroxide, the alkaline by-product formed when calcium carbide reacts with moisture. The method involves moistening the fruit surface, collecting residue with an absorbent material, and contacting it with the indicator strip. A distinct color change from substantially colorless to dark pink within one minute confirms the presence of artificial ripening agents. The system is non-destructive and validated to detect calcium carbide concentrations as low as 2% relative to the fruit weight. A portable kit including indicator strips, residue collection means, and instructions is also disclosed.

No. of Pages : 54 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :07/04/2025
(21) Application No.202511033856 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COLORIMETRIC SYSTEM FOR ON-SITE DETECTION OF CHEMICAL ADULTERANTS IN SPICES

(51) International classification	:G01N0021780000, G01N0031220000, G01N0033520000, G01N0033280000, B01L0003000000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Beejapuri Fresh Products Private Limited
Address of Applicant :Unit 547-550, 5th floor, JMD Megapolis, Sohna Road, Sector-48, Gurgaon, Haryana- 122018 Gurugram Haryana India
(72)**Name of Inventor :**
1)Dr. Shankar Ashok Gaware
2)Mr. Deepu Khushwaha

(57) Abstract :
The present invention discloses a colorimetric system (100) and method for the on-site detection of chemical adulterants in spices. The system comprises distinct paper-based test strips impregnated with specific reagents: a first strip (102) treated with silver-containing salt (15-30 g/L) and chromate (50-100 g/L) for detecting sodium chloride in coriander powder, a second strip (104) treated with phosphomolybdic acid (30-60 g/L) for detecting metanil yellow in turmeric powder, and a third strip (106) treated with sodium carbonate (100-200 g/L) for detecting phenol red in red chilli powder. The method involves mixing a spice sample with water, allowing sedimentation, and applying the supernatant to the strips to observe distinct color changes—light brown, brownish-violet, and pink, respectively. The system achieves limits of detection of 1.5%, 0.5%, and 0.25% for the respective adulterants, providing a rapid, stable, and user-friendly kit for verifying spice purity.

No. of Pages : 42 No. of Claims : 11

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :07/04/2025
(21) Application No.202511033930 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TRUST MANAGEMENT OF MACHINE LEARNING

(51) International classification	:H04L0045020000, H04L0009320000, H04L0005000000, H04W0024100000, H04L0041400000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, FI – 02610 Espoo, FINLAND Finland
(72)**Name of Inventor :**
1)ISTVÁN ZSOLT KOVÁCS
2)MAHMOOD REZA ALIZADEH ASHRAFI
3)AFEF FEKI
4)BHARATH RAMESH KASHYAP
5)FAHAD SYED MUHAMMAD

(57) Abstract :
Example embodiments of the present disclosure are directed to trust management of machine learning. In a method, a user equipment receives, from a network element, a message for requesting capabilities in relation to trust management of at least one machine learning enabled feature in association with an inter-domain service. The user equipment transmits, to the network element, a response informing the capabilities. The user equipment receives, from the network element, a configuration message for a trust management report. The configuration message comprises information on at least one request element in association with the at least one inter-domain service. The user equipment receives, from the network element, a request for the trust management report. The user equipment generates the trust management report based on the configuration. Then, the user equipment transmits the trust management report to the network element.

No. of Pages : 39 No. of Claims : 34

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :07/04/2025
(21) Application No.202511033934 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TRUST MANAGEMENT OF MACHINE LEARNING

(51) International classification	:H04L9/40, H04L41/00, H04L41/16, H04L67/50, G06N20/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, FI – 02610 Espoo, FINLAND Finland
(72)**Name of Inventor :**
1)ISTVÁN ZSOLT KOVÁCS
2)MAHMOOD REZA ALIZADEH ASHRAFI
3)AFEF FEKI
4)BHARATH RAMESH KASHYAP
5)FAHAD SYED MUHAMMAD

(57) Abstract :
Example embodiments of the present disclosure are directed to trust management of machine learning. In a method, a user equipment receives, from a network element, a message for requesting capabilities in relation to trust management of at least one machine learning enabled feature in association with a radio network service. The user equipment transmits, to the network element, a response informing the capabilities. The user equipment receives, from the network element, a configuration message for a trust management report. The user equipment receives, from the network element, a request for the trust management report. The user equipment generates the trust management report based on the configuration. Then, the user equipment transmits the trust management report to the network element.

No. of Pages : 39 No. of Claims : 28

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :07/04/2025
(21) Application No.202511033936 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ITERATIVE EXPLAINABILITY REPORTING FOR MACHINE LEARNING FEATURES

(51) International classification	:G06N20/00, H04W8/24, H04L41/12, H04W24/10, H04W24/02
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, FI – 02610 Espoo, FINLAND Finland
(72)**Name of Inventor :**
1)AFEF FEKI
2)ISTVÁN ZSOLT KOVÁCS
3)BHARATH RAMESH KASHYAP
4)MAHMOOD REZA ALIZADEH ASHRAFI
5)FAHAD SYED MUHAMMAD
6)GERALD LEHMANN

(57) Abstract :
A method includes: transmitting, by a user equipment (UE) to a network node, an indication of a capability of the UE to iterate with the network node to determine an explainability report (ER) configuration; and iteratively communicating with the network node to determine an ER configuration for reporting on a machine learning (ML)-enabled feature implemented at the UE, where the iteratively communicating includes receiving, by the UE from the network node, an indication of at least one partial ER configuration and at least one configuration switching timer.

No. of Pages : 69 No. of Claims : 28

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :07/04/2025
(21) Application No.202511033982 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TRUST MANAGEMENT OF MACHINE LEARNING

(51) International classification	:H04L9/40, H04L41/00, H04L41/16, H04L67/50, G06N20/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, FI – 02610 Espoo, FINLAND Finland
(72)**Name of Inventor :**
1)ISTVÁN ZSOLT KOVÁCS
2)MAHMOOD REZA ALIZADEH ASHRAFI
3)AFEF FEKI
4)BHARATH RAMESH KASHYAP
5)FAHAD SYED MUHAMMAD

(57) Abstract :
Abstract Example embodiments of the present disclosure are directed to trust management of machine learning. In a method, a user equipment receives, from a network element, a message for requesting capabilities in relation to trust management of at least one machine learning enabled feature in association with a radio network service. The user equipment transmits, to the network element, a response informing the capabilities. The user equipment receives, from the network element, a configuration message for a trust management report. The configuration message comprises an indication of a transmission type of the trust management report. The user equipment receives, from the network element, a request for the trust management report. The user equipment generates the trust management report based on the configuration. Then the user equipment transmits the trust management report to the network element according to the transmission type.

No. of Pages : 39 No. of Claims : 32

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :07/04/2025

(21) Application No.202511034051 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A TARGETED LENTIVIRAL DELIVERY SYSTEM FOR IN VIVO CAR T CELL THERAPY, AND A METHOD FOR THE SAME

(51) International classification	:A61K0039000000, A61P0035000000, C12N0015860000, C07K0014725000, C07K0016280000	(71)**Name of Applicant :** **1)Ruquaiya Alam** Address of Applicant :B-39/A, Third Floor, Thokar no. 07, Abul Fazal Enclave-II, New Delhi-110025 New Delhi Delhi India **2)Tanveer Ahmad**
(31) Priority Document No	:NA	(72)**Name of Inventor :**
(32) Priority Date	:NA	**1)Ruquaiya Alam**
(33) Name of priority country	:NA	**2)Tanveer Ahmad**
(86) International Application No	:NA	
Filing Date	:NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :

The present invention relates to a high-specificity targeted lentiviral delivery system for in vivo CAR T-cell therapy, engineered to eliminate pseudo-transduction of off-target cells. The system utilizes an engineered producer cell line that expresses T-cell engaging ligands (CD3 scFv, CD80, and CD252) and a mutated, serum-stable VSV-G glycoprotein with abolished native receptor binding. The core innovation lies in an intracellular protein regulatory system that decouples therapeutic payload production from producer cell surface expression. By employing TOM20-mediated mitochondrial sequestration, KDEL-mediated ER retention, or PROTAC-catalyzed proteasomal degradation, the system intercepts and neutralizes nascent CAR proteins within the producer cell. This ensures that budding lentiviral particles incorporate the T-cell targeting machinery but remain substantially free of surface-incorporated CAR protein. The resulting vectors demonstrate enhanced potency and safety, restricting transgene delivery strictly to T-cells while preventing unintended B-cell transduction, thereby optimizing the efficacy of systemic in vivo CAR T-cell generation.

No. of Pages : 30 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :07/04/2025
(21) Application No.202511034054 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : EXTRACTION PROCESS FROM IMMATURE APPLES AND MALUS DOMESTICA LEAVES AND EXTRACTS OBTAINED

(51) International classification	:A61K 36/00, A61K 36/73, A61K 31/7048, A61K 9/127, A61P 3/04, A61P 3/10, A23L 33/105
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Alchem Europe SA
Address of Applicant :45A, rue de Lausanne, 1201 Geneva, Switzerland Switzerland
(72)**Name of Inventor :**
1)Ezio BOMBARDELLI
2)Divya MEHTA

(57) Abstract :
A process is described for preparing extracts from apples and leaves of Malus domestica that contain the active ingredients of this plant in different amounts and ratios from those present in the source product and with different carriers that change their bioavailability when administered to animals or humans. The processing of the different parts of the plant includes stages of extraction according to technologies and under conditions suitable for massive recovery and concentration of the active ingredients of interest. The extracts obtained have a content of active substances useful for appetite reduction in subjects suffering from superfluous fat accumulation for the treatment of obesity and metabolic syndrome. They are also active in modulating intestinal inflammation, normalizing intestinal function, and reducing blood glucose and lipid parameters in type 1 or type 2 diabetes.

No. of Pages : 14 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :07/04/2025
(21) Application No.202511034086 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR PARCEL SINGULATION AND CONVEYING

(51) International classification :B65G0047310000, B41J0002210000, G06F0009300000, B65G0043100000, F25B0049020000
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :NA
Filing Date :NA
(87) International Publication No : NA
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)Falcon Autotech Private Limited
Address of Applicant :57, Nimri Colony, Double Storey Flats, Delhi, 110052, India Delhi Delhi India
(72)**Name of Inventor :**
1)Dheeraj Verma
2)Anil Kumar
3)Shanky Kumar Mangla
4)Vikramjit Singh
5)Atul Dhiman
6)Gaurav Jha

(57) Abstract :
Disclosed is a system (100) including a conveyor system (104) with independently controllable conveyor sections (110) including at least one singulation section (116) having a separation execution unit (206) with multiple execution units (206a-206n), and at least one imaging device (102) captures image data of parcels (212) on the conveyors. The system (100) further includes processing circuitry (112) that determines parcel centroids, calculates approaching gap between an end (402) of the separation execution unit (206) and parcel centroids, compares gaps to prioritize parcels, assigns states based on parcel positions or spacing, allocates speeds based on states, and generates control signals to adjust execution unit speeds for singulation. FIG. 1 is selected

No. of Pages : 47 No. of Claims : 22

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :07/04/2025
(21) Application No.202511034088 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DEVICE AND METHOD FOR HANDLING INSURANCE EVENTS

(51) International classification	:G06Q 40/08, G06F 40/40, G06N 20/00, G06F 16/93	(71)**Name of Applicant :** **1)Grabtaxi Holdings Pte. Ltd.** Address of Applicant :c/o 3 Media Close, #01-03/06 Singapore 138498 Singapore (72)**Name of Inventor :** **1)CHONG Min Zhen, Ulysses** **2)YEAP Wei Yong** **3)ONG Sing Isabel** **4)Melvin LEE Wei Ming** **5)Shreya** **6)Ploypailin THOMAS** **7)Andreas RINANTO** **8)Sanathkumar M S**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No Filing Date	:NA :NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :
Aspects concern a method for handling insurance events, comprising receiving, from a mobile device of a user, one or more digital representations of one or more support documents which support an insurance claim of the user, extracting information about the insurance claim from the one or more representations by feeding the one or more representations to a generative machine learning model and instructing the generative machine learning model to extract the information about the insurance claim, instructing the mobile device to present an insurance claim form pre-filled with the extracted information to the user and processing the insurance claim in response to the reception of a submission of the insurance claim from the mobile device.

No. of Pages : 33 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :07/04/2025
(21) Application No.202511034099 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TRIAZOLOBENZODIAZEPINE, ITS PROCESS OF PREPARATION, AND USE THEREOF

(51) International classification	:C07D0487040000, A61P0025000000, A61P0035000000, A61P0025200000, A61P0025220000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Council of Scientific and Industrial Research
Address of Applicant :Anusandhan Bhawan, 2-Rafi Marg, New Delhi-110001 New Delhi Delhi India
(72)**Name of Inventor :**
1)Udaya Kiran Marelli
2)Sandip Sushila Mohan Kamble

(57) Abstract :
The present invention generally discloses organic compounds having medicinal values. Particularly, the present invention discloses a [1,2,3] triazolobenzodiazepine compound of formula I, and a process for preparation thereof. The present invention also discloses a process for preparation of Formula I on N-terminally and/or side chain modified peptides, drug conjugates or drug-peptide conjugates. Also, the present invention disclsoes a composition comprising the compound of Formula I acting as therapeutic agent specifically as sedative, muscle relaxant, anticonvulsant, anxiolytic and antitumor, etc. Formula I

No. of Pages : 30 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :07/04/2025

(21) Application No.202511034100 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A SYSTEM AND METHOD FOR NON-INVASIVE PREDICTIVE MAINTENANCE OF VIBRATING MACHINERY

(51) International classification	:G05B 23/02, G06Q 10/20, G01H 9/00, G06V 10/14, G06N 20/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)CYRAN AI SOLUTIONS PRIVATE LIMITED
Address of Applicant :TBIU, 2nd Floor Synergy Building, IIT Delhi, Hauz Khas, South Delhi, Delhi-110016, India New Delhi Delhi India
(72)**Name of Inventor :**
1)SURI, Manan
2)BANE, Dwijay

(57) Abstract :
The present invention relates to a system for non-invasive predictive maintenance of vibrating machinery. The system comprises asynchronous pixel-intensity vision sensors to capture high-frequency vibrations without contact, and Edge Monitoring Hardware units with Adaptive Environmental Compensation Modules, Environmental Sensing Arrays, Controlled Illumination Modules, and Event Processors. A Central Processing Hub wirelessly connects to these units, aggregating data from multiple machines. A Secure Database Server stores processed data, while a Web Server facilitates communication between the Central Processing Hub and user interfaces. A Web Portal allows users to interact with the system's features. This approach ensures early issue detection, improved maintenance scheduling, reduced downtime, enhanced accuracy, real-time monitoring, cost-effectiveness, and minimal operational disruption.

No. of Pages : 22 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/04/2025
(21) Application No.202511034173 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : Adaptive Learning System Utilizing AI for Personalized Education

(51) International classification	:G06Q50/20, G06N20/00, G09B7/00, G09B5/06
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Amit Kumar Jha
Address of Applicant :Palam, New Delhi 110045 New Delhi Delhi India
(72)**Name of Inventor :**
1)Dr Bidhan Chandra Chaudhary
2)Pratyush Nandan
3)Dr. Umakar Thakur

(57) Abstract :
The invention describes a novel adaptive learning system powered by artificial intelligence designed to create personalized educational experiences. The system analyzes learner data, including progress, preferences, and performance, to dynamically adjust learning pathways. Through real-time feedback, content recommendation, and customized assessments, the platform optimizes educational outcomes for individuals across diverse learning environments. The system is compatible with various devices and incorporates machine learning algorithms for continuous improvement of teaching strategies and learning materials.

No. of Pages : 11 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :08/04/2025

(21) Application No.202511034336 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : PROCESS FORPREPARING COMPOSITION COMPRISING HYDROLYZED GUAR POLYPEPTIDES

(51) International classification	:C12P21/06, C07K1/12, C07K14/415, A23J3/34, A23J1/14
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Hindustan Gum & Chemicals Ltd.
Address of Applicant :Birla Colony Bhiwani Haryana India 127021 Bhiwani Haryana India
(72)**Name of Inventor :**
1)Sandipta Ghosh
2)Shyamal Das
3)Dhananjay Kumar
4)Sanjoy Mondal
5)Subrata Kanjilal
6)Rajdeep Mullick

(57) Abstract :
A process of preparing a composition comprising at least hydrolyzed guar polypeptides having a mass average molecular weight (Mw) ranging from 2000 g/mol to 20000 g/mol and a dispersity (Đ) ranging from 2 to 5, preferably the total nitrogen content of the composition ranging from 5 to 11. The said process comprises the following steps;firstly treating guar korma with a base solution to obtain first reaction mixture, neutralizing the first reaction mixture to obtain a neutralized first reaction mixture, after that obtaining neutralized protein extract from the neutralized first reaction mixture; and finally hydrolyzing the neutralized protein extract with a hydrolyzing agent to obtain the composition comprising at least hydrolyzed guar polypeptides.

No. of Pages : 50 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/04/2025
(21) Application No.202511034354 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : OPTICAL FIBER WITH A LOW MICRO BEND LOSS

(51) International classification	:G02B6/036, G02B6/02, G02B6/44
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Sterlite Technologies Limited
Address of Applicant :15th and 16th Floor Capital Cyberscape, Sector – 59 Gurugram Haryana India 122102 Gurugram Haryana India
(72)**Name of Inventor :**
1)Apeksha Malviya
2)Janarthanan Balakrishnan
3)Srinivas Reddy Munige
4)Anand Pandey

(57) Abstract :
An optical fiber cable (300) comprising a plurality of optical fibers (100, 200), each with one or more core region (102)and a cladding region (108), designed to minimize micro and macro bend losses for high-performance communication systems. The optical fiber cable (300) includes a plurality of intermittently bonded optical fiber ribbons (804), each consisting of multiple parallel and adjacent optical fibers (100, 200), with bonded regions providing structural integrity. Each optical fiber (100, 200) within the ribbons (804) features one or more glass core regions (102) and a cladding region (108), optimized to reduce signal loss. FIGURE 14

No. of Pages : 53 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/04/2025
(21) Application No.202511034395 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : USER EQUIPMENT (UE), AND METHOD OF UE

(51) International classification	:H04W24/08, H04W24/10, H04B7/06, G06N20/00, H04W24/02, H04L41/16
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)NEC CORPORATION
Address of Applicant :7-1, Shiba 5-chome, Minato-ku, Tokyo 108-8001, Japan Japan
(72)**Name of Inventor :**
1)Sayyed Shafivulla
2)Pravjyot Singh Deogun
3)Yuhua Chen
4)Xuelong Wang
5)Neeraj Gupta

(57) Abstract :
In one implementation, a user equipment (UE) for determining performance metric is provid-ed. The UE comprises a memory (36) to store the AI/ML model wherein the AI/ML model is configured to provide inference results. The UE further comprises a transceiver circuit (31) to receive from network node, a set of monitoring resources and set of parameters. The set of parameters comprises at least one of: resources for channel state information reference signal (CSI-RS)/synchronization signal block reference signal (SSS-RS), a configuration for deter-mining inference report and monitoring report. The UE further comprises a controller (33) to determine performance metric for the set of monitoring resources based on the set of parame-ters and inference results from the AI/ML model, wherein the transceiver circuit (31) is con-figured to report the performance metric to the network node. Refer to FIG. 2

No. of Pages : 86 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :08/04/2025

(21) Application No.202511034417 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : GELATIN-FREE KOMBUCHA GUMMIES AND ITS METHOD OF PREPARATION

(51) International classification	:A23G3/36, A23G4/12, A23G4/14, A23L29/262, A23L33/105, A23L33/17, A23L33/21
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)BRIC- National Agri-Food and Biomanufacturing Institute (Formerly National Agri-Food Biotechnology Institute)
Address of Applicant :BRIC-National Agri-Food and Biomanufacturing Institute (NABI), Sector-81, Knowledge City, Mohali - 140306, Punjab, India Mohali Punjab India
(72)**Name of Inventor :**
1)DR. VANISH KUMAR
2)NEHA THAKUR

(57) Abstract :
The present invention relates to Gelatin-free Kombucha gummies with herbal additives and its method of preparation.The gelatin-free, vegan nutritional gummies is derived from bacterial cellulose produced via fermentation of a symbiotic culture of bacteria and yeast (SCOBY) on a tea or herbal infusion. The gummies are prepared without the use of gelatin or synthetic gelling agents and are enriched with proteins, dietary fiber, polyphenols, antioxidants, and probiotic microbes. The gummies are palatable, nutritionally fortified, and suitable as functional food, nutraceuticals, natural thickening agents in beverages and foods, or as edible rice-paper alternatives. Thus, the invention provides a sustainable, clean-label, and customizable alternative to conventional gelatin-based confections.

No. of Pages : 21 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :08/04/2025

(21) Application No.202511034430 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : THERMAL INTERFACE MATERIAL COMPOSITION FOR ENHANCED RELIABILITY

(51) International classification	:C08F 299/08, C08L 83/04, C09K 5/14, B82Y 30/00, H01L 23/00	(71)**Name of Applicant :** **1)Momentive Performance Materials Inc.** Address of Applicant :2750 Balltown Road, Niskayuna NY, United States of America. New York U.S.A. (72)**Name of Inventor :** **1)DOLAI, Sukanta** **2)PERALA, Suresh Kumar** **3)MS, Anjitha** **4)KUMAR, Kaushlendra** **5)KOTHAPALLI, Kalyanachakravarthi** **6)KONDO, Takuya** **7)CHOI, David** **8)XIA, Xuhui**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No Filing Date	:NA :NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :

The present disclosure relates to compositions for use as thermal interface materials (TIMs) that have predetermined concentration limitations of certain impurities to eliminate stability problems.

No. of Pages : 27 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/04/2025
(21) Application No.202511034460 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A TORSION-DAMPING SPRING FOR A CLUTCH DISC

(51) International classification	:F16D13/64, F16F15/10, F16F15/12
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Schaeffler Technologies AG & Co. KG
Address of Applicant :Industriestraße 1-3, 91074 Herzogenaurach (DE) Germany
(72)**Name of Inventor :**
1)D, Rajkumar

(57) Abstract :
Disclosed herein is a torsion-damping spring (130) for a clutch disc (100). The torsion-damping spring (130) includes a coil (131) defined by a geometrical cross-section. The geometrical cross-section includes a first straight boundary (202), a second straight boundary (204), a first elliptical boundary (206), and a second elliptical boundary (208). The second straight boundary (204) may be opposite to the first straight boundary (202). The first elliptical boundary (206) may be adjacent to the first straight boundary (202) and the second straight boundary (204). The second elliptical boundary (208) is adjacent to the first straight boundary (202) and the second straight boundary (204), such that the second elliptical boundary (208) is opposite to the first elliptical boundary (206).

No. of Pages : 20 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/04/2025
(21) Application No.202511034464 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : VISUAL EDITOR FOR SPECIFYING PREFERRED REPRESENTATION OF REQUESTED GENERATIVE VISUAL CONTENT

(51) International classification	:G06F3/01, G06T11/60, G06T19/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GOOGLE LLC
Address of Applicant :1600 Amphitheatre Parkway, Mountain View, California 94043, United States of America. U.S.A.
(72)**Name of Inventor :**
1)GOVINDARAJU, Raviteja
2)SEDOURAM, Ramprasad

(57) Abstract :
Implementations set forth herein relate to a generative application that provides a visual content editor in response to receiving a request for generative visual content. The visual content editor can be provided with an intermediate representation of the generative visual content requested by a user, thereby allowing the user to adjust the intermediate representation. Such adjustments can involve annotating the intermediate representation, adjusting orientation, zoom, gaze, or other features of the intermediate representation. Such modifications to the intermediate representation can then be processed with the initial request from the user to ultimately render the requested generative visual content. The generative visual content can include, for example, generative image content, generative visual content, or other generative visual content.

No. of Pages : 40 No. of Claims : 23

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/04/2025
(21) Application No.202511034473 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A METHOD OF PREPARING A MODIFIED SODIUM METAL ELECTRODE, A SODIUM METAL ANODE, AND AN ELECTROCHEMICAL CELL

(51) International classification	:H01M 10/054, H01M 4/134, C07F 7/18, C07D 303/22, C01D 1/02, C07C 309/06, H01M 4/38
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Indian Institute of Technology Delhi
Address of Applicant :Hauz Khas, New Delhi- 110016, India New Delhi Delhi India
(72)**Name of Inventor :**
1)VIPIN KUMAR
2)CHHAIL BIHARI SONI
3)RAMAKRISHANA RAMANATH SONDE

(57) Abstract :
This disclosure relates to a method for preparing a modified sodium metal electrode for room-temperature sodium-sulfur (Na-S) batteries. The method involves treating sodium metal with trance amount of oxygen to form a surface layer. The treated sodium metal is then soaked in an additive solution results in the formation of a modified sodium metal electrode with a glass interphase. The disclosure further encompasses an electrochemical cell comprising the modified sodium metal electrode, a sulfur cathode, and an electrolyte solution. This approach provides enhanced stability and performance for room-temperature Na-S batteries.

No. of Pages : 24 No. of Claims : 6

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :08/04/2025

(21) Application No.202511034493 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A SYSTEM FOR GENERATING AN OPTIMIZED MARINE ENGINE FOUNDATION

(51) International classification	:G06F0030230000, G06N0003082000, G06Q0010100000, G06F0008410000, G06F0030200000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)CHAIRMAN, DEFENCE RESEARCH AND DEVELOPMENT ORGANIZATION
Address of Applicant :Ministry of Defence, Govt of India, DRDO Bhawan, Rajaji Marg, New Delhi-110011, India New Delhi Delhi India
(72)**Name of Inventor :**
1)RAMA KRISHNA VANARASI
2)SHINAGAM RAMA KRISHNA

(57) Abstract :
The present disclosure envisages a system (100) for generating an optimized marine engine foundation. The system (100) comprises a repository (102) that stores marine engine foundation models, optimization parameters, and computational rules. A user interface module (104) collects input parameters, which a computational module (106) processes to create a baseline model. An optimization module (108) refines material distribution and structural stiffness, while a simulation module (110) assesses vibration characteristics. A comparator module (112) evaluates the optimized model against stored models, and a report generator module (114) creates validation reports. An output module (116) delivers the optimized model and reports. The system integrates multiple processor-based modules that fetch stored rules from the repository (102) for computation, optimization, analysis, comparison, and reporting, ensuring an efficient and validated marine engine foundation design.

No. of Pages : 45 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :31/03/2025

(21) Application No.202511031933 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTOMATED SEEDLING TRAY FILLING ASSISTIVE DEVICE

(51) International classification	:A01G 9/08, B01F 27/00, B01F 35/21, B65B 43/44, B65G 47/90
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Shobhit Institute of Engineering & Technology (Deemed to-be University)
Address of Applicant :NH-58, Dulhera Marg, Modipuram, Meerut-250110, Uttar Pradesh, India. Meerut Uttar Pradesh India
(72)**Name of Inventor :**
1)Mahendru Kumar Gautam
2)Vikas Yadav
3)Anil Kumar
4)Asif Beg

(57) Abstract :
An automated seedling tray filling assistive device, comprises of a surface configured with plurality of wheels 102 that provides translation to the housing 101, a touch interactive display panel 103 to provide input details regarding type of plant, an iris lid 107 installed to dispense a regulated amount of the soil amendments, a weight sensor is installed to monitor weight of the dispensed soil amendments, a motorized stirrer 108 installed within the container 105 to mix dispensed soil, a pair of telescopically operated gripper 110 provided inside the housing 101 to grip and position a seedling tray, an electronically controlled valve 111 arranged beneath the container 105 to dispense the mixture in a pipe lined with container 105, a curved-shaped flap 112 configured inside housing 101 for levelling the tray evenly, and a suction unit 114 is installed inside housing 101 to withdraw any soil amendments present over conveyor belt.

No. of Pages : 19 No. of Claims : 6

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :08/04/2025

(21) Application No.202511034562 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : GLOBAL DISTRIBUTED CLIENT-SIDE CACHE FOR DAOS

(51) International classification	:G06F 12/08, G06F 12/0804, G06F 12/0868, G06F 16/172, G06F 9/50	
(31) Priority Document No	:NA	
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No Filing Date	:NA :NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(71)**Name of Applicant :**
1)HEWLETT PACKARD ENTERPRISE DEVELOPMENT LP
Address of Applicant :1701 East Mossy Oaks Road Spring, Texas 77389, United States of America U.S.A.
(72)**Name of Inventor :**
1)CRASTA, Clarete Riana
2)BYRNE, John L.
3)DWARAKI, Abhishek
4)EMBERSON, David R.
5)KUNO, Harumi
6)LEE, Sekwon
7)SINGHAL, Sharad
8)RAO, Ramya Bangalore Ahobala
9)BASRI K S, Shreyas Vinayaka
10)CHANDRACHARI, Amitha
11)GHOSH, Chinmay
12)RAJAK, Rishi Kesh Kumar
13)RAVISHANKAR, Sriram
14)SHOME, Porno

(57) Abstract :
One aspect of the instant disclosure provides a 5 cache system for a computer cluster comprising a plurality of nodes. The cache system may include a global cache distributed over a subset of nodes of the computer cluster. A respective node in the subset contributes a portion of local storage resource to the global cache and runs a cache-manager process to: receive a 10 request for a piece of data; determine whether the requested data is present in the global cache; responsive to locating the requested data in the portion of local storage resource contributed to the global cache by a contributing node, retrieve the requested data by accessing the local storage resource of the contributing node; and respond to the request using the retrieved data.

No. of Pages : 37 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/04/2025
(21) Application No.202511034594 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A BIOCHIP, SYSTEM AND METHOD FOR RAPID IDENTIFICATION OF BIOMARKERS AND PATHOGENS

(51) International classification	:C12Q 1/68, G01N 27/30, G01N 27/327
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Council of Scientific and Industrial Research
Address of Applicant :Anusandhan Bhawan, 2-Rafi Marg, New Delhi-110001 New Delhi Delhi India
(72)**Name of Inventor :**
1)Somenath Roy
2)Preetam Guha Ray
3)Siddhartha Sankar Bhunia
4)Ankita Dutta Chowdhury

(57) Abstract :
The present invention relates to a biochip, system and method for rapid identification of biomarkers and pathogens. The said device comprises a PCB- mounted biochip, a set of signalling probes in solution, an ultra-compact electronic detector, and a display device. The said PCB-mounted biochip constitutes a plurality of electrode pairs and immobilized capture probes at the channels between two electrodes. The mechanism behind the detection of the target biomolecules is based on a change in electrical properties due to the formation of a complex between capture probes, target biomolecules, and signalling probes. The amplification of the signal is carried out using multi-walled carbon nanotubes, as a part of the signalling probes. The concentration determination of the target biomolecule is achieved by the ultra-compact electronic detector and displayed using the display device. The sensor device in the present invention is capable of detecting the target biomolecules ranging between 1fM and 1µM.

No. of Pages : 26 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/04/2025
(21) Application No.202511034622 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : P-F-B-OXO THIOKETAL AS ANTIBACTERIAL AGENT AND PROCESS FOR PREPARATION THEREOF

(51) International classification	:A61K0038000000, A61K0009000000, A61K0031198000, H10K0059800000, C07K0005083000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)COUNCIL OF SCIENTIFIC AND INDUSTRIAL RESEARCH an Indian registered body incorporated under the Regn. of Soc. Act (Act XXI of 1860)
Address of Applicant :Anusandhan Bhawan, 2 Rafi Marg Rafi Marg New Delhi Delhi India 110001 New Delhi Delhi India
(72)**Name of Inventor :**
1)KESHAV RAGHUVANSHI
2)SUDARSHAN SINGH RATHORE
3)SOUVIK BARMAN
4)PRADIP KUMAR BANERJEE

(57) Abstract :
The present invention relates to a photo-mediated process for preparing a thioketal from p-F β-OXO dithioester by methylation of thio group under ambient condition using CO2 and their biological activity towards gram -negative bacteria.

No. of Pages : 17 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :09/04/2025
(21) Application No.202511034649 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DATA COLLECTION FROM UE VIA USER PLANE

(51) International classification	:H04W36/00, H04W24/10, H04W24/02, H04L43/04, H04W8/02, H04W60/04, H04W28/02
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, FI – 02610 Espoo, FINLAND Finland
(72)**Name of Inventor :**
1)SIVARAMAKRISHNAN SWAMINATHAN
2)TEJAS SUBRAMANYA
3)ZEXIAN LI
4)ABOLFAZL AMIRI

(57) Abstract :
Abstract Apparatuses, methods and computer readable storage medium for data collection via a user plane are provided. In a method, a user equipment (UE) receives, from a network element, a configuration message for collecting user plane data for training a machine learning model. The configuration message comprises information on one or more types of the user plane data to be collected. The UE transmit, to a core network (CN) entity, a message for indicating that at least one type of the user plane data is to be transmitted via at least one data traffic session. The UE carries out collecting of the at least one type of the user plane data, and transmits, to the network element, at least part of the collected user plane data via the at least one data traffic session.

No. of Pages : 56 No. of Claims : 26

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :24/02/2025
(21) Application No.202511015990 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DEVELOPMENT OF POLY LACTIC ACID BASED ETHYLENE SCAVENGING ACTIVE PACKAGING TRAY FOR DELAYING

(51) International classification :C08L97/02, C08L67/04
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :NA
Filing Date :NA
(87) International Publication No : NA
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)G.B. PANT UNIVERSITY OF AGRICULTURE & TECHNOLOGY
Address of Applicant :PANTNAGAR, UTTARAKHAND-263145 Uttarakhand India
(72)**Name of Inventor :**
1)SHEEBA MALIK
2)PRAMOD KUMAR OMRE
3)NAVIN CHANDRA SHAHI
4)OM PRAKASH
5)ANIL KUMAR

(57) Abstract :
The present invention relates to blending of poly lactic acid (PLA) with modified rice husk cellulose and potassium permanganate to develop ethylene scavenging active packaging tray. The Poly lactic acid was dissolved in solvent, after predetermined time, modified cellulose dissolved in solvent by ultrasonication, along with potassium permanganate was added with continuous stirring for 3-4 hours. The prepared solution was poured in tray mould (silicon) and placed in hot air oven. When solvent was evaporated, solution was poured again and this process continues until solution is fmished. After that, mould was kept at room temperature for 18- 24 hours until complete dry. The tray was removed from the silicon mould and kept in desiccator until further analysis. The present invention provides a method to develop packaging trays to store the climacteric and non-climacteric horticulture produce to reduce the spoilage due to the ripening process caused by ethylene gas.

No. of Pages : 12 No. of Claims : 6

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :10/04/2025
(21) Application No.202511035119 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR REGULATING THE CURRENT IN A BRUSHED DIRECT CURRENT MOTOR

(51) International classification :H02P7/29
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :NA
Filing Date :NA
(87) International Publication No : NA
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)MARUTI SUZUKI INDIA LIMITED
Address of Applicant :1, Nelson Mandela Road, Vasant Kunj, New Delhi – 110070, India New Delhi Delhi India
(72)**Name of Inventor :**
1)BHATT, Pancham
2)KUCHHAL, Abhinav
3)AGRAWAL, Adheesh
4)PARMAR, Aashish
5)KHAN, Prasenjit
6)MISHRA, Uttam Kr R

(57) Abstract :
A method (300) for regulating the current in a brushed Direct Current (DC) motor (101) is disclosed herein. The method (300) may include detecting (302) an input current to generate a first signal indicating an operational mode of the brushed DC motor (101). Further, the method (300) may include receiving (304) the first signal indicating the operational mode of the brushed DC motor (101). Furthermore, the method (300) may include selecting (306) a Pulse Width Modulation (PWM) duty cycle, based on the operational mode of the brushed DC motor (101), to control a current supplied to the brushed DC motor (101). Furthermore, the method (300) may include monitoring (308) a current flowing through the brushed DC motor (101). Moreover, the method (300) may include adjusting (310) the selected PWM duty cycle, based on the monitored current flowing through the brushed DC motor (101).

No. of Pages : 29 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035126 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A DISPLACEMENT SENSOR CALIBRATOR APPARATUS AND METHOD THEREOF

(51) International classification	:G01D 18/00, G01B 21/04, G01B 7/02	(71)**Name of Applicant :** **1)INTERNATIONAL CENTRE FOR AUTOMOTIVE TECHNOLOGY** Address of Applicant :Plot - 26, Sector - 3, IMT Manesar, Gurugram, Haryana – 122050, India Manesar Haryana India (72)**Name of Inventor :** **1)PRASHANT VISHE**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No Filing Date	:NA :NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :

The present invention relates to a portable displacement sensor calibrator apparatus calibrator specifically designed for field applications. This calibrator is a hardware-based metrological instrument that operates on mechanical precision actuation through a lead screw mechanism, eliminating the need for external power sources or sophisticated electronic feedback systems.

No. of Pages : 28 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035133 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A COMPUTER-IMPLEMENTED METHOD, INFORMATION PROCESSING APPARATUS AND COMPUTER PROGRAM TO RETRIEVE QUERY-RELEVANT CONTENT FROM A SOURCE DOCUMENT TO ANSWER AN INPUT QUERY

(51) International classification	:G06F16/901, G06F16/43, G06F16/3329, G06F16/332
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Fujitsu Limited
Address of Applicant :1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588 Japan Kawasaki-shi Japan
(72)**Name of Inventor :**
1)KHAN, Ainulla
2)YAMADA, Moyuru

(57) Abstract :
A computer-implemented method of retrieving query-relevant content from a source document to answer an input query is proved, comprising: accepting an input query; constructing a multi-modal graph including textual nodes and image nodes and made from the source document; retrieving relevant content based on similarity to the input query, in the form of a relevant sub-graph of the multi-modal graph; forming enhanced relevant content by adding a further node of different modality connected in the multi-modal graph to a node of the relevant content.

No. of Pages : 42 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035165 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AN AUTOMATIC PLANT WATERING SYSTEM

(51) International classification	:A01G 25/16, A01G 27/00, G05D 7/06
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)AMITY INTERNATIONAL SCHOOL
Address of Applicant :AMITY INTERNATIONAL SCHOOL, M BLOCK, NO:44, SAKET RD, BLOCK N, SAKET, NEW DELHI, DELHI 110017, INDIA Delhi India
(72)**Name of Inventor :**
1)NAMITA ARORA
2)PRISHA GUPTA

(57) Abstract :
The present invention discloses an automatic plant watering system configured to provide timed irrigation of plants using a programmable control mechanism. The system comprises a programmable timer (1) operatively connected to a solenoid valve (2) through connecting wires (6), an overhead water tank (3) for storing water, a pipe network (4) for distribution, a water tap (5) for regulating flow, and a plurality of plant outlets (7). The programmable timer (1) is configured to complete an electrical circuit at a pre-set start time to energize the solenoid valve (2) for allowing water flow, and to break the circuit at a pre-set end time to stop the flow. The system utilizes gravitational force from the overhead tank (3), thereby eliminating the need for a pump, and enables automatic, periodic, and controlled watering of plants. The system is scalable and suitable for domestic and commercial applications. Accompanied Drawings [Figure 1-5]

No. of Pages : 27 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035166 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AI POWERED HEADPHONE ASSEMBLY WITH AUTOMATICALLY VOLUME ADJUSTMENT AND WORKING METHOD THEREOF

(51) International classification	:H04R0001100000, H04R0003000000, G06N0003080000, H04R0005040000, G10H0001460000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)AMITY UNIVERSITY
Address of Applicant :AMITY UNIVERSITY CAMPUS, SECTOR-125, NOIDA-201313, INDIA Uttar Pradesh India
(72)**Name of Inventor :**
1)Shivek Chhabra
2)Shilpi Sharma

(57) Abstract :
The present invention discloses an AI-powered headphone assembly (100) for automatically adjusting sound volume during audio playback. The assembly comprises a sound module (102), an embedded AI processing chip (104), an audio control circuitry (106), and a user toggle interface (108). The AI processing chip (104) is configured to analyze an audio signal, extract musical note characteristics, and generate a volume modulation chart prior to playback. During operation, the audio control circuitry (106) modulates the output sound in real time based on the generated chart, ensuring smooth and gradual transitions. The system further incorporates a safety constraint to limit the output sound level to a maximum of 85 dB. The user toggle interface (108) enables selective activation or deactivation of automatic volume modulation. The invention provides enhanced listening experience while reducing the risk of hearing damage. Accompanied Drawings [Figure 1-4]

No. of Pages : 20 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035167 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : VAGINAL INSERTABLE CAPSULE COMPOSITIONS BASED ON LYOPHILIZED HERBAL EXTRACTS AND PREPARATION METHOD THEREOF

(51) International classification	:A61K 9/00, A61K 9/48, A61K 9/19, A61K 36/00, A61K 36/185, A61K 36/47, A61K 47/36
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)AMITY UNIVERSITY
Address of Applicant :AMITY UNIVERSITY CAMPUS, SECTOR-125, NOIDA-201313, INDIA Uttar Pradesh India
(72)**Name of Inventor :**
1)Kumud Bala
2)Mohini Agarwal
3)N Zaheer Ahmed
4)Manish Kumar

(57) Abstract :
The present invention discloses a vaginal insertable capsule compositions based on lyophilized herbal extracts and a preparation method thereof. The invention provides a polyherbal formulation subjected to hydroalcoholic extraction followed by lyophilization to obtain a stable, porous, and free-flowing extract. The composition comprises 30–45% by weight of the lyophilized herbal extract along with structural polysaccharides, selective substrates, mucoadhesive components, pH stabilizers, and about 20% carrier oil, formulated into soft gelatin capsules suitable for vaginal administration. The method includes Soxhlet extraction using hydroalcoholic solvent, concentration under controlled temperature and vacuum, pre-freezing, freeze-drying under defined temperature and pressure conditions, and encapsulation via rotary die technique. The invention ensures stability, reproducibility, and effective delivery of phytoconstituents through a standardized formulation and process.
Accompanied Drawings [Figure 1-26]

No. of Pages : 30 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035168 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SMART INTERLOCKING MECHANISM FOR METRO DOOR SAFETY

(51) International classification	:E05F 15/632, E05F 15/20, E05F 15/14	(71)**Name of Applicant :** **1)Amity University** Address of Applicant :AMITY UNIVERSITY CAMPUS, SECTOR-125, NOIDA, UTTAR PRADESH, INDIA, 201313 Uttar Pradesh India (72)**Name of Inventor :** **1)Kartikey Kumar** **2)R. K. Viral** **3)Divya Asija**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No	:NA	
Filing Date	:NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :

The present invention discloses a smart interlocking mechanism for metro door safety and other automatic sliding door systems. The mechanism comprises a flexible strip (100) mounted along the door edge and carrying a plurality of conductive contacts (200) arranged to align with corresponding contacts on an opposing door edge. The conductive contacts (200) are connected through an electrical interlock circuit (300) interfaced with a door control unit (400). Upon proper alignment during unobstructed closure, the circuit (300) is completed, permitting normal door operation. In the presence of an obstruction, misalignment of the conductive contacts (200) interrupts the circuit (300), causing the door control unit (400) to prevent, halt, or reverse closure. The system may further include an alert system (500) for indicating obstruction conditions. The invention provides reliable detection of thin and flexible obstructions and enhances passenger safety. Accompanied Drawings [Figure 1]

No. of Pages : 17 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035169 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AN ADVANCED PHYTOREMEDIATION AND WATER HARVESTING SYSTEM USING NATURAL FILTRATION FOR RURAL ENVIRONMENTS

(51) International classification	:C02F0003320000, C02F0001000000, C02F0009000000, C02F0001440000, C02F0003300000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)AMITY UNIVERSITY
Address of Applicant :AMITY UNIVERSITY CAMPUS, SECTOR125, NOIDA, UTTAR PRADESH, INDIA, 201313 Noida Uttar Pradesh India
(72)**Name of Inventor :**
1)Yash Sharma
2)Kunal Pratap Singh
3)Pranjal Chaturvedi
4)Vinayak Majhi
5)Sujata Pandey

(57) Abstract :
The present invention discloses an advanced phytoremediation and water harvesting system using natural filtration for rural environments. The system comprises a grey water collection channel (101), a screening unit (102) for removal of coarse impurities, a first sand filter unit (103) for eliminating suspended particles, and a channelled wetland unit (104) incorporating Water Hyacinth, Umbrella Palm, macrophytes, and zooplankton for phytoremediation and biological purification. The system further includes a screening and gravel pedestal unit (105) for enhancing dissolved oxygen, a second sand filter unit (106) for final filtration, and a water quality monitoring unit (107) comprising TDS and pH meters. Treated water is distributed via a water supply unit (108), stored in a storage tank (109), and managed through a reservoir (110) enabling rainwater harvesting and groundwater recharge. The system provides sustainable water treatment with minimal chemical dependency. Accompanied Drawing [Figure 1]

No. of Pages : 24 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035170 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR ENHANCED POLYGALACTURONASE ACTIVITY FOR EFFICIENT ORGANIC WASTE VALORIZATION

(51) International classification	:C12N0009240000, A23K0010180000, A23L0007104000, C12G0003060000, A23L0029231000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)AMITY UNIVERSITY
Address of Applicant :AMITY UNIVERSITY CAMPUS, SECTOR-125, NOIDA-201313, INDIA Uttar Pradesh India
(72)**Name of Inventor :**
1)Smriti Shrivastava
2)Manasvi Vashisht
3)Kavya

(57) Abstract :
The present invention discloses a system and method for enhanced polygalacturonase activity for efficient organic waste valorization. Extracellular pectin hydrolyzing enzymes are produced from indigenously isolated microbial strains KBM13, KBM15, KBM16, KBM20, KBM21 and KBM25 and combined to form enzyme cocktails based on enzymatic activity. The enzyme cocktail is applied at a concentration of 200 units per 0.05 g of dried fruit and vegetable peel biomass in 0.1M sodium acetate buffer at pH 4.5, followed by incubation for 30 minutes to hydrolyze pectin into poly-galacturonic acid. Synergistic enhancement in hydrolysis is achieved using specific enzyme combinations, resulting in increased production efficiency. The invention provides a reproducible and scalable approach for enzymatic valorization of biodegradable waste into value-added products. Accompanied Drawing [Figures 1-5]

No. of Pages : 21 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035171 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : HONEY-BASED POLYHERBAL SYRUP COMPOSITION TO TREAT AIR POLLUTION-INDUCED INFLAMMATION AND PREPARATION METHOD THEREOF

(51) International classification	:A61K 36/00, A61K 36/81, A61K 36/53, A61K 36/484, A61K 36/28, A61K 36/67, A61K 36/75, A61K 36/21
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)AMITY UNIVERSITY RAJASTHAN
Address of Applicant :AMITY UNIVERSITY JAIPUR, RAJASTHAN-303002, INDIA Rajasthan India
(72)**Name of Inventor :**
1)Tanvi Rathore
2)Dr. Era Upadhyay

(57) Abstract :
The present invention discloses a a honey-based polyherbal pharmaceutical composition in the form of an oral syrup for the management of air pollution-induced respiratory inflammation and associated anxiety. The composition comprises 40–50% (w/v) combined extracts of Withania somnifera, Ocimum sanctum, Glycyrrhiza glabra, Matricaria chamomilla, Piper betle, Aegle marmelos, Spinacia oleracea, Annona squamosa, and Passiflora incarnata, along with 25–40% (v/v) honey, 5–10% (v/v) propylene glycol, and 0.3–0.7% (w/v) citric acid, with purified water q.s. The formulation is maintained at pH 4.5–5.5. The invention further provides a method of preparation involving aqueous and hydroalcoholic extraction, concentration, mixing, and homogenization. The composition exhibits synergistic pharmacological activity characterized by enhanced antioxidant activity and a combination index less than 1. Accompanied Drawings [Figure 1-7]

No. of Pages : 27 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :10/04/2025
(21) Application No.202511035172 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AN INTEGRATED SEED COATING DRUM WITH ON-DEMAND ELECTRO-SPUN

(51) International classification	:A01C 1/06, D01D 5/00, B05B 5/00, B05C 3/04, A01N 25/26, A01C 1/08, B82Y 30/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)AMITY UNIVERSITY
Address of Applicant :AMITY UNIVERSITY CAMPUS, SECTOR-125, NOIDA-201313, INDIA Noida Uttar Pradesh India
(72)**Name of Inventor :**
1)Kanta Prasad Sharma
2)Ajay Rana
3)Grish Paliwal

(57) Abstract :
The present invention discloses an integrated seed coating system comprising a seed coating drum (100) operatively coupled with an electrospinning unit for on-demand deposition of nanofibers onto seeds. The system includes an electrospinning nozzle system (200) having a spinneret (600), a high-voltage power supply (300), a polymer solution reservoir (400), a pump (500), and a controlled airflow drying unit (700). The seed coating drum (100) replaces a conventional collector and rotates to enable uniform coating of seeds with nanofibers encapsulating active compounds. The invention further discloses a method for forming a fiber-forming solution and electrospinning the same directly onto seeds to achieve controlled release of the active compounds. The system enables uniform coating, improved seed germination, and enhanced seedling vigor. Accompanied Drawings [Figure 1-11]

No. of Pages : 25 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :10/04/2025
(21) Application No.202511035217 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTO-CAMERA CALIBRATION SYSTEM OF A VEHICLE AND METHOD THEREOF

(51) International classification	:B60W40/08, G06V20/56, G06V20/58, G06T7/80, G06T7/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOVUS HI-TECH ROBOTIC SYSTEMZ PRIVATE LIMITED
Address of Applicant :A-18 infocity-1, Sector-34 Gurgaon Haryana India 122001 Gurgaon Haryana India
(72)**Name of Inventor :**
1)Nishant Kejriwal
2)Anuj Kapuria

(57) Abstract :
The present disclosure provides an auto-camera calibration system and a method thereof. The system100 and method300 include a feature extraction unit102, one or more camera(s)110, and a control unit104. The one or more camera(s)110 captures a plurality of images of a user. The feature extraction unit102 identifies one or more object of interest (OOI) within the captured plurality of images to detect a movement and positions of the identified one or more OOI. The CU104 calculates a user's line of sight (LOS) based on the movement and position of the identified one OOI and compares the calculated user's LOS with a predefined reference LOS to identify any misalignment between the user's LOS and the predefined reference LOS. Further, the CU104 adjusts one or more camera's field of view to align the user's LOS with the predefined reference LOS when the user's LOS and the predefined reference LOS are misaligned. FIG.1&3

No. of Pages : 37 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035218 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : ADAPTIVE SEATBELT ADJUSTMENT SYSTEM FOR A VEHICLE AND METHOD THEREOF

(51) International classification	:B60R 22/48, B60R 22/46, B60R 22/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOVUS HI-TECH ROBOTIC SYSTEMZ PRIVATE LIMITED
Address of Applicant :A-18 infocity-1, Sector-34 Gurgaon Haryana India 122001 Gurgaon Haryana India
(72)**Name of Inventor :**
1)Nishant Kejriwal
2)Anuj Kapuria

(57) Abstract :
The present disclosure provides an adaptive seatbelt adjustment system for a vehicle and a method thereof. The system100 includes a monitoring unit102, a control unit104, and a seatbelt adjustment unit110. The monitoring unit102 collects a plurality of data by detecting and continuously monitoring of at least one physical attribute of an occupant in a real-time. The control unit104 processes and analyzes the collected plurality of data from the monitoring unit102. Further, the control unit104 classifies the occupant into one or more categories based on the processed and analyzed collected plurality of data and generates a seatbelt adjustment signal based on the classified occupant's one or more categories. The seatbelt adjustment unit110 modifies at least one seatbelt configuration upon receiving the seatbelt adjustment signal from the control unit104. FIG.1&7

No. of Pages : 45 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035219 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A SYSTEM TO DETECT AND INTERPRET PARTIALLY VISIBLE TRAFFIC SIGNS AND METHOD THEREOF

(51) International classification	:G06V20/58, G06N3/02, G06V10/82, G06V10/75, G06N3/0464
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOVUS HI-TECH ROBOTIC SYSTEMZ PRIVATE LIMITED
Address of Applicant :A-18 infocity-1, Sector-34 Gurgaon Haryana India 122001 Gurgaon Haryana India
(72)**Name of Inventor :**
1)Nishant Kejriwal
2)Anuj Kapuria

(57) Abstract :
The present disclosure provides a system to detect and interpret partially visible traffic signs and a method thereof. The system100 and method500 include a monitoring module102, a processing module104, and an image recognition module110. The monitoring module102 collects a plurality of real-time image data of a plurality of traffic signs. The image recognition module110 identifies one or more partially visible traffic signs by analyzing one or more attributes of the collected plurality of real-time image data of the plurality of traffic signs. The processing module104 is configured to compare the identified one or more partially visible traffic signs against a database of known traffic signs to determine a traffic sign type, calculate a confidence score, categorize the detected traffic sign type into one or more risk level categories, and perform one or more actions based on the calculated confidence score and the categorization of the one or more risk levels. FIG.1&4

No. of Pages : 46 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035220 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : ADAPTIVE AIRBAG SYSTEM FOR A VEHICLE AND METHOD THEREOF

(51) International classification	:B60R 21/16, B60R 21/0132, B60R 21/01	(71)**Name of Applicant :** **1)NOVUS HI-TECH ROBOTIC SYSTEMZ PRIVATE LIMITED** Address of Applicant :A-18 infocity-1, Sector-34 Gurgaon Haryana India 122001 Gurgaon Haryana India (72)**Name of Inventor :** **1)Nishant Kejriwal** **2)Anuj Kapuria**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No Filing Date	:NA :NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :

The present disclosure provides an adaptive airbag system for a vehicle and a method thereof. The system100 includes a detection module102 and a processing module104. Further, the detection module102 acquires a plurality of data by detecting at least one occupant attribute, seating posture, and seating position of an occupant in real-time. The processing module104 processes and interprets the acquired plurality of data from the detection module102. The processing module104 categorizes the occupant into one or more categories based on the processed and interpreted plurality of data to predict an occupant motion trajectory based on the occupant's categorization and seating position in a critical event. Further, the processing module104 automatically adjusts the at least one airbag deployment parameter based on the predicted occupant motion trajectory during the deployment of a vehicle airbag. FIG.1&5

No. of Pages : 41 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035221 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : ADAPTIVE SEAT ADJUSTMENT SYSTEM FOR A VEHICLE AND METHOD THEREOF

(51) International classification	:B60N 2/427, B60N 2/90, B60N 2/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOVUS HI-TECH ROBOTIC SYSTEMZ PRIVATE LIMITED
Address of Applicant :A-18 infocity-1, Sector-34 Gurgaon Haryana India 122001 Gurgaon Haryana India
(72)**Name of Inventor :**
1)Nishant Kejriwal
2)Anuj Kapuria

(57) Abstract :
The present disclosure provides an adaptive seat adjustment system and a method thereof. The system100 and method300 include a monitoring module102, a data processing module104, a control module106, and a seat adjustment module108. The monitoring module102 collects a plurality of data of at least one occupant attribute and a plurality of driving conditions in a real-time. Further, the data processing module104 processes and analyzes the collected plurality of data to determine an occurrence scenario of a hazardous event. The control module106 receives the processed and analyzed plurality of data to generate a seat adjustment signal and the seat adjustment module108 is configured with the control module 106 to adjust a seat position to a safer position upon receiving the seat adjustment signal from the control module106. FIG.1&3

No. of Pages : 35 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :10/04/2025
(21) Application No.202511035222 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A DRIVER ASSISTANCE WEARABLE ASSEMBLY

(51) International classification	:A61B0090000000, A61B0005000000, B60W0050000000, H04W0004140000, G05D0001000000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOVUS HI-TECH ROBOTIC SYSTEMZ PRIVATE LIMITED
Address of Applicant :A-18 infocity-1, Sector-34 Gurgaon Haryana India 122001 Gurgaon Haryana India
(72)**Name of Inventor :**
1)Nishant Kejriwal
2)Anuj Kapuria

(57) Abstract :
The present disclosure provides a driver assistance wearable assembly to enhance a rider safety of a two-wheeler vehicle. The assembly100 includes a protective enclosure102, a communication unit108, a plurality of sensors106, an alert unit110, and an onboard processor104. The communication unit108 is configured to securely connect the assembly 100 to the two-wheeler vehicle202 via an authentication mechanism. The plurality of sensors106 generates a plurality of real-time data. Further, the onboard processor104 is configured with the assembly100 to gather and analyze one or more information from the two-wheeler vehicle202 and the plurality of real-time data from the plurality of sensors106, detect one or more real-time events based on the analyzed plurality of real-time data, and generate an alert signal upon detection of the one or more real-time events. The alert unit110 notifies a user about the detection of the one or more real-time events through the generated alert signal.
FIG.1

No. of Pages : 47 No. of Claims : 18

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035223 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : WEIGHT DISTRIBUTION SYSTEM OF A VEHICLE AND METHOD THEREOF

(51) International classification	:G01G 19/08, B60R 16/023
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOVUS HI-TECH ROBOTIC SYSTEMZ PRIVATE LIMITED
Address of Applicant :A-18 infocity-1, Sector-34 Gurgaon Haryana India 122001 Gurgaon Haryana India
(72)**Name of Inventor :**
1)Nishant Kejriwal
2)Anuj Kapuria

(57) Abstract :
The present disclosure provides a weight distribution system of a vehicle and a method thereof. The system100 includes one or more sensors102, and a processing unit104. Further, the one or more sensors102 measures a weight and a volume of one or more vehicle loads and their respective locations in a real-time and transmitting a real-time weight and volume measurements with location data. The processing unit104 receives the real-time weight and volume measurements with location data from the one or more sensors102 to calculate a vehicle's current center of gravity (CG). The processing unit104 compares the calculated vehicle's current CG with a predefined CG to determine a deviation between the vehicle's current CG and the predefined CG and provides a real-time recommendation to a user through an alerting signal, to perform one or more vehicle load reallocation actions in order to align the vehicle's current center of gravity (CG) with the predefined CG. FIG.1&3

No. of Pages : 33 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :10/04/2025
(21) Application No.202511035224 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ENHANCING EVALUATION SET FOR AGENT HEALTH SCORE FOR AGENTIC AUTOMATIONS

(51) International classification	:G16H0050300000, G06Q0010063900, G16H0050700000, G06F0011340000, G06F0040300000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)UIPATH, INC.
Address of Applicant :1 Vanderbilt Avenue, 60th Floor, New York, NY 10017, USA U.S.A.
(72)**Name of Inventor :**
1)Chibi Vikramathithan
2)Dragos H. BOBOLEA
3)Jordan HOLCOMBE
4)Zach ESLAMI
5)Venkata Shyam P. RAPAKA
6)Emanuela HALLER

(57) Abstract :
A method is provided. The method is performed by a hyper-automation system performing agentic automations. The hyper-automation system including a memory storing computer code for the agentic automations, for evaluation sets, for agent health score generation and enhancement. The hyper-automation system including a processor executing the computer code to cause the method to refine and improve over time the evaluation sets. The method includes determining whether an evaluation set of the on evaluation sets for an agent is acceptable. The method includes, when the evaluation set is determined as acceptable, executing the evaluation set for the agent. The method includes, when the evaluation set is determined as not acceptable, enhancing the evaluation set for the agent by sufficiency determinations or health score assessments through iterative improvements until the evaluation set is acceptable.

No. of Pages : 103 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035225 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEMS, METHODS AND COMPUTER PROGRAM PRODUCTS FOR ELECTRONIC TRANSACTION AUTHORIZATION USING CROSS-SYSTEM IDENTIFIER MAPPING

(51) International classification	:G06Q20/40, G06Q20/38, G06Q20/36, G06Q20/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)MASTERCARD INTERNATIONAL INCORPORATED
Address of Applicant :2000 PURCHASE STREET, PURCHASE, NY 10577, UNITED STATES OF AMERICA U.S.A.

(72)**Name of Inventor :**
1)SUNIL, Saurabh
2)TADALA, Suryanarayana Murty
3)JAIN, Deepak Kumar
4)SRIVASTAVA, Roshan

(57) Abstract :
A computer-implemented method, system, and computer program product for processing an electronic transaction authorization request within a distributed transaction processing network. A transaction authorization server receives a transaction authorization request message formatted in accordance with a predefined field-constrained transaction messaging protocol, and extracts therefrom a transaction amount data value and a unique identifier associated with an account holder. The transaction authorization server transmits a limit data request message comprising the unique identifier to a limit consolidation and decisioning system. The limit consolidation and decisioning system queries a mapping database using the unique identifier to retrieve a mapping data record associating the unique identifier with a first identifier key native to a loan management system and a second identifier key native to a card management system, wherein the first and second identifier keys are of different identifier types and at least one is absent from the transaction authorization request message. The limit consolidation and decisioning system retrieves available credit limits from each system using the respective identifier keys, computes an aggregated credit limit data value, and returns it to the transaction authorization server, which generates and transmits a transaction authorization decision based thereon.

No. of Pages : 47 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035226 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEMS, METHODS AND COMPUTER PROGRAM PRODUCTS FOR CONTROLLING PROPAGATION OF TRANSACTION AUTHORIZATION MESSAGES

(51) International classification	:G06Q 20/40, G06Q 20/42, G06Q 40/02, G06F 16/24, H04L 67/10
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)MASTERCARD INTERNATIONAL INCORPORATED
Address of Applicant :2000 PURCHASE STREET, PURCHASE, NY 10577, UNITED STATES OF AMERICA U.S.A.
(72)**Name of Inventor :**
1)SUNIL, Saurabh
2)TADALA, Suryanarayana Murty
3)JAIN, Deepak Kumar
4)SRIVASTAVA, Roshan

(57) Abstract :
Systems, methods and computer program products are provided for controlling propagation of transaction authorization messages within a distributed transaction processing network. A transaction authorization server receives a transaction authorization request message formatted in accordance with a predefined field-constrained transaction messaging protocol, and extracts therefrom a transaction amount data value and a unique identifier associated with an account holder. The unique identifier is transmitted to a limit determination server, which queries a mapping database to retrieve a mapping data record associating the unique identifier with identifier keys native to a loan management system and a card management system respectively. The limit determination server retrieves available credit limits from each system using the respective identifier keys and determines an aggregated credit limit data value. Based on a comparison of the transaction amount with the aggregated credit limit, the transaction authorization server either suppresses transmission of the transaction authorization request message to an issuer network or forwards it thereto for further processing.

No. of Pages : 49 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035228 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A MOTOR CABLE OR PHASE TERMINAL SEALING MECHANISM WITH A TUBULAR COMPONENT FOR INGRESS PROTECTION

(51) International classification	:H01R0013520000, H05K0005020000, G02B0007020000, B60R0016020000, B01D0046240000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Sona BLW Precision Forgings Limited
Address of Applicant :Sona Enclave, Village Begumpur Khatola, Sector 35, Gurugram - 122 004, Haryana, India Gurugram Haryana India
(72)**Name of Inventor :**
1)Kumar V
2)Baskaran D
3)David Prem Jose Godwin
4)Dineshkumar A
5)Muruganandam Radhakrishnan
6)Praveen Chakrapani Rao

(57) Abstract :
The present disclosure provides a motor 100 cable or phase terminal sealing mechanism with a tubular component for ingress protection. The mechanism includes a housing 102 including a perforated hole 140, a transmission member 110 extending through the perforated hole 140 into the housing 102, a securing member 152 placed on an outer surface of the transmission member 110 and a seal casing 120 including a projected portion 136 having a groove 128, an internal portion 134 engaged with the outer surface 150 of the securing member 152, an external portion 132 engaged with the threaded portion 146 of the perforated hole 140 of the housing 102 and a tubular component 160 including a flange portion 164.The flange portion 164 extends into the groove 128. The present disclosure also provides a method for preventing ingress of external substances into a motor. Refer to Fig. 1 and 2

No. of Pages : 39 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :10/04/2025
(21) Application No.202511035258 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : RUNNING EVALUATION SETS FOR AN AGENT HEALTH SCORE FOR AGENTIC AUTOMATIONS

(51) International classification	:G16H0050300000, G06F0040300000, G06F0011340000, G06Q0010040000, G05B0013020000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)UIPATH, INC.
Address of Applicant :1 Vanderbilt Avenue, 60th Floor, New York, NY 10017, USA U.S.A.
(72)**Name of Inventor :**
1)Chibi Vikramathithan
2)Dragos H. BOBOLEA
3)Jordan HOLCOMBE
4)Zach ESLAMI
5)Venkata Shyam P. RAPAKA
6)Emanuela HALLER

(57) Abstract :
A method is provided. The method is performed by a hyper-automation system performing agentic automations. The hyper-automation system includes a memory storing computer code for the agentic automations, for evaluation sets, and for evaluation score generation and enhancement. The hyper-automation system comprising a processor executing the computer code to cause the method to refine and improve over time the evaluation sets. The method includes determining whether an evaluation set of the evaluation sets for an agent is acceptable. The method includes running an evaluation set of the evaluation sets for an agent. The method includes generating an evaluation score based on the running of the evaluation set. The method includes, when the evaluation score is determined as acceptable, flagging the agent as ready for production; The method includes, when the evaluation score is determined as not acceptable, iteratively executing multi-touch attribution for assigning which factors contributed to a low evaluation score, determining an optimization for the factors, and implementing the optimizations and reruns the evaluation set until the evaluation score is acceptable.

No. of Pages : 103 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035259 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : INJK Magnetic & Alkaline Water Treatment Device

(51) International classification	:C02F0001000000, C02F0001680000, C02F0001440000, C02F0001280000, C02F0009000000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)MAKEWAY INDIA INVENTION PRIVATE LIMITED
Address of Applicant :109, VIJENSH PARK, BALAJI MKT INDUST AREA, HISAR, HARYANA-125001 HISAR Haryana India
(72)**Name of Inventor :**
1)MAKEWAY INDIA INVENTION PRIVATE LIMITED

(57) Abstract :
The present invention relates to a magnetic and alkaline water treatment device designed to enhance the quality and characteristics of potable water through physical structuring and mineral enrichment. The device comprises a multi-component assembly including a 99% lab-tested copper input funnel connected to Stainless-steel cylinder having Neodymium magnetic chamber, Medical-grade copper-infused nylon bush with 92.5% pure sterling silver antimicrobial plates, an alkaline cartridge having natural spring water and sprinkler-based circulation technology in centre surrounded by Korean volcanic ceramic balls, a filter, a medical-grade jamun wood chamber, and proprietary INJK™ quantum revitalization technology. The system synergistically purifies, energizes, mineralizes, and restructures water, offering health benefits such as improved hydration, digestive health, immune support, and enhanced pH balance. The treated water exits through a user-friendly nozzle, ready for consumption.

No. of Pages : 40 No. of Claims : 7

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035272 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : ADAPTIVE BIO-RESPONSIVE NEUROMUSCULAR ELECTRICAL STIMULATION SYSTEM WITH PREDICTIVE PHARMACOLOGICAL DELIVERY

(51) International classification	:A61N0001360000, A61N0001040000, A61M0037000000, A61B0005000000, A61B0005145000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)BERRYSTEEN VENTURES PVT. LTD
Address of Applicant :2- Devnagar, Sector-8, Indira Nagar Lucknow- 226016 Uttar Pradesh India
(72)**Name of Inventor :**
1)Mr. Saransh Chaturvedi
2)Mr. Shardul Chauhan

(57) Abstract :
An adaptive bio-responsive neuromuscular electrical stimulation system with predictive pharmacological delivery, comprising a skin-conformable patch integrated with micro-sensors and micro-needles, a central processing unit employing artificial intelligence algorithms, and a multi-dimensional drug dosage analysis matrix. The system continuously monitors physiological and NMES parameters, employing RNNs and reinforcement learning agents to optimize stimulation and predict pharmacological needs, thereby providing personalized and adaptive therapeutic interventions. Fig. 1 shall be taken as reference figure.

No. of Pages : 16 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :09/04/2025

(21) Application No.202511035298 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : HYDRO DISTILLATION PROCESS FOR EXTRACTION OF ESSENTIAL OIL FROM THE PEEL OF CITRUS SPECIES BY USING NATURAL DEEP EUTECTIC SOLVENT AS COSOLVENT

(51) International classification	:C11B0009020000, A61K0036752000, A23L0027120000, A61P0029000000, A23K0020105000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Council of Scientific and Industrial Research
Address of Applicant :Anusandhan Bhawan, 2-Rafi Marg, New Delhi-110001 New delhi Delhi India
(72)**Name of Inventor :**
1)Anmol
2)Mehak Sharma
3)Mohit Sharma
4)Upendra Sharma

(57) Abstract :
The present invention relates to an efficient and improved hydro distillation process for extraction of essential oil from peel of Citrus species using choline chloride: organic acid (1:1) based Natural Deep Eutectic Solvent [NADES] as a co-solvent for enhancement of the essential oil [EO] yield. More particularly, the present invention relates to an improved hydro distillation process for the extraction of essential oil [EO] from the four Citrus species (Citrus reticulata, Citrus limetta, Citrus limon, Citrus sinensis) using choline chloride: organic acid (1:1) based Natural Deep Eutectic Solvent [NADES] as co-solvent approach. The Natural Deep Eutectic Solvent [NADES] co-solvent based approach in conventional hydro distillation process enhances the essential oil [EO] yield 2-5 times compared to conventional hydro distillation in peels of different Citrus species i.e. Citrus reticulata, Citrus limetta, Citrus limon, Citrus sinensis. The natural deep eutectic solvent assisted hydro distillation (NADES-AHD) process is environmentally sustainable, economical, easy to use with enhanced essential oil [EO] extraction tendency.

No. of Pages : 27 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :09/04/2025
(21) Application No.202511035313 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AMINO ACID-BASED HARDENER OR CROSSLINKER, PROCESS FOR PREPARATION, AND COMPOSITION THEREOF

(51) International classification	:A61K0008440000, A01N0057200000, G03C0001300000, C09K0008900000, A61L0031140000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)COUNCIL OF SCIENTIFIC AND INDUSTRIAL RESEARCH an Indian registered body incorporated under the Regn. of Soc. Act (Act XXI of 1860)
Address of Applicant :Anusandhan Bhawan, 2 Rafi Marg Rafi Marg New Delhi Delhi India 110001 New Delhi Delhi India
(72)**Name of Inventor :**
1)Asha Syamakumari
2)Ganesh Narsing Kamble

(57) Abstract :
The present invention generally relates to hardener or crosslinker molecules, and their vitrimer polymers thereof. Particularly, the present invention relates to a reversible and recyclable amino acid, imine-based hardener or crosslinker compound of formula (I) and resin formulation comprising said compound of formula (I).

No. of Pages : 24 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :27/03/2025
(21) Application No.202511029166 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : GUARDRAILS FOR ARTIFICIAL INTELLIGENCE MODELS AND AGENTIC AUTOMATION

(51) International classification	:G06F21/57, G06N3/006, G06Q10/0633, G06N20/00, G06N5/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)UIPATH, INC.
Address of Applicant :1 Vanderbilt Avenue, 60th Floor, New York, NY 10017, USA U.S.A.
(72)**Name of Inventor :**
1)Victor VLASCEANU
2)Umesh AMIN
3)Valentina BOJAN
4)Jay PATEL
5)Scott SCHOENBERGER

(57) Abstract :
5 A method is provided. The method is implemented by a hyper-automation system including processors executing computer code for agentic automations and an artificial intelligence trust layer and a memory storing the computer code. The method includes initially setting guardrails for an agent within the artificial intelligence trust layer of the hyper-automation system. The method includes operating the agent according to the 10 guardrails to implement a workflow of the agentic automations including an action. The guardrails define a scope of the agent to control the operation of the agent as the agent implements action. 70

No. of Pages : 86 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :09/04/2025

(21) Application No.202511035315 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A System of Self-Rotating Multi-Layered Vertical Disks (SVDs) For Wastewater Treatment

(51) International classification	:C02F 3/10, C02F 3/30, C02F 3/10, C02F 3/30
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)COUNCIL OF SCIENTIFIC AND INDUSTRIAL RESEARCH an Indian registered body incorporated under the Regn. of Soc. Act (Act XXI of 1860)
Address of Applicant :Anusandhan Bhawan, 2 Rafi Marg, Rafi Marg, New Delhi, Delhi - 110001 India Delhi Delhi India
(72)**Name of Inventor :**
1)Ritesh Vijay
2)Bhuvanesh Surianarayanan
3)Satyendra
4)Neelam Joharwal

(57) Abstract :
A System of Self-Rotating Multi-Layered Vertical Disks (SVDs) For Wastewater Treatment The present invention provides a self-rotating multi-layered vertical disk (SVD) arrangement for wastewater treatment and mechanism thereof, designed to provide an efficient, sustainable, and cost-effective solution for decentralized treatment applications. The system utilizes a unique arrangement of vertical disks and horizontal tubular paddles, driven by the natural flow of wastewater. The paddles store wastewater and convert its potential energy into kinetic energy, enabling drag-free rotation of the disks without requiring external energy sources. The textured surface of the vertical disks facilitates biofilm formation, promoting the simultaneous removal of organic matter and nitrogen through combined aerobic and anaerobic processes. A central shaft supports the vertical disks and tubular paddles, ensuring compactness, portability, and ease of installation. The system features a tapered nozzle for evenly distributing incoming wastewater onto collection wings, preventing spillage and enhancing flow dynamics. The self-rotating mechanism ensures energy efficiency, while its modular design allows seamless integration with existing treatment units and nature-based systems.

No. of Pages : 25 No. of Claims : 4

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :11/04/2025
(21) Application No.202511035360 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : License Renewal System Based on Driver Behavior Analysis using hybrid AI

(51) International classification	:G06V10/70, G06N3/045, G06V10/82, G06N3/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)COER University
Address of Applicant :COER UNIVERSTIY, 7th km Stone Roorkee Haridwar Highway, Roorkee, Distt Haridwar, Uttarakhand, India Roorkee Uttarakhand India
(72)**Name of Inventor :**
1)B D Patel

(57) Abstract :
License Renewal System Based on Driver Behavior Analysis using hybrid AI Abstract The present invention relates to development of driving license renewal based on the previous driving behavior pattern analysis. It specifically focuses on evaluating driver behavior using sensors data, machine learning models and explainable AI techniques to determine eligibility for license renewal, providing human-readable explanations to support the decision-making process.

No. of Pages : 8 No. of Claims : 5

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :11/04/2025

(21) Application No.202511035382 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AI-Powered Event Management System and Method for Multi-Day Cultural Events

(51) International classification	:G06Q 10/0631, G06Q 10/109, G06Q 50/00, G06N 20/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)COER University
Address of Applicant :COER UNIVERSTIY, 7th km Stone Roorkee Haridwar Highway, Roorkee, Distt Haridwar, Uttarakhand, India Roorkee Uttarakhand India
(72)**Name of Inventor :**
1)Dr. Prabhat Kumar

(57) Abstract :
AI powered Event Management System and Method for Multi-Day Cultural Events Abstract The invention relates to development of an AI-powered event management system and methods for automating as well as enhancing various aspects of event planning, execution and post-event analysis. The system utilizes machine learning algorithms for predictive analysis to optimize event scheduling, resource allocation, attendee engagement and overall event experience. By analyzing historical data, attendee preferences and real-time event dynamics, the system continuously improves event planning strategies and delivers personalized experiences so that next time those activities can be given preference in multi day cultural event and those activities which does not gather more participation can be ruled out and new activities can be included.

No. of Pages : 7 No. of Claims : 4

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :11/04/2025
(21) Application No.202511035394 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TRAINING TIME SERIES FORECASTING MODELS USING CURRICULUM LEARNING

(51) International classification	:G06N 20/00, G06F 18/211, G06F 17/18, G06N 7/01, G06N 3/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)FUJITSU LIMITED
Address of Applicant :1-1 Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi Kanagawa 211-8588, Japan Japan
(72)**Name of Inventor :**
1)PAGADALA, Krishna Murthy
2)MADIRAJU, Srilakshmi
3)KUMAR, Niraj

(57) Abstract :
According to an aspect of an embodiment, a method includes a set of operations which include receiving time-series data. The set of operations includes determining one or more characteristics of time-series data and sampling time-series data into first sequence of training samples. The set of operations further include sampling time-series data into first sequence of training samples and selecting complexity metric from set of complexity metrics based on one or more characteristics. The method further includes computing complexity scores corresponding to first sequence of training samples by applying complexity metric on first sequence of training samples and sorting first sequence of training samples into second sequence of training samples based on plurality of complexity scores. Finally, the set of operations includes dividing second sequence of training samples into plurality of training chunks and training a forecasting model based on plurality of training chunks.

No. of Pages : 68 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :11/04/2025
(21) Application No.202511035410 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A PROCESS OF PREPARATION OF JAGGERY DIGESTIVE CHOCOLATE

(51) International classification	:A23L 33/135, A23G 1/00, A23L 7/10, A23G 1/38
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)G.B. PANT UNIVERSITY OF AGRICULTURE & TECHNOLOGY
Address of Applicant :PCPGR BUILDING, G.B.PANT UNIVERSITY OF AGRICULTURE & TECHNOLOGY, PANTNAGAR-263145, DISTT. UDHAM SINGH NAGAR, UTTARAKHAND. Uttarakhand India
(72)**Name of Inventor :**
1)NAVIN CHANDRA SHAHI
2)NABIL ARSHAD
3)A.K. VERMA
4)ARSHI SIDDIQUI
5)ASHUTOSH TIWARI
6)P.V. SINGH
7)BILAL AHMAD LANGOO

(57) Abstract :
The present invention relates to the development of nutrient-rich jaggerybased digestive chocolate by incorporating microencapsulated probiotic Lactobacillus rhamnosus GG. Using the Box-Behnken design within Response Surface Methodology, the effects of conching time (3-5 h), tempering temperature (40-50 °C), and probiotic concentration (1-2 g/100g) on various responses were evaluated. Optimal conditions-5 h conching time, 40.26 °C tempering temperature, and 1.61 g probiotic concentration-yielded a probiotic count of 3.5x108 CFU/g, 108.38 N for hardness, 1.37 N.s for adhesiveness, 0.43 for cohesiveness, 3.39 N for chewiness, 8.30 for sensory analysis, and 8.22 for consumer acceptability in the developed chocolate. The model was validated, confirming no significant difference between experimental and predicted values. The proximate analysis of the optimized jaggery-based digestive chocolate revealed improvements in moisture, ash content, crude protein, crude fiber, calcium, and potassium compared to market chocolate.

No. of Pages : 18 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :11/04/2025

(21) Application No.202511035413 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A SYSTEM AND A METHOD FOR DECELERATION

(51) International classification	:F16F 15/14, F16F 15/30, F16F 7/10
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)AKLESH KUMAR
Address of Applicant :Q NO-03/TYPE IV, BSNL COLONY, DELHI SATELLITE EARTH STATION, GULAOTHI ROAD, SIKANDTABAD, UP-203205 Uttar Pradesh India
2)DR. CHANDRA SHEKHAR VERMA
(72)**Name of Inventor :**
1)AKLESH KUMAR
2)DR. CHANDRA SHEKHAR VERMA

(57) Abstract :
A system designed to decelerate a kinetic machinery configured with one or more rotating components (A) (100), said system (100) comprising: one or more shafts (110) intended for coupling to the one or more rotating components (A), and one or more masses (120) hinged onto the one or more shafts (110); wherein the one or more masses (120) are designed to oscillate; and wherein the one or more masses (120) engage with the one or more rotating components (A) upon coupling the one or more shafts (110) to said one or more rotating components (A) for decelerating the kinetic machinery. Figure 1.

No. of Pages : 22 No. of Claims : 5

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :11/04/2025

(21) Application No.202511035438 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AN APPARATUS FOR COASTAL STRUCTURE PROTECTION

(51) International classification	:E02B3/04, E02B3/06, E04H17/04	(71)**Name of Applicant :** **1)BIRLA INSTITUTE OF TECHNOLOGY AND SCIENCE, PILANI** Address of Applicant :Vidya Vihar, Pilani, Rajasthan - 333031, India Pilani Rajasthan India
(31) Priority Document No	:NA	
(32) Priority Date	:NA	(72)**Name of Inventor :** **1)Santanu Koley** **2)Rajdip Dey**
(33) Name of priority country	:NA	
(86) International Application No	:NA	
Filing Date	:NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :
The present invention relates to an apparatus (100) for coastal structure protection. The apparatus (100) comprises a plurality of anchors (104). Each of the plurality of anchors (104) is positioned at a predefined distance. The apparatus (100) further comprises a first structure (102) surrounding each of the plurality of anchors (104) and the first structure (102) is connected to each of the plurality of anchors (104) to form a partially enclosed space. The apparatus (100) further comprises a second structure (106) positioned on an inner surface of the first structure (102). The first structure (102) surrounds the second structure (106). Figure 1.

No. of Pages : 28 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :11/04/2025

(21) Application No.202511035474 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : APPARATUS FOR MULTIPLE SLIDING CONTACT FINGER ASSEMBLY IN HIGH CURRENT SWITCHGEAR

(51) International classification	:H01H1/00, H01H1/36
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)SCHNEIDER ELECTRIC INDIA PRIVATE LIMITED
Address of Applicant :C-56 Mayapuri Industrial Area, Phase II, New Delhi – 110064, Delhi, India New Delhi Delhi India
(72)**Name of Inventor :**
1)SHIRSAT, Srushti Sunil
2)DASH, Sudhansu Sekhar
3)SAHOO, Gyana Ranjan
4)KORE, Ruturaj Jitendra
5)JOSHI, Prajakta Jayant

(57) Abstract :
The invention relates to an advanced electrical contact assembly for air-insulated switchgear systems, featuring a dual concentric finger design. This assembly comprises outer and inner diametric finger assemblies, each with multiple conductive fingers arranged in circular configurations. The design enhances electrical performance by increasing the effective surface area for current flow, counteracting the skin effect, and minimizing eddy current losses. High-conductivity materials, such as copper or silver alloys, are used to reduce resistive losses, while optimized finger geometry improves current distribution. A sliding mechanism ensures consistent contact pressure, reducing intermittent connections and wear due to localized heating and arcing. The modular design facilitates easy maintenance and replacement, reducing downtime and operational costs. This versatile assembly is adaptable for both low-voltage and high-voltage systems, offering improved efficiency, reliability, and sustainability in modern electrical applications. The invention provides a robust solution for high-power applications, enhancing the longevity and performance of switchgear systems.

No. of Pages : 32 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :11/04/2025
(21) Application No.202511035503 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND APPARATUS FOR REMOTE PRINTING

(51) International classification	:G06F3/12, G06F21/60, G06Q20/04, G06Q20/40
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)BHATTACHARYA, SUJIT
Address of Applicant :H-1584, Second Floor, Chittaranjan Park, New Delhi – 110019, INDIA New Delhi Delhi India
(72)**Name of Inventor :**
1)BHATTACHARYA, SUJIT

(57) Abstract :
The present invention provides a method and apparatus for facilitating remote printing with electronic transaction capabilities. The method includes receiving at least one parameter of a print request through a user interface of a virtual print driver embedded in an apparatus, which instructs a remote printer connected to the virtual print driver. The print request, including the parameters, is transmitted to the remote printer, which generates electronic transaction data. This data is then received by the virtual print driver, which communicates with an electronic transaction server to execute the transaction. Upon successful execution of the electronic transaction, the virtual print driver instructs the remote printer to output a digital collateral. The invention enables seamless integration of printing and electronic transaction processing in a single system.

No. of Pages : 20 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :11/04/2025

(21) Application No.202511035594 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR PREVENTING PIPE CORROSION INSIDE A LIQUEFIED PETROLEUM GAS (LPG) STORAGE SHAFT

(51) International classification	:C23F0013060000, C23F0013040000, C23F0013020000, C23F0013100000, C23F0013180000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ENGINEERS INDIA LIMITED
Address of Applicant :Engineers India Bhawan, 1, Bhikaji Cama Place, New Delhi - 110066, India. New Delhi Delhi India
(72)**Name of Inventor :**
1)BHATTACHARYYA, Nivedita S
2)DAS, Samiran

(57) Abstract :
Embodiments of the present disclosure relate to a system (200) and method (300) for prevention of corrosion of a plurality of pipes (102) installed inside a Liquefied Petroleum Gas (LPG) storage shaft in a rock cavern. The system (200) is a dual cathodic protection (CP) mechanism designed to prevent corrosion of carbon steel and stainless-steel pipes inside an LPG storage shaft in a rock cavern. The system (100) combines Sacrificial Anode Cathodic Protection (SACP) for the submerged pipes (102) below the concrete plug level and Impressed Current Cathodic Protection (ICCP) for the pipes (102) above the plug. Zinc anodes ensure long-term galvanic protection, while MMO tubular anodes provide powered by an external DC supply. Reference electrodes continuously monitor potential, ensuring uniform current distribution. The system (200) is engineered for limited space, varying depths, and differential oxygen concentrations, extending pipe life beyond 50 years.

No. of Pages : 21 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :11/04/2025

(21) Application No.202511035598 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : EXTENDED ROTARY HANDLE ASSEMBLY FOR PANEL DOORS IN CIRCUIT BREAKERS

(51) International classification	:H01H31/02, H01H9/20, H01H71/10, H01H3/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Schneider Electric India Private Limited
Address of Applicant :C-56, Mayapuri Industrial Area, Phase II, Delhi - 110064, India. Delhi Delhi India

(72)**Name of Inventor :**
1)DASH, Debasmita

(57) Abstract :
The present disclosure relates to a rotary handle assembly (100) for operating a circuit breaker (102) within a panel enclosure. The rotary handle assembly (100) includes an extended handle assembly (104), a rotary operating mechanism (ROM) (110), and a coupling shaft (108). The extended handle assembly (104) includes a housing (114) and a rotary handle (112) rotatably mounted on the extended handle assembly (104). Integrated with the rotary handle (112) is a padlock mechanism (216) featuring a padlock pin (230) and snap-fit locking elements (222, 224) for secure locking. An error prevention mechanism (236) limits the rotary handle (112) to a predefined angle when the panel door (106) is open. A spring-biased interlock component (118) with cam surface (232), blocking surface (234), and circular bend (238) engages the padlock pin (230), preventing the panel door (106) opening and the circuit breaker (102) state changes during anti-clockwise rotation attempts.

No. of Pages : 29 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :11/04/2025

(21) Application No.202511035599 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A BRAKING SYSTEM FOR A VEHICLE, AND A PUSH ROD THEREOF

(51) International classification	:B60T 13/74, B60T 13/12
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Mercedes-Benz Group AG
Address of Applicant :Mercedesstraße 122, Stuttgart, 70372, Germany.
Stuttgart Germany
(72)**Name of Inventor :**
1)Chandra Kumar
2)Shaman Raj Pajila
3)Karthik Mohan
4)Sriram Mutalik
5)Pooja Kulkarni
6)Muthukumar Kochadai

(57) Abstract :
The present disclosure provides a braking system (100) for a vehicle, comprising a push rod (118) that includes an outer push rod (302) attached to the hydraulic booster (106), and an inner push rod (304) slidably coupled to the outer push rod (302). A piston (306) has a fixed end (306-1) fixedly coupled to the brake pedal (108) and a free end (306-2) slidably coupled within the inner push rod (304). A lock mechanism selectively locks and unlocks movement of the outer and inner push rods (302, 304) based on movement of the piston (306). The push rod (118), in an unlocked position of the lock mechanism, operates the braking system (100) in a Brake-by-Wire (BBW) mode. During failure of the BBW mode, the lock mechanism moves to a locked position to allow the piston (306) to transfer movement of the brake pedal (108) to the hydraulic booster (106).

No. of Pages : 30 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :11/04/2025

(21) Application No.202511035626 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A WHEEL TACKLE SYSTEM AND METHOD FOR A VEHICLE HOISTING

(51) International classification	:B66C 1/10, B66F 3/00, B66F 7/28
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)INTERNATIONAL CENTRE FOR AUTOMOTIVE TECHNOLOGY
Address of Applicant :Plot - 26, Sector - 3, IMT Manesar, Gurugram, Haryana – 122050, India Manesar Haryana India
(72)**Name of Inventor :**
1)PRASHANT VISHE

(57) Abstract :
The present invention relates to a wheel tackle system for vehicle lifting capable of lifting vehicles with different tire sizes. The wheel tackle system has four-point supports which lifts the vehicle directly from its wheels and distributes the load more evenly and reduces stress on the vehicle's frame or body.

No. of Pages : 17 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :11/04/2025

(21) Application No.202511035641 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A method to alleviate blackening in anodized Additive Manufactured AlSi10Mg alloy through heat treatment.

(51) International classification	:C22C21/02, C22F1/043, C22C21/04, C22C21/06, B22D21/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Chairman, Defence Research & Development Organization (DRDO)
Address of Applicant :Ministry of Defence, Govt. of India, DRDO Bhawan, Rajaji Marg, New Delhi, Delhi, India 110011 New Delhi Delhi India
2)Principal, Sri Ramakrishna Engineering College (SREC)
(72)**Name of Inventor :**
1)Chandramohan Palanisamy
2)Raghu Raman
3)Chandan Mondal
4)Pradeesh Kumar Dhanaraj
5)Saravanakumar Shanmugam

(57) Abstract :
A method to alleviate blackening in anodized Additive Manufactured AlSi10Mg alloy through heat treatment. This invention presents a method for alleviating blackening in anodized Additive Manufactured (AM) AlSi10Mg alloy through heat treatment processes. The method involves creating AlSi10Mg alloy samples using Direct Metal Laser Sintering with specific parameters, followed by two different heat treatment approaches: Solution Heat Treatment (SHT) at 430°C to 500°C for 0 to 2 hours, followed by artificial aging at room temperature from 0°C to 140°C for 0-9 hours with water cooling. Stress Relieving (SR) at 250°C to 290°C for 0-2 hours, followed by air cooling at room temperature. After heat treatment, the samples undergo a multi-step anodizing process involving caustic soda treatment, washing, nitric acid treatment, and anodizing at specific voltages. Visual inspection reveals that SHT samples appear darker (black), while SR samples appear lighter (grey). The mean intensity of the blackening is measured with Python 3.10 software with an 8-bit grayscale system. It is observed that SHT samples having a high intensity of 36.69 to 44.12 and SR samples having a low intensity of 44.46 to 63.58 of blackening. Microstructure analysis using FESEM characterization shows that SHT samples have a coarser silicon distribution, while SR samples have a finer silicon distribution. The finer silicon distribution and low intensity of blackening were achieved through the SR heat treatment process is found to alleviate the formation of blackening in anodized AM AlSi10Mg alloy. This method addresses the challenge of blackening in anodized AM AlSi10Mg alloy, which is crucial for enhancing the corrosion resistance and effectiveness of components used in the aerospace and defense sector. Figure 4

No. of Pages : 19 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :11/04/2025
(21) Application No.202511035652 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : FAST ACCESS STRATUM SECURITY

(51) International classification	:H04W 12/04, H04W 76/27, H04L 9/40
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, Espoo, 02610, Finland Finland
(72)**Name of Inventor :**
1)KALIRAJA B, Arun
2)ALWAR, Ethiraj
3)KAASALAINEN, Janne Veikko

(57) Abstract :
There are provided techniques for fast establishment of AS security, in particular in connection with redirection or handover of a UE. Such techniques may, 5 for example, comprise that a base station is configured to perform an RRC setup procedure with a UE and to transmit, after having successfully completed the RRC setup procedure, a security key request message to a core network, the security key request message comprising an indication that the base station intends to release the UE immediately and/or that no PDU session is to be established for the UE and/or 10 that setup of radio bearers for the UE is to be withheld. The base station may be further configured to receive, in response to the security key request message, a security key information message from the core network, the security key information message comprising security key information indicating a security key for establishing AS security for the UE. 15 To Be Published With [FIG. 1] 52

No. of Pages : 62 No. of Claims : 22

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :09/04/2025

(21) Application No.202511034652 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : DATA COLLECTION FROM UE VIA USER PLANE

(51) International classification	:H04L 41/16, H04W 24/02, H04W 28/02	(71)**Name of Applicant :** **1)NOKIA TECHNOLOGIES OY** Address of Applicant :Karakaari 7, FI – 02610 Espoo, FINLAND Finland (72)**Name of Inventor :** **1)SIVARAMAKRISHNAN SWAMINATHAN** **2)TEJAS SUBRAMANYA** **3)ZEXIAN LI** **4)ABOLFAZL AMIRI**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No Filing Date	:NA :NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :

Abstract Apparatuses, methods and computer readable storage medium for data collection via a user plane are provided. In a method, a network element transmits, to a user equipment (UE), a configuration message for collecting user plane data for model training. The configuration message comprises information on one or more types of data to be collected, and a first indication that the data collecting is for model training. The network element receives, from a core network (CN) entity, a message for requesting allocation of resources for at least one data traffic session, and carries out the allocation of the resources. The network element receives at least one type of user plane data from the UE via the at least one data traffic session, and processes the received data based on a second indication that the user plane data is for the model training.

No. of Pages : 53 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :09/04/2025
(21) Application No.202511034660 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DATA COLLECTION FROM UE VIA USER PLANE

(51) International classification	:H04L41/16, G06N20/00, H04W24/08, H04W28/02
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, FI – 02610 Espoo, FINLAND Finland
(72)**Name of Inventor :**
1)SIVARAMAKRISHNAN SWAMINATHAN
2)TEJAS SUBRAMANYA
3)ZEXIAN LI
4)ABOLFAZL AMIRI

(57) Abstract :
Abstract Apparatuses, methods and computer readable storage medium for data collection via a user plane are provided. In a method, a user equipment (UE) receives, from a network element, a first indication that collecting of user plane data is for training a machine learning model. The UE carries out the collecting of the user plane data, and transmits, to the network element, at least part of the collected user plane data via at least one data traffic session between the user equipment and a core network entity. The transmission is carried out using the first indication and further comprises a second indication that the user plane data is for the training of the machine learning model

No. of Pages : 53 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :09/04/2025
(21) Application No.202511034727 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : OPTIMIZATION OF GOVERNMENT AMBULANCE ARRIVAL TIME AT ACCIDENT SITES

(51) International classification	:G16H40/00, G16Y40/60, G16Y10/40, G16Y40/10, G08G1/087, G06N3/00, G06N20/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)COER University
Address of Applicant :COER UNIVERSTIY, 7th km Stone Roorkee Haridwar Highway, Roorkee, Distt Haridwar, Uttarakhand, India Roorkee Uttarakhand India
(72)**Name of Inventor :**
1)Dr. Kamal Kapoor
2)Nitin Chand

(57) Abstract :
Optimizing ambulance response time is critical for enhancing survival rates and reducing the severity of injuries following accidents. This document outlines strategies and technologies to minimize the arrival time of government-operated ambulances at accident sites. By integrating predictive analytics, real-time traffic data and resource optimization techniques, this initiative aims to enhance the efficiency of emergency medical services (EMS). The proposed solutions leverage Geographic Information System (GIS)-based routing, IoT-enabled traffic signal prioritization, and robust communication networks to create a streamlined and effective EMS framework.

No. of Pages : 7 No. of Claims : 6

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :10/04/2025

(21) Application No.202511035060 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A System for Tracking Motion of Mobile Robots

(51) International classification	:G05D0001000000, G05B0015020000, B25J0009160000, G06F0003048200, A61B0090000000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)BIRLA INSTITUTE OF TECHNOLOGY AND SCIENCE, PILANI
Address of Applicant :Vidya Vihar, Pilani, Rajasthan - 333031, India Pilani Rajasthan India
(72)**Name of Inventor :**
1)Yuvaraj George
2)Venkata Daseswara Rao Yendluri
3)Abhishek Sarkar

(57) Abstract :
The inventions relate to a system (100) for tracking motion of a mobile robot (102). The system (100) comprises of a chassis (104) for supporting a plurality of wheels (106). A set of markers (108) positioned on the plurality of wheels (106). A plurality of sensors (110) is positioned on the chassis (104) and configured to detect the movement of the set of markers (108). A processor (112) is communicatively coupled to the plurality of sensors (110). The processor (112) receives an input data from the plurality of sensors (110) and computes a motion data including a velocity, position, and orientation of the mobile robot (102) based on the received input data. Then, it determines a control signal to be sent to a motor driving unit (114) based on the computed motion data. The motor driving unit (114) is configured to drive the plurality of wheels (106) based on the control signal received from the processor (112). Figure 3.

No. of Pages : 25 No. of Claims : 11

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :09/04/2025
(21) Application No.202519034719 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : FLEXIBLE FERMENTATION PLATFORM FOR IMPROVED CONVERSION OF CARBON DIOXIDE INTO PRODUCTS

(51) International classification	:C12P 7/06, C12P 7/52, C12P 7/18, C12P 7/56, C12P 7/26
(31) Priority Document No	:63/173262
(32) Priority Date	:09/04/2021
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2022/071641 :08/04/2022
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filed on	:202317066151 :08/04/2022
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)LANZATECH, INC.
Address of Applicant :8045 LAMON AVENUE, SUITE 400, SKOKIE, ILLINOIS 60077, UNITED STATES OF AMERICA U.S.A.
(72)**Name of Inventor :**
1)METZGAR, STEVEN ANDREW
2)KARAKAYA, MUSTAFA MUSK
3)PARIKH, SAURABH HASMUKH
4)CONRADO, ROBERT JOHN

(57) Abstract :
An integrated process and system for the production of at least one gas fermentation product from a gaseous stream has been developed. The disclosure provides improved carbon utilization through both the recycle of a bioreactor tail gas via various different flow schemes and the employment of a CO2 to CO conversion system such as a reverse water gas shift unit and hydrogen separation unit. Recycling of the bioreactor tail gas and employment of a CO2 to CO conversion process provides for favourable H2:CO molar ratios of the feed to the gas fermentation bioreactor(s) for enhanced production of fermentation products.

No. of Pages : 71 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :27/03/2025

(21) Application No.202511029591 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : HAND-HELD METALLIC SHEET BENDING ASSISTIVE DEVICE

(51) International classification	:B21D 5/04, B21D 5/00, B25F 5/00, B70J 54/00, G06V 20/00, B25F 5/02
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Shobhit Institute of Engineering & Technology (Deemed to-be University)
Address of Applicant :NH-58, Dulhera Marg, Modipuram, Meerut-250110, Uttar Pradesh, India. Meerut Uttar Pradesh India
(72)**Name of Inventor :**
1)Dhruv Joshi
2)Vansh Shekhar
3)Rajiv Kumar
4)Mridul Vaish

(57) Abstract :
A hand-held metallic sheet bending assistive device comprises of an elongated telescopically operated frame 101 having a first portion is installed with a bar 102 attached with a curved-shaped member 103 and second portion is attached with a handle 104 to be gripped by a user for holding frame 101, a microphone 105 positioned for enabling user to give voice commands for bending sheet, artificial intelligence-based imaging unit 106 mounted on frame 101 for capturing and detecting position and angle of sheet, a laser projection unit 107 mounted on handle 104 for projecting a laser beam to guide user, a pneumatic actuator 108 installed between said frame 101 and bar 102 to retract for tilting bar 102 towards frame 101, a hinge 109 configured between bar 102 and frame 101 for bending sheet with ease.

No. of Pages : 18 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099333 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ELECTROCHEMICAL DEVICE AND ELECTRIC APPARATUS

(51) International classification	:H01M 50/474, H01M 50/477, H01M 10/0525
(31) Priority Document No	:202410071249.5
(32) Priority Date	:17/01/2024
(33) Name of priority country	:China
(86) International Application No Filing Date	:PCT/CN2024/135817 :29/11/2024
(87) International Publication No	:WO 2025/152630
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)DONGGUAN AMPEREX TECHNOLOGY LIMITED
Address of Applicant :No. 1 Industrial West Road, Songshan Lake High-Tech Industrial Development Zone Dongguan, Guangdong 523000 China
(72)**Name of Inventor :**
1)CHEN, Tengteng
2)DENG, Daolin
3)LI, Xun
4)CHEN, Wen

(57) Abstract :
An electrochemical device (100) and an electric apparatus (1000). The electrochemical device (100) comprises a housing (10), an electrode assembly (20), and a first bonding component (30). The electrode assembly (20) is arranged in the housing (10), and the electrode assembly (20) comprises: a first side face (21) and a second side face (22), which are opposite each other in a first direction, and a third side face (23) and a fourth side face (24), which are opposite each other in a second direction, the second direction being perpendicular to the first direction. The first bonding component (30) comprises a first side portion (31) and a second side portion (32), which are opposite each other, wherein the first side portion (31) comprises a first bonding area (311), a first non-bonding area (312) and a second bonding area (313), which are sequentially arranged, the first bonding area (311) being bonded to the first side face (21), and the second bonding area (313) being bonded to the second side face (22); and the second side portion (32) comprises a third bonding area (321), the third bonding area (321) being bonded to the housing (10). In the second direction, a projection of the first non-bonding area (312) overlaps the third side face (23), and a projection of the third bonding area (321) overlaps the third side face (23). The first non-bonding area (312) of the first bonding component (30) is not bonded to the third side face (23), which is beneficial to reducing the risk that the electrode assembly (20) is damaged.

No. of Pages : 36 No. of Claims : 11

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026

(21) Application No.202617099334 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AG ALLOY SPUTTERING TARGET WITH LOW OXYGEN CONTENT

(51) International classification	:C23C 14/34, C22C 1/02, C22C 5/06, H01J 37/34
(31) Priority Document No	:24160776.1
(32) Priority Date	:01/03/2024
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:PCT/EP2025/055517 :28/02/2025
(87) International Publication No	:WO 2025/181334
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)MATERION ADVANCED MATERIALS GERMANY GMBH
Address of Applicant :Borsigstraße 10 63755 Alzenau Germany
(72)**Name of Inventor :**
1)KONIETZKA, Uwe
2)SCHLOTT, Martin
3)SIMONS, Christoph

(57) Abstract :
The present invention relates to a sputtering target with low oxygen content. The sputtering target is based on silver (Ag) and comprises a low amount of alloying element(s) selected from Mg, Al, Si, Ca, Sr, Sc, Y, rare earth metals, Ti and Ge and combinations thereof. The present invention also relates to a layer produced with said sputtering target and to a process for the production of the sputtering target.

No. of Pages : 18 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099351 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MEMORY CONSOLIDATION FOR NEURAL NETWORKS WHICH PROCESS MEDIA ELEMENTS

(51) International classification :G06N 3/045
(31) Priority Document No :20240100063
(32) Priority Date :01/02/2024
(33) Name of priority country :Greece
(86) International Application No :PCT/US2025/014194
Filing Date :31/01/2025
(87) International Publication No :WO 2025/166290
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)GDM HOLDING LLC
Address of Applicant :1600 Amphitheatre Parkway Mountain View, California 94043 U.S.A.
(72)**Name of Inventor :**
1)BALAZEVIC, Ivana
2)SHI, Yuge
3)CHAABOUNI, Rahma
4)KOPPULA, Skanda Kumar
5)PAPALAMPIDI, Pinelopi
6)HENAFF, Olivier Jean

(57) Abstract :
A media element processing system, for media elements such as videos, comprises a memory which is augmented by a memory control unit in each of number of steps based on a corresponding current segment of the media element, by adding to it a memory element. The memory element is formed based on an embedding of the current segment of the media element, and comprises a smaller number of values than the embedding of the current segment. The system uses the memory to process current segments of the media element. The data stored in the memory may be informative about a large number of previous segments of the media element, while limiting the required size of the memory and the number of tunable parameters employed in the system.

No. of Pages : 39 No. of Claims : 27

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099100 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MATERIALS AND METHODS FOR DESIGNING, USE AND MANUFACTURE OF IMPROVED BIOLOGIC MOLECULES

(51) International classification :C07K 16/00
(31) Priority Document No :63/625395
(32) Priority Date :26/01/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/IB2025/050810
Filing Date :24/01/2025
(87) International Publication No :WO 2025/158376
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)JANSSEN BIOTECH, INC.
Address of Applicant :800/850 Ridgeview Drive Horsham, Pennsylvania 19044 U.S.A.
(72)**Name of Inventor :**
1)ZWOLAK, Adam
2)TILEGENOVA, Cholpon
3)LIU, Tun
4)ARE, Mahati
5)CARDOSO, Rosa
6)ZHAO, Qian
7)CHEUNG, Wan Cheung
8)ZHAO, Yu
9)REED, John

(57) Abstract :
Materials, methods and systems for making and using improved biologic molecules are provided, such as improved biologic multispecific molecules.

No. of Pages : 342 No. of Claims : 73

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099105 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY PACK AND VEHICLE INCLUDING SAME

(51) International classification	:H01M 50/262, H01M 50/291, H01M 50/24, H01M 50/249, F16B 31/00
(31) Priority Document No	:10-2024-0047651
(32) Priority Date	:08/04/2024
(33) Name of priority country	:Republic of Korea
(86) International Application No Filing Date	:PCT/KR2025/002567 :24/02/2025
(87) International Publication No	:WO 2025/216430
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)LG ENERGY SOLUTION, LTD.
Address of Applicant :Tower1, 108, Yeoui-daero, Yeongdeungpo-Gu, Seoul 07335 Republic of Korea
(72)**Name of Inventor :**
1)PARK, Shin-Young
2)KANG, Jong-Mo
3)MUN, Jeong-O
4)SEO, Sung-Won
5)LEE, Sang-Joon
6)HWANG, Tae-Won

(57) Abstract :
A battery pack according to the present invention comprises: a pack case that has, on the inside, an accommodation space for accommodating a plurality of battery cells, and has an opening part on one side; a pack lid that covers the opening part; a partition frame that is coupled to the pack case to partition the accommodation space; and bolt members, at least a portion of each of which passes through the pack lid, and is coupled to the partition frame and has a first threaded part disposed at the end close to the partition frame, wherein the first threaded part includes a high-temperature-sensitive material that changes in material properties in certain high-temperature environments to weaken the coupling strength between a bolt member and the partition frame.

No. of Pages : 28 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099144 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A SYSTEM AND METHOD FOR CONVEYING AND STORING HARVESTED HAIR FOLLICLES

(51) International classification	:A61B 17/34, A61B 10/02, A61B 90/00, A61F 2/10
(31) Priority Document No	:63/556393
(32) Priority Date	:21/02/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/IL2025/050175 :20/02/2025
(87) International Publication No	:WO 2025/177278
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SPIDER MEDICAL LTD.
Address of Applicant :16 King David Street 2220316 Nahariya Israel
(72)**Name of Inventor :**
1)SAAD, Avraham

(57) Abstract :
Presented herein is a system and method for conveying, sorting, and storing harvested hair follicles. The system and the method allow the insertion of hair follicles intended for transplantation one by one either manually or automatically, taking a picture of the follicle, processing the image, making a decision on how to route the follicle in the specific direction so that it enters the storage matrix with the root down and the end of the hair sticking out (a decision whether to turn the follicle or leave it in the original direction of flow is made), finally to sort it into a desired amount of categories, and to store the follicle in a matrix that is delivered to a surgeon for re-implantation in the patient's scalp. All of these steps are carried out without mechanical contact in to the follicle by using flow paths within a system of tubes and electric valves.

No. of Pages : 17 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099189 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : OVARIAN NEOANTIGENS AND USE THEREOF

(51) International classification :C07K 14/005
(31) Priority Document No :63/625451
(32) Priority Date :26/01/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/IB2025/050710
Filing Date :23/01/2025
(87) International Publication No :WO 2025/158316
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)JANSSEN BIOTECH, INC.
Address of Applicant :800/850 Ridgeview Drive Horsham, Pennsylvania 19044 U.S.A.
(72)**Name of Inventor :**
1)WILKINSON, Patrick
2)SEPULVEDA, Manuel Alejandro
3)MARRO, Brett
4)GROPPO, Rachel
5)DEL VALLE, Jorge Reyes
6)BOS, Rinke
7)JURASZEK, Jaroslaw

(57) Abstract :
Disclosed herein are methods and compositions for treating ovarian cancer. In some embodiments, the compositions comprise polynucleotides encoding polypeptides that are ovarian cancer neoantigen sequences. Also disclosed herein are methods of treating or preventing ovarian cancer in a subject, the methods comprising administering to the subject a treatment regimen comprising Ad26 vector comprising a polynucleotide encoding ovarian neoantigen sequences and self-replicating RNA molecule comprising a polynucleotide encoding ovarian neoantigen sequences.

No. of Pages : 149 No. of Claims : 30

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099195 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : HOT-ROLLED STEEL SHEET

(51) International classification	:C22C 38/00, C22C 38/14, C22C 38/60
(31) Priority Document No	:2024-221029
(32) Priority Date	:17/12/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/006076 :21/02/2025
(87) International Publication No	:WO 2026/133577
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)TOKYO STEEL MANUFACTURING CO., LTD.
Address of Applicant :3-7-1 Kasumigaseki, Chiyoda-ku, Tokyo 1000013 Japan
(72)**Name of Inventor :**
1)HAYASHI, Kazuyuki
2)SAKAEDA, Hiroyuki
3)ODANI, Wataru
4)NISHINA, Hirotaka
5)NAKANISHI, Noriyuki
6)TAKEUCHI, Naoya
7)KOKUMAI, Hiroyuki

(57) Abstract :
A hot-rolled steel sheet of the present invention has a carbon (C) content of 0.005 mass% to 0.20 mass%, a silicon (Si) content of 0.004 mass% to 0.55 mass%, a manganese (Mn) content of 0.07 mass% to 1.65 mass%, a titanium (Ti) content of 0.005 mass% or less, a boron (B) content of 0.0005 mass% or less, and the remainder consists of iron (Fe), aluminum (Al), nitrogen (N), and unavoidable impurities. Furthermore, by setting the nitrogen (N) content to be 0.0065 mass% to 0.0120 mass%, the aluminum (Al) content to be more than 0.070 mass% but at most 0.110 mass%, and the content of solid-solution nitrogen not combined with other components to be 0.0020 mass% or less, it is possible to provide an inexpensive hot-rolled steel sheet with excellent aging resistance.

No. of Pages : 16 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099357 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BLOOD PUMP

(51) International classification	:A61M 60/861, A61M 60/178, A61M 60/232, A61M 60/857
(31) Priority Document No	:2024-012428
(32) Priority Date	:31/01/2024
(33) Name of priority country	:Japan
(86) International Application No	:PCT/JP2025/003202
Filing Date	:31/01/2025
(87) International Publication No	:WO 2025/164766
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)SUN MEDICAL TECHNOLOGY RESEARCH CORPORATION
Address of Applicant :2990, Shiga, Suwa-shi, Nagano 3920012 Japan
(72)**Name of Inventor :**
1)AYUZAWA Kiyoto

(57) Abstract :
A blood pump 10 has a tubular connection part 15 which is provided so as to protrude from a pump case 11 and which has a blood flow passage 20 that communicates a heart 3 with a pump chamber 12. On the distal-end side of the tubular connection part 15, a first cuff 21 is fitted to the tubular connection part 15. On the outer peripheral side surface 15c on the proximal-end side of the tubular connection part 15, an intra-cuff ring 25 is rotatably fitted to a rotating shaft part 15f, and in the intra-cuff ring 25, an annular recessed groove 25a is formed. To this annular recessed groove 25a, a second cuff 22 is fitted. Between the first cuff 21 and the intra-cuff ring 25, a cuff receiving nut 23 is provided which is screwed to the outer peripheral side surface 15c of the tubular connection part 15 while pressing one surface of the second cuff 22. This makes it possible to suppress generation of a blood clot between the heart 3 and the blood pump 10, makes the operation of attaching the blood pump 10 to the heart 3 easier, suppresses deviation of the angle at which to attach the blood pump 10 to the heart 3, and makes it possible to reduce the extent of a pump pocket.

No. of Pages : 41 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099359 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : RETINOID COMPOSITIONS AND METHODS OF USE

(51) International classification	:A61K 31/07, A61K 9/00, A61K 9/10, A61K 9/48, A61K 31/203
(31) Priority Document No	:2024900129
(32) Priority Date	:19/01/2024
(33) Name of priority country	:Australia
(86) International Application No Filing Date	:PCT/IB2025/000029 :17/01/2025
(87) International Publication No	:WO 2025/153898
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GENE COMPANY PTY LTD
Address of Applicant :60 Musk Avenue Kelvin Grove Brisbane, QLD 4059 Australia
(72)**Name of Inventor :**
1)WANG, Cheng, Chi

(57) Abstract :
Described herein are retinoid compositions comprising (a) a retinoid preferably a C20-deuterated vitamin A that inhibits dimerisation to N-retinylidene-N-retinylethanolamine (A2E), (b) a lipid excipient preferably an omega-3 fatty acid comprising eicosapentaenoic acid (EPA) or docosahexaenoic acid (DHA), and (c) a surfactant, wherein the compositions increase the bioavailability of the retinoid in a subject, and methods of using such retinoid compositions for treating eye conditions including macular degeneration.

No. of Pages : 93 No. of Claims : 286

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026

(21) Application No.202617099367 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : FILTERING CONFIGURATION FOR MEASUREMENTS

(51) International classification :H04W 24/10
(31) Priority Document No :20245171
(32) Priority Date :15/02/2024
(33) Name of priority country :Finland
(86) International Application No :PCT/EP2025/052361
Filing Date :30/01/2025
(87) International Publication No :WO 2025/172066
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)PEDERSEN, Klaus Ingemann
2)PARIS, Stefano

(57) Abstract :
According to an example aspect of the present disclosure, there is provided a method for an apparatus, the method comprising receiving, from a wireless network node, a filtering configuration configuring the apparatus to predict, for skipped measurement windows, lower layer outputs for upper layer filtering and predicting, based on the filtering configuration, a lower layer output for a skipped measurement window, wherein the lower layer output is based on at least two measurement windows before the skipped measurement window and performing, based at least on the lower layer output, said upper layer filtering for the skipped measurement window.

No. of Pages : 25 No. of Claims : 19

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099368 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : EARLY INFORMATION DOWNLINK CHANNEL FOR A WIRELESS NETWORK

(51) International classification	:H04L 5/00, H04W 16/14, H04W 48/12, H04W 48/16
(31) Priority Document No	:63/568727
(32) Priority Date	:22/03/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/EP2025/050508 :10/01/2025
(87) International Publication No	:WO 2025/195636
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)HATHIRAMANI, Navin
2)RANTA-AHO, Karri Markus

(57) Abstract :
A method includes receiving, from a cell of a network node, a master information block (MIB) including a first indication of a first physical downlink channel for a system information block (SIB) acquisition and a second indication of a second physical downlink channel; determining, based on the second indication, at least one search space for the second physical downlink channel; monitor the at least one search space for the second physical downlink channel; and receive the second physical downlink channel.

No. of Pages : 37 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026

(21) Application No.202617099370 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CAPACITANCE IN A WIRELESS POWER APPARATUS

(51) International classification :H02J 50/12
(31) Priority Document No :202411013129
(32) Priority Date :23/02/2024
(33) Name of priority country :India
(86) International Application No :PCT/US2025/016749
Filing Date :21/02/2025
(87) International Publication No :WO 2025/179116
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)DOLBY INTELLECTUAL PROPERTY LICENSING, LLC
Address of Applicant :1275 Market Street San Francisco, CA 94103 U.S.A.
(72)**Name of Inventor :**
1)GANESH, Jayanti
2)KANAKASABAI, Viswanathan
3)TATIKONDA, Subbarao
4)BATAGERI, Arpita

(57) Abstract :
This disclosure provides systems, methods and apparatuses for managing capacitance in a wireless power apparatus. The wireless power apparatus can be a type of Power Receiver or Power Transceiver that supports different power transfer modes associated with a variety of power levels such as watts (5W), 15W, or 25W, among other examples. In some aspects, a wireless power apparatus can manage the capacitance of the PRx tank circuit or PTx tank circuit based on one or more factors, such as the power transfer mode, the power level, power profile, a coupling factor, the power transfer direction, or a combination of multiple factors.

No. of Pages : 27 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099714 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM FOR PRODUCING ENERGY AND BIOMETHANE FROM WASTE

(51) International classification :C12M 1/107
(31) Priority Document No :18/584398
(32) Priority Date :22/02/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/IB2025/051767
Filing Date :19/02/2025
(87) International Publication No :WO 2025/177158
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NUOVO PIGNONE S.R.L.
Address of Applicant :Via F. Matteucci 2 50100 Firenze (FI) Italy
(72)**Name of Inventor :**
1)AMIDEI, Simone
2)MANSOURI, Ali
3)MONTENEGRO CAMACHO, Yeidy Sorani

(57) Abstract :
A system for producing energy and methane includes a waste-to-energy unit configured to produce energy and a flue gas by combusting waste and an oxidizing agent having oxygen and a carbon dioxide (CO2) separation unit configured to separate CO2 from the flue gas to provide separated CO2. The system also includes a bio-methanation unit configured to generate methane (CH4), heat, and water using the separated CO2 received from the CO2 separation unit and received hydrogen (H2) gas. The system further includes an electrolyzer coupled to a source of water (H2O) and an electric power source supplying electricity and configured to split the H2O to generate the oxygen used in the oxidizing agent and the H2 gas used in the bio-methanation unit.

No. of Pages : 16 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099728 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BLAST FURNACE AUXILIARY EQUIPMENT AND BLAST FURNACE OPERATION METHOD

(51) International classification	:C21B 5/06, C21B 7/00, C21B 9/00, C21B 9/12, C22B 15/02
(31) Priority Document No	:2024-062421
(32) Priority Date	:08/04/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/010000 :14/03/2025
(87) International Publication No	:WO 2025/216015
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)JFE STEEL CORPORATION
Address of Applicant :2-3, Uchisaiwai-cho 2-chome, Chiyoda-ku, Tokyo 1000011 Japan
(72)**Name of Inventor :**
1)UCHIDA Seiji
2)SETA Takamasa
3)HIROSAWA Toshiyuki
4)MORITA Yuya

(57) Abstract :
In a blast furnace operation method according to the present invention, a blowing gas and a reducing material are blown from a tuyere. The reducing material contains a hydrocarbon-hydrogen mixed gas. The method includes: a step of preheating the hydrocarbon-hydrogen mixed gas to generate a high-temperature hydrocarbon-hydrogen mixed gas; and a step of blowing the high-temperature hydrocarbon-hydrogen mixed gas from the tuyere of the blast furnace. Blast furnace auxiliary equipment according to the present invention comprises: a preheating device that preheats the hydrocarbon-hydrogen mixed gas to generate high-temperature hydrocarbon-hydrogen mixed gas; and a blowing device that has a hydrocarbon-hydrogen mixed gas supply unit which introduces the high-temperature hydrocarbon-hydrogen mixed gas into the tuyere.

No. of Pages : 28 No. of Claims : 11

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026

(21) Application No.202617099744 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMMUNICATION METHOD AND DEVICE

(51) International classification :H04W 74/0833
(31) Priority Document No :202410228375.7
(32) Priority Date :28/02/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2024/126466
Filing Date :22/10/2024
(87) International Publication No :WO 2025/179915
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)HUAWEI TECHNOLOGIES CO., LTD.
Address of Applicant :Huawei Administration Building, Bantian Longgang District Shenzhen, Guangdong 518129 China
(72)**Name of Inventor :**
1)ZHANG, Mengchen
2)SHI, Yulong
3)KUANG, Yiru
4)WANG, Rui

(57) Abstract :
The present application relates to a communication method and device. A first device obtains first indication information, the first indication information indicating one or more of the following: a first duration, used for indicating the latest time for sending first random information in one access opportunity; a first step size, which is a time interval between two access moments within the first duration; or a first number, used for indicating the number of access moments within the first duration. The first device sends the first random information at a first access moment, wherein the first access moment is a moment following the first moment, the first moment is a moment related to the value of a first counter being 0, and the first access moment is determined on the basis of the first indication information. When the first moment is reached, the first device waits for a period of time and then executes transmission, wherein the waiting time is determined on the basis of the first indication information. Thus, the probability of collisions between devices in one access opportunity is reduced, improving the quality of transmission.

No. of Pages : 68 No. of Claims : 26

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :18/08/2026

(21) Application No.202617099751 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : IMAGE ENCODING/DECODING METHOD AND DEVICE, AND RECORDING MEDIUM HAVING BITSTREAM STORED THEREIN

(51) International classification	:H04N 19/61, H04N 19/11, H04N 19/147, H04N 19/70, H04N 19/86
(31) Priority Document No	:10-2024-0026238
(32) Priority Date	:23/02/2024
(33) Name of priority country	:Republic of Korea
(86) International Application No Filing Date	:PCT/KR2025/099308 :06/02/2025
(87) International Publication No	:WO 2025/178438
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)HYUNDAI MOTOR COMPANY
Address of Applicant :12, Heolleung-ro, Seocho-gu Seoul 06797 Republic of Korea
2)KIA CORPORATION
(72)**Name of Inventor :**
1)CHOI, Jungah
2)HEO, Jin
3)PARK, Seung Wook

(57) Abstract :
Provided are an image encoding/decoding method and device, a recording medium having a bitstream stored therein, and a transmission method. The image decoding method comprises the steps of: deriving a transform kernel determination intra prediction mode of the current block; determining a transform kernel of the current block on the basis of the transform kernel determination intra prediction mode; and performing an inverse transformation of the current block on the basis of the transform kernel, wherein the transform kernel determination intra prediction mode can be derived by using an occurrence frequency histogram generated on the basis of an intra prediction mode of a neighboring block of the current block, and the occurrence frequency histogram can be generated by accumulating the intra prediction mode of the neighboring block.

No. of Pages : 59 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099199 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BLOOD PUMP AND CATHETER PUMP ASSEMBLY

(51) International classification	:A61M 60/13, A61M 60/237, A61M 60/416, A61M 60/808, A61M 60/81
(31) Priority Document No	:10 2024 200 694.7
(32) Priority Date	:26/01/2024
(33) Name of priority country	:Germany
(86) International Application No	:PCT/EP2025/051586
Filing Date	:23/01/2025
(87) International Publication No	:WO 2025/157875
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)ABIOMED EUROPE GMBH
Address of Applicant :Neuenhofer Weg 3 52074 Aachen Germany
(72)**Name of Inventor :**
1)SIESS, Thorsten
2)SPANIER, Gerd Bruno

(57) Abstract :
The present invention relates to a blood pump (10) comprising a steering catheter (12) and a pump section (14). The pump section (14) is configured to be placed in a human body and comprises an expandable and collapsible pump housing (20), an expandable and collapsible pump element (22) disposed within the pump housing (20), and an electric motor (32) configured to rotate the pump element (22). The steering catheter (12) comprises a distal end (16) and a proximal end (18), wherein the pump section (14) is coupled to the distal end (16) of the steering catheter (12).The steering catheter (12) further comprises an elongated main body (60) extending between the distal end (16) and the proximal end (18) along a central axis, a working channel (64) at least partially extending within the main body (60) from the proximal end (18) of the steering catheter (12) in a direction of the distal end (16) of the steering catheter (12), the working channel (64) being configured to removably receive a guide catheter (78).

No. of Pages : 34 No. of Claims : 38

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099203 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : FRAGRANCE AND FLAVOR COMPOSITIONS COMPRISING THIENYL ALKANOATE DERIVATIVES

(51) International classification	:A61K 8/30, A61K 8/33, A61K 8/23, A61K 8/18
(31) Priority Document No	:63/624742
(32) Priority Date	:24/01/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/013026 :24/01/2025
(87) International Publication No	:WO 2025/160455
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)OSMO LABS, PBC
Address of Applicant :585 Kapkowski Road Elizabeth, NJ 07201 U.S.A.
(72)**Name of Inventor :**
1)WILTSCHKO, Alexander
2)LAUDAMIEL, Christophe
3)GILBERT, Bradley B.
4)PATRON, Andrew P.
5)AMORELLI, Benjamin

(57) Abstract :
The present application relates to thienyl alkanoates and related compounds, methods of making them, and methods of using them as flavor and fragrance ingredients in food, cosmetic, pharmaceutical, consumer, and other compositions and products.

No. of Pages : 90 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099204 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : INTERLOCKING REFRACTORY BRICKS AND REFRACTORY LAYER STRUCTURES FORMED THEREWITH

(51) International classification	:C21B 7/06, C21B 7/12, C21B 9/06, C21C 5/44, F27B 1/14
(31) Priority Document No	:18/423420
(32) Priority Date	:26/01/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2024/057398 :26/11/2024
(87) International Publication No	:WO 2025/159822
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)HARBISONWALKER INTERNATIONAL HOLDINGS, INC.
Address of Applicant :1305 Cherrington Parkway Suite 100 Moon Township, PA 15108 U.S.A.
(72)**Name of Inventor :**
1)SNOW, Bryn, Christine
2)RICHTER, Tomas
3)WILLIAMS, Thomas, S.

(57) Abstract :
A refractory layer structure includes a plurality of refractory layers stacked on each other. Each of the refractory layers includes refractory bricks. Each of the refractory bricks is formed as a cuboid having a pair of oppositely positioned first diverging sides and a pair of oppositely positioned second diverging sides. The first diverging sides diverge away from each other from a top to a bottom of the refractory bricks. The second diverging sides diverge away from each other from the bottom to the top of the refractory bricks. The first diverging sides and the second diverging sides are connected to each other. Each of the first diverging sides have a first diverging side protrusion projecting from a top surface thereof. Each of the second diverging sides have a second diverging side protrusion projecting from a top surface thereof.

No. of Pages : 15 No. of Claims : 11

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026

(21) Application No.202617099225 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : POWERTRAIN, VEHICLE CONTROLLER AND VEHICLE

(51) International classification :B60K 1/00
(31) Priority Document No :202410142392.9
(32) Priority Date :31/01/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/075492
Filing Date :27/01/2025
(87) International Publication No :WO 2025/162447
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)GEELY AUTOMOBILE RESEARCH INSTITUTE (NINGBO) CO., LTD.
Address of Applicant :No. 818, Binhai 2nd Road, Hangzhou Bay New District Ningbo, Zhejiang 315336 China
2)ZHEJIANG GEELY HOLDING GROUP CO., LTD.
(72)**Name of Inventor :**
1)LIU, Ming
2)DUO, Yonghong

(57) Abstract :
The present application relates to the technical field of vehicles, and provides a powertrain, a vehicle controller and a vehicle. The powertrain comprises a motor, a speed reducer and the controller; the controller comprises a controller shell, and a first control module and a second control module arranged in the controller shell; the first control module comprises a whole vehicle control unit, a motor control unit, a high-voltage battery management unit and a low-voltage battery management unit; the second control module comprises a charging control unit; the controller shell is provided with a first opening and a second opening, the controller shell is further provided with a first sealing cover and a second sealing cover, the first sealing cover is used for opening and closing the first opening, and the second sealing cover is used for opening and closing the second opening, wherein the first opening is opposite to the first control module, and the second opening is opposite to the second control module. According to the present application, parts such as an on-board charger can be safely and conveniently maintained, without colliding with or damaging other electric devices.

No. of Pages : 46 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099378 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVED CONDUCTIVE INK COMPOSITIONS

(51) International classification	:C09D 11/52, C09D 11/037, C09D 11/36, C09D 11/38, H01B 1/22
(31) Priority Document No	:63/622489
(32) Priority Date	:18/01/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/012219 :17/01/2025
(87) International Publication No	:WO 2025/155932
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ELECTRONINKS INCORPORATED
Address of Applicant :7901 East Riverside Dr. Building 1 Unit 150 Austin, Texas 78744 U.S.A.
(72)**Name of Inventor :**
1)WALKER, S. Brett
2)PERERA, K.L. Iresha Sampathi
3)LEE, Scott Soung Jae
4)HOWLADER, Chandan Qumar
5)KOCIAN, Mitchel Chapman

(57) Abstract :
Improved conductive ink compositions are provided. The improved conductive ink compositions include a silver complex formed by mixing a silver carboxylate, specifically a silver decanoate, a cyclic azasilane adhesion promoter, and at least one dissolving agent. The silver carboxylate of the subject ink compositions is decarboxylated at a temperature of 250 °C or less, optionally in the presence of an acid stabilizer or non-acid stabilizer, to form a conductive structure. Methods of making the compositions and methods of forming conductive structures from the compositions, including methods where the disclosed compositions are applied to a substrate by various techniques, are also provided.

No. of Pages : 33 No. of Claims : 65

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026

(21) Application No.202617099379 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TRICYCLIC COMPOUNDS, PREPARATION THEREOF AND THERAPEUTIC USES AS ERK5 INHIBITORS

(51) International classification	:C07D 471/04, C07D 471/14, C07D 491/14, C07D 491/20, A61K 31/437
(31) Priority Document No	:24315016.6
(32) Priority Date	:19/01/2024
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:PCT/EP2025/051206 :17/01/2025
(87) International Publication No	:WO 2025/153712
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SANOFI
Address of Applicant :46 avenue de la Grande Armée 75017 Paris France
(72)**Name of Inventor :**
1)ARRANZ PLAZA, Maria Esther
2)AUGER, Florian Alain
3)BERNARDELLI, Patrick
4)DOMMERGUE, Amélie
5)LOUBOUTIN, Audrey
6)SLOWINSKI, Franck
7)ZHANG, Jidong

(57) Abstract :
Compounds are provided which can inhibit ERK5. Also provided are pharmaceutical compositions and medical uses of the same, including the use in treating or preventing conditions such as cancers. Formula (I)

No. of Pages : 399 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099402 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ASSEMBLY FOR THE TOUCH-PROOF CONTACTING OF A PLURALITY OF BUSBARS WITH A CABLE FEEDTHROUGH

(51) International classification	:H02B 1/21, H02B 1/20
(31) Priority Document No	:10 2024 110 871.1
(32) Priority Date	:18/04/2024
(33) Name of priority country	:Germany
(86) International Application No Filing Date	:PCT/DE2025/100226 :28/02/2025
(87) International Publication No	:WO 2025/218850
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)RITTAL GMBH & CO. KG
Address of Applicant :Auf dem Stützelberg 35745 Herborn Germany
(72)**Name of Inventor :**
1)STURM, Peter
2)GLATZL, Benjamin

(57) Abstract :
The invention relates to an assembly (1) for the touch-proof contacting of a plurality of busbars, wherein the assembly (1) has a touch-protection housing (4) which is made of an electrically insulating material and in which busbars (2) are accommodated so as to be touch-proof. The touch-protection housing has a receiving area (3) for a base (5), which has the busbars (2), and a cover (6) with a flat installation face (9) for busbar adapters (7). The assembly (1) also has at least one single-pole or multi-pole busbar adapter (7) for making electrical contact with at least one of the busbars (2), said busbar adapter being installable on the flat installation face (9), and the base (5) has at least one cable feed-through tunnel (11) which is surrounded by a tunnel wall (10) and extends between opposite longitudinal sides (12, 13) of the touch-protection housing (4). The invention further relates to an electrical installation (100) having at least one assembly (1) according to the invention for a touch-proof contacting of busbars.

No. of Pages : 16 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026

(21) Application No.202617099460 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : PHARMACEUTICAL COMPOSITIONS COMPRISING AZD5305

(51) International classification :A61K 9/20
(31) Priority Document No :24152853.8
(32) Priority Date :19/01/2024
(33) Name of priority country :EPO
(86) International Application No :PCT/EP2025/051126
Filing Date :17/01/2025
(87) International Publication No :WO 2025/153668
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)ASTRAZENECA AB
Address of Applicant :SE-151 85 Södertälje Sweden
(72)**Name of Inventor :**
1)KALARIA, Dhaval R
2)PARISI, Nicola

(57) Abstract :
A pharmaceutical composition comprising: (a) from about 10.0 to about 25.0 wt% AZD5305, or a pharmaceutically acceptable salt thereof; (b) from about 0.5 to about 8.0 wt% of one of more pharmaceutical disintegrants; (c) from about 0.5 to about 2.5 wt% of one or more pharmaceutical lubricants; (d) from about 64.5 to about 74.0 wt% of one or more pharmaceutical diluents, wherein the component weights add up to 100.

No. of Pages : 24 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099490 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ANTISENSE OLIGONUCLEOTIDES FOR THE TREATMENT OF HURLER SYNDROME

(51) International classification	:C12N 15/113, A61K 31/7125
(31) Priority Document No	:63/622296
(32) Priority Date	:18/01/2024
(33) Name of priority country	:U.S.A.
(86) International Application No	:PCT/US2025/012183
Filing Date	:17/01/2025
(87) International Publication No	:WO 2025/155911
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)PROQR THERAPEUTICS II B.V.
Address of Applicant :Zernikedreef 9 2333 CK Leiden Netherlands
2)ELI LILLY AND COMPANY
(72)**Name of Inventor :**
1)VAN SINT FIET, Lenka
2)KEMMEL, Cherie Paige
3)PLATENBURG, Gerardus Johannes
4)SMITH, Ryan Matthew
5)CARMONA, Ellese Marie

(57) Abstract :
The disclosure describes antisense oligonucleotides that are capable of bringing about specific deamination of a target adenosine in a target RNA molecule in a eukaryotic cell into an inosine, wherein said oligonucleotide is for use in the treatment of MPS 1, preferably Hurler syndrome, and more preferably for the deamination of target adenosines that are part of a premature stop codon present in the human IDUA pre-mRNA or IDUA mRNA.

No. of Pages : 92 No. of Claims : 30

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099536 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TARGETED LOW POTENCY IL-12 FC FUSION PROTEINS AND USES THEREOF

(51) International classification	:C07K 16/28, A61K 38/00, A61K 38/20, A61K 39/00, A61P 35/00
(31) Priority Document No	:63/623458
(32) Priority Date	:22/01/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/012449 :21/01/2025
(87) International Publication No	:WO 2025/160083
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)AUDAX BIOSCIENCES PTY. LTD.
Address of Applicant :27 Norwood Crescent Moonee Ponds, Victoria 3039 Australia
(72)**Name of Inventor :**
1)BERRY, Richard
2)HUNTINGTON, Nicholas David
3)HOUSE, Imran Geoffrey
4)CURSONS, Joseph
5)FOROUTAN, Momeneh
6)NIKOLIC, Iva

(57) Abstract :
The present invention is directed to compositions of novel, targeted, low potency IL-12 Fc fusion proteins, as well as methods of making and using such compositions.

No. of Pages : 263 No. of Claims : 419

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026

(21) Application No.202617099754 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : NO-TRANSMIT ZONES FOR UNCREWED AERIAL VEHICLES

(51) International classification :G08G 5/00
(31) Priority Document No :20240100107
(32) Priority Date :16/02/2024
(33) Name of priority country :Greece
(86) International Application No :PCT/EP2024/055390
Filing Date :01/03/2024
(87) International Publication No :WO 2024/260589
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)LENOVO (SINGAPORE) PTE. LTD.
Address of Applicant :151, Lorong Chuan #02-01 New Tech Park Singapore 556741 Singapore
(72)**Name of Inventor :**
1)PATEROMICHELAKIS, Emmanouil
2)KARAMPATSIS, Dimitrios

(57) Abstract :
Various aspects of the present disclosure relate to a network entity for wireless communication, comprising instructions executable by at least one processor to cause the network entity to: obtain at least one indication of at least one expected route of an uncrewed aerial vehicle (UAV); obtain information defining at least one no-transmit zone corresponding to the expected route; provision at least one service parameter associated with the at least one no-transmit zone and an application associated with the UAV; and transmit the at least one service parameter to a second network entity.

No. of Pages : 28 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099755 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : NO-TRANSMIT ZONES FOR UNCREWED AERIAL VEHICLES

(51) International classification	:G01C 21/20, G08G 5/00, H04W 84/06, H04B 7/185
(31) Priority Document No	:20240100108
(32) Priority Date	:16/02/2024
(33) Name of priority country	:Greece
(86) International Application No Filing Date	:PCT/EP2024/055393 :01/03/2024
(87) International Publication No	:WO 2025/021327
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)LENOVO (SINGAPORE) PTE. LTD.
Address of Applicant :151, Lorong Chuan #02-01 New Tech Park Singapore 556741 Singapore
(72)**Name of Inventor :**
1)PATEROMICHELAKIS, Emmanouil
2)KARAMPATSIS, Dimitrios

(57) Abstract :
Various aspects of the present disclosure relate to a UE for wireless communication, the UE being configured to be associated with an uncrewed aerial vehicle (UAV), comprising at least one memory at least one processor coupled with the at least one memory. The at least one processor is configured to cause the UE to: obtain an indication of at least one expected route for a second UE corresponding to a second UAV; obtain information identifying at least one no-transmit zone corresponding to the expected route; and transmit a n indication of a trigger event, associated with the at least one no-transmit zone, to the second UE.

No. of Pages : 28 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099771 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : RECOVERED AND RECLAIMED THERMAL MANAGEMENT FLUID COMPOSITIONS

(51) International classification :C09K 5/04
(31) Priority Document No :63/627419
(32) Priority Date :31/01/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2025/013732
Filing Date :30/01/2025
(87) International Publication No :WO 2025/165956
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)THE CHEMOURS COMPANY FC, LLC
Address of Applicant :1007 Market Street Wilmington, Delaware 19801 U.S.A.
(72)**Name of Inventor :**
1)PENG, Sheng
2)SNYDER, David Matthew
3)BRADLEY, Michael A.
4)ALLGOOD, Charles Clinton

(57) Abstract :
Recovered and reclaimed thermal management fluid compositions, as well as to systems containing the same and processes of thermal management fluid recovery and reclamation, are provided. Thermal management fluid compositions which have been recovered from a heat transfer system, as well as to uses thereof in heat transfer systems, methods of recovery of the same, methods of reclamation of the same, methods of using the same, and storage of the same, are also provided herein.

No. of Pages : 170 No. of Claims : 144

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026

(21) Application No.202617099775 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMPOSITIONS OF AND PROCESSES FOR 3,5,5-TRICHLORO-1,1,1,2,2,6,6,6-OCTAFLUOROHEXANE

(51) International classification	:C12P 1/00, C10N 40/00, C04B 35/00, C12Q 1/00, C04B 35/117
(31) Priority Document No	:63/623388
(32) Priority Date	:22/01/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/012368 :21/01/2025
(87) International Publication No	:WO 2025/160049
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)THE CHEMOURS COMPANY FC, LLC
Address of Applicant :1007 Market Street Wilmington, Delaware 19801 U.S.A.
(72)**Name of Inventor :**
1)JACKSON, Andrew
2)PETROV, Viacheslav A.
3)KRISTJANSDOTTIR, Sigridur Soley
4)HAGEDORN, John Joseph

(57) Abstract :
The present application relates to compositions comprising 3,5,5-trichloro-1,1,1,2,2,6,6,6-octafluorohexane (HCFC-548mafd, CF3CF2CHClCH2CCl2CF3), processes of preparing such compositions and their use.

No. of Pages : 24 No. of Claims : 71

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099777 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : RECOVERED AND RECLAIMED THERMAL MANAGEMENT FLUID COMPOSITIONS

(51) International classification :C09K 5/04
(31) Priority Document No :63/627393
(32) Priority Date :31/01/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2025/013735
Filing Date :30/01/2025
(87) International Publication No :WO 2025/165958
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)THE CHEMOURS COMPANY FC, LLC
Address of Applicant :1007 Market Street Wilmington, Delaware 19801 U.S.A.
(72)**Name of Inventor :**
1)PENG, Sheng
2)SNYDER, David Matthew
3)BRADLEY, Michael A.
4)ALLGOOD, Charles Clinton

(57) Abstract :
Recovered and reclaimed thermal management fluid compositions, as well as to systems containing the same and processes of thermal management fluid recovery and reclamation, are provided. Thermal management fluid compositions which have been recovered from a heat transfer system, as well as to uses thereof in heat transfer systems, methods of recovery of the same, methods of reclamation of the same, methods of using the same, and storage of the same, are also provided herein.

No. of Pages : 203 No. of Claims : 88

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099778 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : RECLAMATION PROCESSES INCLUDING AZEOTROPIC AND OTHER CLOSE-BOILING THERMAL FLUIDS

(51) International classification	:C07C 4/04, C07C 4/16, C10G 55/04, C10G 51/04, B09C 1/06
(31) Priority Document No	:63/627429
(32) Priority Date	:31/01/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2024/048757 :27/09/2024
(87) International Publication No	:WO 2025/165411
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)THE CHEMOURS COMPANY FC, LLC
Address of Applicant :1007 Market Street Wilmington, Delaware 19801 U.S.A.
(72)**Name of Inventor :**
1)PENG, Sheng
2)GEIGER, Samuel Emerson

(57) Abstract :
A process of thermal fluid reclamation includes collecting a recovered thermal fluid including a plurality of refrigerant compounds. The process also includes testing the collected recovered thermal fluid and validating that the thermal fluid has greater than 99.5 wt% organic purity. The process further includes distilling the collected recovered thermal fluid to form at least one distillate including a first refrigerant compound and a second refrigerant compound of the plurality of refrigerant compounds as an azeotropic, near-azeotrope, or close-boiling reclaimed thermal fluid. The process yet further includes supplying the azeotropic, near-azeotrope, or close-boiling reclaimed thermal fluid for use in a heat transfer system or for formation of a thermal fluid product. In some cases, distilling the collected recovered thermal fluid also forms a distillate including a third refrigerant compound of the plurality of refrigerant compounds as a neat reclaimed thermal fluid.

No. of Pages : 54 No. of Claims : 47

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026

(21) Application No.202617099228 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SUGAR CANE HARVESTER

(51) International classification :A01D 45/10
(31) Priority Document No :2024-028854
(32) Priority Date :28/02/2024
(33) Name of priority country :Japan
(86) International Application No :PCT/JP2024/045441
Filing Date :23/12/2024
(87) International Publication No :WO 2025/182270
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)KUBOTA CORPORATION
Address of Applicant :2-47, Shikitsuhigashi 1-chome, Naniwa-ku, Osaka-shi, Osaka 5568601 Japan
(72)**Name of Inventor :**
1)OKU Takamasa

(57) Abstract :
The present invention is provided with: front wheels for supporting the front part of a machine body; rear wheels 2 for supporting the rear part of the machine body; a travel drive mechanism 38 for driving the rear wheels 2; and a support frame 40 for supporting the travel drive mechanism 38. The support frame 40 is provided with a first rear-upwardly extending part 40e positioned to the rear of the axle of the rear wheels 2 and having a bottom surface formed in a rear-upwardly extending shape.

No. of Pages : 18 No. of Claims : 7

(12) PATENT APPLICATION PUBLICATION
(21) Application No.202617099229 A
(19) INDIA
(22) Date of filing of Application :17/08/2026
(43) Publication Date : 06/11/2026

(54) Title of the invention : CHECKING ASSEMBLY AND METHOD FOR CHECKING THE OUTLINE OF A SURFACE OF AN OBJECT

(51) International classification	:G01B 11/00, G01B 7/02, G01B 11/24, G01B 7/28
(31) Priority Document No	:102024000003541
(32) Priority Date	:20/02/2024
(33) Name of priority country	:Italy
(86) International Application No Filing Date	:PCT/IB2025/051750 :19/02/2025
(87) International Publication No	:WO 2025/177152
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)MARPOSS SOCIETA' PER AZIONI
Address of Applicant :Via Saliceto, 13 40010 BENTIVOGLIO (BO) Italy
(72)**Name of Inventor :**
1)LOTTI, Mirko
2)TREVISANI, Luca
3)BARUCHELLO, Roberto

(57) Abstract :
Checking assembly (1) and method for checking the outline of a surface (2') of an object (2). The following are included: a support (3) which is configured to support and reference the object; a reference element (4) which defines a reference surface (4') placed in a known position; a measuring head (6) with at least one contactless sensor (8) configured to detect at each acquisition the position of a point (P1) of the surface of the object, and the position of a corresponding point (P2) of the reference surface; a displacement system (5) which is configured to support and displace the measuring head on the surface of the object; and a processing unit (7) which is configured to check the outline of the surface of the object according to the position of the detected points of the surface of the object and of the reference surface.

No. of Pages : 13 No. of Claims : 22

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099236 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ROTARY CAN BEADING APPARATUS

(51) International classification	:B21D 51/26, B21D 51/46, B21D 51/10, H01M 50/224, H01M 50/202
(31) Priority Document No	:10-2024-0012512
(32) Priority Date	:26/01/2024
(33) Name of priority country	:Republic of Korea
(86) International Application No Filing Date	:PCT/KR2025/000427 :08/01/2025
(87) International Publication No	:WO 2025/159407
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)LG ENERGY SOLUTION, LTD.
Address of Applicant :Tower1, 108, yeoui-daero Yeongdeungpo-gu Seoul 07335 Republic of Korea
(72)**Name of Inventor :**
1)KIM, Taeheon
2)CHO, Haeyoun
3)SHIM, Kyuhun
4)LEE, Junyoung
5)KIM, Daehyun

(57) Abstract :
Provided is a rotary-type can beading apparatus enabling the smooth cooling of a spindle shaft rotating at a high speed, thereby enabling the prevention of a processing error due to the thermal expansion of the shaft. A spindle of the rotary can beading apparatus comprises: a case provided with a first hollow portion extending in an axial direction; a housing received in the first hollow portion so as to be rotatable with respect to the case, and provided with a second hollow portion having a diameter smaller than that of the case and extending in the axial direction; and a shaft rotationally constrained with the housing while extending in the axial direction so as to be slidable in the axial direction with respect to the housing. The housing has installed thereon a plurality of fan blades protruding radially outward from an outer circumferential surface and extending in the vertical direction, and arranged so as to be spaced apart along the circumferential direction.

No. of Pages : 21 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099267 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHODS AND COMPOSITIONS TO ADMINISTER THERAPEUTICS TO SOFT TISSUE SURFACES

(51) International classification	:A61K 9/70, A61L 27/36, B32B 5/02
(31) Priority Document No	:63/551400
(32) Priority Date	:08/02/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/014512 :04/02/2025
(87) International Publication No	:WO 2025/170943
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)INTEGRAL BIOSYSTEMS LLC
Address of Applicant :23 Crosby Drive Suite 100A Bedford, MA 01730 U.S.A.
(72)**Name of Inventor :**
1)BARMAN, Shikha, P.
2)WARD, Kevin
3)BHARDWAJ, Akshita
4)STANCZAK, Sagan
5)GUERRERO, Ivan

(57) Abstract :
A dry drug delivery system comprising a middle layer encased in two outer layers, the middle layer and the two outer layers each comprising a mixture of electrospun fibers. Also disclosed is a water-dissolvable dry device containing a physical mixture of a first fiber and a second fiber in which the first fiber and the second fiber are configured to react with each other and with a biological tissue upon hydration, and the device transforms into a hydrogel upon contact with the biological tissue. Further provided is a method for delivering a bioactive substance to a soft tissue using the system or device.

No. of Pages : 100 No. of Claims : 26

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099278 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SOLID ELECTROLYTE AND ELECTRODE FOR A SOLID-STATE BATTERY COMPRISING FUNCTIONAL FILLERS AND DISPERSING AGENTS, AND METHODS FOR PRODUCING THE SAME

(51) International classification :H01M 10/056
(31) Priority Document No :24160807.4
(32) Priority Date :01/03/2024
(33) Name of priority country :EPO
(86) International Application No :PCT/EP2025/055437
Filing Date :28/02/2025
(87) International Publication No :WO 2025/181294
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)SOLITHOR
Address of Applicant :Ondernemerslaan 5429 3800 Sint-Truiden Belgium
2)IMEC VZW
(72)**Name of Inventor :**
1)ALKARMO, Walid
2)BARDE, Fanny Jeanne Julie

(57) Abstract :
The technology of the present invention generally relates to the field of power storage devices, and more specifically to a clay mineral modified solid electrolyte comprising a polyphosphate-based dispersing agent, electrodes, and methods for producing the same. In an aspect of the invention, the method comprises the steps of: mixing an alkoxide compound selected from the group consisting of silica alkoxide, alumina alkoxide, zirconium alkoxide, and mixtures thereof; a polyether compound comprising two end groups of which at least one end group is a functional end group selected from the group consisting of alkoxysilane, alkoxy aluminium, alkoxy zirconium, and combinations thereof; an ionically conductive compound, a metal salt, clay mineral particles, a polyphosphate-based dispersing agent, and a solvent to form a liquid mixture; causing gelation of the liquid mixture to form a gel mixture; and drying and/or ageing the gel mixture to form a solid electrolyte.

No. of Pages : 46 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099540 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DETECTION OF LIPOARABINOMANNAN AND HOST BIOMARKERS TO DIAGNOSE TUBERCULOSIS

(51) International classification	:A61K 39/04, A61P 31/06, E21D 13/02, F23B 90/00, C12R 1/32
(31) Priority Document No	:2401340.1
(32) Priority Date	:01/02/2024
(33) Name of priority country	:U.K.
(86) International Application No Filing Date	:PCT/IB2025/051054 :31/01/2025
(87) International Publication No	:WO 2025/163571
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)UNIVERSITY OF CAPE TOWN
Address of Applicant :Bremner Building Lovers' Walk Rondebosch 7701 Cape Town South Africa
2)ANTRUM BIOTECH PROPRIETARY LIMITED
(72)**Name of Inventor :**
1)DHEDA, Keertan Unkha Jairam
2)RANDALL, Philippa Jane

(57) Abstract :
The present invention relates to methods for diagnosing a Mycobacterium tuberculosis (M. tb) infection in a subject. The methods comprise detecting the presence of at least one host biomarker in a sample from the subject and simultaneously detecting the presence of at least one M. tb biomarker in the same sample. The presence of the at least one host biomarker together with the presence of the at least one M. tb biomarker indicates the presence of M. tb infection in the subject. The invention also relates to kits which incorporate simultaneously detecting the presence of host biomarkers and M. tb biomarkers in a sample from a subject.

No. of Pages : 19 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099551 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : GLYCOL COMPOSITIONS

(51) International classification	:C07C 59/06, C11D 1/72, C11D 1/74, A61K 31/25, C08L 19/00
(31) Priority Document No	:20245335
(32) Priority Date	:25/03/2024
(33) Name of priority country	:Finland
(86) International Application No Filing Date	:PCT/EP2025/057503 :19/03/2025
(87) International Publication No	:WO 2025/201988
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)UPM-KYMMENE CORPORATION
Address of Applicant :Alvar Aallon katu 1 00100 Helsinki Finland
(72)**Name of Inventor :**
1)FUNTAN, Sebastian
2)GEBAUER, Konrad
3)KAJANTO, Isko
4)RÖGER, Peter

(57) Abstract :
The present disclosure provides a composition comprising monopropylene glycol, monoethylene glycol, 1,2-butanediol, 2,3-pentanediol and water. The compositions of the disclosure have desirable properties and can be used as a low carbon footprint alternative to fossil-based glycol compositions in various applications.

No. of Pages : 28 No. of Claims : 22

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :18/08/2026

(21) Application No.202617099553 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD FOR PRODUCING LITHIUM-BASED POLYANION PARTICLES FOR POSITIVE ELECTRODE ACTIVE MATERIAL OF LITHIUM-ION SECONDARY BATTERY

(51) International classification	:H01M 10/54, H01M 4/36, H01M 4/58
(31) Priority Document No	:2024-018967
(32) Priority Date	:09/02/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/003401 :03/02/2025
(87) International Publication No	:WO 2025/169875
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)TAIHEIYO CEMENT CORPORATION
Address of Applicant :1-1-1, Koishikawa, Bunkyo-ku, Tokyo 1128503 Japan
(72)**Name of Inventor :**
1)YOKOYAMA, Ayumi
2)IKEGAMI, Jun
3)OGAMI, Takaaki

(57) Abstract :
The present invention pertains to a method for manufacturing lithium-based polyanion particles for a positive electrode active material of a lithium-ion secondary battery. The method is highly safe and provides simplified steps as a process for regenerating used lithium-ion batteries. Specifically, the present invention is a method for producing lithium-based polyanion particles for a positive electrode active material of a lithium-ion secondary battery, the method using a powder (X) that contains degraded lithium-based polyanion particles (A') and that is obtained from a used lithium ion secondary battery constituted by a positive electrode containing lithium-based polyanion particles (A) that carry carbons. The method does not use a reducing agent and comprises: a step (I) for mixing the powder (X) and a lithium source (Y) to obtain slurry water I; a step (II) for adjusting the pH of the slurry water I that has been obtained to 9-14 to obtain slurry water II; and a step (III) for subjecting the slurry water II that has been obtained to a heating process at a temperature of at least 30°C but lower than 200°C for 3 to 5 hours. The lithium-based polyanion particles (A) are represented by formula (A): LiaMnbFecMxPO4, and the degraded lithium-based polyanion particles (A') are represented by formula (A), where the molar ratio of Li to P, which is Li/P, is at least 0.3 but less than 1.

No. of Pages : 41 No. of Claims : 6

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026

(21) Application No.202617099555 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : THERMOPLASTIC POLYURETHANE MULTIFILAMENT YARN FOR A TEXTILE PRODUCT

(51) International classification	:D04H 3/14, D04H 5/06, C09J 175/04, C09D 175/04, C08L 75/04
(31) Priority Document No	:24157428.4
(32) Priority Date	:13/02/2024
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:PCT/EP2025/052923 :05/02/2025
(87) International Publication No	:WO 2025/172128
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)HUNTSMAN INTERNATIONAL LLC
Address of Applicant :10003 Woodloch Forest Drive The Woodlands, Texas 77380 U.S.A.
(72)**Name of Inventor :**
1)KIEWIDT, Ann-Christin
2)MICHEL, Olaf
3)GIANNINI, Giacomo
4)VERBEKE, Hugo

(57) Abstract :
The present disclosure provides a thermoplastic polyurethane multifilament yarn for a textile product, wherein the thermoplastic polyurethane multifilament yarn is produced from a thermoplastic polyurethane material comprising: (v) a thermoplastic polyurethane component; (vi) a polystyrene component; (vii) an ultraviolet absorber; and (viii) a hindered amine light stabilizer, wherein the polystyrene component is present in an amount of from about 5 wt% to about 20 wt%, based upon the total weight of the thermoplastic polyurethane material.

No. of Pages : 24 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099556 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY PACK AND VEHICLE INCLUDING SAME

(51) International classification	:H01M 50/383, H01M 50/367, H01M 50/262, H01M 50/317, H01M 50/289
(31) Priority Document No	:10-2024-0050781
(32) Priority Date	:16/04/2024
(33) Name of priority country	:Republic of Korea
(86) International Application No Filing Date	:PCT/KR2025/000518 :09/01/2025
(87) International Publication No	:WO 2025/220846
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)LG ENERGY SOLUTION, LTD.
Address of Applicant :Tower1, 108, Yeoui-daero, Yeongdeungpo-Gu, Seoul 07335 Republic of Korea
(72)**Name of Inventor :**
1)HWANG, Tae-Won
2)KANG, Jong-Mo
3)MUN, Jeong-O
4)PARK, Shin-Young
5)SEO, Sung-Won
6)LEE, Sang-Joon

(57) Abstract :
Disclosed are a battery pack and a vehicle including same. The battery pack according to an embodiment of the present invention includes: a plurality of battery modules, each having a plurality of stacked battery cells; a pack case in which the plurality of battery modules are accommodated; and a fastening member fastening the pack case, wherein the fastening member has at least a part thereof coupled to the pack case and configured to break when the pressure inside the pack case increases.

No. of Pages : 18 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099310 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : INTEGRAL AND FULLY ENCLOSED RECIPROCATING ENGINE-COMPRESSOR ASSEMBLY

(51) International classification	:F04B 9/125, F04B 9/133, F04B 53/16, F04B 9/123, F04B 9/129
(31) Priority Document No	:102024000003484
(32) Priority Date	:19/02/2024
(33) Name of priority country	:Italy
(86) International Application No	:PCT/EP2025/053663
Filing Date	:12/02/2025
(87) International Publication No	:WO 2025/176523
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)NUOVO PIGNONE S.R.L.
Address of Applicant :Via F. Matteucci 2 50100 Firenze (FI) Italy
(72)**Name of Inventor :**
1)BASSANI, Simone

(57) Abstract :
An integral and fully enclosed reciprocating engine-compressor assembly is disclosed. The assembly comprises - one or more compressor enclosed spaces (10) configured to receive the gas to be compressed, hold the gas during compression and release the gas after compression; - one or more compressor pistons (15) configured to move in alternating motion within the compressor enclosed spaces (10); - one or more engine enclosed spaces (20) configured to receive a compressed 10 motion gas, hold the motion gas during expansion of the motion gas and release the motion gas after expansion; - one or more engine pistons (25) configured to move in alternating motion within the engine enclosed spaces (20); - the engine pistons (25) being integral with the compressor pistons (15). In particular, the gas to be compressed is the same as the motion gas and the one or more compressor enclosed spaces (10) and the one or more engine enclosed spaces (20) are configured as an integral and fully enclosed space.

No. of Pages : 14 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099325 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : STORAGE BODY FOR UNDERPANTS-TYPE ABSORBENT ARTICLES

(51) International classification	:B65D 85/07, A61F 13/15, A61F 13/49, A61F 13/53, A61F 13/496
(31) Priority Document No	:2024-048787
(32) Priority Date	:25/03/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/011457 :24/03/2025
(87) International Publication No	:WO 2025/205607
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)UNICHARM CORPORATION
Address of Applicant :182, Shimobun, Kinsei-cho, Shikokuchuo-City, Ehime 7990111 Japan
(72)**Name of Inventor :**
1)KATO, Nobuyuki
2)SUZUKI, Kenta
3)MUKAI, Hirotomo
4)UTSUNOMIYA, Hideto
5)NARA, Yuki

(57) Abstract :
This storage body for underpants-type absorbent articles has a plurality of underpants-type absorbent articles and a storage member. The underpants-type absorbent articles each have a pair of waist parts, a crotch part, and a crotch elastic member that is attached to the lateral-direction central portion of the crotch part using an adhesive and is capable of expanding and contracting in the vertical direction. In the waist parts, a plurality of waist elastic members that are capable of expanding and contracting in the lateral direction are provided at intervals in the vertical direction between a first sheet and a second sheet joined by a plurality of joining parts. Each of the waist elastic members is sandwiched between two joining parts that are adjacent in the vertical direction, from among the plurality of joining parts, in a state of being laterally contracted, whereby the vertical-direction positions of the waist elastic members with respect to the first sheet and the second sheet are regulated, and the vertical-direction upper-end sections of the waist parts are folded back in an accommodated state; the plurality of underpants-type absorbent articles are compressed in a state of being overlapped in the thickness direction; and the underpants-type absorbent article is such that the distance from the upper end of the waist parts to the lower end of the crotch part at the lateral-direction central position is equal to or less than the average thickness of the crotch part.

No. of Pages : 54 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099328 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MOLECULES FOR DETECTION OF BIOMARKERS IN BODILY EMISSIONS

(51) International classification	:G01N 33/52, A61B 5/00, A61F 13/15, G01N 33/543, A61B 10/00
(31) Priority Document No	:63/548651
(32) Priority Date	:01/02/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/IB2025/051017 :30/01/2025
(87) International Publication No	:WO 2025/163544
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)OUTSENSE DIAGNOSTICS LTD.
Address of Applicant :7 HaBarzel Street 4791011 Tel Aviv Israel
(72)**Name of Inventor :**
1)KAPP-BARNEA, Yaara
2)HADASSI, Guy

(57) Abstract :
Apparatus and methods are described for use with a bodily emission of a subject and a toilet bowl (23) containing water. A plurality of molecules (27) are disposed on a substrate (26), each of the molecules comprising an epitope (29) that is configured to target a biomarker and a color reporter molecule (31) conjugated to the epitope (29). The color reporter molecule is configured to undergo a color change from a first color to a second color in response to being in reactive proximity with the biomarker within the water within the toilet bowl (23). Other applications are also described.

No. of Pages : 22 No. of Claims : 47

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099330 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : INFORMATION TRANSMISSION METHOD AND APPARATUS, AND STORAGE MEDIUM

(51) International classification :H04W 36/08
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :PCT/CN2024/073732
Filing Date :23/01/2024
(87) International Publication No :WO 2025/156130
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)BEIJING XIAOMI MOBILE SOFTWARE CO., LTD.
Address of Applicant :No.018, Floor 8, Building 6, Yard 33, Middle Xierqi Road, Haidian District Beijing 100085 China
(72)**Name of Inventor :**
1)LI, Xiaolong

(57) Abstract :
The present disclosure provides an information transmission method and apparatus, and a storage medium. The method comprises: broadcasting a system message, wherein the system message is used for providing new radio non-terrestrial network communication (NR NTN) neighbor cell information, and the NR NTN neighbor cell information is used by a terminal for cell reselection. The present disclosure achieves the objective of reselection from E-UTRAN TN to NR NTN, and improves the availability of NTN communication.

No. of Pages : 42 No. of Claims : 21

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099583 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BOPP CAPACITOR FILM WITH PECULIAR ROUGHNESS STATISTICS

(51) International classification	:D01F 6/06, B29C 55/12, B29C 55/26, B05D 5/02, F16H 15/16
(31) Priority Document No	:24152834.8
(32) Priority Date	:19/01/2024
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:PCT/EP2025/050864 :15/01/2025
(87) International Publication No	:WO 2025/153523
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)BOREALIS GMBH
Address of Applicant :Trabrennstrasse 6-8 1020 Wien Austria
(72)**Name of Inventor :**
1)GLOGER, Dietrich
2)JERABEK, Michael
3)TORRES, Juan

(57) Abstract :
The present invention provides a biaxially oriented polypropylene (BOPP) film for capacitor, which has a peculiar surface roughness derived from fiber-like supramolecular structures (peaks) on a surface thereof, which show local variations in thickness that additionally cause height deviations (outlier peaks), thereby showing a unique surface roughness statistics.

No. of Pages : 37 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026

(21) Application No.202617099589 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CONCENTRATES FOR USE IN AQUEOUS COMPOSITIONS

(51) International classification	:C23F 1/14, G21C 3/46, C09K 8/04, G21C 19/46, B01F 101/24
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:PCT/GB2024/050484 :21/02/2024
(87) International Publication No	:WO 2025/176967
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)PURDY & FIGG LTD
Address of Applicant :9 Heron Business Park Hemel Hempstead Hertfordshire HP2 7FW U.K.
(72)**Name of Inventor :**
1)SLASTANOVA, Dr Anna

(57) Abstract :
The present invention relates to concentrates for use in aqueous cleaning compositions, aqueous cleaning compositions containing said concentrates, processes for preparing said compositions, and non-therapeutic uses of the concentrates and compositions described herein.

No. of Pages : 48 No. of Claims : 36

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099598 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : STAINLESS STEEL MATERIAL FOR SOLID OXIDE WATER ELECTROLYSIS

(51) International classification	:C10J 3/00, G01F 1/76, G07F 15/12, B65B 1/00, F16F 9/30
(31) Priority Document No	:2024-063556
(32) Priority Date	:10/04/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/013015 :28/03/2025
(87) International Publication No	:WO 2025/216105
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NIPPON STEEL CORPORATION
Address of Applicant :6-1, Marunouchi 2-chome, Chiyoda-ku, Tokyo 1008071 Japan
(72)**Name of Inventor :**
1)MATSUMOTO,Mitsuki
2)HATANO,Masaharu

(57) Abstract :
Provided is a stainless steel material for solid oxide water electrolysis, which contains, on a mass basis, 0.030% or less of C, 1.6% to 3.5% of Si, 0.10% to 1.00% of Mn, 0.050% or less of P, 0.0030% or less of S, 16.0% to 21.0% of Cr, 1.00% or less of Al, 0.030% or less of N, 1.00% or less of Nb, 1.00% or less of Ti, 1.00% or less of Ni, and 1.00% or less of Cu, with the balance being made up of Fe and impurities.

No. of Pages : 31 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099599 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY MODULE, AND BATTERY PACK AND VEHICLE COMPRISING SAME

(51) International classification	:H01M 50/383, H01M 10/658, H01M 10/625, H01M 50/367, H01M 50/249
(31) Priority Document No	:10-2024-0049116
(32) Priority Date	:12/04/2024
(33) Name of priority country	:Republic of Korea
(86) International Application No Filing Date	:PCT/KR2025/003663 :21/03/2025
(87) International Publication No	:WO 2025/216451
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)LG ENERGY SOLUTION, LTD.
Address of Applicant :Tower1, 108, Yeoui-daero, Yeongdeungpo-Gu, Seoul 07335 Republic of Korea
(72)**Name of Inventor :**
1)JANG, Sung-Hwan
2)KIM, Gwan-Woo
3)KIM, Jae-Wook

(57) Abstract :
The present invention relates to a battery module which is accommodated in a pack case, the battery module comprising: a plurality of battery cells; and a module case accommodating the plurality of battery cells in an inner space and having a protrusion part configured to protrude outward toward the inner surface of the pack case.

No. of Pages : 36 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099605 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A BED ASSEMBLY

(51) International classification :A47C 17/86
(31) Priority Document No :2401080.3
(32) Priority Date :26/01/2024
(33) Name of priority country :U.K.
(86) International Application No :PCT/GB2025/050142
Filing Date :24/01/2025
(87) International Publication No :WO 2025/158165
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)ASHLEY FURNITURE INDUSTRIES, LLC
Address of Applicant :One Ashley Way Arcadia, WI 54612 U.S.A.
(72)**Name of Inventor :**
1)ROBERTSON, Dale
2)BROWN, Paul

(57) Abstract :
A bed assembly (10) comprising a bed (12) and a bed storage assembly (14), the bed storage assembly (14) comprises a storage compartment (16), in which the storage compartment (16)) comprises a first storage compartment (16) and a second storage compartment (18), in which the first storage compartment (16) and the second storage compartment (18) are simultaneously movable in a longitudinal direction (X) relative to the bed (12), and the first storage compartment (16) is movable relative to the second storage compartment (18) in a lateral direction (Z).

No. of Pages : 12 No. of Claims : 21

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099620 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ORGANIC COMPOUNDS COMPRISING HYDROPHILIC GROUPS, SUCH AS FATTY ACIDS AND ALCOHOLS FOR THE SURFACE FINISHING OF OBJECTS

(51) International classification :C25F 3/16
(31) Priority Document No :24382101.4
(32) Priority Date :31/01/2024
(33) Name of priority country :EPO
(86) International Application No :PCT/EP2025/052440
Filing Date :30/01/2025
(87) International Publication No :WO 2025/163093
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)DRYLYTE, S.L.
Address of Applicant :C/ Salvador Alarma nº 16 08035 Barcelona Spain
(72)**Name of Inventor :**
1)NISTAL I CUNI, Guillem
2)KISS CID, Adam Uriel
3)FÀBREGAS FERNANDEZ, Jordi
4)SARSANEDAS GIMPERA, Marc

(57) Abstract :
The present disclosure relates to the field of object surface finishing. More particularly, the disclosure relates to methods for surface finishing of objects and objects with surfaces finished with such methods. More in particular, the present disclosure relates to the use of organic compounds comprising hydrophilic groups for the surface finishing of objects, in particular using electrically conductive particles. Organic compounds comprising hydrophilic groups may be selected from organic compounds comprising carboxyl groups (e.g., fatty acids); hydroxyl groups (e.g., alcohols); sulfonic, sulfate, sulfone or thiol groups; nitro or nitrate groups; phosphate groups; and/or amine groups.

No. of Pages : 39 No. of Claims : 22

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026

(21) Application No.202617099623 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A DIFFERENTIAL ASSEMBLY

(51) International classification :F16H 48/11
(31) Priority Document No :63/557153
(32) Priority Date :23/02/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/IB2025/051913
Filing Date :21/02/2025
(87) International Publication No :WO 2025/177246
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)EATON INTELLIGENT POWER LIMITED
Address of Applicant :30 Pembroke Road Dublin 4, D04 Y0C2 Ireland
(72)**Name of Inventor :**
1)OESCH, Jeffrey
2)HILLMAN, Chad

(57) Abstract :
A differential assembly includes an axle shaft retainer configured to mount within the retainer passage of the differential case. An example axle shaft retainer includes: a spacer disposed at a first end of a stem and a mounting arm disposed at a second end of the stem. The axle shaft retainer attaches to the differential case using the mounting arm. In an example, the axle shaft retainer is cantilevered off the differential case using the mounting arm.

No. of Pages : 8 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :08/04/2025

(21) Application No.202511034205 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Advanced Computational Models for Multi-Domain Problem Solving in Engineering and Finance

(51) International classification	:G06Q 10/04, G06Q 40/06, G06N 20/00, G06F 17/18, G06N 5/02
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Amit Kumar Jha
Address of Applicant :Palam, New Delhi 110045 New Delhi Delhi India
(72)**Name of Inventor :**
1)Rupesh Kumar Jha
2)Dr. Shambhu Kumar Singh
3)Mr. Aishwarya Shekhar
4)Sonal Kumar
5)Dr Rahmuddin Miyan
6)Gaurav Kumar
7)Dr. Vivekanand Kumar
8)Prof. Sriram Yadav

(57) Abstract :
This invention proposes advanced computational models tailored for addressing complex multi-domain problems in engineering and finance. By leveraging a combination of algorithmic frameworks, data processing techniques, and domain-specific modelling, the approach aims to enhance problem-solving capabilities in environments characterized by highdimensional data, dynamic conditions, and interdisciplinary interactions. The models integrate simulation techniques, predictive analytics, and optimization strategies to deliver scalable and adaptable solutions for real-world challenges. The proposed system provides a unified framework capable of handling engineering applications such as system design and material analysis, alongside financial problems like risk assessment and market forecasting. It emphasizes the use of advanced computational tools, ensuring flexibility to adapt to evolving requirements and varying domain-specific constraints. This invention also sets the foundation for exploring future enhancements, including the integration of emerging technologies such as machine learning and hybrid modelling techniques. By maintaining a modular design, the proposed models are envisioned to support dynamic alterations, fostering continual improvements and expanding their applicability across diverse problem-solving scenarios. The invention underscores its potential to streamline multi-domain workflows, optimize outcomes, and drive innovation, while allowing for future adaptability and expansion to align with new technological advancements.

No. of Pages : 13 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :24/03/2025

(21) Application No.202511027295 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : POSTURE CORRECTING SITTING DEVICE

(51) International classification	:A61F 5/00, A61B 5/00, A47C 16/00, A47C 7/00, A61B 5/103
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Chandigarh School of Business
Address of Applicant :State Highway 12A Jhanjeri, Sahibzada Ajit Singh Nagar, Punjab 140307, India. Mohali Punjab India
(72)**Name of Inventor :**
1)Navneet Sharma

(57) Abstract :
A posture correcting sitting device comprises of a rectangular base 101 adapted to be positioned on a sitting surface, a plurality of cushioned rectangular plates 102 attached by means of telescopic rods 103, in a grid formation to provide an adjustable sitting region four telescopic links 104 installed perpendicularly underneath the base 101, at ends of links 104 are provided with rubberized pads attached by means of hinges to support base 101 on sloped sitting surfaces, a microphone 112, for receiving an audio command from user regarding levelling the base 101 to actuate gyroscopic sensor to detect an angular position of base 101, an artificial intelligence-based imaging unit 111, with a processor for recording and processing images in a vicinity of flap 108, to determine posture of user.

No. of Pages : 19 No. of Claims : 5

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026

(21) Application No.202617099625 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD FOR THE MASS TRANSFER IN GAS-LIQUID OR GAS-SLURRY OR VAPOR-LIQUID EXCHANGES

(51) International classification	:B01J 39/00, F28F 13/16, B01J 13/18, G09B 5/10, G09B 7/073
(31) Priority Document No	:24460011.0
(32) Priority Date	:23/02/2024
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:PCT/IB2025/051891 :21/02/2025
(87) International Publication No	:WO 2025/177233
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SAIPEM S.P.A.
Address of Applicant :VIA LUIGI RUSSOLO, 5 I-20138 MILANO Italy
2)PROSPIN SP. Z O.O.
3)PROCELER MICHAL PAWLOWSKI
(72)**Name of Inventor :**
1)GÓRAK, Andrzej
2)PAWLOWSKI, Michal
3)PELA, Jerzy
4)ZAWADZKI, Dawid

(57) Abstract :
The present invention finds application in all the fields wherein a gas-liquid or gas-slurry or vapor-liquid exchange is required.

No. of Pages : 29 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099627 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : PHARMACEUTICAL FORMULATION FOR ANTI-CCR8 ANTIBODIES

(51) International classification :C07K 16/00
(31) Priority Document No :63/561998
(32) Priority Date :06/03/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/EP2025/054952
Filing Date :25/02/2025
(87) International Publication No :WO 2025/186043
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)BAYER AKTIENGESELLSCHAFT
Address of Applicant :Kaiser-Wilhelm-Allee 1 51373 Leverkusen Germany
(72)**Name of Inventor :**
1)DMELLO, Sheetal
2)NIU, Jianjie
3)KUNZE, Marc

(57) Abstract :
The present invention relates to safe pharmaceutical formulations to stabilize a therapeutic anti-CCR8 antibody. The pharmaceutical formulation is provided as a liquid, such as a frozen liquid, or in a lyophilized from, and may be in a ready-to-use form or may be further diluted for intravenous or subcutaneous administration.

No. of Pages : 110 No. of Claims : 42

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026

(21) Application No.202617099678 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SIMULATED ABLATION TREATMENT PLANS FOR ENERGY DELIVERY SYSTEMS

(51) International classification :A61B 18/18
(31) Priority Document No :18/417479
(32) Priority Date :19/01/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/IB2025/050156
Filing Date :07/01/2025
(87) International Publication No :WO 2025/153912
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NEUWAVE MEDICAL, INC.
Address of Applicant :3529 Anderson Street Madison, Wisconsin 53704 U.S.A.
(72)**Name of Inventor :**
1)JOHNSON, Scott Laran
2)STITT, James Michael
3)CHEONG, Sek U.
4)WOLETZ, Kevin James
5)HASTINGS, Barbara Paige
6)ELSER, Michael

(57) Abstract :
A method of planning a microwave ablation procedure includes uploading a pretreatment scan to a control system of an energy delivery system, displaying the pretreatment scan on a display of the control system, and analyzing the pretreatment scan and identifying a target tissue region that includes a disorder. The method further includes creating and graphically displaying a digital target area on the pretreatment scan, planning and graphically depicting on the pretreatment scan a target path for one or more planned ablation probes, and creating a planned ablation zone for each planned ablation probe based on user-selected parameters. The method further includes placing one or more actual ablation probes in the subject patient, obtaining a probe scan of the subject patient that detects the actual ablation probes, and assigning the planned ablation zone for the planned ablation probes to the actual probes.

No. of Pages : 30 No. of Claims : 21

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099681 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : POLYMER, PRODUCTION METHOD THEREFOR, AND COMPOSITION, AQUEOUS SOLUTION, MOLDED BODY, AND PACKAGING CONTAINING POLYMER

(51) International classification	:C08F 218/04, B65D 85/00, C08F 8/12, C08F 8/48, C08F 216/06
(31) Priority Document No	:2024-025795
(32) Priority Date	:22/02/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/005258 :18/02/2025
(87) International Publication No	:WO 2025/178003
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)KURARAY CO., LTD.
Address of Applicant :1621, Sakazu, Kurashiki-shi, Okayama 7100801 Japan
(72)**Name of Inventor :**
1)HAMA Kenichiro
2)TAKAYAMA Takumi
3)INUBUSHI Yasutaka

(57) Abstract :
Provided are: a polymer (X) containing a structural unit (A) represented by general formula (1) and a structural unit (B) represented by general formula (2); a production method therefor; and a composition, aqueous solution, molded body, and packaging containing said polymer.

No. of Pages : 49 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026
(21) Application No.202617099331 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BACTERIOPHAGE LYTIC ENZYME OR CHIMERA AND USE THEREOF

(51) International classification	:C07K 19/00, C07K 14/00, C12N 9/88, A61K 38/51, A61P 31/04
(31) Priority Document No	:202410174405.0
(32) Priority Date	:07/02/2024
(33) Name of priority country	:China
(86) International Application No Filing Date	:PCT/CN2025/074937 :24/01/2025
(87) International Publication No	:WO 2025/167768
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)PRECISIO BIOTIX THERAPEUTICS, INC.
Address of Applicant :1012 College Road, Suite 201, Dover, DE U.S.A.
(72)**Name of Inventor :**
1)RAZ, Assaf
2)THANDAR, Mya

(57) Abstract :
Provided are a bacteriophage lytic enzyme or a chimera and a use thereof. The lytic enzyme or chimera thereof comprises: (1) a natural bacteriophage lytic enzyme, the natural bacteriophage lytic enzyme being selected from the amino acid sequences of GNL14, GNL24, GNL25, GNL46, GNL53, GNL66, GNL68, GNL73, GNL80, or GNL82; (2) an antimicrobial peptide, the antimicrobial peptide being selected from the amino acid sequences of GNP6, GNP24, GNP27, GNP30, or GNP45; and (3) a linker, the linker being selected from the amino acid sequences of GNLK1, GNLK2, GNLK4, GNLK5, GNLK6, GNLK7, GNLK8, GNLK9, or GNLK11. The lytic enzyme or chimera thereof can be used for treating or preventing bacterial infections caused by Gram-negative bacteria, particularly infections of Acinetobacter baumannii, Klebsiella, and Pseudomonas.

No. of Pages : 50 No. of Claims : 28

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099784 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COUPLED V-BELT, METHOD FOR MANUFACTURING SAME, AND BELT TRANSMISSION MECHANISM

(51) International classification	:F16G 5/06, F16G 5/20
(31) Priority Document No	:2024-027659
(32) Priority Date	:27/02/2024
(33) Name of priority country	:Japan
(86) International Application No	:PCT/JP2025/006286
Filing Date	:25/02/2025
(87) International Publication No	:WO 2025/182876
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)MITSUBOSHI BELTING LTD.
Address of Applicant :1-21, Hamazoe-dori 4-chome, Nagata-ku, Kobe-shi, Hyogo 6530024 Japan
(72)**Name of Inventor :**
1)OKADA Keisuke
2)FUKUNAGA Yudai

(57) Abstract :
The present invention relates to a coupled V-belt including a plurality of wrapped V-belt portions arranged in a belt width direction, and a tie band for connecting the wrapped V-belt portions, wherein each wrapped V-belt portion is formed of a V-belt body and a cover cloth covering at least a side surface of the V-belt body, and the tie band includes a core wire.

No. of Pages : 56 No. of Claims : 11

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026

(21) Application No.202617099790 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : LIGNIN CONSTITUENTS CONTAINING COMPOSITION AND ITS APPLICATIONS

(51) International classification	:C03C 17/34, C09D 147/00, C09D 197/00, C09D 161/34, C04B 41/70
(31) Priority Document No	:24158600.7
(32) Priority Date	:20/02/2024
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:PCT/EP2025/054612 :20/02/2025
(87) International Publication No	:WO 2025/176794
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)HANSEN & ROSENTHAL GMBH & CO. KG
Address of Applicant :Am Sandtorkai 64 20457 Hamburg Germany
(72)**Name of Inventor :**
1)PODSCHUN, Jacob
2)WITTMANN, Tobias
3)RATHI, Akansha
4)TRIMBACH, Jürgen

(57) Abstract :
The present invention relates to a composition comprising at least two lignin constituents A) and B), wherein at least a part of the oxygen atoms originating from OH-groups present in the chemical structure of at least one of A) and B) is covalently bonded to at least one kind of organic residues selected from organic residues comprising 1 to 22 carbon atoms, wherein the Mw of all lignin constituents is 200 g/mol, their polydispersity index is 1.20, the sum of aromatic and aliphatic hydroxyl groups of all lignins is 0 or = 2.00 mmol/g, the sum of aliphatic hydroxyl groups of all lignins is 0 or 0.25 mmol/g, the methoxyl group content of all lignins is in a range of 1.0 wt.-% to 20.0 wt.-%, based on the total weight of all lignin constituents being present, and the number of unsubstituted aromatic C-H bonds per aromatic ring of each chemical structure of each lignin constituent is on average = 2 and = 4, to a process for preparing the composition, to a mixture of said composition and at least one hydrocarbon, a use of said composition in polymer-containing formulations, coating formulations, pharmaceutical formulations and cosmetic formulations, e.g., as plasticizer, plasticizer oil, and/or process oil, and to a polymer formulation comprising at least one polymer and said composition.

No. of Pages : 54 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099816 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMMUNICATION METHODS AND APPARATUSES, AND TERMINAL, NETWORK DEVICE, COMMUNICATION SYSTEM AND MEDIUM

(51) International classification :H04L 5/00
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :PCT/CN2024/073356
Filing Date :19/01/2024
(87) International Publication No :WO 2025/152181
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)BEIJING XIAOMI MOBILE SOFTWARE CO., LTD.
Address of Applicant :No.018, Floor 8, Building 6, Yard 33, Middle Xierqi Road Haidian District, Beijing 100085 China
(72)**Name of Inventor :**
1)LIU, Zhengxuan

(57) Abstract :
The present disclosure relates to communication methods and apparatuses, and a terminal, a network device, a communication system and a medium. A communication method comprises: a terminal receiving configuration information sent by a network device, wherein the configuration information is used for configuring Ks CSI-RS resources, Ks being an integer greater than 1; and the terminal sending first information to the network device, wherein the first information comprises CSI-RS resource indication information, the CSI-RS resource indication information is used for indicating Ntot CSI-RS resources selected by the terminal, and the first information further comprises PMIs corresponding to the Ntot CSI-RS resources, Ntot being an integer greater than 1, and Ntot being less than or equal to Ks. In an embodiment of the present disclosure, a terminal selects two or more CSI-RS resources from among Ks CSI-RS resources configured by a network device, and reports indication information of the selected CSI-RS resources and corresponding PMIs to the network device.

No. of Pages : 90 No. of Claims : 19

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :18/08/2026
(21) Application No.202617099817 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : HETEROARYL DERIVATIVE COMPOUND AND USES THEREOF

(51) International classification	:C07D 487/04, A61K 31/4985, A61K 31/5377, A61P 35/00, C07D 491/048
(31) Priority Document No	:10-2024-0048942
(32) Priority Date	:11/04/2024
(33) Name of priority country	:Republic of Korea
(86) International Application No Filing Date	:PCT/KR2025/003462 :17/03/2025
(87) International Publication No	:WO 2025/216444
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)VORONOI, INC.
Address of Applicant :S-Dong 18F, 32, Songdogwahak-ro, Yeonsu-gu, Incheon 21984 Republic of Korea
(72)**Name of Inventor :**
1)JO, Seohyun
2)KO, Yikyung
3)LEE, Younho
4)KIM, Daekwon

(57) Abstract :
The present invention relates to a heteroaryl derivative and uses thereof. The heteroaryl derivative of the present invention exhibit excellent inhibitory activity against PKMYT1 and/or CCNE1 and thus can be usefully employed as a therapeutic agent for diseases associated with hyperactivation, amplification, or overexpression of PKMYT1 and/or CCNE1.

No. of Pages : 291 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :11/04/2025

(21) Application No.202511035653 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : FAST ACCESS STRATUM SECURITY

(51) International classification	:H04W 36/00, H04W 76/27, H04W 12/04, H04L 9/40
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, Espoo 02610, Finland Finland
(72)**Name of Inventor :**
1)KALIRAJA B, Arun
2)ALWAR, Ethiraj
3)KAASALAINEN, Janne Veikko

(57) Abstract :
There are provided techniques for fast establishment of AS security, in particular in connection with redirection or handover of a UE. Such techniques may, for example, comprise that a base station is configured to perform an RRC setup procedure with a UE and to transmit, after having successfully completed the RRC setup procedure, a security key request message to a core network, the security key request message comprising an indication that the base station intends to release the UE immediately and/or that no PDU session is to be established for the UE and/or that setup of radio bearers for the UE is to be withheld. The base station may be further configured to receive, in response to the security key request message, a security key information message from the core network, the security key information message comprising security key information indicating a security key for establishing AS security for the UE.

No. of Pages : 62 No. of Claims : 18

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :11/04/2025
(21) Application No.202511035654 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : FAST ACCESS STRATUM SECURITY

(51) International classification	:H04L0009400000, H04W0012040000, H04L0009320000, H04W0012041000, H04L0009080000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, Espoo, 02610, Finland Finland
(72)**Name of Inventor :**
1)KALIRAJA B, Arun
2)ALWAR, Ethiraj
3)KAASALAINEN, Janne Veikko

(57) Abstract :
There are provided techniques for fast establishment of AS security, in particular in connection with redirection or handover of a UE. Such techniques may, 5 for example, comprise that a base station is configured to perform an RRC setup procedure with a UE and to transmit, after having successfully completed the RRC setup procedure, a security key request message to a core network, the security key request message comprising an indication that the base station intends to release the UE immediately and/or that no PDU session is to be established for the UE and/or 10 that setup of radio bearers for the UE is to be withheld. The base station may be further configured to receive, in response to the security key request message, a security key information message from the core network, the security key information message comprising security key information indicating a security key for establishing AS security for the UE.

No. of Pages : 65 No. of Claims : 24

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :09/04/2025

(21) Application No.202511035314 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : E-Textile Rewritable Memristor with a Multi-mode Control

(51) International classification	:G11C0013000000, H10N0070000000, H10N0070200000, G06K0019077000, F21Y0113130000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)COUNCIL OF SCIENTIFIC AND INDUSTRIAL RESEARCH an Indian registered body incorporated under the Regn. of Soc. Act (Act XXI of 1860)
Address of Applicant :House No. Anusandhan Bhawan, 2 Rafi Marg Street Rafi Marg City New Delhi State Delhi Country India Pin code 110001 New Delhi Delhi India
(72)**Name of Inventor :**
1)Suraj Parkash Khanna
2)Satish
3)Nandan Kumar
4)Chandra Kant Suman
5)Hemavathi A
6)Priyanka Jain

(57) Abstract :
The present invention discloses a multi-contact mode e-textile rewritable memristor fabricated using electroconductive textile or yarn and a method for modifying its resistive state through both contact and non-contact stimuli. The e-textile memristor consists of two electrodes (112, 114) connected to an active material or yarn (116) and a stimulus source (118), enabling controlled resistance switching. The rewritable memristor (110) transitions from a high-resistance state (HRS) to intermediate resistance states (IRS) and further to a low-resistance state (LRS), allowing versatile electrical control. The electroconductive yarn, composed of polyester staple fiber and stainless-steel fiber sliver in an 80:20 ratio, ensures flexibility and adaptability. The method for switching the state of the e-textile memristor involves applying a stimulus via either contact mode, which includes electrical bias and conduction heat, or non-contact mode, which includes thermal convection, radiative heating, or time-varying electric and/or magnetic fields, to induce resistive state transitions. Additionally, a mechanical perturbation is applied to return the memristor to its high-resistance state by disrupting conduction pathways ensuring rewritability. A flowchart (200) illustrating the switching process is included, detailing the sequential steps of excitation through contact and non-contact stimuli, the progression of resistance states, and the reset mechanism via mechanical perturbation. This structured approach ensures reliable, repeatable, and energy-efficient control over the memristor's resistive states. The multi-mode switching mechanism enhances durability, adaptability, and integration potential in next-generation adaptable electronic textiles applications.

No. of Pages : 22 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :07/04/2025

(21) Application No.202511034070 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Innovative transmission system for full battery electric vehicles (BEVs)

(51) International classification	:F16H 3/093, F16H 3/091, F16D 25/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Sanchit Kumar Tyagi
Address of Applicant :2536, Landcrafts Golflinks Pandav Nagar, Ghaziabad Uttar Pradesh 201002 Uttar Pradesh India
(72)**Name of Inventor :**
1)Sanchit Kumar Tyagi

(57) Abstract :
A transmission system or gearbox for battery electric vehicles (BEVs) utilising a dual clutch mechanism and two gear trains arranged in an innovative layout to optimise torque distribution. First gear train consists of simple gear pair whereas second gear train comprises of compound gear train. It provides benefits of 2 speed transmission without any traditional shifting.

No. of Pages : 16 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :08/04/2025

(21) Application No.202513034623 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A POLYETHYLENE BLEND COMPOSITION FOR POLYMER PROCESSING OPERATIONS AND A PROCESS FOR PREPARATION THEREOF

(51) International classification	:C08J 5/18, B29C 48/00, B29C 48/10, B29C 48/08, B29C 48/88
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filed on	:201711035497 :01/01/1900
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**

1)COUNCIL OF SCIENTIFIC AND INDUSTRIAL RESEARCH, an Indian registered body incorporated under the Regn. of Soc. Act (Act XXI of 1860)

Address of Applicant :Anusandhan Bhawan, 2 Rafi Marg, New Delhi, 110001 New Delhi Delhi India

(72)**Name of Inventor :**

1)Samir Hujur Chikkali

2)Harshawardhan Vinayak Pol

3)Dnyaneshwar Vitthal Bodkhe

4)Dhammaraj Shankar Rokade

5)Prashant Arvind Patil

6)Sheetal Dipak Nandimath

7)Digvijay Prashant Mahajan

(57) Abstract :

The present invention provides the polyethylene (PE) blend composition displaying high melt extensional viscosity (or high melt strength) for potential use in polymer processing operations such as extrusion film casting (EFC), blown film extrusion (BFE), pipe extrusion (PiExt) and plug-assist thermoforming (PAT) and a process for the preparation by using screw extruder device.

No. of Pages : 20 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/04/2025
(21) Application No.202421074899 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A Handlebar Riser Assembly for a Two-wheeler Vehicle

(51) International classification	:B62K21/12, B62K21/18, B62K21/22, B62K11/14
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)CHATURVEDI, Nikhil
Address of Applicant :A-303, Devi Orchid Bhau Patil Road, Near Pune IT Park, Bopodi, Pune Maharashtra, 411020. Pune Maharashtra India
(72)**Name of Inventor :**
1)CHATURVEDI, Nikhil

(57) Abstract :
The present invention provides a handlebar riser assembly (100) for a two-wheeler vehicle. The handlebar riser assembly includes a support structure (10). A lower bracket (20) has a lower end (20a) and an upper end (20b). The lower bracket (20) is adapted to receive the handlebar (70). The upper bracket (30) is adapted to secure on the lower bracket (20) to clamp the handlebar (70) therebetween. A mounting portion (40) is configured on the lower end (20a) of the lower bracket. Also, a securing member (50) is adapted to secure on the support structure (10) to form a cavity (60) to receive the mounting portion (40) therebetween which enables the mounting portion (40) to retain within the cavity (60), and while being angularly movable within the cavity (60) to reposition the lower bracket (20) with respect to the support structure (10).

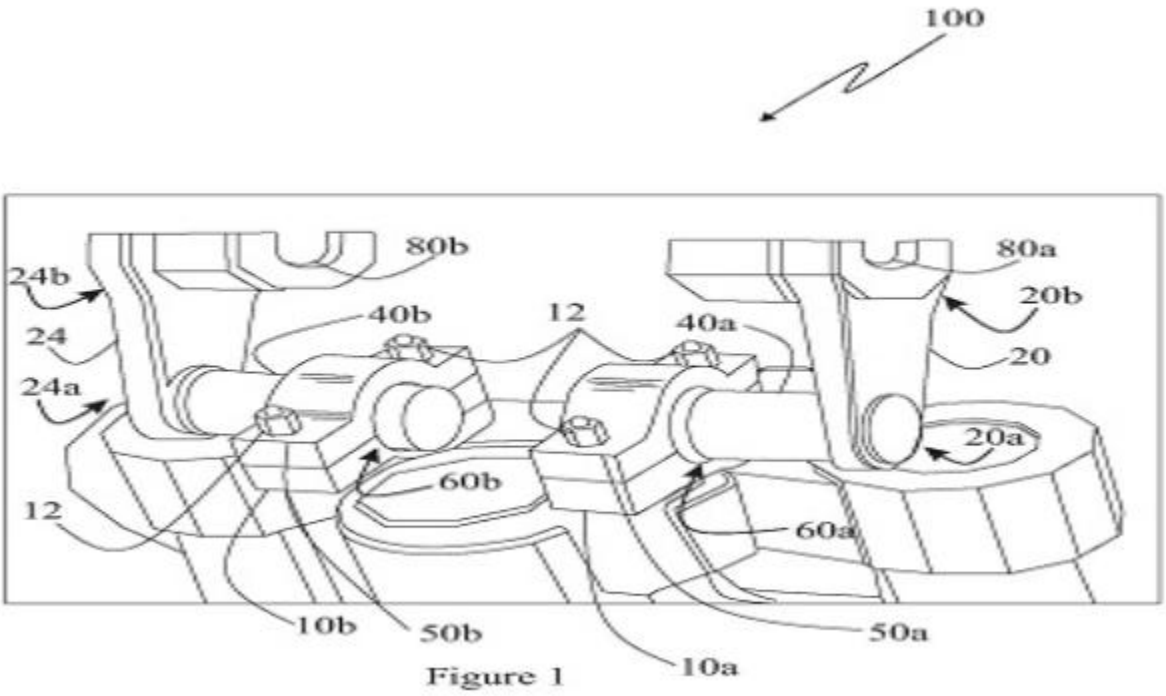


Figure 1

No. of Pages : 20 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :13/10/2024
(21) Application No.202421077542 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTOMATED DERMATOME

(51) International classification :A61B17/322
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :NA
Filing Date :NA
(87) International Publication No : NA
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)Dr Mohini Parmar
Address of Applicant :22, Amrut Bhavan, Jeevan Deep society, Zalod road, Dahod, Gujarat Dahod Gujarat India
2)Dr Tushar Kanajariya
3)Dr Kamlesh Bhadreshwara
4)Saurashtra University
(72)**Name of Inventor :**
1)Dr Mohini Parmar
2)Dr Tushar Kanajariya
3)Dr Kamlesh Bhadreshwara

(57) Abstract :
Abstract: The current embodiment of the invention related with the crises generated in surgeries where grafting in surgery is difficult and requires expertise for uniform grafting with least injury, avoiding repetitive grafting and adequate size of grafting. The current embodiment is addressing the conditions of the graft failure, rejections of dermatome, oozing out blood from the part of the dermatome. The device in the current embodiment is development for smooth, uniform and precise grafting.

No. of Pages : 13 No. of Claims : 6

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202521042029 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Hospital Resource Tracking and Management Using Internet of Things (IoT)

(51) International classification	:H04W4/02, G16H40/67, H04W4/029, H04W4/80
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)VAIBHAV VIDHYADHAR THAKARE
Address of Applicant :Chaitanya Colony, Old bypass road, Amravati Maharashtra India
2)DR. Manisha Kumbhar
(72)**Name of Inventor :**
1)VAIBHAV VIDHYADHAR THAKARE
2)DR. Manisha Kumbhar

(57) Abstract :
The invention provides a real-time system for tracking and managing movable hospital resources using Internet of Things (IoT) technologies. Each hospital resource is equipped with a Bluetooth Low Energy (BLE) tag, while ESP32-based scanner modules are installed at fixed indoor locations such as corridors and doorways. These scanners detect nearby BLE tags and transmit the tag ID, scanner ID, and timestamp to a central server via Wi-Fi. The server processes this data to determine the real-time location of each resource, generates usage analytics, and visualizes movement patterns through a dashboard interface. The system offers an efficient, low-cost solution for indoor equipment tracking where GPS is ineffective. It improves equipment utilization, floor-wise availability analysis, and enables better decision-making in hospital operations. The solution is scalable, energy-efficient, and designed to work reliably in complex indoor healthcare environments.

No. of Pages : 8 No. of Claims : 5

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202521042037 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A MOUNTING DEVICE FOR A ROTOR BLADE

(51) International classification	:F03D 13/10, B66C 1/10, B66C 1/66, B66C 1/42, F03D 1/06, B66C 13/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Suzlon Energy Limited
Address of Applicant :Shrimali Society, Near Shri Krishna Complex, Navrangpura, Ahmedabad 380 009, Gujarat, India Ahmedabad Gujarat India
(72)**Name of Inventor :**
1)Mario Schemik
2)Andre Knopp

(57) Abstract :
ABSTRACT A MOUNTING DEVICE FOR A ROTOR BLADE A mounting device for a rotor blade comprising: - at least two circumferential-shaped segments (18a,18b) for supporting rotor blade root (38), - at least one attaching element (19) for attaching the mounting device to bar-rel nut holes (37) of rotor blade root (38), wherein - the attaching element (19) is arranged to an inherent circumferential-shaped segment (18) and wherein - the attaching element (19) is connected to the inherent circumferential-shaped segment (18) by a connection element (20). Fig. 2a

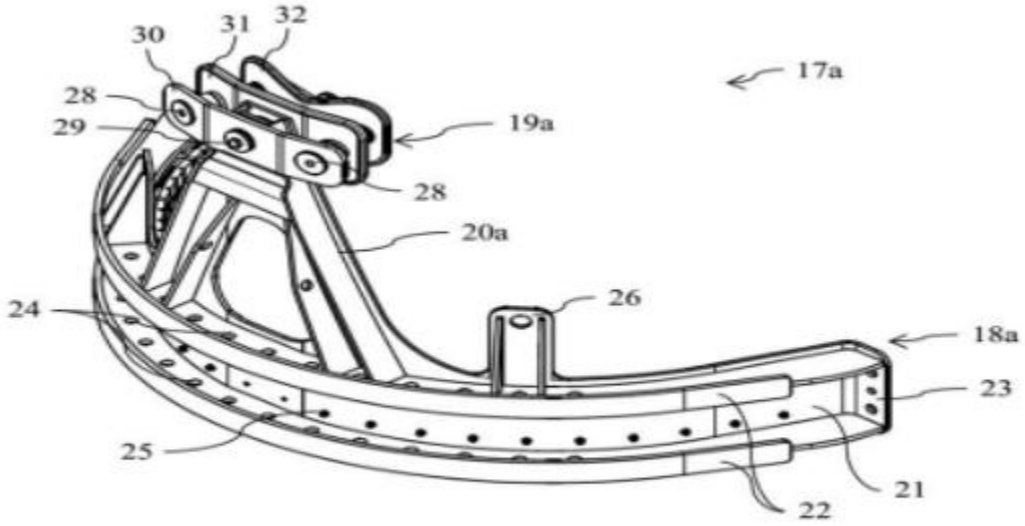


Fig. 2a

No. of Pages : 34 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042052 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : HIGH-EFFICIENCY ELECTRIC PROPULSION SYSTEM FOR VEHICLES

(51) International classification	:B60L50/51, B60L50/60, B60L7/14, H02M7/48, H02K21/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Vedashri Bhagwan Bhadule
4)Ameya Umesh Babar
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Vedashri Bhagwan Bhadule
3)Ameya Umesh Babar
4)Pimpri Chinchwad college of engineering and Research

(57) Abstract :
The present invention relates to a high-efficiency electric propulsion system for vehicles that integrates advanced electric motor technologies, next-generation energy storage solutions, optimized power electronics, and thermal management systems to significantly enhance the overall energy efficiency, performance, and sustainability of electric vehicles (EVs). The system includes a high-efficiency electric motor, such as a permanent magnet synchronous motor or axial flux motor, paired with advanced energy storage technologies like solid-state or lithium-sulfur batteries. Additionally, the system incorporates state-of-the-art power conversion and energy management algorithms to optimize the flow of electrical power between the battery and motor, ensuring maximum efficiency during all driving conditions. The propulsion system also features an innovative thermal management strategy, utilizing liquid or air cooling solutions, to regulate the temperature of critical components, thus preserving system integrity and performance over extended use. The integration of lightweight materials, aerodynamic vehicle design, and regenerative braking further contribute to the system's overall energy efficiency. This invention provides a comprehensive solution for reducing energy consumption, improving driving range, and lowering the environmental impact of electric vehicles, while also addressing challenges related to battery life, charging speed, and vehicle weight. The proposed high-efficiency system is adaptable to a wide range of electric vehicles, including passenger cars, commercial vehicles, and industrial applications, promoting the adoption of cleaner, more sustainable transportation technologies.

No. of Pages : 8 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/04/2025
(21) Application No.202521032311 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND COMPOSITION FOR PREPARING A HOMOGENEOUSLY DISPERSED SILICON-GRAPHITE COMPOSITE

(51) International classification	:H01M0004620000, H01M0010052500, H01M0004380000, H01M0004020000, H01M0004360000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)EPSILON ADVANCED MATERIALS PRIVATE LIMITED
Address of Applicant :Upadrastha House, 2nd & 3rd Floor, 48 Dr. V. B. Gandhi Marg, Fort Mumbai Mumbai Maharashtra India
(72)**Name of Inventor :**
1)CHINNASAMY NATARAJAN
2)EDDULA SUDHAKAR REDDY
3)KRISHNA PRASAD GANNAVARAPU
4)MARUTHAPANDIAN V
5)PRIYADARSHINI B
6)NAGADARSHAN S S

(57) Abstract :
The present invention relates to a negative electrode material for lithium-ion batteries and to a method for preparing the same. The negative electrode material comprises nano-sized silicon particles, graphite, at least one polymeric binder, and an amorphous carbon phase derived from at least one carbon precursor, wherein the nano-sized silicon particles are present in an amount of 1 wt% to 40 wt% and have a particle size in the range of 1 nm to 300 nm. The invention provides a silicon–graphite composite in which the nano-sized silicon particles are homogeneously dispersed and mechanically embedded within surface asperities, pores, or defect regions of graphite particles through a milling process. The method comprises milling micron-sized silicon to form nano-sized silicon particles, mixing the nano-sized silicon particles with solvent-dispersed graphite, adding a polymeric binder to form a slurry, drying the slurry to obtain a silicon–graphite powder, and coating the powder with a carbon precursor followed by carbonization under an inert atmosphere. The resulting composite exhibits improved structural stability, reduced silicon agglomeration, and enhanced electrochemical performance.

No. of Pages : 45 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042082 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY OPERATED POCKET SIZE PORTABLE HOT MELT SEALING WAX DISPENSER

(51) International classification	:B05C 5/00, B05C 5/02, B05C 17/005, H05B 3/34
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Dinesh Krishnaji Bawane
3)Nilima Rahul Bawane
4)Anjali Rahul Bawane
5)Pallavi Baliram Gadge

(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Dinesh Krishnaji Bawane
3)Nilima Rahul Bawane
4)Anjali Rahul Bawane
5)Pallavi Baliram Gadge

(57) Abstract :
This invention is proposed the pocket size battery operated portable hot melt seal wax dispenser which can be used indoor/outdoor for the application of wax seal a like government red wax seal, post office red wax seals and decoration/art colored wax seals etc. According to this invention, the battery (10)a like alkaline 9.0V is used to supply electric power the heating coil (7) mounted on the thermal shell (5) to create a heating zone near nozzle (6). The heat causes hot melt the wax stick (11) and the molten wax is allow to dispensed through nozzle (6). The metal/wooden seal is then pressed against the accumulated molten wax and on cooling it leave the impression of the seal. This dispenser is handy, light weight and detachable at nozzle (6) so that new wax sticks (11) can refill and detachable end cap (3) so thatthe battery can be replace/change if required. This invention will eliminates the conventional requirement of carrying material like match box, candle, gas lighter and wax stick etc.

No. of Pages : 9 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042085 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Spindle System for Textile Twisting and Covering Machines

(51) International classification	:D01H0011000000, D02G0003380000, D02G0003360000, D21F0007080000, D01H0007040000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Kavita Tejas Mahajan
Address of Applicant :4A, Flat No-801, Mindhola Building, Veer Narmad Height Vibhag-1, Opp Saraswati School, Kanakpur, Kansad, Surat, Gujarat – 394230, India Surat Gujarat India
2)Pushpaben Ashokbhai Mahajan
3)Ashokkumar Madhav Mahajan
(72)**Name of Inventor :**
1)Kavita Tejas Mahajan
2)Pushpaben Ashokbhai Mahajan
3)Ashokkumar Madhav Mahajan

(57) Abstract :
The present invention relates to a spindle system for textile twisting and covering machines that significantly enhances energy efficiency and production output. The system introduces the use of low-diameter spindles—specifically 13mm to 15mm spindles in covering machines and 16mm to 18mm spindles in TFO (Two-for-One) machines—coupled with optimized channel track configurations having 4, 5, or 6 holes. This arrangement replaces the conventional larger spindles and high-hole-count channel tracks traditionally used in textile machines. The novel spindle-channel combination ensures improved belt contact, smoother spindle rotation, and reduced motor load. As a result, the system achieves approximately 30% reduction in power consumption and a 39.15% increase in yarn production efficiency. The invention is applicable in both low and high TPM textile operations and allows significant operational cost savings, reduced equipment requirements, and enhanced productivity in industrial textile applications.

No. of Pages : 24 No. of Claims : 7

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042087 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : ENERGY HARVESTING DEVICE FROM VEHICLE SUSPENSION COMPRESSION AND EXPANSION

(51) International classification	:F03G7/08, H02K7/18, H02J7/14, B60G9/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Mrunmai Narendra Lakal
4)Naveli Rajaram Shinde
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Mrunmai Narendra Lakal
3)Naveli Rajaram Shinde

(57) Abstract :
An energy harvesting system for vehicles that captures energy from the motion of the vehicle's suspension system. The system integrates with traditional suspension components such as struts or shock absorbers, where it compresses and expands with the motion of the vehicle’s wheels relative to the chassis. The system includes a motion translation mechanism that converts vertical motion into rotational or linear movement, which drives an electromagnetic generator to produce electrical energy. A control and power conditioning unit regulates the electrical output, including converting and optimizing the energy for use. The harvested energy is stored in an onboard energy storage unit, such as a battery or supercapacitor, or can be directly supplied to low-power vehicle systems like lights, infotainment, and auxiliary motors. The system enhances overall vehicle energy efficiency by converting suspension motion into usable electrical energy, reducing reliance on the vehicle's primary power source and contributing to more sustainable vehicle operation.

No. of Pages : 9 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042053 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : LIQUID COOLING SYSTEM FOR THERMAL MANAGEMENT OF ELECTRIC VEHICLE BATTERY PACKS

(51) International classification	:H01M 10/6568, H01M 10/6556, H01M 10/625, H01M 10/6568, H01M 10/6556
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Siddhant Kailas Chincholikar
4)Mukesh Genaram Choudhary

(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Siddhant Kailas Chincholikar
3)Mukesh Genaram Choudhary
4)Pimpri Chinchwad College of Engineering and Research

(57) Abstract :
The invention provides a liquid cooling system for managing the thermal conditions of an electric vehicle (EV) battery pack. The system includes a battery pack thermally coupled to one or more cooling plates through which a coolant circulates. A coolant pump drives the coolant through a closed-loop circuit comprising the cooling plates and a heat exchanger. One or more temperature sensors monitor the battery temperature and provide input to an electronic control unit (ECU), which regulates the operation of the coolant pump to maintain the battery within a predefined temperature range. The system ensures uniform heat distribution, prevents thermal hotspots, and enhances battery performance, safety, and longevity under various operating conditions, including rapid charging and discharging.

No. of Pages : 8 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042054 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MULTI-FLUID HEAT EXCHANGER WITH DYNAMIC CHANNEL RESHAPING

(51) International classification	:G01K13/02, F28F27/00, G01F1/684
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Mahendra Gorakh Kumbhar
4)Hemant Raju Patil
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Mahendra Gorakh Kumbhar
3)Hemant Raju Patil

(57) Abstract :
A multi-fluid heat exchanger is disclosed that incorporates dynamically reconfigurable flow channels to enhance thermal performance across variable operating conditions. The system comprises a core housing multiple fluid paths separated by thermally conductive walls, allowing simultaneous heat exchange among two or more working fluids. Embedded actuators such as shape-memory alloys or electro-active polymers are integrated into the channel walls to actively reshape their geometry in real time in response to thermal, pressure, or flow data collected by onboard sensors. A control unit dynamically adjusts channel profiles to optimize heat transfer, reduce pressure loss, and adapt to fluctuating system demands. The invention enables compact, efficient, and intelligent thermal management for applications including aerospace, electric vehicles, data centers, and industrial systems.

No. of Pages : 8 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042055 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : ADJUSTABLE SEAT HEIGHT MECHANISM FOR TWO-WHEELED VEHICLES

(51) International classification	:B60N 2/16, B60N 2/06, B60N 2/07
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Ajay Dhanraj Patil
4)Darshan Prashant Kasar
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Ajay Dhanraj Patil
3)Darshan Prashant Kasar

(57) Abstract :
An adjustable seat height mechanism for two-wheeled vehicles is disclosed. The mechanism includes a vehicle chassis, a mounting bracket affixed to the chassis, a vertically movable support frame, and a seat mounted atop the support frame. A guide rail is provided to direct the vertical movement of the support frame, allowing for smooth and stable height adjustment. A locking lever is operatively connected to a locking pin that engages with one of several locking positions on the guide rail, enabling the user to securely fix the seat at a desired height. The design allows for simple, tool-free adjustment, enhancing rider comfort and adaptability across different users and riding conditions.

No. of Pages : 9 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042056 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ELECTRIC VEHICLES INTEGRATED BATTERY AND POWER MANAGEMENT SYSTEM

(51) International classification	:B60L58/10, H01M10/48, H02J7/80, H02J7/90, H01M10/625, B60L58/24
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Swapnil Chandrakant Kalyankar
4)Pratyush Santosh Bhalerao
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Swapnil Chandrakant Kalyankar
3)Pratyush Santosh Bhalerao

(57) Abstract :
An integrated battery and power management system for electric vehicles is disclosed, comprising a Battery Management Module (BMM), Power Distribution and Control Unit (PDCU), Central Energy Management Controller (CEMC), and Thermal Management Subsystem (TMS). The BMM monitors and controls critical battery parameters including voltage, current, temperature, and state of charge, while ensuring cell balancing and safety. The PDCU manages the routing and protection of electrical power across the vehicle's propulsion and auxiliary systems. The CEMC acts as a centralized controller, optimizing power flow and system performance based on real-time conditions and battery status. The TMS regulates component temperatures to maintain efficiency and prevent thermal degradation. Together, these subsystems provide a cohesive platform for enhanced energy efficiency, battery longevity, operational safety, and improved vehicle performance in electric mobility applications.

No. of Pages : 9 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042088 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTOMATIC COOLING SYSTEM FOR DRUM BRAKE A LIKE AUTOMOBILE VEHICLE

(51) International classification	:F16D 65/78, F16D 65/847, G05D 23/19	(71)**Name of Applicant :** **1)Rahul Krishnaji Bawane** Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India **2)Pimpri Chinchwad College of Engineering and Research** **3)Sarthak Umesh Bhamre** **4)Anmol Hrushikesh Tapshalkar**
(31) Priority Document No	:NA	(72)**Name of Inventor :**
(32) Priority Date	:NA	**1)Rahul Krishnaji Bawane**
(33) Name of priority country	:NA	**2)Sarthak Umesh Bhamre**
(86) International Application No Filing Date	:NA :NA	**3)Anmol Hrushikesh Tapshalkar**
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :

The present invention discloses an automatic cooling system for drum brakes designed to prevent brake fade and enhance vehicle safety during prolonged or high-load braking. The system includes a temperature sensor that continuously monitors the brake drum temperature and a control unit that activates a coolant pump when the temperature exceeds a predefined threshold. The pump delivers coolant from a storage tank through a spray nozzle directed at the exterior surface of the drum. The system operates autonomously, drawing power from the vehicle's electrical source and incorporating safety features to prevent overcooling or component damage. This invention provides an efficient, reliable, and maintenance-friendly solution to manage heat in drum brake systems, particularly in heavy-duty or downhill driving conditions.

No. of Pages : 8 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042089 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : MODULAR TABLE LAMP WITH DETACHABLE SOCKET AND SHADE ASSEMBLY

(51) International classification	:F21S 6/00, F21V 17/10, F21V 23/06
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Girish Amol Mule
4)Sakshi Mahadev Mule
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Girish Amol Mule
3)Sakshi Mahadev Mule

(57) Abstract :
The present invention relates to a ballpoint pen that employs a fluid pressure mechanism for the extension and retraction of the writing tip. The system comprises a pen nozzle, a refill, a flexible grip filled with incompressible fluid, and a retracting spring. When a user applies pressure to the flexible grip, the incompressible fluid transmits this pressure to the refill, overcoming the force of the retracting spring and extending the writing tip through the pen nozzle for writing. Upon release of pressure, the retracting spring returns the refill to its retracted position within the pen body, safeguarding the writing tip. This design eliminates the need for mechanical buttons or switches, offering intuitive and ergonomic writing experience.

No. of Pages : 8 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042094 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BALLPOINT PEN WITH FLUID PRESSURE MECHANISM FOR TIP EXTENSION AND RETRACTION

(51) International classification	:B43K 24/08, B43K 7/12, B43K 7/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Nikhil Jagannath Borse
4)Kedar Chauhan
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Nikhil Jagannath Borse
3)Kedar Chauhan

(57) Abstract :
The present invention relates to a ballpoint pen that employs a fluid pressure mechanism for the extension and retraction of the writing tip. The system comprises a pen nozzle, a refill, a flexible grip filled with incompressible fluid, and a retracting spring. When a user applies pressure to the flexible grip, the incompressible fluid transmits this pressure to the refill, overcoming the force of the retracting spring and extending the writing tip through the pen nozzle for writing. Upon release of pressure, the retracting spring returns the refill to its retracted position within the pen body, safeguarding the writing tip. This design eliminates the need for mechanical buttons or switches, offering intuitive and ergonomic writing experience.

No. of Pages : 8 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042095 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : TEA-CUP WITH INTEGRATED TEA BAG ASSEMBLY

(51) International classification	:A47G 19/22, A47G 19/16
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Sarthak Rajesh Thete
4)Sarvesh Sanjay Dhamale
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Sarthak Rajesh Thete
3)Sarvesh Sanjay Dhamale

(57) Abstract :
The present invention relates to a tea-cup with an integrated tea bag assembly designed for efficient and convenient brewing and drinking. The tea-cup comprises a main tea-cup body configured to hold hot water, a tea bag chamber that holds the tea bag during stepping, and a pathway for water flow that allows hot water to circulate through the tea bag for optimal infusion. A lid with a sipping spout is provided to maintain heat and allow for easy drinking without removing the lid. Additionally, a used tea bag holding area is incorporated at the base of the tea bag chamber to securely contain the used tea bag after stepping, allowing for easy disposal. This innovative design offers a simple, mess-free way to brew and consume tea, all within a single, portable cup.

No. of Pages : 8 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042096 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVED AUTOMATIC WATERING SYSTEM FOR INDOOR PLANTS

(51) International classification	:A01G 25/16, A01G 27/00, A01G 25/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Anushka Prakash Waydande
4)Asmita Ramchandra Ganage
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Anushka Prakash Waydande
3)Asmita Ramchandra Ganage

(57) Abstract :
The present invention relates to an improved automatic watering system specifically designed for indoor plants. The system includes a water reservoir, soil moisture sensors, a control unit, a water pump, a tubing network, and dispensing nozzles to deliver water directly to plant roots as needed. A wireless module enables remote monitoring and control via a mobile application or smart home interface. The control unit processes real-time moisture data to activate the water pump only, when necessary, thereby conserving water and ensuring optimal plant health. The system is compact, user-friendly, and adaptable to a variety of indoor plant setups, providing an efficient and intelligent solution for automated indoor plant care.

No. of Pages : 9 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042097 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVED GROOMING COMB WITH INTEGRATED HAIR DETANGLING AND SCALP MASSAGING FEATURES

(51) International classification	:A61H0007000000, A61H0023020000, A61H0011000000, A46B0013020000, A61Q0005120000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Nutan Pandurang Dhanwade
4)Shreya Rajkumar Kadam
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Nutan Pandurang Dhanwade
3)Shreya Rajkumar Kadam

(57) Abstract :
An improved grooming comb is disclosed, incorporating integrated hair detangling and scalp massaging features within a single, ergonomically designed device. The comb includes a comb body fitted with detangling teeth configured to reduce hair breakage and tangling. Adjacent to or integrated with the detangling teeth are soft, flexible scalp massaging elements that stimulate blood circulation and promote relaxation during use. The device further comprises an optional vibration or heating mechanism housed within the comb body to enhance the massaging effect. Removable teeth and/or massage pads are included to allow for easy cleaning, maintenance, and functional customization. The invention provides a comprehensive solution for daily hair care and scalp wellness in a convenient and user-friendly form.

No. of Pages : 8 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042098 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : BLACKBOARD DUSTER WITH INTEGRATED SELF-CLEANING MECHANISM

(51) International classification	:A47L 13/00, B08B 1/04, A47L 9/00, B43L 21/00	(71)**Name of Applicant :** **1)Rahul Krishnaji Bawane** Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India **2)Pimpri Chinchwad College of Engineering and Research** **3)Yadnyesh Sunil Borole** **4)Manthan Ulhas Borole**
(31) Priority Document No	:NA	(72)**Name of Inventor :** **1)Rahul Krishnaji Bawane** **2)Yadnyesh Sunil Borole** **3)Manthan Ulhas Borole**
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No Filing Date	:NA :NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :

An automatic blackboard duster cleaner is disclosed, designed to efficiently remove chalk dust from blackboard erasers in a hygienic and user-friendly manner. The device comprises an outer housing that encloses a motor-driven rotating brush mechanism aligned with a base tray into which a chalkboard eraser is inserted. A control knob allows users to power the device and adjust cleaning intensity. As the brush rotates, it dislodges chalk particles from the eraser, which are then collected in an internal dust collector tray or through a suction system. The top cover provides access for maintenance and cleaning. The invention minimizes dust dispersion, reduces manual labor, and maintains a clean environment in classrooms and educational settings.

No. of Pages : 8 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042099 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : HANDLED CUP HOLDER FOR BEVERAGE CONTAINERS

(51) International classification	:A47G 23/02, A47G 19/22, B65D 25/28	(71)**Name of Applicant :** **1)Rahul Krishnaji Bawane** Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India **2)Pimpri Chinchwad College of Engineering and Research** **3)Pooja Rajreddy Chilamwad** **4)Ragini Chaudhari Chudaman**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	(72)**Name of Inventor :**
(33) Name of priority country	:NA	**1)Rahul Krishnaji Bawane**
(86) International Application No	:NA	**2)Pooja Rajreddy Chilamwad**
Filing Date	:NA	**3)Ragini Chaudhari Chudaman**
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :

A modular and ergonomic cup holder assembly designed to securely hold beverage containers while enhancing user comfort and hygiene. The assembly includes a removable conical or tapered paper holder configured to accommodate disposable liners or paper cups, enabling easy replacement and cleaning. A main cup holder body, constructed from rigid, heat-resistant material, provides structural support. The upper circular holder section is contoured to seat various cup sizes securely. An ergonomic handle, shaped for a comfortable grip, is integrated into the design for ease of transport. The invention addresses versatility, portability, and hygiene in beverage container support.

No. of Pages : 9 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042100 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DEVICE FOR DETECTING AND DISPLAYING RIDING POSTURE INFORMATION

(51) International classification	:A61B0005000000, A61B0005110000, H02J0007350000, H04W0004029000, A63B0071060000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Yuvrajsingh Amolsingh Pardeshi
4)Anshul Dheeraj Nandeshwar
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Yuvrajsingh Amolsingh Pardeshi
3)Anshul Dheeraj Nandeshwar

(57) Abstract :
The present invention relates to a device for detecting and displaying riding posture information, designed to improve rider comfort, safety, and performance. The device includes a plurality of sensors that monitor the rider's body orientation, movement, and weight distribution during riding. The collected data is processed and displayed in real-time on a user-friendly display system, which may include a mounted screen, wearable device, or mobile application. The device also features wireless connectivity to transmit the posture data to external devices for further analysis and storage. A power supply, which may include rechargeable batteries, solar charging, or kinetic energy harvesting, ensures long-lasting and reliable operation. This system provides continuous posture monitoring and real-time corrective feedback, helping riders maintain optimal posture throughout their riding activities.

No. of Pages : 9 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042057 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : ENERGY-EFFICIENT KITCHEN VENTILATION CHIMNEY SYSTEM

(51) International classification	:F24F 7/06, F24C 15/20
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Akanksha Gajanan Lande
4)Sakshi Dnyaneshwar Kumatkar
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Akanksha Gajanan Lande
3)Sakshi Dnyaneshwar Kumatkar

(57) Abstract :
The present invention relates to an energy-efficient kitchen ventilation chimney system designed to optimize airflow and reduce power consumption while effectively removing smoke, odors, and airborne particles from cooking environments. The system includes a housing unit, a motor and fan assembly, a sensor module, a control unit, a filtration system, a user interface panel, and a connectivity module. The motor and fan assembly is controlled by the sensor module to adjust its operation based on real-time cooking conditions, ensuring minimal energy use during low-activity periods. The filtration system includes mesh and carbon filters to trap grease and odors, while the control unit dynamically adjusts motor speed for efficient performance. Additionally, the system features a user-friendly interface and wireless connectivity for remote control and monitoring. This invention provides a significant reduction in energy consumption compared to traditional kitchen chimneys, while maintaining optimal air quality and operational efficiency.

No. of Pages : 9 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042058 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : THERMAL REGULATION CAR WINDOW SHIELD WITH PHASE CHANGE MATERIAL

(51) International classification	:B60J 1/20, F28D 20/02, C09K 5/06	(71)**Name of Applicant :** **1)Rahul Krishnaji Bawane** Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India **2)Pimpri Chinchwad College of Engineering and Research** **3)Rutuja Pandharinath Bhavarthe** **4)Binaya Kumar Panda**
(31) Priority Document No	:NA	(72)**Name of Inventor :**
(32) Priority Date	:NA	**1)Rahul Krishnaji Bawane**
(33) Name of priority country	:NA	**2)Rutuja Pandharinath Bhavarthe**
(86) International Application No Filing Date	:NA :NA	**3)Binaya Kumar Panda**
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :

A thermal regulation car window shield incorporating phase change material (PCM) is disclosed. The shield comprises an outer reflective layer designed to reflect a portion of incoming solar radiation, an intermediate PCM layer configured to absorb and store thermal energy during periods of high temperature through a phase transition, and an inner protective backing layer providing mechanical support and thermal insulation. The PCM moderates the temperature inside the vehicle by absorbing excess heat during peak sunlight exposure and releasing stored heat when ambient temperatures decrease, thereby enhancing passenger comfort, protecting interior components, and reducing the vehicle's reliance on active cooling systems. The shield is lightweight, flexible, and adaptable for installation on various vehicle windows, offering a sustainable passive thermal management solution.

No. of Pages : 8 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042060 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : VEHICLE ACCIDENT DETECTION AND AUTOMATIC ENGINE SHUTDOWN SYSTEM

(51) International classification	:B60W 50/14, B60W 30/095
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Shreya Rajgonda Patil Motake
4)Payal Santosh Rakshe
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Shreya Rajgonda Patil Motake
3)Payal Santosh Rakshe

(57) Abstract :
The invention relates to a Vehicle Accident Detection and Automatic Engine Shutdown System designed to enhance vehicle safety. The system includes collision detection sensors that detect impact forces and deceleration, sending data to an onboard controller. Upon detecting a collision, the onboard controller triggers an engine shutdown mechanism to disable the engine and activate automatic safety features such as airbags deployment, unlocking vehicle doors, and hazard light activation. Additionally, the system includes an emergency response notification feature, sending critical accident data such as vehicle location and severity to emergency responders. A backup power supply ensures continuous operation of the system in case of power loss during a collision. This integrated system aims to minimize further damage and injury, facilitate rapid emergency response, and provide proactive safety measures following a vehicle accident.

No. of Pages : 8 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042062 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : MOTORIZED CENTER STAND MECHANISM FOR TWO-WHEELED VEHICLES

(51) International classification	:B62H 1/02, B62H 1/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Aniket Raja Pawane
4)Pranav Balasaheb Hule
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Aniket Raja Pawane
3)Pranav Balasaheb Hule

(57) Abstract :
A motorized center stand mechanism for two-wheeled vehicles is disclosed. The system includes a motorized actuator assembly for automatically deploying and retracting the center stand, a control unit for managing actuator operations, and a user interface for manual command input. One or more safety sensors are integrated to detect vehicle motion, tilt, or ground proximity, ensuring that stand operation occurs only under safe conditions. Mechanical linkages connect the actuator to the stand to achieve smooth and reliable movement. The invention enhances rider convenience, improves stability during parking, and increases overall operational safety, particularly for heavier motorcycles and scooters.

No. of Pages : 8 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042063 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTOMATED TIRE PRESSURE MONITORING AND ALERT SYSTEM FOR VEHICLES

(51) International classification	:B60C0023040000, B60C0023060000, G01M0017020000, B60Q0009000000, G08G0001000000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Dishant Gopal Pipare
4)Sumit Santosh Kadam
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Dishant Gopal Pipare
3)Sumit Santosh Kadam

(57) Abstract :
The present invention relates to an automated tire pressure monitoring and alert system for vehicles. The system includes a plurality of pressure sensors mounted within each tire, capable of continuously measuring tire air pressure. These sensors transmit data wirelessly to a central control unit, which analyzes the data to detect abnormal pressure conditions, such as under-inflation, over-inflation, or rapid pressure loss. In response to detected abnormalities, the system activates an alert mechanism to notify the vehicle operator. The system may also include integration with a mobile application or cloud-based server for remote monitoring and data logging. This invention provides enhanced vehicle safety, optimizes tire performance, and reduces the need for manual tire pressure checks.

No. of Pages : 8 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042064 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : ADAPTIVE MAGNETO-RHEOLOGICAL STRUT FOR LIGHT COMMERCIAL VEHICLES

(51) International classification	:F16F 9/53, B60G 17/015, B60G 15/06	(71)**Name of Applicant :** **1)Rahul Krishnaji Bawane** Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India **2)Pimpri Chinchwad College of Engineering and Research** **3)Tanishq Kuldeep Ubhe** **4)Amita Rajesh Patil Rode**
(31) Priority Document No	:NA	(72)**Name of Inventor :**
(32) Priority Date	:NA	**1)Rahul Krishnaji Bawane**
(33) Name of priority country	:NA	**2)Tanishq Kuldeep Ubhe**
(86) International Application No Filing Date	:NA :NA	**3)Amita Rajesh Patil Rode**
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :

The present invention relates to a Magneto-Rheological (MR) Strut for Light Commercial Vehicle Suspension Systems designed to enhance vehicle stability, ride comfort, and handling performance. The system utilizes Magneto-Rheological fluid placed between a piston and cylinder, where the fluid's viscosity is dynamically controlled by the application of electrical current to a coil wound around the piston. This enables real-time adjustments to the damping force based on varying driving conditions. The MR strut operates in three distinct modes: pressure-driven flow, direct shear, and squeeze film, with the direct shear mode being specifically employed for optimal damping in suspension systems. The piston and cylinder are constructed from mild steel and aluminum, respectively, providing a balance of strength, lightness, and heat dissipation. The system supports both sprung mass and unsprung mass of the vehicle, integrating a compression spring for additional force control. The MR strut is connected to the vehicle's suspension through a secure mounting structure, offering a highly adaptable solution for varying road conditions and improving overall vehicle dynamics.

No. of Pages : 9 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042065 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : WIND TURBINE ENERGY HARVESTING SYSTEM FOR ELECTRIC VEHICLES

(51) International classification	:F03D 9/00, F03D 9/11, B60L 8/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Sharvil Vinod Chavan
4)Atharv Anandrao Shelke
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Sharvil Vinod Chavan
3)Atharv Anandrao Shelke

(57) Abstract :
A wind energy harvesting system for electric vehicles is disclosed, comprising a rooftop or front-mounted air intake duct, an integrated wind turbine, a generator, and a power management unit. The system utilizes relative wind generated during vehicle motion to spin the turbine, converting kinetic energy into electrical energy through the generator. The harvested energy is regulated and stored in a battery system, enabling supplemental charging of the vehicle's electrical components or mobile devices. This passive energy recovery system enhances vehicle efficiency without affecting primary propulsion, offering a sustainable and auxiliary power source for electric vehicles.

No. of Pages : 8 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042066 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : RIDER WEIGHT-RESPONSIVE FOOT REST APPARATUS FOR TWO-WHEELED VEHICLES

(51) International classification	:B62J 1/12, B60R 3/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Shivraj Jalinder Deshmukh
4)Dhiraj Samadhan Patil
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Shivraj Jalinder Deshmukh
3)Dhiraj Samadhan Patil

(57) Abstract :
The present invention relates to an automated footrest system for two-wheelers, which operates based on the presence of a co-passenger. The system incorporates a load sensor strategically positioned to detect the weight of the co-passenger. Upon sensing a load, the sensor transmits a signal to a pre-programmed power supply unit, which in turn sends a specific electrical pulse to a DC motor. The motor converts this electrical input into mechanical rotation, causing the footrest to automatically extend outward, providing a convenient platform for the passenger's foot. Conversely, when the co-passenger dismounts, the system detects the absence of load and sends an opposite electrical pulse, prompting the DC motor to rotate in the reverse direction, thereby retracting the footrest to its closed position. This invention offers a smart, automated solution for enhancing passenger convenience and safety in two-wheelers by automatically controlling the footrest movement based on real-time weight detection.

No. of Pages : 9 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042101 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MOBILE DEVICE CHARGING SYSTEM WITH INTEGRATED MOTION-BASED ENERGY HARVESTING AND CONTROL UNITS

(51) International classification	:H02J0007000000, H02J0007340000, H01M0010052500, H01M0010440000, H10N0030300000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Nikhil Hansraj Bhamare
4)Harsh Yogesh Aher
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Nikhil Hansraj Bhamare
3)Harsh Yogesh Aher

(57) Abstract :
The present invention discloses a mobile device charging system that integrates motion-based energy harvesting with advanced control units to enhance the charging process. The system comprises a motion sensor to detect environmental motion or vibrations, a kinetic generator to convert this mechanical energy into electrical energy, and a power control unit to efficiently distribute the harvested energy between a supercapacitor and a lithium-ion battery. The microcontroller unit (MCU) monitors and manages the entire process, ensuring optimal energy storage and usage. The supercapacitor temporarily stores the energy for immediate use, while the lithium-ion battery serves as the long-term energy storage unit for the mobile device. An app control interface allows users to monitor and adjust the energy harvesting and charging process in real time. This invention provides an efficient and sustainable solution for charging mobile devices, utilizing ambient motion to extend battery life and reduce reliance on traditional charging methods.

No. of Pages : 11 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042102 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : WEARABLE-EMBEDDED JEWELRY TRACKING SYSTEM USING WIRELESS TECHNOLOGY

(51) International classification	:B60J 11/04, B60J 11/00, B32B 17/10, B60J 11/04, B60J 11/00, B32B 17/10, B60J 11/04, B60J 11/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Bhakti Shivaji Chape
4)Siddhant Bhutada
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Bhakti Shivaji Chape
3)Siddhant Bhutada

(57) Abstract :
An automobile windshield protection cover is disclosed, designed to shield a vehicle's windshield from environmental hazards such as ultraviolet radiation, thermal extremes, hail, frost, and debris. The cover comprises a flexible, multi-layered structure including an outer reflective layer, a middle insulating layer, and an inner impact-absorbing layer. The device is lightweight, weather-resistant, and easy to deploy. It may be secured using suction cups, magnetic edges, or elastic bands. In certain embodiments, the invention incorporates smart sensors for detecting environmental conditions and may include an automatic deployment system for enhanced convenience. The design is adaptable to various vehicle models, offering an effective, user-friendly, and cost-efficient solution to protect windshields and extend their lifespan.

No. of Pages : 9 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042104 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTOMOBILE WINDSHIELD PROTECTION COVER WITH INTEGRATED ENVIRONMENTAL SHIELDING FEATURES

(51) International classification	:B60J 11/00, B60R 13/08, G05D 27/02	(71)**Name of Applicant :** **1)Rahul Krishnaji Bawane** Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India **2)Pimpri Chinchwad College of Engineering and Research** **3)Jivan Dattatray Aghao** **4)Omkar Ramhari Dhas**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	(72)**Name of Inventor :**
(33) Name of priority country	:NA	**1)Rahul Krishnaji Bawane**
(86) International Application No	:NA	**2)Jivan Dattatray Aghao**
Filing Date	:NA	**3)Omkar Ramhari Dhas**
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :

An automobile windshield protection cover is disclosed, designed to shield a vehicle's windshield from environmental hazards such as ultraviolet radiation, thermal extremes, hail, frost, and debris. The cover comprises a flexible, multi-layered structure including an outer reflective layer, a middle insulating layer, and an inner impact-absorbing layer. The device is lightweight, weather-resistant, and easy to deploy. It may be secured using suction cups, magnetic edges, or elastic bands. In certain embodiments, the invention incorporates smart sensors for detecting environmental conditions and may include an automatic deployment system for enhanced convenience. The design is adaptable to various vehicle models, offering an effective, user-friendly, and cost-efficient solution to protect windshields and extend their lifespan.

No. of Pages : 9 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042105 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR COLLABORATIVE LEARNING USING HOLOGRAPHIC PROJECTION TECHNOLOGY

(51) International classification	:G03H1/00, G06F3/01
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Tanishq Atin Jain
4)Yuvraj Vivek Ligade
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Tanishq Atin Jain
3)Yuvraj Vivek Ligade

(57) Abstract :
The present invention a system and method for collaborative learning using holographic projection technology. The invention provides a system and method for collaborative learning utilizing holographic projection technology to deliver immersive educational experiences. The system includes a holographic projector for displaying three-dimensional content in physical space, a central content management unit for rendering and controlling educational media, and user input interfaces such as gesture recognition sensors and voice modules for real-time interaction. A network interface enables synchronization across multiple remote devices, allowing students and instructors in different locations to participate simultaneously. The system supports intuitive manipulation of holograms, dynamic content delivery, and session logging for analysis. Designed to function without head-mounted displays, it enhances group-based learning through shared, interactive 3D visualization.

No. of Pages : 9 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042068 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD FOR ENHANCING THERMAL EFFICIENCY IN EVACUATED TUBE HEAT PIPE SOLAR COLLECTORS USING NANOFLUIDS

(51) International classification	:F24S 10/95, F24S 10/40, F24J 2/46
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Prathamesh Dnyaneshwar Pohare
4)Arnav Rahul Kadam
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Prathamesh Dnyaneshwar Pohare
3)Arnav Rahul Kadam

(57) Abstract :
The present invention relates to a Complete Evacuated Tube Heat Pipe Solar Collector System, designed to efficiently harness solar energy for thermal applications such as water heating. The system incorporates an evacuated tube (1) to reduce heat loss, ensuring optimal energy absorption from solar radiation. Inside the evacuated tube, an absorber (5) captures solar energy, which is transferred to a nanofluid (4) circulating within a heat pipe. The nanofluid undergoes a phase change in the evaporation section (3), absorbing heat and vaporizing. The vapor then flows to the condenser section (2), where it releases the captured heat to a circulating fluid. The heat is then transferred to a storage tank (8) via a circulation pump (7), ensuring that the thermal energy is stored for later use. This system offers high thermal efficiency through the integration of nanofluids, minimized heat loss via the evacuated tube, and passive heat transfer through the heat pipe, providing a sustainable and reliable solution for solar thermal energy. The system's design minimizes maintenance, increases energy conversion efficiency, and offers significant environmental benefits by reducing reliance on fossil fuels for heating.

No. of Pages : 9 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042069 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : REAL-TIME VIDEO COMMUNICATION SYSTEM FOR ASSISTING VEHICLE OVERTAKING

(51) International classification	:B60W 60/00, G08G 1/00, G08G 1/16, G08G 1/01, H04N 21/2343
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Aditya Kisan Mane
4)Kunal Dilip Puri
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Aditya Kisan Mane
3)Kunal Dilip Puri

(57) Abstract :
The invention provides a real-time video communication system for enhancing the safety and efficiency of vehicle overtaking maneuvers. The system includes a forward-facing camera mounted on a lead vehicle, a video transmission module for broadcasting the captured live video feed, and a receiving unit in a trailing vehicle that displays the video feed to the driver. The system further includes a communication interface enabling the exchange of overtaking-related signals or status indicators between vehicles. By providing the trailing driver with a direct visual of the oncoming lane ahead of the lead vehicle, the system improves decision-making during overtaking, particularly on single-lane roads or in limited visibility conditions. The system is designed to be secure, low-latency, and compatible with existing vehicle technologies, and may optionally integrate with autonomous driving features or advanced driver assistance systems (ADAS).

No. of Pages : 8 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042071 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD FOR AMBIENT LIGHTING CONTROL BASED ON BIOMETRIC STRESS DETECTION

(51) International classification	:A61B0005000000, G16H0050200000, G16H0040670000, A61B0005024000, A61B0005160000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Shivendra Milind Jadhav
4)Ayush Nilprakash Pande
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Shivendra Milind Jadhav
3)Ayush Nilprakash Pande

(57) Abstract :
An ambient stress-responsive lighting system dynamically adapts environmental lighting conditions based on a user's real-time physiological and emotional state. The system comprises biometric sensors for capturing stress-related biometric data, a sensor interface module for data aggregation, and a data processing unit that analyzes the data to determine the user's stress level using signal processing and machine learning techniques. A lighting control module then adjusts smart ambient lighting units to create a personalized visual ambiance aimed at stress reduction or stimulation. A feedback loop continuously monitors the user’s response to lighting changes to refine future adjustments. An optional user interface provides visual feedback, manual controls, and customization options. The system is applicable to various environments including homes, workplaces, and healthcare settings, enhancing user well-being through intelligent, responsive lighting.

No. of Pages : 10 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042072 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : TEA KULLAD-CUP WITH INTERNAL POCKET FOR TEA BAG

(51) International classification	:A47G 19/16, A47G 19/22, B28B 1/54
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Shreya Santosh Khot
4)Bhoomika Gajanan Salunke
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Shreya Santosh Khot
3)Bhoomika Gajanan Salunke

(57) Abstract :
The present invention relates to a biodegradable tea-cup designed in the traditional form of a kullad, featuring an integrated internal pocket for holding a tea bag. The kullad includes a recessed compartment molded into the inner wall of the cup to securely accommodate a tea bag during and after steeping. A string attached to the tea bag extends through a notch on the rim of the kullad, terminating in a tag assembly for easy handling. An optional biodegradable lid may be provided with a slit to allow the string to pass through while maintaining a seal. The invention combines cultural authenticity with modern convenience, offering an eco-friendly, hygienic, and user-friendly solution for tea consumption in single-use settings.

No. of Pages : 8 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042107 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : REAL-TIME EMERGENCY ALERT SYSTEM AND METHOD FOR SENIOR CITIZENS USING MOBILE TECHNOLOGY

(51) International classification	:A61B0005000000, A61B0005024000, G16H0040670000, A61B0005110000, G08B0027000000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Chaitanyagauri Battula
4)Janhavi Hemant Jadhav
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Chaitanyagauri Battula
3)Janhavi Hemant Jadhav

(57) Abstract :
The present invention a real-time emergency alert system and method are disclosed for enhancing the safety and independence of elderly individuals using mobile technology. The system includes a mobile device equipped with an emergency alert application, one or more physiological and motion sensors, a GPS module, and a wireless communication interface. The sensors monitor the user's activity and vital signs to detect emergency conditions such as falls or abnormal health events. Upon detection of such conditions—or manual activation by the user—the system generates an emergency alert containing real-time location and status data, which is transmitted to designated caregivers, family members, or emergency responders via SMS, voice call, or push notification. The system also logs event data to a secure cloud server for later access by authorized parties. The invention enables automated, location-aware emergency response without requiring constant user interaction, providing a reliable and low-effort safety solution for elderly users.

No. of Pages : 12 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042108 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SOLAR POWERED EVAPORATIVE COOLING SYSTEM USING MUD GRILLS TO WINDOW

(51) International classification	:F24F 5/00, F24F 3/14, F24J 2/04
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Dhananjay Ghansham Chavan
4)Om Sanjay Borkar
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Dhananjay Ghansham Chavan
3)Om Sanjay Borkar

(57) Abstract :
The present invention relates to a solar-powered evaporative cooling system designed for window integration utilizes baked mud grills to enable passive, sustainable indoor cooling. The system comprises a window-mounted frame containing porous baked mud grills, which facilitate evaporative cooling through continuous moisture retention. A solar panel powers a water distribution mechanism, including a series of sprinklers positioned to wet the mud grills at controlled intervals. A reservoir equipped with a float valve automatically regulates water supply, ensuring uninterrupted operation without manual refilling. The system may optionally include a solar-powered exhaust fan to enhance air circulation. This invention combines renewable energy with traditional cooling methods to deliver a low-cost, eco-friendly, and maintenance-efficient alternative to conventional air conditioning systems, particularly suited for hot and arid climates.

No. of Pages : 8 No. of Claims : 5

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042109 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SOLAR OPERATED PASSIVE COOLING SYSTEM FOR PARKED FOUR-WHEELER VEHICLES

(51) International classification	:B60H 1/00, B60H 1/32
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Vishwajeet Tushar Kolhe
4)Sreerag Ravi Nair
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Vishwajeet Tushar Kolhe
3)Sreerag Ravi Nair

(57) Abstract :
The present invention relates to an automotive cooling system that utilizes a solar panel mounted on the roof of a four-wheeler vehicle to maintain a comfortable cabin temperature while the vehicle is parked and in a switched-off state. The system comprises a solar photovoltaic panel, a rechargeable battery, a temperature sensor, a controller, and a compact cooling unit integrated within the vehicle. When sunlight strikes the solar panel, it generates electricity, which is stored in the battery. If the cabin temperature exceeds a predefined threshold, the temperature sensor triggers the controller to activate the cooling unit, which circulates cool air within the cabin using stored or direct solar energy. The system automatically deactivates once the temperature falls below the set limit or battery power becomes insufficient. This invention offers a sustainable, energy-efficient solution for reducing cabin heat buildup in parked vehicles, enhancing passenger comfort, safety, and vehicle interior protection, especially in hot climates.

No. of Pages : 7 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042110 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVED PAPER PUNCHING MACHINE SIMULTANEOUSLY STAPLE PIN AT CENTER POSITION OF PUNCH

(51) International classification	:B26D 7/18, B42B 4/00	(71)**Name of Applicant :** **1)Rahul Krishnaji Bawane** Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
(31) Priority Document No	:NA	**2)Pimpri Chinchwad College of Engineering and Research**
(32) Priority Date	:NA	**3)Siddhi Sandeep Pisal**
(33) Name of priority country	:NA	**4)Rachana Sharad Sutar**
(86) International Application No	:NA	(72)**Name of Inventor :**
Filing Date	:NA	**1)Rahul Krishnaji Bawane**
(87) International Publication No	: NA	**2)Siddhi Sandeep Pisal**
(61) Patent of Addition to Application Number	:NA	**3)Rachana Sharad Sutar**
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :

The foundation of this innovation is the ability to punch and staple simultaneously. The punch is used to create holes in the paper sheet, and the stapler is used to pierce the staple pin in the middle of the space between two punch holes. This allows one to use a new and improved punching machine to punch and staple the paper together at the same time.

No. of Pages : 7 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042073 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD FOR DEVELOPING TARGETED DRUG DELIVERY SYSTEMS

(51) International classification	:A61P0035000000, C07K0016320000, A61K0031708800, A61K0047680000, A61P0031000000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Tanaj Ayyub Manyar
4)Harshada Chandrakant Mahakal
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Tanaj Ayyub Manyar
3)Harshada Chandrakant Mahakal

(57) Abstract :
The present invention relates to a method for developing targeted drug delivery systems (TDDS) designed to enhance therapeutic efficacy and minimize off-target effects. The method comprises a systematic sequence of steps, including the identification of disease-specific biomarkers or receptors, selection of corresponding targeting ligands, formulation of biocompatible delivery vehicles such as nanoparticles, liposomes, or micelles, and surface functionalization of these carriers with the selected ligands. The process further involves encapsulation or conjugation of therapeutic agents within the delivery system, followed by in vitro and in vivo validation of targeting specificity and therapeutic performance. Additionally, the method incorporates iterative optimization based on biological feedback and computational modeling. This comprehensive approach enables the development of customizable, site-specific drug delivery platforms applicable across a wide range of diseases and therapeutic agents.

No. of Pages : 7 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042074 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : INTELLIGENT PEN-SHAPED SCANNER FOR INSTANT TEXT CAPTURE AND TRANSMISSION

(51) International classification	:G06V 30/10, G06K 7/10, G06V 10/14, H04N 1/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Soham Kiran Kumbhar
4)Yash Ashok Chaudhari
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Soham Kiran Kumbhar
3)Yash Ashok Chaudhari

(57) Abstract :
The present invention relates to an intelligent, pen-shaped scanner for instant text capture and transmission. The device integrates an optical sensor module, a lighting unit, and an optical character recognition (OCR) processor within a compact, ergonomically designed housing. As the user moves the device across printed text, the optical sensor captures the text, which is then processed in real time by the OCR system to convert it into machine-readable digital text. The recognized text is wirelessly transmitted via an integrated communication module e.g., Bluetooth or Wi-Fi to an external device such as a smartphone, tablet, or computer. The scanner further includes a user-friendly control interface, a power supply, and optional memory for temporary storage. The invention provides a portable, efficient, and accessible solution for digitizing printed material, particularly benefiting professionals, students, researchers, and individuals with visual impairments.

No. of Pages : 9 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042075 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : RUBBER GRIP HOLDING MECHANISM FOR BOTTLES

(51) International classification	:B65D 23/10, B65D 1/02
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Tanish Deepak Bohara
4)Rohit Hemant Chaudhari
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Tanish Deepak Bohara
3)Rohit Hemant Chaudhari

(57) Abstract :
A rubber grip holding mechanism for bottles is disclosed, designed to enhance user comfort, handling, and safety. The invention comprises a grip made from flexible, high-friction rubber material that is either integrally molded with the bottle or configured as a detachable sleeve. The grip includes ergonomic features such as finger grooves and surface textures to provide a secure hold, particularly in wet or high-motion environments. It also offers thermal insulation to protect the user's hand from temperature extremes. The mechanism is adaptable to various bottle shapes and sizes, and may include additional features such as branding zones, antimicrobial additives, or modular adjustability. This invention improves overall bottle functionality and user experience.

No. of Pages : 8 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042076 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : PORTABLE VEGETABLE WASHING SYSTEM WITH INTEGRATED WATER CIRCULATION

(51) International classification	:A23N 12/02, B08B 3/02
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Prathamesh Sanjay Pore
4)Sankalp Vinayak Mhamane
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Prathamesh Sanjay Pore
3)Sankalp Vinayak Mhamane

(57) Abstract :
A portable vegetable washing system is disclosed, comprising a compact outer housing that encloses a vegetable rotary chamber, a water chamber, and an integrated water circulation mechanism. The system includes a pump connected to one or more spray nozzles configured to direct water into the rotary chamber for cleaning produce. A removable lid provides secure access, while a rechargeable power source enables operation without external utilities. The system operates in a closed-loop configuration, recirculating water through the washing cycle to minimize consumption. Designed for portability and efficiency, the invention is suitable for use in outdoor, mobile, or compact kitchen environments and may optionally include features such as ultrasonic cleaning and filtration.

No. of Pages : 8 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042111 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVED SHOE CLIPS FOR SHOE LESSEES

(51) International classification	:A43B0001000000, G06Q0020400000, A43C0007000000, G05D0001000000, G06Q0020420000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Riya Rajkumar Borana
4)Bhumika Deepak Ladhani
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Riya Rajkumar Borana
3)Bhumika Deepak Ladhani

(57) Abstract :
The invention concerns an improved shoe clips for shoe lessees. The said invention involves a system for unlocking the shoe laces and to prevent trip and fall. This makes it very easier to keep the shoe laces enact and at place.

No. of Pages : 6 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042123 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTOMATIC ACCIDENT SOS SYSTEM FOR AUTOMOBILE

(51) International classification	:G08G1/16, G08G1/0965, B60W30/08, H04W4/90, G16Y40/10, G16Y40/60, G06N3/00, G06N20/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Ritesh Mahesh Bhole
4)Siddhesh Tatyaso Jadhav
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Ritesh Mahesh Bhole
3)Siddhesh Tatyaso Jadhav

(57) Abstract :
The invention concerns an intelligent and economically viable accident detection and emergency alert system for four-wheelers and two-wheelers. The system involves a combination of motion sensors, GPS, and GSM modules to sense vehicular accidents in real time and alert emergency contacts automatically. The system continuously tracks vehicular movement and orientation using onboard sensors and detects collision or tilt-based anomalies against predefined thresholds. When detected, it takes the exact location of the vehicle via GPS and automatically sends SMS messages and voice calls through GSM to pre-programmed emergency contacts. One of the distinctive aspects of the invention is the application of AI-pattern recognition to understand the regular behavior of the driver while riding and identify anomalies like drowsiness or unpredictable movement. Upon detection of such a behavior, the system warns the driver through a buzzer as well as sends a warning message to an emergency number. The invention also enables a dual-mode communication model with functionality in both GSM-based and Smartphone-supported Wi-Fi tethering mode. This guarantees seamless emergency alert transmission even in the event of low-connectivity locations or when there is a Smartphone available for internet browsing and location sharing. The system can also download contact information of the closest hospitals using GPS location and automatically call the closest hospital to access immediate help. The invention is made to be small, scalable, and versatile for motorcycles, scooters, and automobiles, with a considerable reduction in post-accident response time and increased vehicular safety.

No. of Pages : 9 No. of Claims : 7

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042126 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MECHANISM TO CONVERT BICYCLE PEDAL FORCE TO ELECTRIC POWER

(51) International classification	:H02N2/18, H02M7/02, H02J7/00, G05F1/10
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Satyajeet Manish Mane
4)Sarthak Jitendra Chaudhari
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Satyajeet Manish Mane
3)Sarthak Jitendra Chaudhari

(57) Abstract :
This innovation is based on providing a piezoelectric cell arrangement on the bicycle pedals so that when a rider applies force on the pedal to propel the bicycle the mechanical stresses applied on the piezoelectric cell generates the piezoelectric energy which then after rectifies and stored in a battery, these stored energy then after may be used for head lamp for illumination, operating radio or charging a mobiles etc., thus using no external power sources electrical / electronic devices can be operated by recovering riders mechanical force energy.

No. of Pages : 7 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042127 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVED MECHANISM TO DETECT FAULT IN PIPES USING IMAGE PROCESSING

(51) International classification	:G01N0033487000, A23L0033125000, B22F0001100000, C21B0013000000, H04W0072540000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Kedar Bhaskar Paitwar
4)Sanket Trambak Dolhare
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Kedar Bhaskar Paitwar
3)Sanket Trambak Dolhare

(57) Abstract :
This innovation, which is based on automation in the quality check procedure in industrial pipe manufacturing units, aims to shorten the time needed to assess the final product for any defects or faults and separate it from the finished and finalized product. It offers the manufacturing unit several advantages, including a reduction in the time needed to check the final product for defects or faults, an increase in accuracy, and a reduction in the amount of time and resources needed for the quality check process, all of which increase the manufacturing unit's overall productivity.

No. of Pages : 7 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042158 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SMART GLASSES SYSTEM FOR THE VISUALLY IMPAIRED WITH INTEGRATED AUDIO NAVIGATION ASSISTANCE

(51) International classification	:A61H0003060000, G02B0027010000, G05D0001000000, G06F0003010000, G01C0021200000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Aditya Yadav
4)Harshvardhan Mahesh Nawandar
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Aditya Yadav
3)Harshvardhan Mahesh Nawandar

(57) Abstract :
The invention discloses a wearable smart glasses system designed to assist visually impaired individuals in navigating and perceiving their environment through integrated audio guidance. The system comprises a lightweight frame and lens assembly housing a processing unit, a power supply, multiple environmental sensors (including ultrasonic and/or LiDAR), a camera module, a GPS receiver, and an inertial measurement unit (IMU). Real-time data from these components is processed to detect obstacles, identify objects, and determine user location and orientation. An audio navigation system employing bone conduction or in-ear speakers delivers intuitive verbal cues and spatial feedback, generated via an onboard text-to-speech engine. The system operates hands-free, supports both indoor and outdoor environments, and enhances user autonomy by providing real-time, context-aware navigation and obstacle avoidance assistance in an ergonomic wearable form.

No. of Pages : 9 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042160 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : THERMAL ENERGY STORAGE THERMOS FLASK UTILIZING PHASE CHANGE MATERIALS

(51) International classification	:A47J 41/00, A47J 41/02, F28D 20/02, C09K 5/06, B65D 81/38
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Shekhar Chandrakant Sonar
4)Vaibhav Kamlakar Zunjare
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Shekhar Chandrakant Sonar
3)Vaibhav Kamlakar Zunjare

(57) Abstract :
The present invention relates to a thermal energy storage flask utilizing phase change materials (PCMs) to significantly enhance temperature retention capabilities. The flask comprises an outer shell, an inner shell defining a liquid storage chamber, and a phase change material shell positioned between the outer and inner shells. The PCM shell contains materials capable of undergoing latent heat absorption and release during phase transitions to maintain a stable internal temperature. An evacuated space adjacent to the PCM shell provides superior thermal insulation by minimizing conductive and convective heat losses. The flask further includes a main body providing structural support and a cap configured to seal the chamber and reduce heat exchange. By combining vacuum insulation with latent heat storage, the invention substantially improves the ability to maintain hot or cold temperatures of stored liquids over extended periods, offering enhanced energy efficiency, versatility, and user convenience.

No. of Pages : 9 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042161 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTOMATIC CURTAIN CONTROL SYSTEM WITH SENSOR INTEGRATION

(51) International classification	:A47H5/02, G05B15/02, G06N20/00, H02S20/32, H04L67/12, G06F3/01, E06B9/68, G05B19/418
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Harsh Prakash Patil
4)Sarvesh Vitthal Patil
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Harsh Prakash Patil
3)Sarvesh Vitthal Patil

(57) Abstract :
An automatic curtain control system is disclosed that enables intelligent opening and closing of curtains based on environmental conditions, scheduled routines, and remote user input. The system comprises a motorized track assembly for curtain movement, a microcontroller-based control unit, a power supply, one or more environmental sensors such as light, temperature, or motion sensors, and a wireless communication module supporting integration with mobile devices and smart home platforms. The controller processes sensor data and user commands to dynamically adjust curtain positioning for improved energy efficiency, comfort, and convenience. The system also includes multiple operation modes and manual override functionality, offering a versatile and scalable solution for residential and commercial applications.

No. of Pages : 9 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042163 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVED MOBILE CAMERA MECHANISM FOR PATH OBSTACLE DETECTION

(51) International classification	:G06T 7/70, G06V 20/58, H04N 23/57, G06T 7/20
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Anup Prasad Kulkarni
4)Arjun Jugnu Sahu
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Anup Prasad Kulkarni
3)Arjun Jugnu Sahu

(57) Abstract :
A mobile device (1) without an integrated camera is required. A mount (2) for attaching the camera is connect to mobile device (1) where a mount is having a rotating system (3) to move only camera in 360 degree where in on the top on mount (2) camera (4) is placed with the sensing capacity to make decision based to rotate and a mobile (1) cognitively changes its position to the front side and starts detecting obstacles when user is walking where through algorithm the system gives instruction to rotating mechanism to move automatic when person is walking and the camera senses the obstacles and make aware user to take avoid accidents. Thus, this invention increases camera usage in mobile phones.

No. of Pages : 7 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042164 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTOMATIC RAIN SENSING WINDOW CLOSING MECHANISM

(51) International classification	:E05F 15/20, E05F 15/71, E05F 15/73	(71)**Name of Applicant :** **1)Rahul Krishnaji Bawane** Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India **2)Pimpri Chinchwad College of Engineering and Research** **3)Nayan Rajesh Ramteke** **4)Rajadynee Sandeep Nimbalkar**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	(72)**Name of Inventor :**
(33) Name of priority country	:NA	**1)Rahul Krishnaji Bawane**
(86) International Application No	:NA	**2)Nayan Rajesh Ramteke**
Filing Date	:NA	**3)Rajadynee Sandeep Nimbalkar**
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :

The automatic rain-sensing window closer employs a novel mechanical linkage system to autonomously close windows when rain is detected, offering a significant departure from traditional electrically powered or sensor-driven systems. This invention centers around a specialized rain sensor designed to directly initiate a mechanical response upon contact with precipitation. This response, such as a change in weight or material expansion, triggers a meticulously engineered mechanical linkage comprising components like levers, gears, pulleys, and springs. This linkage then translates the initial mechanical signal into the necessary force and motion to effectively move a window from an open or partially open state to a fully closed position, thereby safeguarding interiors from water damage. A key advantage of this invention lies in its purely mechanical operation, eliminating the complexities and potential failure points associated with electrical components, sensors, and power sources. Furthermore, the system can incorporate a manual override mechanism, providing users with the flexibility to control the windows independently of the automatic rain-sensing function. This reliable and energy-efficient design is adaptable for integration into various window types across residential, commercial, and automotive settings, offering a cost-effective and low-maintenance solution for automated rain protection.

No. of Pages : 8 No. of Claims : 5

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042165 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVED MULTIPURPOSE ECO-FRIENDLY ROPE

(51) International classification	:G01S0005020000, D07B0001140000, A61B0005000000, A61B0090000000, G06K0019077000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Siddhesh Ankush Khamkar
4)Ujjwal Vijay Kor
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Siddhesh Ankush Khamkar
3)Ujjwal Vijay Kor

(57) Abstract :
The present invention relates to multipurpose eco-friendly rope. The invention relates to a smart, multi-layered rope embedded with flexible sensors for real-time monitoring. Natural fibers are pre-treated and braided into a strong structure, with strain gauges and thermistors integrated between layers to detect tension and temperature. Powered by energy-harvesting or low-power systems, the sensors transmit data via Bluetooth or LoRa modules to external devices. The rope is coated with eco-friendly resin for waterproofing and UV protection. This intelligent rope system enhances safety and durability, making it ideal for critical applications such as construction, mountaineering, and rescue operations. A biodegradable, sensor-enabled smart rope system is developed to improve safety and performance across industries such as climbing, military, construction, and rescue, while reducing environmental damage from synthetic materials.

No. of Pages : 8 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042167 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTOMATIC HEIGHT ADJUSTER MECHANISM FOR PUBLIC PLACE BENCHES

(51) International classification	:A47C 9/00, A47C 11/00, B66F 7/00, G05B 19/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Vidula Mahadu Patil
4)Rimpa Pal
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Vidula Mahadu Patil
3)Rimpa Pal

(57) Abstract :
The present invention relates to an intelligent and space-efficient public seating system that provides a bench which remains concealed beneath the ground surface and automatically raises when needed. The system is designed for urban public areas such as parks, railway stations, airports, and smart cities where space optimization, hygiene, and automation are important. It comprises an underground housing structure, a motorized or hydraulic lifting mechanism, a weather-resistant bench top, a sensor-based control system, and an independent or grid-powered energy source. Motion sensors detect the presence of users nearby, prompting the bench to rise, while weight and obstacle sensors ensure safe usage and automatic retraction when no longer needed. The system is controlled by a microcontroller that processes sensor input and regulates the lifting and lowering functions. This invention enhances the flexibility, cleanliness, and aesthetics of public spaces, offering seating only when required and retracting seamlessly into the ground when not in use.

No. of Pages : 9 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042168 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : DRINKING WATER PURIFIER USING SOLAR ENERGY

(51) International classification	:C02F 1/14, C02F 1/04, B01D 5/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Pratiksha Prakash Chavare
4)Bipasha Shaw
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Pratiksha Prakash Chavare
3)Bipasha Shaw

(57) Abstract :
This invention is proposed describing the process of using solar energy to purify the drinking water. The solar water purifier produces a stream of clean water by boiling, evaporating, and condensing water using either direct heat from the Sun or waste heat from a solar panel. One version uses a boiling tank to capture waste heat that is positioned beneath and in direct thermal contact with a solar panel. Another version exposes the boiling tank's transparent wall to the sun's rays directly. The boiling tank receives unfiltered water from an intake tank. When steam and water vapor enter the boiling tank, they exit the tank and are permitted to condense in a condenser. The intake water is preheated to the boiling tank using the heat recovered during condensation since the condenser is housed inside the input tank.

No. of Pages : 9 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042169 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SOLAR OPERATED PORTABLE EXHAUST FAN

(51) International classification	:H02S10/40, H02J7/00, H02S40/38, F24F7/007
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Ansh Tarachand Agarwal
4)Atharv SantoshAkolkar
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Ansh Tarachand Agarwal
3)Atharv SantoshAkolkar

(57) Abstract :
This invention is proposed the portable solar operated exhaust fan system to draw the exhausted air from the enclosed spaces. According to this invention the said portable exhaust fan (3) system is placed in the window on its base plate (1) when someone wants to exhale smoke, exhausted air, etc. from an enclosed environment, such as a room or a kitchen, and the suction pad (6) provides firm support while reducing vibration and shocks. Solar energy will be captured by the solar panel (2) and immediately transformed into electrical power. The exhaust fan (3), which is powered by a DC motor, will take away smoke, exhausted air, and other materials from the inside through the luminous charge controller (4). Concurrently, the battery (5) that powers the exhaust fan (3) at night or in locations where direct solar harvesting is not feasible was charged by the luminous charge controller (4).

No. of Pages : 8 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042077 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : WALK-BEHIND FLOOR CLEANING AND MOPPING MACHINE

(51) International classification	:A47L 11/282, A47L 11/40, A47L 11/30
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Samarjeet Deepak Tanpure
4)Shivam Karbhari Dighe
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Samarjeet Deepak Tanpure
3)Shivam Karbhari Dighe

(57) Abstract :
A walk-behind floor cleaning machine is disclosed, integrating scrubbing, mopping, and drying functionalities within a single modular system. The machine comprises a front-mounted motorized scrubbing mechanism for loosening dirt and debris, a central mopping assembly for surface wiping and sanitation, and a rear-positioned drying system including a squeegee and vacuum unit for moisture recovery. An onboard water and cleaning solution reservoir supplies fluid to the scrubbing and mopping units, while a separate recovery tank collects waste water. The system is powered by an energy-efficient battery module and designed with adjustable, tool-free components for ease of maintenance and adaptability to various floor types. Safety features include fluid level sensors, auto shut-off controls, and ergonomic operator interfaces. The invention provides an efficient, user-friendly solution for comprehensive floor maintenance in commercial and industrial environments.

No. of Pages : 8 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042078 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : WALL MOUNT COMPACT AIR COOLER

(51) International classification	:F24F 6/04, F24F 5/00, F24F 11/00	(71)**Name of Applicant :** **1)Rahul Krishnaji Bawane** Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India **2)Pimpri Chinchwad College of Engineering and Research** **3)Atharva Sanjay Jejurkar** **4)Maitreyee Sanjay Dhumal**
(31) Priority Document No	:NA	(72)**Name of Inventor :**
(32) Priority Date	:NA	**1)Rahul Krishnaji Bawane**
(33) Name of priority country	:NA	**2)Atharva Sanjay Jejurkar**
(86) International Application No	:NA	**3)Maitreyee Sanjay Dhumal**
Filing Date	:NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :

The invention relates to a wall-mounted compact air cooler utilizing evaporative cooling technology to provide efficient and environmentally friendly air cooling. The system comprises an outer housing configured for wall mounting, an air inlet, an evaporative cooling pad, a water pump, a water distribution system, a water reservoir, a fan, and an air outlet. A control unit regulates the operation of the fan and water circulation. Warm ambient air is drawn through the cooling pad moistened by water circulated from the reservoir, thereby cooling the air through evaporation before it is discharged into the room. The design offers a space-saving, energy-efficient, and low-maintenance solution suitable for residential, commercial, and industrial applications, particularly in hot and arid climates.

No. of Pages : 8 No. of Claims : 3

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042079 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SENSOR-BASED TOOL BREAKAGE DETECTION APPARATUS

(51) International classification	:B23Q 17/09, G05B 19/4065, G05B 19/18, B23Q 17/09, G05B 19/4065, G05B 19/18
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Karan Sunil Maindad
4)Akshay Sanjay Lipare
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Karan Sunil Maindad
3)Akshay Sanjay Lipare

(57) Abstract :
The present invention provides a sensor-based apparatus and method for detecting the breakage of cutting tools in automated and semi-automated machining systems, such as Computer Numerical Control (CNC) machines. The system comprises a cutting tool mounted on a spindle, a sensor configured to monitor physical parameters such as vibration or acoustic emission, a signal conditioning unit to filter and amplify the sensor signals, and a digital signal processor (DSP) that analyzes the conditioned signals to identify tool breakage events. Upon detection, the DSP communicates with the CNC controller to halt or adjust the machining process, preventing further damage and reducing downtime. The invention enables real-time, non-intrusive detection of tool breakage, enhancing the reliability, safety, and efficiency of CNC operations.

No. of Pages : 8 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042080 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVED MECHANISM FOR VEHICLE TIRE COOLING

(51) International classification	:B60C 23/18, B60C 23/20, B60C 23/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Ruturaj Shivaji Bagal
4)Amar Dilip Tope
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Ruturaj Shivaji Bagal
3)Amar Dilip Tope

(57) Abstract :
An improved mechanism for vehicle tire cooling is disclosed, designed to reduce excessive heat buildup in tires during vehicle operation. The system includes one or more cooling nozzles positioned adjacent to the tire, a fluid reservoir containing coolant or water, a pumping unit, temperature sensors, and a control unit. The sensors monitor tire temperature in real time and activate the pump when a preset threshold is exceeded, delivering coolant through the nozzles to spray the tire's surface. This process promotes rapid heat dissipation and enhances tire performance, safety, and lifespan. The mechanism is compact, cost-effective, and adaptable to various vehicle types with minimal structural modifications.

No. of Pages : 8 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202521042853 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR PREDICTING THE FAILURE OF CONTACTORS AND/OR CONNECTORS IN AN ELECTRIC VEHICLE

(51) International classification	:G07C7/00, H01M10/625, H01M10/63, G01R31/389
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)MAHINDRA ELECTRIC AUTOMOBILE LIMITED
Address of Applicant :Mahindra Tower, Pandurang Budhkar Marg, Nr. Doordarshan Kendra, Worli, Mumbai, Mumbai City, Maharashtra 400018, India Mumbai Maharashtra India
(72)**Name of Inventor :**
1)KAUSHIK MONDAL
2)AMRUTA MALVADKAR
3)ALBERT ATHISAYARAJ

(57) Abstract :
ABSTRACT SYSTEM AND METHOD FOR PREDICTING FAILURE OF CONTACTORS AND CONNECTORS IN AN ELECTRIC VEHICLE The present invention relates to a system (100) and a method (200) for predicting failure of one or more contactors and/or connectors in an electric vehicle (101). The system comprises a telematics unit (102) disposed in the vehicle (101) and a processing unit (108). The telematics unit (102) is configured to receive data in relation to at least one of a voltage parameter and a current parameter of one or more battery packs (104) and a motor control unit 106 and transmit the same to the processing unit (108). The processing unit (108) is configured to determine a relative voltage of the one or more battery packs with respect to the motor control unit and predict failure of the one or more contactors (102) and/or connectors (104) when the determined relative voltage exceeds a pre-defined value and increases with each odometer reading. Reference Figure 1

No. of Pages : 16 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202521042854 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A SYSTEM AND METHOD FOR PREDICTING BUS BAR FAULT IN A BATTERY PACK OF AN ELECTRIC VEHICLE

(51) International classification	:B60L3/00, B60L58/10, G01R31/36, G01R31/396, G01R31/382, G01R31/56, H01M10/42
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)MAHINDRA ELECTRIC AUTOMOBILE LIMITED
Address of Applicant :Mahindra Tower, Pandurang Budhkar Marg, Nr. Doordarshan Kendra, Worli, Mumbai, Mumbai City, Maharashtra 400018, India Mumbai Maharashtra India
(72)**Name of Inventor :**
1)KAUSHIK MONDAL
2)AMRUTA MALVADKAR
3)ALBERT ATHISAYARAJ

(57) Abstract :
ABSTRACT A SYSTEM AND METHOD FOR PREDICTING BUS BAR FAILURE IN A BATTERY PACK OF AN ELECTRIC VEHICLE A system (100) for predicting a bus bar fault in a battery pack (114) of an electric vehicle (110). The system (100) includes a telematics unit (112) and a processing unit (122). The telematics unit (112) is disposed in the electric vehicle (110) and configured to receive data in relation to the battery pack (114). The processing unit (122) is disposed in a remote server (120) and configured to: receive the data from the telematics unit (112) in a pre-defined state of the electric vehicle (110), determine the variations in voltages of the cells of the battery pack (114) for a pre-defined number of odometer readings and determine change in current of the battery pack (114) and predict bus bar fault in the battery pack (114). Reference Figure 1

No. of Pages : 17 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202521042855 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR PREDICTING COOLANT LEAKAGE IN ONE OR MORE BATTERY PACKS OF AN ELECTRIC VEHICLE

(51) International classification	:G01R31/36, G01R27/02, H01M10/42
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)MAHINDRA ELECTRIC AUTOMOBILE LIMITED
Address of Applicant :Mahindra Tower, Pandurang Budhkar Marg, Nr. Doordarshan Kendra, Worli, Mumbai, Mumbai City, Maharashtra 400018, India Mumbai Maharashtra India
(72)**Name of Inventor :**
1)KAUSHIK MONDAL
2)AMRUTA MALVADKAR
3)ALBERT ATHISAYARAJ

(57) Abstract :
ABSTRACT SYSTEM AND METHOD FOR PREDICTING COOLANT LEAKAGE IN ONE OR MORE BATTERY PACKS OF A VEHICLE The present invention relates to a system (100) and a method (200) for predicting coolant leakage in one or more battery packs of an electric vehicle. The system comprises a telematics unit (102) disposed of in the vehicle (101) and a processing unit (108). The telematics unit (102) is configured to receive data in relation to isolation resistance of the one or more battery packs (104) of the electric vehicle (101) and transmit the same to the processing unit (108). The processing unit (108) is configured to predict the coolant leakage in the one or more battery packs (104) when the isolation resistance offered by the one or more contactors deviates from a pre-defined range and said deviation increases with each odometer reading for a pre-defined number of odometer readings. Reference Figure 1

No. of Pages : 13 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/05/2025
(21) Application No.202521042856 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A SYSTEM AND METHOD FOR PREDICTING CELL IMBALANCE IN A BATTERY PACK OF AN ELECTRIC VEHICLE

(51) International classification	:B60L58/22, B60L58/12, H01M10/42
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)MAHINDRA ELECTRIC AUTOMOBILE LIMITED
Address of Applicant :Mahindra Tower, Pandurang Budhkar Marg, Nr. Doordarshan Kendra, Worli, Mumbai, Mumbai City, Maharashtra 400018, India Mumbai Maharashtra India
(72)**Name of Inventor :**
1)KAUSHIK MONDAL
2)AMRUTA MALVADKAR
3)ALBERT ATHISAYARAJ

(57) Abstract :
ABSTRACT A SYSTEM AND METHOD FOR PREDICTING CELL IMBALANCE IN A BATTERY PACK OF AN ELECTRIC VEHICLE The present invention relates to a system (100) for predicting cell imbalance in a battery pack of an electric vehicle. The system comprises a telematics unit (106) and a processing unit (112). The telematics unit (104) is configured to receive data in relation to battery management system (BMS) and vehicle control unit (VCU), the current state of charge (SOC) of the battery pack (106), voltage of the cells, current of the battery pack (106), the status of balancing for a plurality of predefined odometer values. The processing unit (112) receives the data from the telematics unit (104) in a pre-defined state of the vehicle, determines non-uniformity in the voltage of the cells based on difference in voltage between at-least two cells and predict the cell imbalance in the battery pack (106). Reference Figure 1

No. of Pages : 17 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042192 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVED HIGH AND LOW BEAM AUTO-OPERATION CONTROLLER SYSTEM FOR AUTOMOBILE A LIKE BIKE

(51) International classification	:B60Q 1/14, B60Q 1/04, B62J 6/02, H05B 47/105
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Soham Ramchandra Shelar
4)Devashish Vishwas Shinde
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Soham Ramchandra Shelar
3)Devashish Vishwas Shinde

(57) Abstract :
This innovation relates to the provision of a mechanism to make an automatic pass signal by shifting from high beam to low beam by detecting the illumination of the opposite side vehicle headlamps. In this system, a light beam detector detects the illumination of the opposite side vehicle, and the electronic control unit generates the signal to actuate the shifting mechanism from high beam to low beam automatically. Upon the vehicle passing, the high beam illumination is resumed automatically. This improves night driving visibility and removes the need for human intervention to operate the pass signal knob and the bike's high and low beam for a better driving experience.

No. of Pages : 7 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042193 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : MECHANICAL LINKAGE OPERATED AUTOMATIC FAN BLADE CLEARING MECHANISM

(51) International classification	:F04D 29/70, F04D 25/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Anushka Arjun Bhujbal
4)Sakshi Ashok Budhwant
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Anushka Arjun Bhujbal
3)Sakshi Ashok Budhwant

(57) Abstract :
The present invention relates to automatic fan blade cleaning mechanisms using mechanical linkages. This innovation is based on providing an attachment for cleaning the ceiling fan blade automatically using the centrifugal force when fan is switch on and off, the attachment slides along the guide ways and during its motion it remove the dust, the slider get position according to the centrifugal force experience and when fan is switch off then retracting spring pull back it and position near the fan rotating hub, thus whenever ceiling fan switch on or off the slider moves along the blade and clean it each time, thus eliminate the accumulation of dust on the fan blade.

No. of Pages : 7 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042349 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A PADDLE ASSEMBLY FOR A LAUNDER

(51) International classification	:B25J 9/16, B25J 15/00, F27D 3/15, B22D 41/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Janyu Technologies Private Limited
Address of Applicant :Unit 1 & 2, Dhuri Industrial Complex No. 1, Madhu Vrinda Phase 4, Waliv Phata, Sativali Road, Vasai East - 401208, Maharashtra, India. Vasai East Maharashtra India
(72)**Name of Inventor :**
1)PILLAIYAR, Abhimanyu Raja
2)CHIRANJEEVI, Sai Hemanth Manchella

(57) Abstract :
The present invention relates to a paddle assembly (100) that includes a linear guide rail (102) positioned parallel to a launder (200); a robotic arm (104) mounted perpendicularly on the linear guide rail (102) to move telescopically and linearly along the length of the linear guide rail (102); and a paddle (106) coupled to the robotic arm (104) for revolving to be positioned at an angle within the launder (200) for adjusting a dipping angle of the paddle (106). The paddle (106) configured in the launder (200) moves linearly along the length of the launder (200) and vertically in and out of the launder (200) upon movement of the robotic arm (104) to guide a material at high temperature up to 800 degrees Celsius contained in the launder (200). The paddle (106) applies consistent pressure over a slag / molten metal that is placed over an inner wall of the launder (200).

No. of Pages : 20 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042386 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A PROCESS FOR PRODUCING PILOT SCALE EXTRUSION BILLETS AND EXTRUDATES FROM MACHINING SWARF

(51) International classification	:B21C 23/21, B21C 23/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)JAWHARLAL NEHRU ALUMINIUM RESEARCH DEVELOPMENT AND DESIGN CENTRE
Address of Applicant :AMRAVATI ROAD, WADI, NAGPUR, MAHARASHTRA, INDIA Nagpur Maharashtra India
(72)**Name of Inventor :**
1)Dr. ANAS N S
2)KAPILKUMAR N RAMTEKE
3)RAMAVAJJALA ANIL KUMAR
4)V N S U VISWANATH AMMU
5)RAM NARAYAN CHOUHAN
6)Dr. ANUPAM AGNIHOTRI

(57) Abstract :
A process for producing pilot scale extrusion billets and extrudates from a machining swarf The present invention relates to a process for producing pilot scale extrusion billets and extrudates from a machining swarf; said process comprises cleaning the swarf followed by compacting the said swarf to obtain a pilot scale compacted billet and machining, and extrusion of the compacted billet to obtain pilot scale extrudates or extruded profiles.

No. of Pages : 28 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202521042615 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : TOOLING DESIGN FOR PRODUCING RIBBED CONTAINERS FOR EXTRUSION BLOW MOLDED CONTAINERS

(51) International classification	:B29C 49/48, B29C 49/04
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SSF PLASTICS INDIA LTD.
Address of Applicant :3C/D,32 Corporate Avenue, Near Paper Box, Off Mahakali Caves Road, Andheri East, Mumbai - 400 093, Maharashtra, India Mumbai Maharashtra India
(72)**Name of Inventor :**
1)PRADHAN, Swadhin
2)DHAWAN, Saurabh

(57) Abstract :
The present invention provides a die-mandrel assembly comprising a configuration for forming plurality of ribs in a blow-molded container, where the mandrel in the assembly is characterized with plurality of vertical ribs. The vertical ribbed configuration in mandrel provides manufacturing of ribbed blow molded container in 10-30% reduced amount of polymer. Thus, the present die-mandrel assembly is a cost-effective approach to manufacture ribbed blow molded container, and yet does not compromise with the mechanical strength of the container.

No. of Pages : 19 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/05/2025
(21) Application No.202521042858 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND SYSTEM FOR CONTENT-AWARE DEPLOYMENT OF ARTIFICIAL INTELLIGENCE WORKLOADS IN EDGE-CLOUD ECOSYSTEM

(51) International classification	:G06F9/50, G06N20/00, G06N3/045, G06N3/08, G06F18/21	(71)**Name of Applicant :** **1)Tata Consultancy Services Limited** Address of Applicant :Nirmal Building, 9th floor, Nariman point, Mumbai 400021, Maharashtra, India Mumbai Maharashtra India
(31) Priority Document No	:NA	(72)**Name of Inventor :** **1)SAHA, Ratul Kishore**
(32) Priority Date	:NA	**2)NAMBIAR, Manoj Karunakaran**
(33) Name of priority country	:NA	**3)SINGHAL, Rekha**
(86) International Application No	:NA	**4)MITTAL, Sparsh**
Filing Date	:NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :
ABSTRACT METHOD AND SYSTEM FOR CONTENT-AWARE DEPLOYMENT OF ARTIFICIAL INTELLIGENCE WORKLOADS IN EDGE-CLOUD ECOSYSTEM Existing approaches deploy model in edge-only or cloud-only environments for performing Artificial Intelligence (AI) workload in AI pipeline, few of the methods uses edge-cloud partitioning mechanisms. These methods lack in balancing the trade-off between latency, performance, and resource efficiency of AI pipeline. Embodiments disclosed herein provide a method and system for content-aware deployment of artificial intelligence workloads in edge-cloud ecosystem. In this approach, optimization framework dynamically selects the models for the task from the model library based on the input data characteristics and system constraints. Identifies the deployment location (edge/cloud) for each task that minimizes latency and better AI performance. The optimization framework leverages content aware approach for minimizing communication and computation latency while considering hardware limitations and environmental factors. [To be published with FIG. 1B]

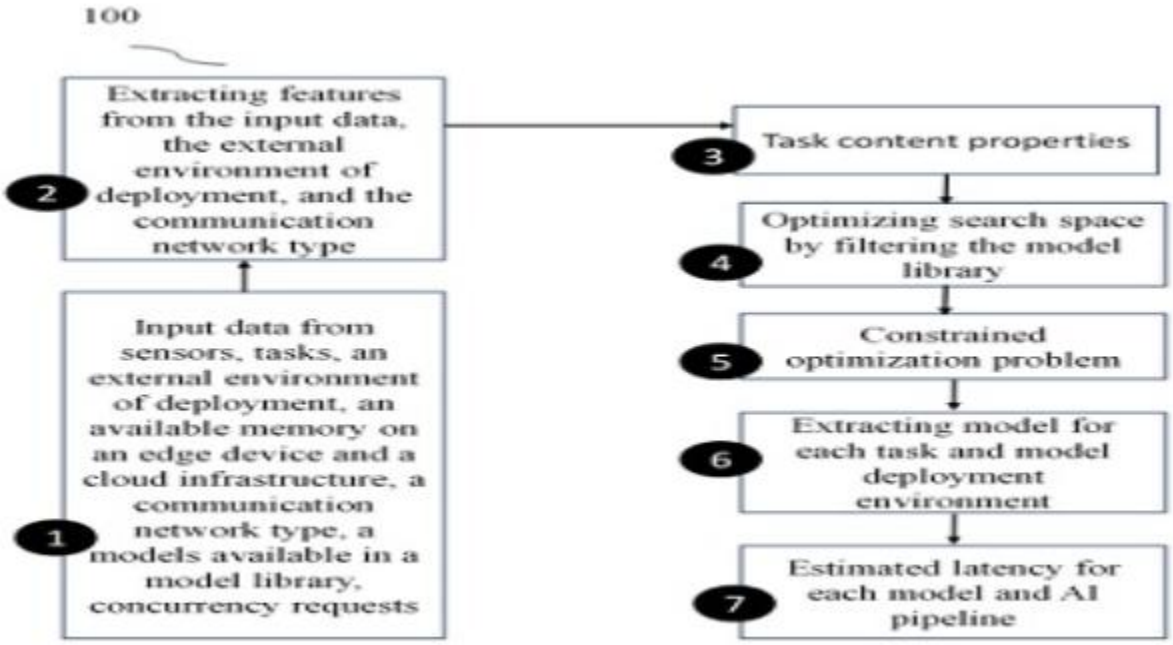


FIG. 1B

No. of Pages : 48 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/05/2025
(21) Application No.202521042988 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ERROR CORRECTION AND NORMALIZATION OF TELEMATICS DATA FOR MACHINE LEARNING

(51) International classification	:G07C5/08, G06N20/00, G07C5/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NIRVANA TECH, INC.
Address of Applicant :201 SPEAR ST, SUITE 220, SAN FRANCISCO, CA 94105, UNITED STATES OF AMERICA U.S.A.
(72)**Name of Inventor :**
1)Abhay Mitra
2)Anand Kumar Singh
3)Sanket Rathi
4)Sarthak Agarwal

(57) Abstract :
A method includes transmitting authorization from a first system to a second system to transmit first telematics data from at least one fleet of vehicles, receiving, at the first system, the first telematics data from the at least one fleet of vehicles in response to the authorization, normalizing the received first telematics data to generate first normalized telematics data, error correcting the first normalized telematics data to generate first error corrected normalized telematics data, and applying machine learning to the first error corrected normalized telematics data to determine at least one of garaging location of the at least one fleet, radius of operation of the at least one fleet, and hazard zones of the at least one fleet.

No. of Pages : 29 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/05/2025
(21) Application No.202521043063 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : UNDERWATER ENVIRONMENT MONITORING SYSTEM USING LI-FI

(51) International classification	:H04B10/00, H02J7/35, H04B10/116, H04B10/50, H04B13/02, G02B6/12, H04B10/80, H04L1/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Zaki Abdul Rehman Dawrey
Address of Applicant :A 802, Kumar Sublime, Parge Nagar, Kondhwa, Pune. Maharashtra India
2)Abhishek Sutar
3)D.A. Jakkan
4)Akshata Mahajan
5)Rupali Ambilge
(72)**Name of Inventor :**
1)Zaki Abdul Rehman Dawrey
2)Abhishek Sutar
3)D.A. Jakkan
4)Akshata Mahajan
5)Rupali Ambilge

(57) Abstract :
A basic underwater environment monitoring system using Light Fidelity (Li-Fi) technology is provided. The system comprises two main units: a transmitting unit with a DS18B20 temperature sensor, a turbidity sensor, an Arduino Uno microcontroller, and an LED; and a receiving unit with a solar panel acting as a photodetector, an Arduino Uno microcontroller, an I2C interface, and a 16x2 LCD display. The system employs On-Off Keying (OOK) modulation where the presence of light represents binary ’1’ and absence represents binary ’0’. The transmitting unit collects temperature and turbidity data, encodes it using OOK, and transmits it through light pulses. The receiving unit detects these pulses, processes them, and displays the decoded information. The system provides an alternative to traditional radio frequency communication methods for underwater environments with advantages of higher data rates and lower power consumption. Applications include marine research, aquaculture, and environmental monitoring.

No. of Pages : 8 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :03/05/2025

(21) Application No.202521043102 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : ADVANCED WASTEWATER TREATMENT UNIT AND METHOD

(51) International classification	:C02F0003100000, C02F0103000000, C02F0003060000, C02F0009000000, C02F0001000000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Biopipe India Private Limited
Address of Applicant :701, The Capital, BKC, Bandra Mumbai, Maharashtra-400051 Mumbai Maharashtra India
(72)**Name of Inventor :**
1)Mehmet Enes Kutluca

(57) Abstract :
The present invention is an advanced treatment unit (10) for treating the wastewater by means of bio-film process, comprising at least one treatment pipe (20) through which wastewater flows and at least one drive means (30) providing with the routing of wastewater through the treatment pipe (20). The said treatment pipe (20) comprises at least one pipe (21) constituting the outer surface of the said treatment pipe (20) and at least one carrier medium (22) where bio-film being grown thereon, complementing the shape of the internal volume of the said pipe (21) and/or occupying at least part of the internal volume of the pipe (21).

No. of Pages : 25 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042170 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVED BATHING EXFOLIATINGSPONGE WITH INTERNAL POCKET FOR LIQUID A LIKE LIQUID SOAP OR BODY WASH

(51) International classification	:A61Q0019100000, A47K0007020000, A47K0007030000, C09K0019200000, A42B0001120000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Sejal Ramchandra Kamble
4)Supriya Jeevan Kamble
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Sejal Ramchandra Kamble
3)Supriya Jeevan Kamble

(57) Abstract :
This invention is proposeddescribing the process of using a specially designed bathing scrubber mesh, a clever way to ensure an efficient and mess-free bathing experience. To utilize the said improved bathing exfoliating scrubber mesh (5), one must first open the enclosure (4) and squeeze sponge (1) throughout its breadth, causing the internal slit pocket (2) to expand. Bathing fluid (6), a like liquid soap or body wash, should be filled using the Refilling End with Poring Basin (3). Once a suitable amount of bathing fluid (6), a like liquid soap or body wash, has been poured, the enclosure (4) is placed over the pouring basin. This closes the pouring basin opening to stops the stored bathing fluid (6) from escaping.The said sponge (1) must be gently compressed during the bath in order for the bathing fluid (6) a like liquid soap or bod wash to flow through the permeable wall of sponge (1). Thus the bathing fluid (6) a like liquid soap or body wash will spread and cover the bathing exfoliating scrubber mesh (5), and create the necessary foam.

No. of Pages : 8 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042171 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVED PIN STAPLER WITH SAFETY LOCK

(51) International classification	:B25C 5/02, B25C 5/11, B25C 5/16
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Tanmay Ajit Chavan
4)Sumit Gokul Bhoye
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Tanmay Ajit Chavan
3)Sumit Gokul Bhoye

(57) Abstract :
This invention is based on providing a hinged type stapler lock to the stapler which can be rotates to cover or uncover the stapler pin ejection port, in the regular stapler hammer is always in operative position which may cause ejection of staples pin unknowingly and result in injury, thus to safeguard it, the stapler lock is made hinged so that wherever not in used one can rotate the lock to the position which cover the stapler pin ejection port to block the staple pin from ejection so stapler become inoperative, which does not eject staples pin even if handle is pressed and when needed then stapler lock rotate at hinged to uncover the stapler pin ejection port so now the pressure applied on handle eject the staples pins for stapling the bunch of papers, thus the conventional hand held stapler is modified to make it operative or inoperative as needed to make it more safer when handled.

No. of Pages : 8 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042172 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : HOT AIR MOISTURE REMOVAL MECHANISM FROM MOIST-WET CLOTHS A LIKE SOCKS

(51) International classification	:D06F 58/10, D06F 58/20, D06F 58/02
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Urvi Yogesh Patil
4)Siddhi Balasaheb Pawar
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Urvi Yogesh Patil
3)Siddhi Balasaheb Pawar

(57) Abstract :
The said invention proposed required to open the enclosure (3) and hang the moist-wet cloths (10) a like socks and then close the opening of outer drum (1) using enclosure (3). Switch on the overhead motor (8) which slowly moves the rotating hanger (9). Start the air blower (4) which drag air from surrounding and though air intake duct (5) pass to the annular space between outer drum (1) and inner drum (2). The air flow from top to bottom in annular space between outer drum (1) and inner drum (2) and finally pass over heating coils (6). The air blower (4), heating coil (6) and overhead motor (8) is supplied with the electric power through the common electric power connection (7). The hot air from heating coil (6) will enter into the inner drum (2) and flow upward. The moist-wet cloths (10) exposed to the hot air and loses its moisture, during this the rotating hanger (9) continuously rotating at a very slow speed. The hot air from the top of inner drum (2) is removed out and exhaust into the atmosphere through hot air outlet duct (11).

No. of Pages : 8 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202521042175 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : PROCESS OF SAUSAGE FRUIT OIL CONVERSION TO BIODESEL

(51) International classification	:C12P0007060000, C12P0007100000, C10L0001320000, F02B0043100000, C05F0005000000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Sakshi Anil Dongare
4)Samiksha Tanaji Chougule
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Sakshi Anil Dongare
3)Samiksha Tanaji Chougule

(57) Abstract :
This invention proposed the use of Sausage fruit for the production of ethanol as combustible fuel for the internal combustion engine. The Sausage fruit pulp is crushed and pre-treated for the enzymatic hydrolysis using enzymes and thus the produced hydrolysate is then pass through the fermentation process wherein the yeast is used for the chemical process to break the molecular bond and convert the hydrolysate into the fermented mixture of ethanol and water along with some impurities. The fermented mixture is heated in the distillation to form the vapors of the ethanol which later condensed into the liquid ethanol using condenser unit. The liquid ethanol thus produced from the Sausage fruit pulp is then passed through dehydration to remove water content and impurities to obtain the high-grade combustible ethanol fuel at 99% purity. Thus, the produced ethanol can be used as combustible fuel in internal combustion engines.

No. of Pages : 7 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202521043183 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A Nanoparticulate Lornoxicam

(51) International classification	:A61K 9/14, A61K 9/10, A61K 9/00, A61K 31/5415, C07D 417/12, A61P 29/00, A61K 47/40, C08B 37/16
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Registrar
Address of Applicant :Kaviyatri Bahinabai Chaudhari North Maharashtra University, Jalgaon- 425001,Maharashtra India Jalgaon Maharashtra India
(72)**Name of Inventor :**
1)Ms. Shilpa R. Mandpe
2)Dr. Vishal R. Parate
3)Dr. Jitendra B. Naik

(57) Abstract :
A Nanoparticulate Lornoxicam Present invention composed of effective concentration of β-cyclodextrin from 1-3 g as taste masking agent and PVP-K 30 from 1 to 2% w/w as polymer with polyvinyl alcohol from 0.75–2.25% w/v as a surfactant taken with 8 mg lornoxicam solution in microreactor to form nanosuspension immediately spray dried into nanoparticulate powder evaluated for melting point, FTIR, X-ray diffraction, scanning electron microscopy (SEM) confirms the stability of the preparation, encapsulation efficiency, in vitro taste evaluation using electronic tongue confirms the taste masking of the drug, signify enhanced bioavailability for oral administration as a powder and effectively masks bitter taste of lornoxicam.

No. of Pages : 25 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :05/05/2025

(21) Application No.202521043544 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Application of Vision Transformers for Scalable Crowd Surveillance: Advanced Techniques in Behavioral Analysis, Anomaly Detection, and Dynamic Flow Management

(51) International classification	:G06V20/52, G06V40/20, G08B21/00, G06V10/82
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)ABHIJIT TRIPATHY
Address of Applicant :Dept of Computer Science and Engg GGV Chattisgarh India
2)Prof. Alok Kumar Singh Kushwaha
3)Dr. Raksha Pandey
4)Dr. Princy Matlani
(72)**Name of Inventor :**
1)ABHIJIT TRIPATHY
2)Prof. Alok Kumar Singh Kushwaha
3)Dr. Raksha Pandey
4)Dr. Princy Matlani

(57) Abstract :
The growing complexity of urban environments necessitates scalable and intelligent solutions for crowd surveillance to ensure public safety. This study explores the application of Vision Transformers (ViT) augmented with a Hazard Matrix framework for advanced behavioral analysis, anomaly detection, and dynamic flow management. The proposed approach aims to address the limitations of conventional methods in terms of precision, adaptability, and real-time decision-making capabilities. The ViT model, integrated with Hazard Matrix estimation, achieves state-of-the-art results across multiple metrics, including accuracy (93.53%), precision (92.91%), and inference efficiency. Compared to traditional models such as LSTM and RTFM, our framework demonstrates a significant reduction in false positive rates while maintaining competitive recall, highlighting its reliability in safety-critical scenarios. Furthermore, the model excels in maintaining detection accuracy under varying crowd densities and adverse lighting conditions, showcasing robust adaptability to real-world challenges. A detailed analysis of inference time versus input resolution underscores the model's capability for real-time processing, essential for high-density environments. Additionally, the model exhibits superior memory utilization and resource efficiency, making it viable for deployment in resource-constrained settings. The correlation between model size and processing speed further reinforces its suitability for scalable applications. The alert system designed within the framework demonstrates high efficiency, with a low false positive rate even under high-alert conditions. The adaptability of the ViT model under varying lighting scenarios ensures consistent anomaly detection, reducing operational overheads and enhancing decision-making accuracy. This research establishes the ViT+Hazard Matrix framework as a robust and scalable solution for next-generation crowd surveillance, providing actionable insights and advancing the field of public safety.

No. of Pages : 29 No. of Claims : 7

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :05/05/2025

(21) Application No.202521043549 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A METHOD FOR CONTROLLING AT LEAST ONE RENEWABLE ENERGY DEVICE FOR THE SWITCHING OF AT LEAST ONE SUBSTATION COMPENSATION DEVICE

(51) International classification	:H02J3/18, G06Q10/20, G06Q50/06, H02J3/28, H02J3/16
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Suzlon Energy Limited
Address of Applicant :Shrimali Society, Near Shri Krishna Complex, Navrangpura, Ahmedabad 380 009, Gujarat, India Ahmedabad Gujarat India
(72)**Name of Inventor :**
1)Jens Thies
2)Venkata Rama Raju Rudraraju
3)Durgesh Kumar Singh

(57) Abstract :
ABSTRACT A METHOD FOR CONTROLLING AT LEAST ONE RENEWABLE EN-ERGY DEVICE FOR THE SWITCHING OF AT LEAST ONE SUBSTA-TION COMPENSATION DEVICE A method for controlling at least one renewable energy device for compensation of switching of at least one substation compensation device, comprising - monitoring of measured voltages at bus bars (4) and at each of at least one renewable energy device (2), - determining expected change in total reactive power injection during switch-ing of at least one substation compensation device (6), - determining expected change in voltage after switching of at least one sub-station compensation device (6) and - pre-adjusting reactive power demand of renewable energy device (2) prior to switching substation compensation device (6), according to expected change in voltage after switching of at least one substation compensation device (6). Fig. 1

No. of Pages : 31 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202521041519 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : Braking Device, PTO Transmission Unit And Work Machine

(51) International classification	:B60K 17/28, F16D 67/02, F16D 53/00, F16D 55/14, A01B 71/06, F16D 67/04
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Deere & Company
Address of Applicant :One John Deere Place, Moline, Illinois, 61265 USA U.S.A.
(72)**Name of Inventor :**
1)STEINER, TOBIAS
2)SHINDE, PRADIP

(57) Abstract :
The invention relates to a braking device (100) for a PTO transmission unit (30), comprising a bearing plate (102), the bearing plate (102) having one or more recesses (106). A ball (108) is arranged and mounted on and/or in each recess (106). The braking device (100) comprises a cone (104), the cone (104), in particular on a side facing the bearing plate (102), having one or more cutouts (112) in the circumferential direction, and the balls (108) being arranged and/or mounted on or in the cutouts (112). The invention furthermore relates to a PTO transmission unit (30) and to a work machine (10). Fig. 1

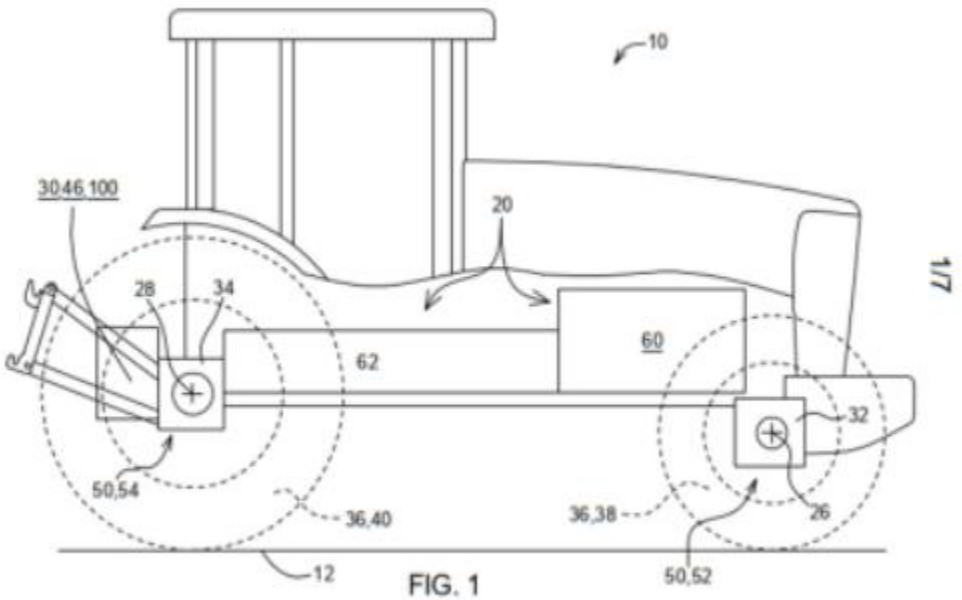


FIG. 1

No. of Pages : 35 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202521041520 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A MASTER BRAKE CYLINDER OF A BRAKING SYSTEM AND AN ASSEMBLY FOR THE SAME

(51) International classification	:B60T 11/16, B60T 11/22, B60T 11/232, B60T 11/30, B60T 11/34, B60T 11/236, B60T 11/28
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Chassis Systems India Private Limited
Address of Applicant :Gate No. 306, Nanekarwadi, Chakan, Pune, Maharashtra- 410501, India Pune Maharashtra India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Abhijit Arvind Deshmukh

(57) Abstract :
A MASTER BRAKE CYLINDER OF A BRAKING SYSTEM AND AN ASSEMBLY FOR THE SAME ABSTRACT The present invention relates to a master brake cylinder 102 of a braking system 100. The master brake cylinder 102 comprises a body 104. The body 104 comprises a chamber 106 with a step-bore profile 108, an inlet 110, an outlet 112, and a piston assembly 114. The piston assembly 114 is mechanically coupled to a pushrod 116 operable by a pedal 118. The chamber 106 comprises a first chamber 1061 and a second chamber 1062 fluidly coupled with each other and separated by the step-bore profile 108. The body 104 is adapted to securely accommodate a fluid compensation valve (FCV) 120, normally in open position, in the inlet 110, to regulate supply of brake fluid into the first chamber 1061. The FCV 120 rests on a piston-rod 1141 of the piston assembly 114 and moves perpendicular to central axis 122 as the piston-rod 1141 travels through the chamber 106. Figure 1.

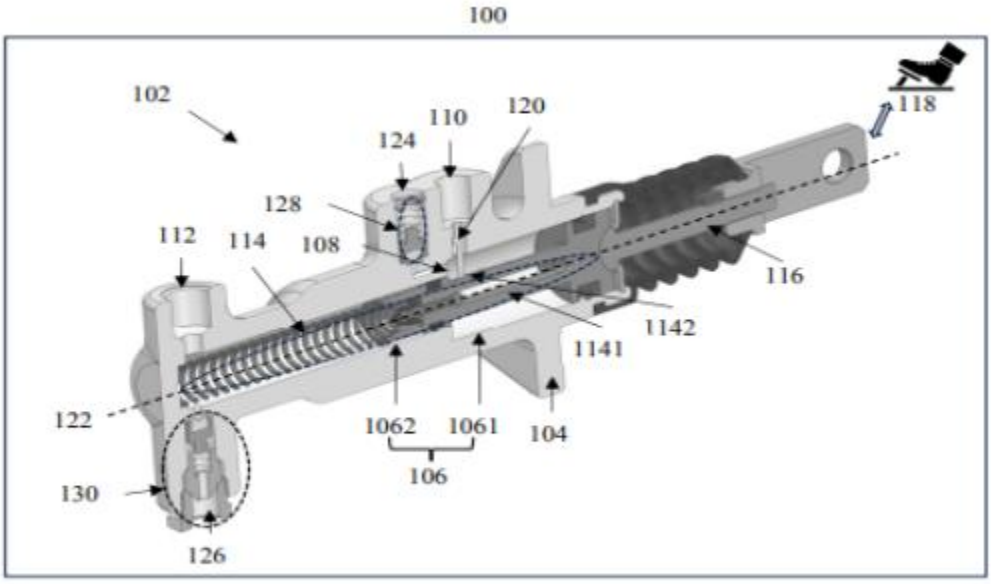


Figure 1

No. of Pages : 21 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202521041715 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND SYSTEM FOR STRATEGIZING NETWORK MIGRATION IN ADAPTATION TO POST QUANTUM CRYPTOGRAPHY

(51) International classification	:H04L9/40, H04L9/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Tata Consultancy Services Limited
Address of Applicant :Nirmal Building, 9th floor, Nariman point, Mumbai 400021, Maharashtra, India Mumbai Maharashtra India
(72)**Name of Inventor :**
1)BHOWMICK, Amit
2)MADDALI, Lakshmi Padmaja
3)SINGH DILIP THAKUR, Meena
4)BHATTACHAR, Rajan Mindigal Alasingara

(57) Abstract :
ABSTRACT METHOD AND SYSTEM FOR STRATEGIZING NETWORK MIGRATION IN ADAPTATION TO POST QUANTUM CRYPTOGRAPHY With the advancements in quantum computing, transitioning to quantum-safe cryptography is becoming increasingly critical to keep today's network secure. The present disclosure introduces a method for industrial application network migration. This method involves formalizing a Harvest Now Decrypt Later (HNDL) adversarial model, finding a risk score of a successful HNDL attack in any network links followed by any network component. Graph theory and the Markov chain are used for finding out the central network points. The centrality of network points is measured using a centrality score. The central points are the points in the network, compromising those can compromise a significant part of the total network. Finally, a critical score is given to network points based on risk score, centrality score and metadata about the network points. This critical score can be a priority number given to the network points to rank them for migration to quantum safe state. [To be published with FIG. 1B]

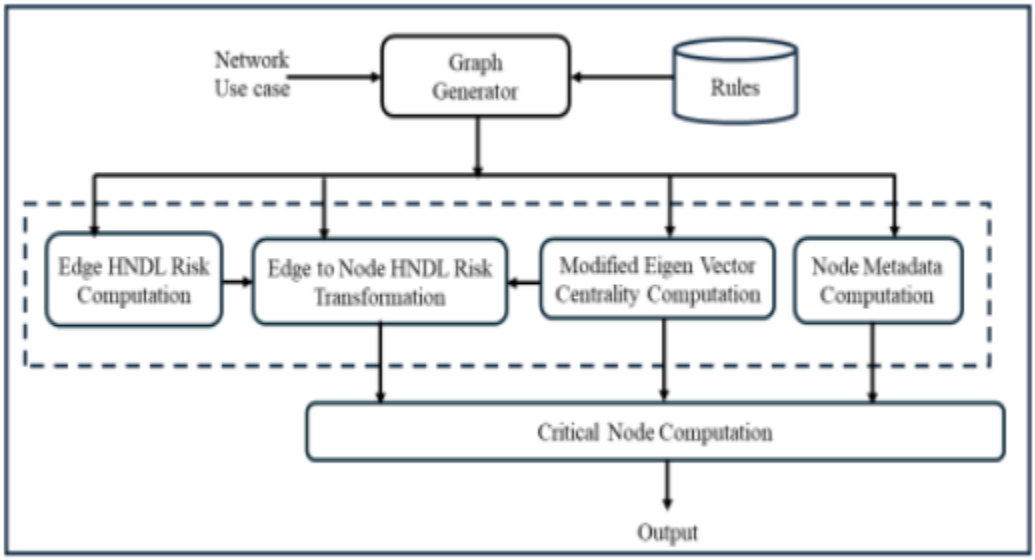


FIG. 1B

No. of Pages : 33 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :20/06/2025

(21) Application No.202524059093 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : All Terrain Hand Pull Push Cart

(51) International classification	:B62B3/00, B62B3/10
(31) Priority Document No	:202524041675
(32) Priority Date	:30/04/2025
(33) Name of priority country	:India
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Devashish De
Address of Applicant :B302, Sinhgad CHS , Plot 23 24 , Sector 42A , Seawoods Maharashtra India
(72)**Name of Inventor :**
1)Devashish De

(57) Abstract :
Urban areas still have an issue with water supply & organised defecation . With mushrooming illegal settlements in Indian cities , there is a hazard of epidemics and health crisis . In view of this canvas bladder based pull push cart has been designed to contain 135 liters to 200 liters of water which can be pulled primarily by women with little effort .

No. of Pages : 6 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :26/06/2025
(21) Application No.202524061283 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : Ambidextrous CBRN Gloves & Overboots

(51) International classification	:B21B0045020000, H04W0004800000, G06F0016230000, G08B0003100000, G05B0015020000
(31) Priority Document No	:202524041675
(32) Priority Date	:30/04/2025
(33) Name of priority country	:India
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Devashish De
Address of Applicant :B302, Sinhgad CHS , Plot 23 24 , Sector 42A , Seawoods Maharashtra India
(72)**Name of Inventor :**
1)Devashish De

(57) Abstract :
Chemical Biological Radiological & Nuclear Disasters are intense . The shock waves are capable of vapourising humans to the extent of no return . Those who are in the outskirts of the killing radius can get physically injured very badly . To ward off the intensity , high quality material based protection suits and gears are being made which may have high cost . These equipment are generally single piece instruments . This invention figures out a smart repair process and also does away with the pairing & sizing difficulty of equipment use .

No. of Pages : 14 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :27/06/2025

(21) Application No.202524061343 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Thick Finger Trigger

(51) International classification :F41A19/10
(31) Priority Document No :202524041675
(32) Priority Date :30/04/2025
(33) Name of priority country :India
(86) International Application No :NA
Filing Date :NA
(87) International Publication No : NA
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)Devashish De
Address of Applicant :B302, Sinhgad CHS , Plot 23 24 , Sector 42A , Seawoods Maharashtra India
(72)**Name of Inventor :**
1)Devashish De

(57) Abstract :
There are many equipments like High Speed Cameras , Fire Extinguishers , Paintball guns , robotic arms , spray bottles , gas lighters , water guns , hydraulic trigger activated rescue tools which depend upon the correct function of a single finger operation which can be the index finger in most cases and thumb in certain cases . In the famous story of Mahabharata , the role of Eklavya , is amplified by the loss of a thumb . This invention works around the same concept and makes an arrangement so that in case of thick finger , or injured finger a mechanism exists which can take control of the operation of equipment and machines as above .

No. of Pages : 7 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :08/07/2025

(21) Application No.202524065137 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Makeshift Protection Gear for Hand & Feet

(51) International classification	:B21B0045020000, H04W0004800000, G06F0016230000, G05B0015020000, H01B0001020000
(31) Priority Document No	:202524041675
(32) Priority Date	:30/04/2025
(33) Name of priority country	:India
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Devashish De
Address of Applicant :B302, Sinhgad CHS , Plot 23 24 , Sector 42A , Seawoods Maharashtra India
(72)**Name of Inventor :**
1)Devashish De

(57) Abstract :
Chemical Biological Radiological & Nuclear Disasters are intense . The shock waves are capable of vapourising humans to the extent of no return . Those who are in the outskirts of the killing radius can get physically injured very badly . To ward off the intensity , high quality material based protection suits and gears are being made which may have high cost . These equipment are generally single piece instruments . This invention figures out a smart repair process and also does away with the pairing & sizing difficulty of equipment use .

No. of Pages : 8 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/07/2025
(21) Application No.202524065139 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : Hill Village Cloudburst Station Observatory

(51) International classification	:A01G0015000000, G06N0003045000, F24F0110200000, H04L0009000000, G01W0001060000
(31) Priority Document No	:202524041675
(32) Priority Date	:30/04/2025
(33) Name of priority country	:India
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Devashish De
Address of Applicant :B302, Sinhgad CHS , Plot 23 24 , Sector 42A , Seawoods Maharashtra India
(72)**Name of Inventor :**
1)Devashish De

(57) Abstract :
This experimental station as described can later be improvised by Artificial Intelligence and Block Chain algorithms to automate an observation mechanism to initiate an alert mechanism for taking control of quick cascading Disasters as Cloudbursts in Hilly regions of Bharat . It is an observatory where weather indices are recorded in minutes & hours to see changes in temperature , humidity , Sea level pressure , Dew Point , Cloud Coverage & Wind Speed besides Relative Humidity measurements using traditional equipment and mobile applications to predict a Cloudburst .

No. of Pages : 11 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :24/07/2025

(21) Application No.202524070508 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Murruku Sandwitched Bombay Dabelis

(51) International classification	:A23L 7/10, A23P 20/00, A23L 19/00	(71)**Name of Applicant :** **1)Devashish De** Address of Applicant :B302, Sinhgad CHS , Plot 23 24 , Sector 42A , Seawoods Maharashtra India
(31) Priority Document No	:202524041675	(72)**Name of Inventor :** **1)Devashish De**
(32) Priority Date	:30/04/2025	
(33) Name of priority country	:India	
(86) International Application No	:NA	
Filing Date	:NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :
Murruku Sandwitched Bombay Dabelis have been named as such to reflect the fact that Kacchi Dabeli as a snack option became famous in Bombay . The Bombay variant comes as a sandwich with a tangy taste . However the set up requires a steady stove and the prepared potato mash for the enterprise to move on .It is pivoted as a food cart option in high footfall region . As a Start Up concept since Murukku/Chakli is popular in Karnataka a variant with Murruku is proposed which may infuse the crispy circles with the tangy taste of pomegranate and well fried peanuts .

No. of Pages : 8 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :24/07/2025
(21) Application No.202524070555 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : Flower- ‘Pot’ -Furnace

(51) International classification	:B32B0027320000, A01G0022000000, B23D0059000000, A61K0033080000, A61K0036840000
(31) Priority Document No	:202524041675
(32) Priority Date	:30/04/2025
(33) Name of priority country	:India
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Devashish De
Address of Applicant :B302, Sinhgad CHS , Plot 23 24 , Sector 42A , Seawoods Maharashtra India
(72)**Name of Inventor :**
1)Devashish De

(57) Abstract :
In any relief exercise or even in any camp the standard teaching says that , people would first need water , the second being the loo or answering to nature's call and the last for which they may stretch themselves up is cooked food . In this invention , in case of an earthquake damaging an urban space , it is suggested that people can take their flowerpots with guards as suggested and use some of them as a furnace to cook the evening meal after the first wave of Disaster gets over . Then they may turn some of those flowerpots as Loo or excreta collection instruments and lace it with vegetable seeds and saw dust powder before working out for the next day . Even if left as an unretrievable salvage the instrument again turns into a flowerpot ready with daisy or a bottle guard in a few weeks . Since a response and recovery may take days to clear the debris , at the start of a new life there will be vegetables ready for consumption

No. of Pages : 7 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :19/05/2025

(21) Application No.202524048325 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Jataka Trails

(51) International classification	:G06Q 30/02, G06Q 50/00, G06Q 50/10	(71)**Name of Applicant :** **1)Devashish De** Address of Applicant :B302, Sinhgad CHS , Plot 23 24 , Sector 42A , Seawoods Maharashtra India
(31) Priority Document No	:202524041675	(72)**Name of Inventor :** **1)Sanchita Saha**
(32) Priority Date	:30/04/2025	
(33) Name of priority country	:India	
(86) International Application No	:NA	
Filing Date	:NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :

This business start-up idea sums up the occult sciences practices in Bharat including the rituals . It is the concept of a knowledge sharing period when some divine experiences could possibly be felt by the subscriber and induce unwavering curiosity . Since the intent of the venture is to treat one through the practice of occult sciences, the subsequent outcome is likely to be good and long lasting for a sustained venture .

No. of Pages : 5 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :12/11/2025
(21) Application No.202528110294 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ENCODER AND DECODER, ENCODING METHOD AND DECODING METHOD WITH PROFILE AND LEVEL DEPENDENT CODING OPTIONS

(51) International classification	:H04N 19/117, H04N 19/136, H04N 19/186, H04N 19/43, H04N 19/46
(31) Priority Document No	:19162052.5
(32) Priority Date	:11/03/2019
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:PCT/EP2020/056355 :10/03/2020
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filed on	:202127040982 :09/09/2021

(71)**Name of Applicant :**
1)Fraunhofer-Gesellschaft zur Förderung der angewandten Forschung e.V.
Address of Applicant :Hansastraße 27c, 80686 München (DE) Germany
(72)**Name of Inventor :**
1)WIECKOWSKI, Adam
2)SKUPIN, Robert
3)SÁNCHEZ DE LA FUENTE, Yago
4)HELLGE, Cornelius
5)SCHIERL, Thomas
6)MARPE, Detlev
7)SÜHRING, Karsten
8)WIEGAND, Thomas

(57) Abstract :
ENCODER AND DECODER, ENCODING METHOD AND DECODING METHOD WITH PROFILE AND LEVEL DEPENDENT CODING OPTIONS The present subject matter relates to a video decoder (151) and encoder (101) for processing video signals comprising multiple pictures. The decoder (151) is configured to decode chroma format information from an encoded video signal and determine motion vectors for chroma subblocks based on motion vector information of one or more luma subblocks, with the selection logic varying according to the chroma format. The encoder (101) performs corresponding operations by encoding chroma format information and determining motion vectors for chroma subblocks using luma subblock motion data. This format-aware approach enables accurate motion prediction and efficient reconstruction and encoding of video frames across different chroma formats.

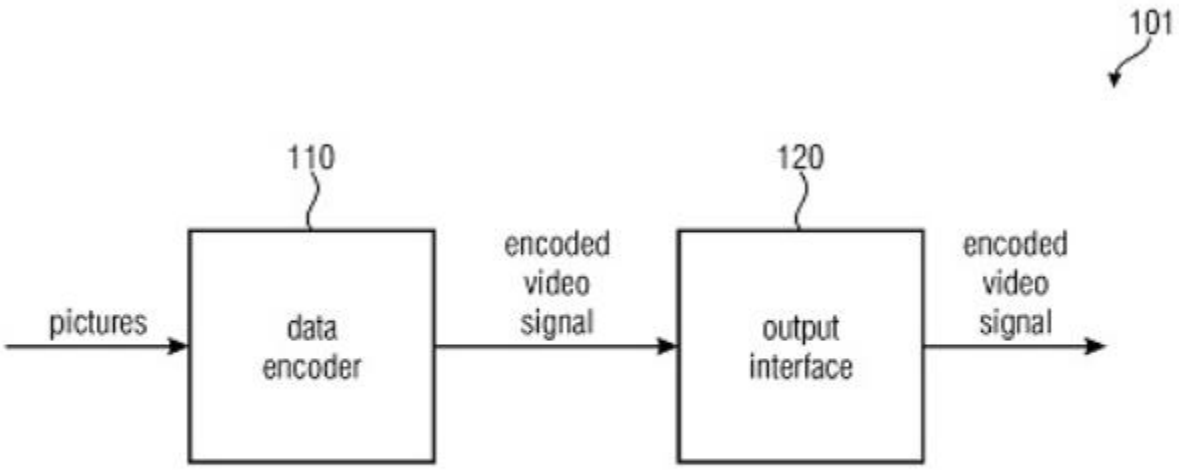


Fig. 1

No. of Pages : 49 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/04/2026

(21) Application No.202622042626 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : MULTI-FUNCTIONAL CONTROLLED RELEASE TABLET COMPOSITIONS WITH ENHANCED STABILITY AND POTENCY AND ENVIRONMENTAL IMPACT TRACKING

(51) International classification	:A61Q 19/10, A61K 8/02, A01N 25/34, A61K 9/46, A61K 8/19
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filed on	:202421053597 :13/07/2024

(71)**Name of Applicant :**
1)MEHTA, AKSHAY RAJENDRA
Address of Applicant :203, Regent Park No. 30, Gidney Park, Salisbury Park, Pune-411037, Maharashtra, India Pune Maharashtra India
2)MEHTA, VEENU RAJENDRA
(72)**Name of Inventor :**
1)MEHTA, AKSHAY RAJENDRA
2)MEHTA, VEENU RAJENDRA

(57) Abstract :
ABSTRACT MULTI-FUNCTIONAL CONTROLLED RELEASE TABLET COMPOSITIONS WITH ENHANCED STABILITY AND POTENCY AND ENVIRONMENTAL IMPACT TRACKING The present disclosure relates to a controlled-release, tablet composition and a process for its preparation. The composition, in the form of compressed effervescent tablets, is designed to deliver active agents across a wide pH range. The composition has enhanced stability against degradation and improved delivery performance. The compositions are useful in various fields such as personal skincare, household cleansers, workplace cleansers, odour control applications and the like. The composition also includes features that enable tracking of the environmental impact associated with product usage. The process for the preparation of the composition in accordance with the present disclosure is simple, economic and environment friendly.

No. of Pages : 102 No. of Claims : 11

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/04/2026
(21) Application No.202622049316 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ANIMAL REPELLENT CHEMICAL COMPOSITION

(51) International classification	:A01N 65/42, A01N 31/02, A01N 25/30, A01N 25/22, A01N 59/16
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filed on	:202321011384 :20/02/2023

(71)**Name of Applicant :**
1)ADITYA PAWANKUMAR BAJAJ
Address of Applicant :Trade World B-807, Kamla Mill, S.B.Marg, Lower Parel, Mumbai-400013, Maharashtra, India 400013 Maharashtra India
(72)**Name of Inventor :**
1)ADITYA PAWANKUMAR BAJAJ

(57) Abstract :
ABSTRACT ANIMAL REPELLENT CHEMICAL COMPOSITION The present invention discloses an animal repellent chemical composition that mimics the odor of animal excretion to repel rodents or mammals. The animal repellent chemical composition includes compounds such as 3-Mercapto-3-methyl butan-1-ol, 4-methoxy-2-methylbutane-2-thiol and 4-Mercapto-4-methylpentan-2-one. The composition additionally includes at least one of the compounds from surfactants, stabilizers, preservatives, antifreezing agent, anticaking agent, binders, viscosity modifying agents, clay, silica, limestone, perlite or water as a diluent and a chemical compound 2-methyl-2-thiazoline and balsam fir oil or garlic oil. The animal repellent composition is a ready to mix water-based formulation to repel rodents and mammals. The repellent composition is simple to use, provides longer lasting repellent efficacy and does not allow animals to become accustomed to the repellent.

No. of Pages : 25 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042081 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : TOOTHPASTE WITH INTEGRAL POCKET FOR STUFF A LIKE TOOTHBRUSH

(51) International classification	:B65D 35/28, B65D 25/20, B65D 21/02, A47K 5/18, A46B 11/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Dinesh Krishnaji Bawane
3)Anjali Rahul Bawane
4)Nilima Rahul Bawane
5)Pallavi Baliram Gadge
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Dinesh Krishnaji Bawane
3)Anjali Rahul Bawane
4)Nilima Rahul Bawane
5)Pallavi Baliram Gadge

(57) Abstract :
The said invention proposed a novel system to carry toothpaste and toothbrush together by providing hollow integral pocket to carry stuff a like toothbrush. The system comprises mainly a toothpaste tubular body (1) is a hollow tubular part made up to accommodate the tooth paste semisolid material. On the rear end of this toothpaste tubular body (1) is sealed end (2) which has been pinched to form a permanent seal, whereas the front end is connected at a seam to a tapered conicalsurface provided with a threaded spout at its small diameter end. The toothpaste cap (3) provided with internal threads cooperating with the threaded spout at close the spout end of the tube. A hollow integral pocket (4) is fused with the toothpaste tubular body (1) along with length and form an integral unit. The open end of the integral pocket (4) is attached with the flexible enclosure (5) used as a lid to cover the open end of it. The flexible enclosure (5) having lock buttons (6) which may have a system like magnetic lock, velcro mechanism or metal snap buttons used to lock the free end of the flexible enclosure (5) so that the stuff a like toothbrush (7) kept in the integra pocket (4) will not come out by its own.

No. of Pages : 9 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :18/08/2025

(21) Application No.202524078165 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Hot-Spring Spillover Flash Flood Breaker(HSS-FFB)

(51) International classification	:H04L0067020000, G06Q0040000000, H04L0009400000, G06Q0030020000, G06F0040232000
(31) Priority Document No	:202524041675
(32) Priority Date	:30/04/2025
(33) Name of priority country	:India
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Devashish De
Address of Applicant :B302, Sinhgad CHS , Plot 23 24 , Sector 42A , Seawoods Maharashtra India
(72)**Name of Inventor :**
1)Devashish De

(57) Abstract :
This is a process innovation which intends to combine the various research outcomes achieved by various scholars to target the containment of mountain flash floods and available on public domain. On 05 August 2025 , the Ibex Brigade(https://www.seajob.net/candidate/single_post.php?p=armys-ibex-brigade-l eads-dharali-rescue-mission-amid-adversity) came under the spell of an environmental hazard that turned into a Disaster . This innovation lists embankment dyke designs as also reflects a resistance element to retard the flash flood force so that destruction to uncontrolled human settlements is avoided as a curse which is associated with the legend of Kheer-Ganga .

No. of Pages : 25 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/10/2025
(21) Application No.202524097233 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DeNovo- Torsion Powered Man Detecting Onager

(51) International classification	:G06F0030327000, F03D0007040000, H04L0067100000, G01S0019510000, C22C0009000000
(31) Priority Document No	:202524041675
(32) Priority Date	:30/04/2025
(33) Name of priority country	:India
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Devashish De
Address of Applicant :B302, Sinhgad CHS , Plot 23 24 , Sector 42A , Seawoods Maharashtra India
(72)**Name of Inventor :**
1)Devashish De

(57) Abstract :
This is an upgraded version of earlier Patents registered and under the process of publication . In the description the generic pattern of design has been described mathematically to take care of distortion of location accuracies achieved by snow blizzards and harsh wind conditions . While the torsion has been experimented with rubber band , however in actuals the necessary force will be achieved by un-fouling spring tension of suitable alloy metal which may perform at - 60°C. Denovo Apparatus is aimed to take out patrolling troops in High Altitude , who may face an avalanche accident & there will be a critical requirement of search and relief . While arriving at DeNovo the traditional teaching of mechanical engineering has been used over AI based indicators and formulations to design this equipment, blanketing the intent as far as possible.

No. of Pages : 37 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :26/02/2026
(21) Application No.202624022793 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : POWERTRAIN ARCHITECTURE

(51) International classification	:F16H 37/08, F16H 37/02, E02F 9/20, F16H 47/04, B60K 6/365	(71)**Name of Applicant :** **1)Deere & Company** Address of Applicant :One John Deere Place, Moline, Illinois, 61265 USA U.S.A. (72)**Name of Inventor :** **1)GALLEN, JOHN J.** **2)TIESZEN, MARK J.** **3)ORE, THOMAS G.**
(31) Priority Document No	:19/198783	
(32) Priority Date	:05/05/2025	
(33) Name of priority country	:U.S.A.	
(86) International Application No Filing Date	:NA :NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :
A working machine includes a prime mover including a prime mover output. A mechanical variator has a variator input and a variator output. A direct drive gearset connects the prime mover output to the variator input. An auxiliary component may also be driven by the direct drive gearset. A planetary gearset is configured to receive a first input from the direct drive gearset and a variable second input from the variator output. A multi-speed transmission is configured to transmit an output drive from the planetary gearset to one or more drive wheels, the transmission including a low speed range, a high speed range and a reverse range. A controller is configured to control the mechanical variator to vary an advance speed of the working machine, and to control the multi-speed transmission to select between the low speed range, the high speed range and the reverse range.

No. of Pages : 23 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/01/2026
(21) Application No.202627002035 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHODS AND DEVICES FOR INTRA BLOCK COPY AND INTRA TEMPLATE MATCHING

(51) International classification :H04N 19/593, H04N 19/11, H04N 19/105, H04N 19/176, H04N 19/119
(31) Priority Document No :63/472250
(32) Priority Date :09/06/2023
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2024/032666
Filing Date :05/06/2024
(87) International Publication No :WO 2024/254216
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)BEIJING DAJIA INTERNET INFORMATION TECHNOLOGY CO., LTD
Address of Applicant :Room 101, 8th Floor, Building 12, No. 16, Xierqi West Road, Haidian District, Beijing 100085 China
(72)**Name of Inventor :**
1)MA, Changyue
2)XIU, Xiaoyu
3)CHEN, Wei
4)JHU, Hong-Jheng
5)KUO, Che-Wei
6)YAN, Ning
7)WANG, Xianglin
8)YU, Bing

(57) Abstract :
Methods for video decoding and encoding, apparatuses and non-transitory computer- readable storage media thereof are provided. One method for video decoding includes obtaining, by a decoder, a current block coded with Geometric Partition Mode (GPM); obtaining, by the decoder, a first Intra Block Copy (IBC) prediction and a second IBC prediction based on partitions using GPM for the current block; receiving, by the decoder, coding modes of the current block; and obtaining, by the decoder, a final prediction for the current block using the first IBC prediction, the second IBC prediction, and the coding modes of the current block.

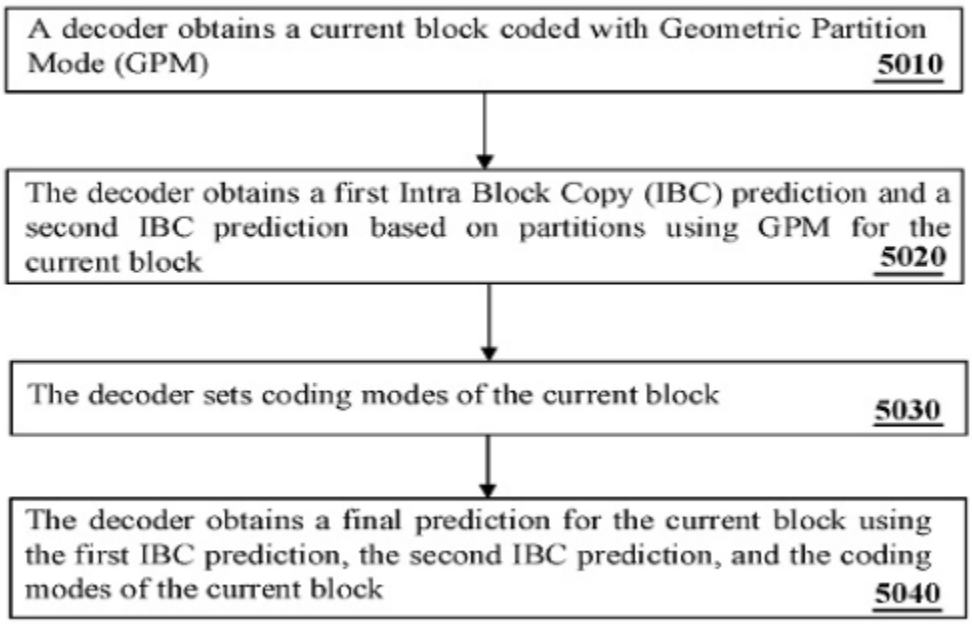


FIG. 50

No. of Pages : 142 No. of Claims : 58


(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/01/2026
(21) Application No.202627002169 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : STATOR MANUFACTURING METHOD AND RESTRAINT JIG

(51) International classification :H02K 15/04
(31) Priority Document No :2023-108051
(32) Priority Date :30/06/2023
(33) Name of priority country :Japan
(86) International Application No :PCT/JP2024/021875
Filing Date :17/06/2024
(87) International Publication No :WO 2025/004886
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NHK SPRING CO., LTD.
Address of Applicant :3-10, Fukuura, Kanazawa-ku, Yokohama-shi Kanagawa 2360004 Japan
(72)**Name of Inventor :**
1)KOBAYASHI Dai
2)OTSUKA Motoyuki

(57) Abstract :
Provided is a stator manufacturing method capable of suppressing twisting of a protrusion part associated with bending a segment coil in the circumferential direction. A restraint jig 19 is positioned between axial base parts 11a of protrusion parts 11 adjacent to each other in the circumferential direction. The restraint jig 19 has a groove 25 corresponding to each of the base parts 11a adjacent in the circumferential direction. A coil end 9a that is the tip of the protrusion parts 11 is relatively displaced in the circumferential direction with respect to a stator core 3, the base part 11a of the projection parts 11 is inserted into the groove 25 of each of the adjacent restraint jigs 19, and the projection parts 11 are bent while being restrained from the radial direction of the stator core 3.

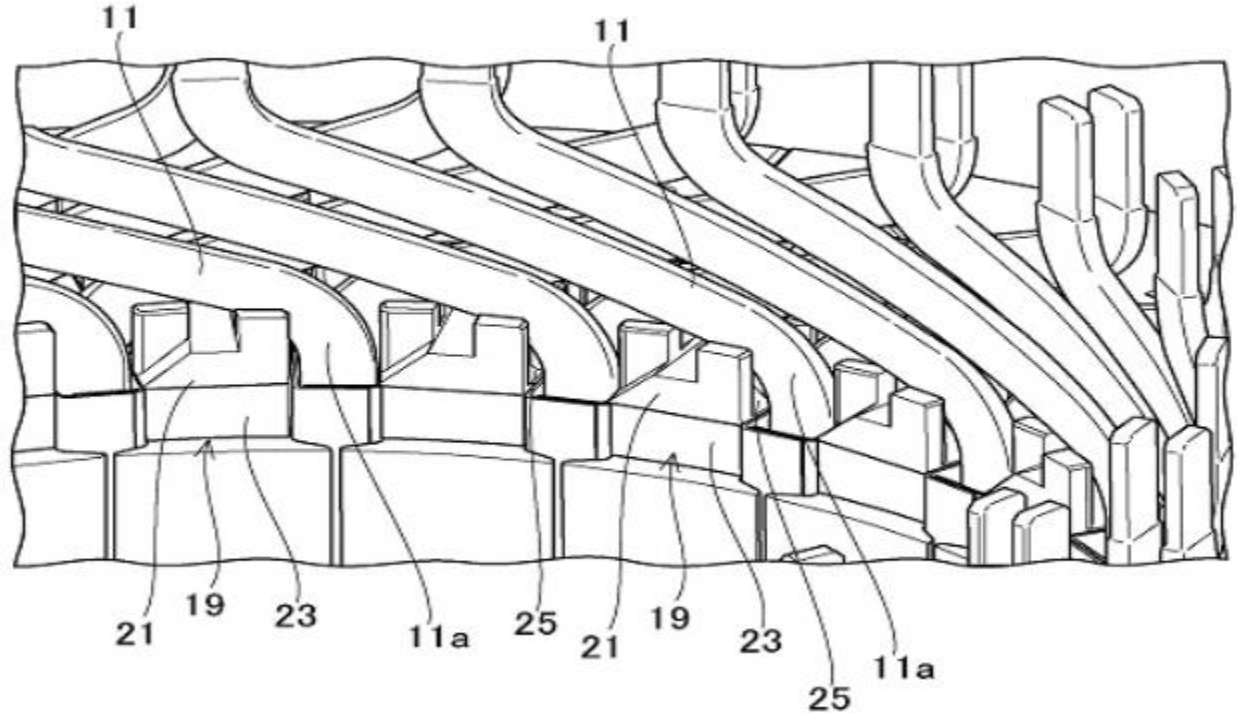

No. of Pages : 18 No. of Claims : 7


(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/01/2026
(21) Application No.202627002213 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMPOSITION CONTAINING NATURAL PYRETHRIN AND ANTIOXIDANT

(51) International classification	:A01N 53/10, A01M 1/20, A01N 25/18, A01N 25/22, A01P 7/04
(31) Priority Document No	:2023-109574
(32) Priority Date	:03/07/2023
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2024/023373 :27/06/2024
(87) International Publication No	:WO 2025/009464
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SUMITOMO CHEMICAL COMPANY, LIMITED
Address of Applicant :2-7-1, Nihonbashi, Chuo-ku, Tokyo 1036020 Japan
(72)**Name of Inventor :**
1)TOKUNAGA Takashi
2)YAMADA Noriko
3)SONOBE Fuhito

(57) Abstract :
The present invention pertains to a composition or the like containing a natural pyrethrin and an antioxidant selected from group P or group S. Group P: A group comprising compounds represented by formula (1) [R1 and R2 are the same or different from each other and each represent a C9-C14 alkyl group], 3,9-bis(2,4-di-tert-butylphenoxy)-2,4,8,10-tetraoxa-3,9-diphosphaspiro[5.5]undecane, tris(nonylphenyl) phosphite, triphenyl phosphite, tetrakis(2,4-di-tert-butyl phenyl) 4,4'-biphenylene diphosphinite, tridodecyl trithiophosphite, etc. Group S: A group comprising pentaerythritol tetrakis[3-(dodecylthio)propionate], 2-mercaptobenzimidazole, 2,4-bis[(dodecylthio)methyl]-6-methylphenol, and didodecyl 3,3'-thiodipropionate.

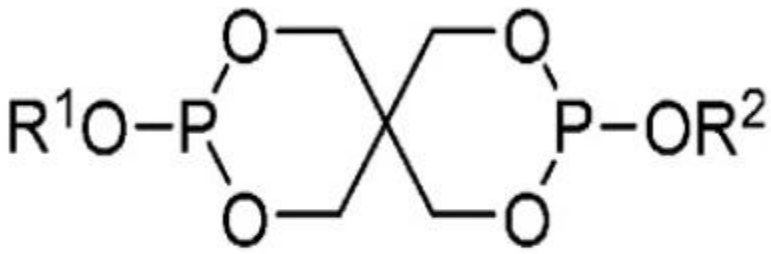

(1)

No. of Pages : 145 No. of Claims : 18

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :08/01/2026

(21) Application No.202627002229 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : HARD MATERIAL-COATED BRAKING ELEMENT AND METHOD FOR PRODUCING A HARD MATERIAL-COATED BRAKING ELEMENT

(51) International classification	:F16D 69/02, C22C 29/02, F16D 65/12, C23C 4/067, C23C 4/01
(31) Priority Document No	:10 2023 118 027.4
(32) Priority Date	:07/07/2023
(33) Name of priority country	:Germany
(86) International Application No Filing Date	:PCT/EP2024/069041 :05/07/2024
(87) International Publication No	:WO 2025/012130
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)C4 LASER TECHNOLOGY GMBH
Address of Applicant :Dresdner Str. 172 B 01705 Freital Germany
(72)**Name of Inventor :**
1)BISCHOFF, Rene
2)STEINMEIER, Tilo

(57) Abstract :
The invention relates to the field of vehicle technology and industrial plant engineering and relates to a hard material-coated braking element. The object of the invention is to provide a braking element, which has an improved service life with reduced manufacturing costs. The object is achieved by a hard material-coated braking element, comprising a metal base body which has at least one region designed as a friction surface, on which at least one wear-protection layer is arranged by means of a thermal coating method, wherein the wear-protection layer is formed from at least one metal matrix material and hard material particle agglomerates at least partially embedded therein, which are connected to the metal material matrix in a materially bonded manner. The hard material particle agglomerates are formed from at least one hard material A, one hard material B and hard material mixed crystals of the hard materials A and B, wherein the hard material A is present in a larger volume fraction than the hard material B in the hard material particle agglomerate. The braking element can, for example, be used in a braking system for motor vehicles and rail vehicles or in a braking system for industrial plants.

No. of Pages : 15 No. of Claims : 25

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/01/2026
(21) Application No.202627002243 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AN APPARATUS AND A METHOD FOR PRODUCING INFORMATION INDICATIVE OF CARDIAC ABNORMALITY

(51) International classification	:A61B 5/11, A61B 5/00
(31) Priority Document No	:20247049
(32) Priority Date	:09/04/2024
(33) Name of priority country	:Finland
(86) International Application No	:PCT/EP2025/059398
Filing Date	:07/04/2025
(87) International Publication No	:WO 2025/214928
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)PRECORDIOR OY
Address of Applicant :Aurakatu 6 20100 TURKU Finland
(72)**Name of Inventor :**
1)BLOMSTER, Juuso
2)PÄNKÄÄLÄ, Mikko
3)DEHKORDI, Kamal
4)HURNANEN, Tero

(57) Abstract :
An apparatus for producing information indicative of cardiac abnormality, for example aortic stenosis, comprises a signal interface (101) for receiving a first signal indicative of cardiac acceleration and measured with an accelerometer having a mechanical contact with a chest of an individual and a second signal indicative of cardiac rotation and measured with a gyroscope having a mechanical contact with the chest of the individual The apparatus comprises a processing system (102) configured to form a first descriptor value expressing a property of the first signal and a second descriptor value expressing the same property of the second signal, and to set an indicator signal outputted by the apparatus to express presence of cardiac abnormality in response to a situation in which the first descriptor value and the second descriptor value with respect to each other are indicative of the cardiac abnormality.

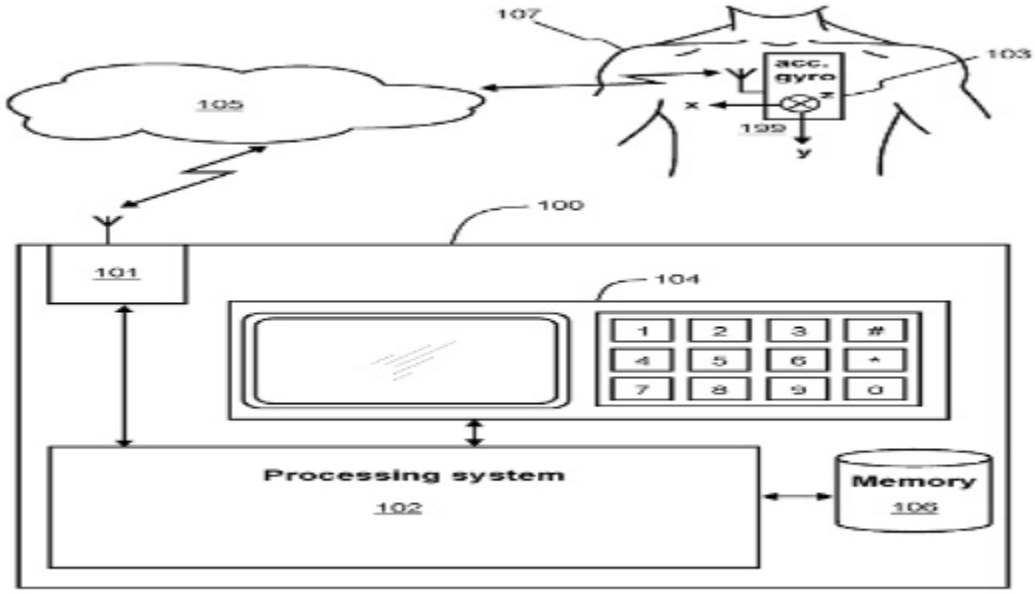


Figure 1

No. of Pages : 32 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/01/2026
(21) Application No.202627002277 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SWITCH UNIT AND ROTARY DISCONNECT SWITCH

(51) International classification	:H01H 19/04, H01H 19/10, H01H 19/08, H01H 19/64, H01H 19/02
(31) Priority Document No	:202311003039.4
(32) Priority Date	:10/08/2023
(33) Name of priority country	:China
(86) International Application No Filing Date	:PCT/CN2024/108660 :31/07/2024
(87) International Publication No	:WO 2025/031220
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOARK ELECTRICS (SHANGHAI) CO., LTD.
Address of Applicant :No 3857 Sixian Road Songjiang District, Shanghai 201614 China
(72)**Name of Inventor :**
1)GU, Zhe
2)GE, Weijun
3)ZHOU, Zhangqing
4)QIN, Zhikai
5)JIANG, Jiapeng

(57) Abstract :
Disclosed in the present invention are a switch unit and a rotary disconnect switch. The switch unit comprises: a shell, a moving contact module, and a static contact module, wherein the moving contact module comprises a driving mechanism and at least two mutually independent moving contacts, and the static contact module comprises at least four static contacts, every two static contacts being in contact with or separated from one moving contact to realize connection or disconnection, and the two static contacts and the moving contact forming a loop switch.

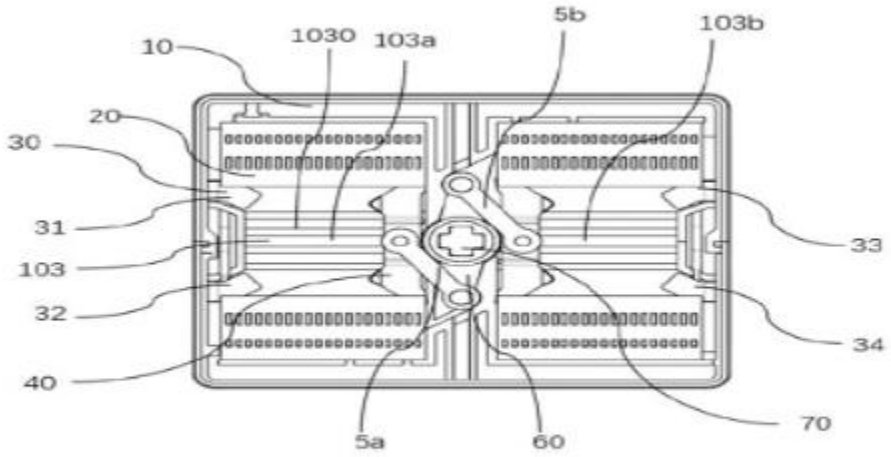


FIG. 1

No. of Pages : 41 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/01/2026
(21) Application No.202627002279 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHODS OF SYNTHESIZING CHELATED CHROMIUM

(51) International classification :B01J37/16,B01J35/30,B22F9/18
(31) Priority Document No :63/510871
(32) Priority Date :28/06/2023
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2024/035841
Filing Date :27/06/2024
(87) International Publication No :WO 2025/006762
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)OTORO ENERGY, INC.
Address of Applicant :3800 Colorado Ave., Unit B Boulder, Colorado 80303 U.S.A.
(72)**Name of Inventor :**
1)ROBB, Brian
2)MURDZEK, Jessica

(57) Abstract :
Methods of synthesizing chelated chromium are described. The methods may include a step of combining a chromium precursor and a reducing agent to thereby provide a reduced chromium compound, wherein the chromium precursor comprises Cr(VI) and the reduced chromium compound comprises Cr(III). The methods may further include a step of combining the reduced chromium compound and a ligand to thereby provide chelated chromium. In some embodiments, the methods described herein are specifically used to synthesize CrEDTA or CrPDTA.

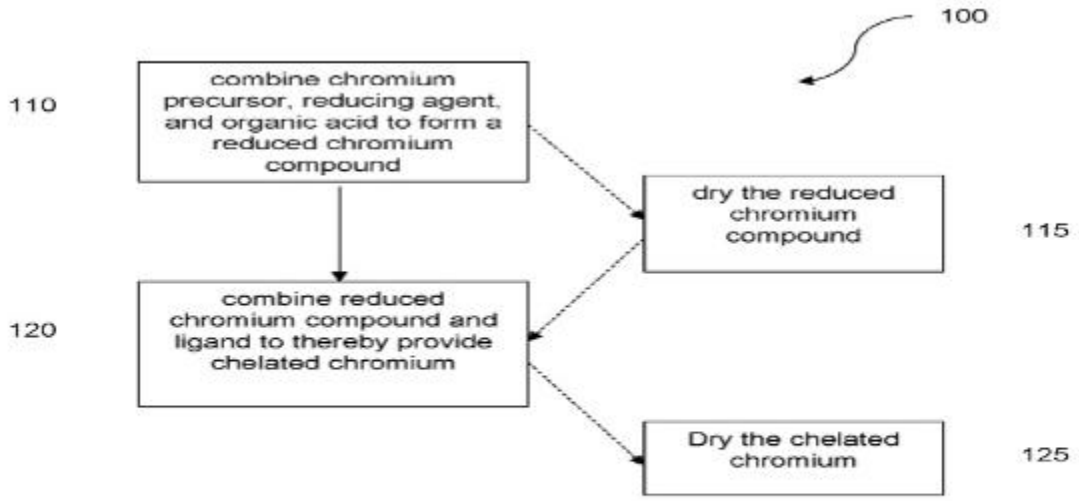


FIGURE 1

No. of Pages : 17 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/01/2026
(21) Application No.202627002280 A
(43) Publication Date : 06/11/2026


(54) Title of the invention : CO-CULTURES OF ORGANOIDS AND STROMAL CELLS

(51) International classification	:C12N 5/00
(31) Priority Document No	:23186041.2
(32) Priority Date	:18/07/2023
(33) Name of priority country	:EPO
(86) International Application No	:PCT/EP2024/070443
Filing Date	:18/07/2024
(87) International Publication No	:WO 2025/017146
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)HUB ORGANOIDS IP B.V.
Address of Applicant :Yalelaan 62 3584 CM Utrecht Netherlands
(72)**Name of Inventor :**
1)FRIAS ALDEGUER, Javier
2)POTT, Johanna
3)VRIES, Robert Gerhardus Jacob

(57) Abstract :
The present invention relates to organoid co-cultures and their use in the investigation of diseases.

Figure 1

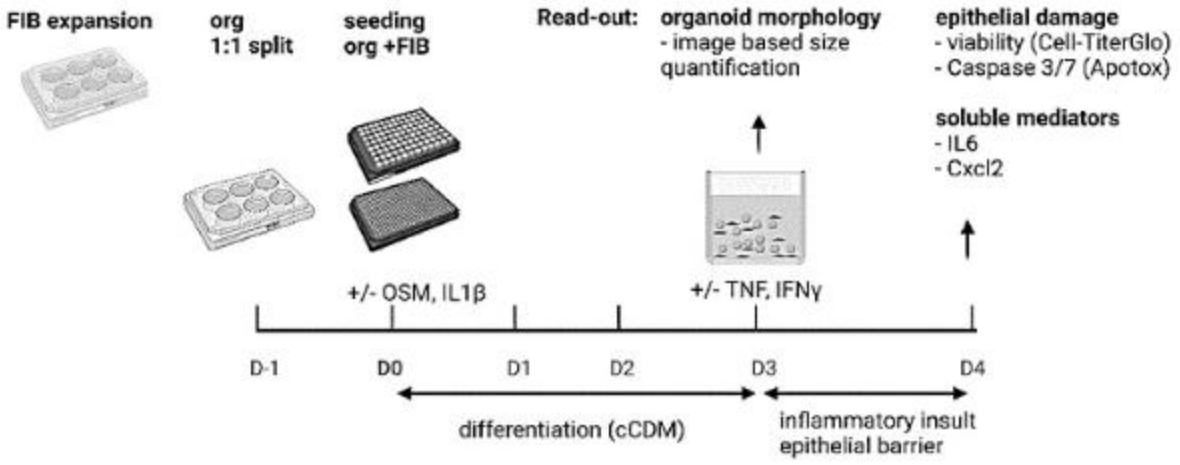

No. of Pages : 125 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/01/2026

(21) Application No.202627002282 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CONTINUOUS RECYCLABLE ENZYMATIC PROCESS FOR PREPARATION OF SITAGLIPTIN OR SALTS THEREOF

(51) International classification :C12P17/18,C12N9/10
(31) Priority Document No :202321039176
(32) Priority Date :08/06/2023
(33) Name of priority country :India
(86) International Application No :PCT/IB2024/055586
Filing Date :07/06/2024
(87) International Publication No :WO 2024/252346
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)AMI LIFESCIENCES PRIVATE LIMITED
Address of Applicant :7th Floor, Lilleria 1038, Gotri Sevasi Road, New Alkapuri Vadodara, Gujarat 390 021 India
(72)**Name of Inventor :**
1)THAKRAR, Virendra Haridas
2)MEHTA, Tushar Bharatkumar
3)WAGH, Atul Gajanan
4)BIRARI, Hemant Rajendra
5)PATEL, Jignesh Ashokbhai
6)PATEL, Arjun Arvindbhai
7)LADUMOR, Chiman Balubhai
8)PATIL, Rohit Ravindra

(57) Abstract :
The present invention relates to an efficient and industrially scalable continuous recyclable enzymatic process for preparation of Sitagliptin or salts thereof. The present invention also relates to a process for the preparation of Sitagliptin hydrochloride or hydrate thereof. The present invention also relates to a process for the preparation of Sitagliptin phosphate or hydrate thereof.

No. of Pages : 21 No. of Claims : 10


(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/01/2026

(21) Application No.202627002283 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : FIBROBLAST ACTIVATION PROTEIN LIGAND AND USE THEREOF

(51) International classification	:C07K 7/08, C07K 14/81, C07K 7/06, A61K 38/08	(71)**Name of Applicant :** **1)JIANGSU HENGRUI PHARMACEUTICALS CO., LTD.** Address of Applicant :No. 7 Kunlunshan Road, Economic and Technological Development Zone, Lianyungang, Jiangsu 222047 China **2)TIANJIN HENGRUI MEDICINE CO., LTD.**
(31) Priority Document No	:202310843734.5	
(32) Priority Date	:11/07/2023	
(33) Name of priority country	:China	
(86) International Application No Filing Date	:PCT/CN2024/104918 :11/07/2024	(72)**Name of Inventor :** **1)GE, Xinyue** **2)ZHOU, Shunguang**
(87) International Publication No	:WO 2025/011611	**3)GUO, Feihu**
(61) Patent of Addition to Application Number Filing Date	:NA :NA	**4)SUN, Jiyun** **5)LI, Zhongqing**
(62) Divisional to Application Number Filing Date	:NA :NA	**6)SONG, Zihui** **7)ZHANG, Mengyi**

(57) Abstract :
The present application relates to a fibroblast activation protein ligand and a use thereof, and in particular to a compound as shown in formula (I) or a pharmaceutically acceptable salt thereof, a pharmaceutical composition containing the compound, and a use thereof in diagnosis or treatment of diseases related to a fibroblast activation protein, such as tumors or cancers.

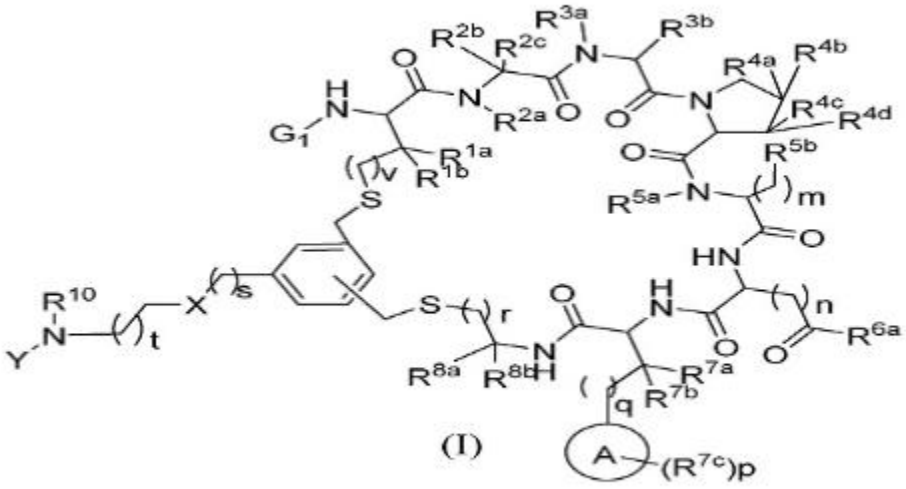

(I)

No. of Pages : 135 No. of Claims : 36

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :09/01/2026
(21) Application No.202627002678 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TYK2 INHIBITORS AND COMPOSITIONS AND METHODS THEREOF

(51) International classification	:C07D 401/14, C07D 401/12, C07D 471/04, A61K 31/53, A61P 35/00
(31) Priority Document No	:PCT/CN2023/100508
(32) Priority Date	:15/06/2023
(33) Name of priority country	:China
(86) International Application No Filing Date	:PCT/CN2024/099407 :14/06/2024
(87) International Publication No	:WO 2024/255886
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)LYNK PHARMACEUTICALS CO. LTD.
Address of Applicant :291 Fucheng Road, Bldg 5-4F, Hangzhou Economic & Technological Development Zone Hangzhou, Zhejiang 310018 China
(72)**Name of Inventor :**
1)LI, Xiaodong
2)SU, Lin
3)WAN, Zhaokui
4)GREWAL, Gurmit
5)VAZQUEZ, Michael Lawrence
6)LIN, Weiyu

(57) Abstract :
Provided herein are a novel class of therapeutic agents that are safe and effective TYK2 inhibitors and pharmaceutical compositions of these compounds and methods of preparation and use thereof against various TYK2-mediated diseases and disorders.

No. of Pages : 157 No. of Claims : 112

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :10/01/2026
(21) Application No.202627002887 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TRACKED UNDERCARRIAGE ROLLER ASSEMBLY

(51) International classification	:B62D 55/15, B62D 55/088, B62D 55/092
(31) Priority Document No	:102023000014502
(32) Priority Date	:11/07/2023
(33) Name of priority country	:Italy
(86) International Application No Filing Date	:PCT/IB2024/056708 :10/07/2024
(87) International Publication No	:WO 2025/012826
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ITALTRACTOR ITM S.P.A.
Address of Applicant :Via Confortino, 30 I-40056 Valsamoggia - Frazione Crespellano (Bologna) Italy
(72)**Name of Inventor :**
1)CALIA, Eustachio
2)BETTINI, Mauro
3)CASELLI, Alex

(57) Abstract :
Tracked undercarriage roller assembly(17) comprising a roller body(18) having inner cavity(19) extending axially from first access opening(18a) to second access opening(18b); a shaft(22) inserted into inner cavity(19) of roller body(18) and extending axially from first end portion(22a) to second end portion(22b); first end support(24) attached to first end portion(22a) of shaft(22) at first access opening(18a); second end support(26) attached to second end portion of shaft(22) at second access opening(18b); a first rotating lip seal(35) attached to roller body(18) at first access opening(18a) and comprising main sealing lip(43) in sliding abutment on first support(24); a second rotating lip seal(36) attached to roller body(18) at second access opening(18b) and comprising a main sealing lip(49) in sliding abutment on second support(26); and at least a first solid oil bearing(31) located in inner cavity(19) and comprising a radially inner slewing ring(31a) coupled to shaft(22) and a radially outer slewing ring(31b) coupled to roller body(18).

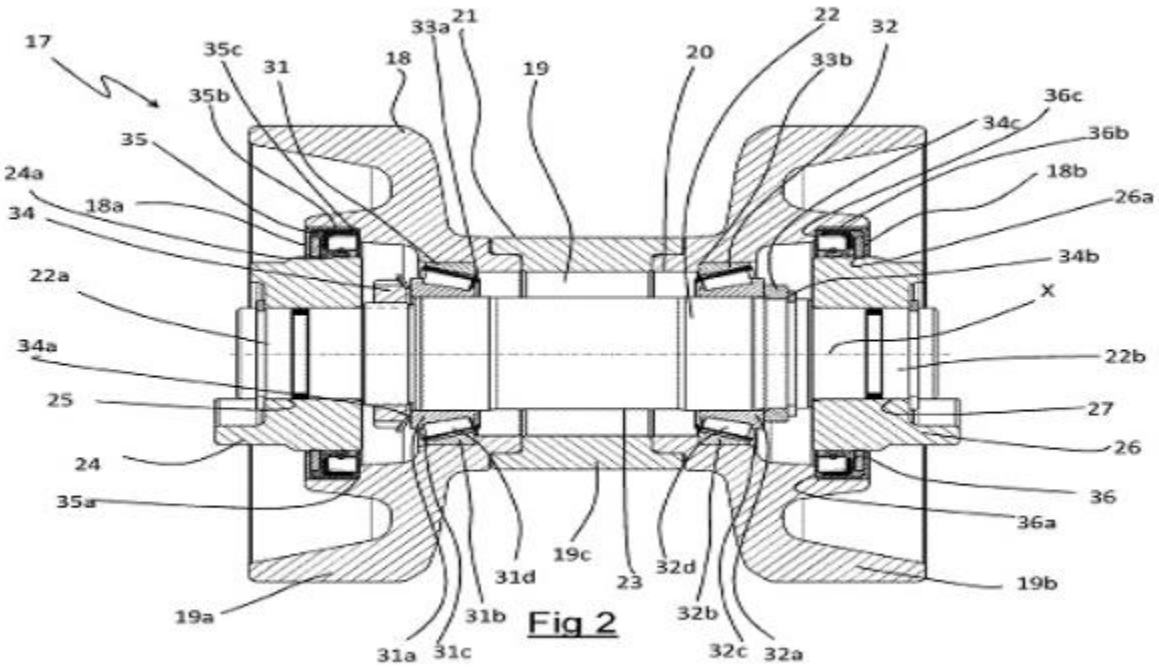


Fig 2

No. of Pages : 20 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :12/01/2026
(21) Application No.202627003016 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ENCODING METHOD, DECODING METHOD, APPARATUS, AND DEVICE

(51) International classification :G06T 9/00
(31) Priority Document No :202310802666.8
(32) Priority Date :30/06/2023
(33) Name of priority country :China
(86) International Application No :PCT/CN2024/100848
Filing Date :24/06/2024
(87) International Publication No :WO 2025/002025
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)VIVO MOBILE COMMUNICATION CO., LTD.
Address of Applicant :No.1, Vivo Road, Chang'an Dongguan, Guangdong 523863 China
(72)**Name of Inventor :**
1)ZOU, Wenjie
2)ZHANG, Wei
3)YANG, Fuzheng
4)LV, Zhuoyi

(57) Abstract :
The present application discloses an encoding method, a decoding method, an apparatus, and a device. The encoding method in embodiments of the present application comprises: an encoding end determining first indication information, wherein the first indication information is used for indicating whether a geometric vertex and an attribute vertex in an original mesh have the same connection relationship; determining one group or two groups of non-manifold structure information on the basis of the first indication information, wherein each group of non-manifold structure information comprises: non-manifold identification information of a target vertex and index information of a target repeated vertex, wherein the target vertex comprises a geometric vertex and an attribute vertex in a manifold mesh, the non-manifold identification information is used for indicating whether the target vertex is a repeated vertex generated when the non-manifold structure is split, the target repeated vertex is a repeated vertex generated when the non-manifold structure in the original mesh is split, and the target repeated vertex comprises a geometric repeated vertex and an attribute repeated vertex; and encoding the first indication information and the one group or two groups of non-manifold structure information to obtain a first code stream.

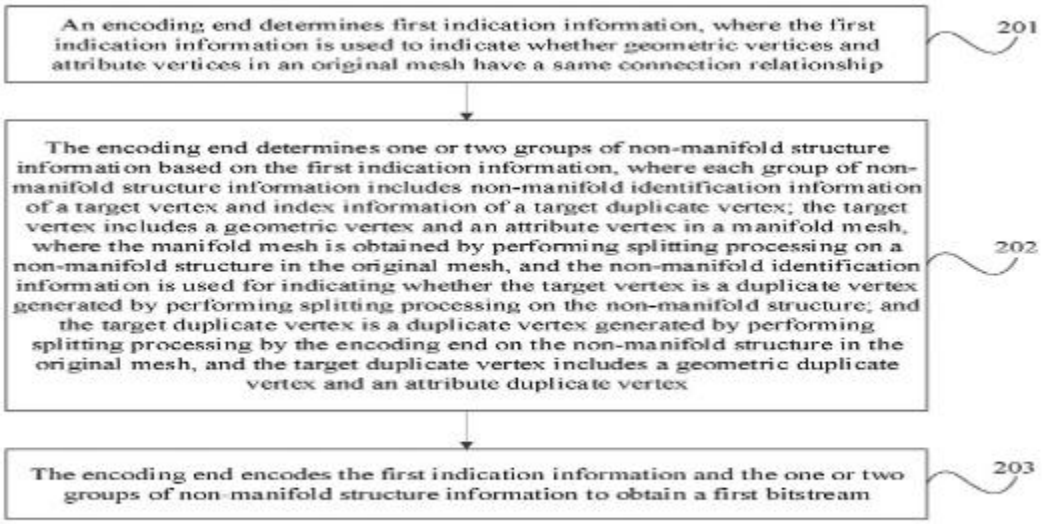


FIG. 2

No. of Pages : 59 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :12/01/2026
(21) Application No.202627003072 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEMS AND METHODS FOR SIDELINK POSITIONING FOR DEVICE-TO-DEVICE COMMUNICATIONS

(51) International classification :H04W 72/23
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :PCT/CN2023/112668
Filing Date :11/08/2023
(87) International Publication No :WO 2025/035295
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)ZTE CORPORATION
Address of Applicant :ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan Shenzhen, Guangdong 518057 China
(72)**Name of Inventor :**
1)LI, Mengzhen
2)JIANG, Chuangxin
3)YANG, Qi
4)PAN, Yu
5)LU, Youxiong
6)WANG, Cong
7)LOU, Junpeng
8)XING, Weimin

(57) Abstract :
The present disclosure relates to systems, apparatuses, methods, and non-transitory computer-readable media for receiving, by a first wireless communication device from a higher layer, Sidelink Positioning Reference Signal (SL PRS) resource configuration for communicating SL PRS in a time-domain unit and sending, by the first wireless communication device, the SL PRS according to the SL PRS resource configuration to a second wireless communication device.

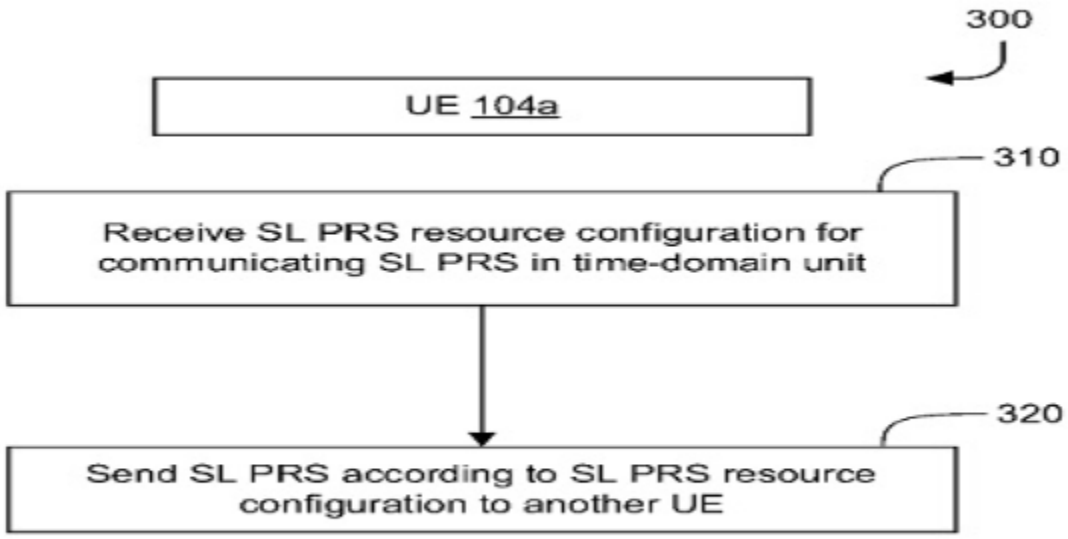


FIG. 3

No. of Pages : 31 No. of Claims : 36

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :12/01/2026
(21) Application No.202627003123 A
(43) Publication Date : 06/11/2026


(54) Title of the invention : RESILIENT DISTRIBUTION NETWORK INFRASTRUCTURE PLANNING WITH RENEWABLE UNCERTAINTY

(51) International classification	:H02J 3/00, G06Q 50/06, H02J 3/38, H02J 13/00
(31) Priority Document No	:18/222719
(32) Priority Date	:17/07/2023
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/JP2024/080067 :08/05/2024
(87) International Publication No	:WO 2025/018429
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)MITSUBISHI ELECTRIC CORPORATION
Address of Applicant :7-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 1008310 Japan
(72)**Name of Inventor :**
1)SUN, Hongbo
2)ZHOU, Anping

(57) Abstract :
Disclosed a decision-dependent chance-constrained optimal model for enhancing resilience of power distribution system under renewable generation uncertainty through strategically setting-up and activating dispatchable diesel generators, renewable distributed generations, battery energy storage systems, and switchable devices. By incorporating the information of decision variables, a moment-based ambiguity set is employed to depict the uncertainty arising from renewable distributed generators. By leveraging convex approximations to handle the considered joint chance constraints, the disclosed model is transformed into a tractable mixed-integer second-order conic programming problem to be solved.

FIG.1B 100

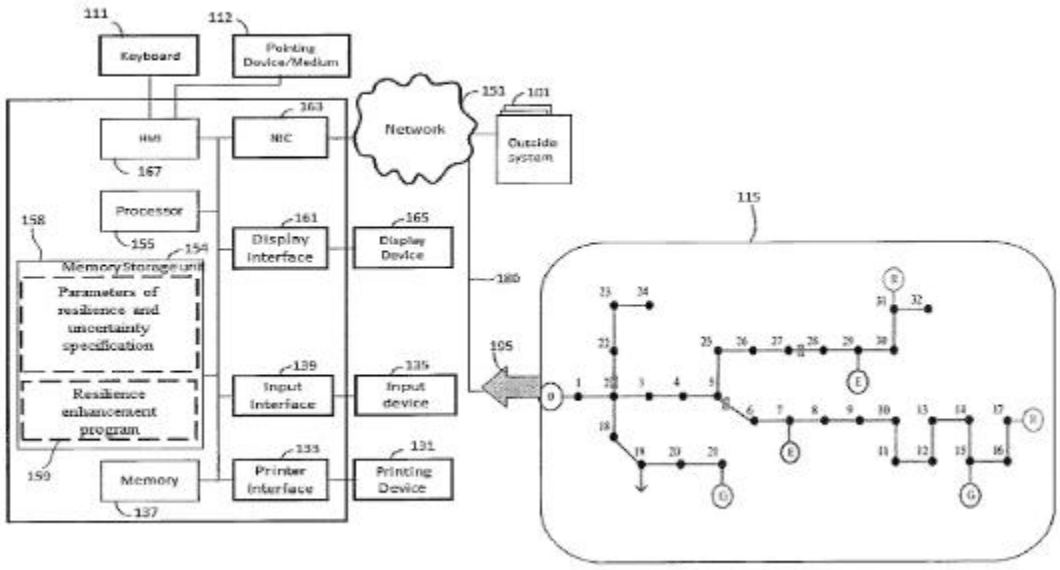

No. of Pages : 32 No. of Claims : 21

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :04/05/2025
(21) Application No.202521043148 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : The integration system for monitoring the temperature of Infant skin.

(51) International classification	:A61B0005000000, G01K0007220000, A61B0005020500, G06F0001160000, A61B0005145000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Shamkuwar Sonal C
Address of Applicant :A 601, Phase 3, GV 7, Ambegaon Maharashtra India
2)Vishwakarma Instiute of Technology
(72)**Name of Inventor :**
1)Praveen Rathod
2)Pranali Chavhan
3)Gajanan Chavhan
4)Dr S C Shamkuwar
5)Chaitali Shewale
6)Shweta Tiwaskar
7)Pallavi Rege
8)Prapti kallawar

(57) Abstract :
This project revolves around a digital watch with a body-temperature-monitoring feature, designed and developed. With the awareness of health growing in infant, wearable technology can be considered the most innovative idea for health monitoring in real time. The digital watch offered comprises a thermistor sensor to give precise temperature and a microcontroller for processing the data. The watch displays the LCD display body temperature along with an alert system in the case of abnormal readings. This project thus furthers personal health management in more ways through instant feedback over their body temperature, thus prompting more proactive health control in users. The prototype is both feasible, accurate, and user-friendly, standing as an excellent stepping ground for the further development of wearable health technology.

No. of Pages : 5 No. of Claims : 5

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :12/01/2026
(21) Application No.202627003149 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SESSION INFORMATION DISPLAY METHOD AND APPARATUS, ELECTRONIC DEVICE, AND STORAGE MEDIUM

(51) International classification	:G06F 3/0481, G06F 9/451
(31) Priority Document No	:202310848308.0
(32) Priority Date	:11/07/2023
(33) Name of priority country	:China
(86) International Application No	:PCT/CN2024/103554
Filing Date	:04/07/2024
(87) International Publication No	:WO 2025/011426
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)BEIJING ZITIAO NETWORK TECHNOLOGY CO., LTD.
Address of Applicant :0207, 2/F, Building4, Zijin Digital Park Haidian District, Beijing 100190 China
(72)**Name of Inventor :**
1)WAN, Shiqi
2)SHU, Siqi

(57) Abstract :
Embodiments of the present disclosure provide a session information display method and apparatus, an electronic device, and a storage medium. The method comprises: receiving a display operation of a first user for a session interface; and in response to the display operation, displaying the session interface, wherein the session interface supports the use of a first display state in displaying at least part of first position information in the session interface, the display state of the first position information is switched to a second display state upon determination that the user sends second position information for the first position information, position information in the session interface is session information, the position information comprises the first position information and/or the second position information, and the position information comprises an image and/or text.

Figure of Abstract

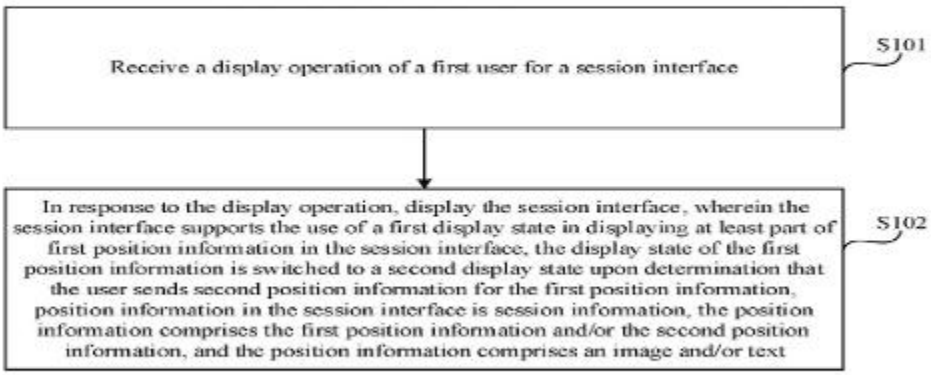


Fig. 1

No. of Pages : 27 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :13/01/2026
(21) Application No.202627003597 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AROMATIC NITROGEN-CONTAINING COMPOUNDS, PREPARATION METHODS AND MEDICINAL USES THEREOF

(51) International classification :C07D 487/04, A61K 31/519, A61P 35/00
(31) Priority Document No :63/510715
(32) Priority Date :28/06/2023
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/CN2024/102582
Filing Date :28/06/2024
(87) International Publication No :WO 2025/002413
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)JIANGSU HENGRUI PHARMACEUTICALS CO., LTD.
Address of Applicant :No.7 Kunlunshan Road, Economic and Technological Development Zone, Lianyungang, Jiangsu 222047 China
(72)**Name of Inventor :**
1)LIU, Gang
2)JING, Bingwen
3)ZHU, Hugh Y.

(57) Abstract :
Aromatic nitrogen-containing compounds, the preparation method thereof, pharmaceutical compositions comprising the compounds, and the pharmaceutical uses for the treatment of related diseases or disorders are disclosed.



(I)

No. of Pages : 159 No. of Claims : 20


(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :13/01/2026
(21) Application No.202627003676 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : POLYSUBSTITUTED MACROCYCLIC COMPOUND, AND PREPARATION METHOD THEREFOR AND USE THEREOF

(51) International classification	:C07D 487/08, A61K 31/4439, A61K 31/513, A61K 31/501, A61P 7/02
(31) Priority Document No	:202310799450.0
(32) Priority Date	:30/06/2023
(33) Name of priority country	:China
(86) International Application No Filing Date	:PCT/CN2024/102166 :28/06/2024
(87) International Publication No	:WO 2025/002297
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SHENZHEN SALUBRIS PHARMACEUTICALS CO., LTD
Address of Applicant :Zone A, 4F, 289 Digitland, 2 Hongliu Road, Futian District Shenzhen, Guangdong 518017 China
(72)**Name of Inventor :**
1)WU, Junjun
2)LU, Yinsuo
3)XING, Wei
4)XIAO, Ying
5)HUANG, Yiqiang
6)WANG, Liulin

(57) Abstract :
Provided are a compound as represented by general formula (I), or a racemate thereof, or an isomer thereof, or a pharmaceutically acceptable salt thereof, and a method for treating a plurality of specific diseases or conditions using same.

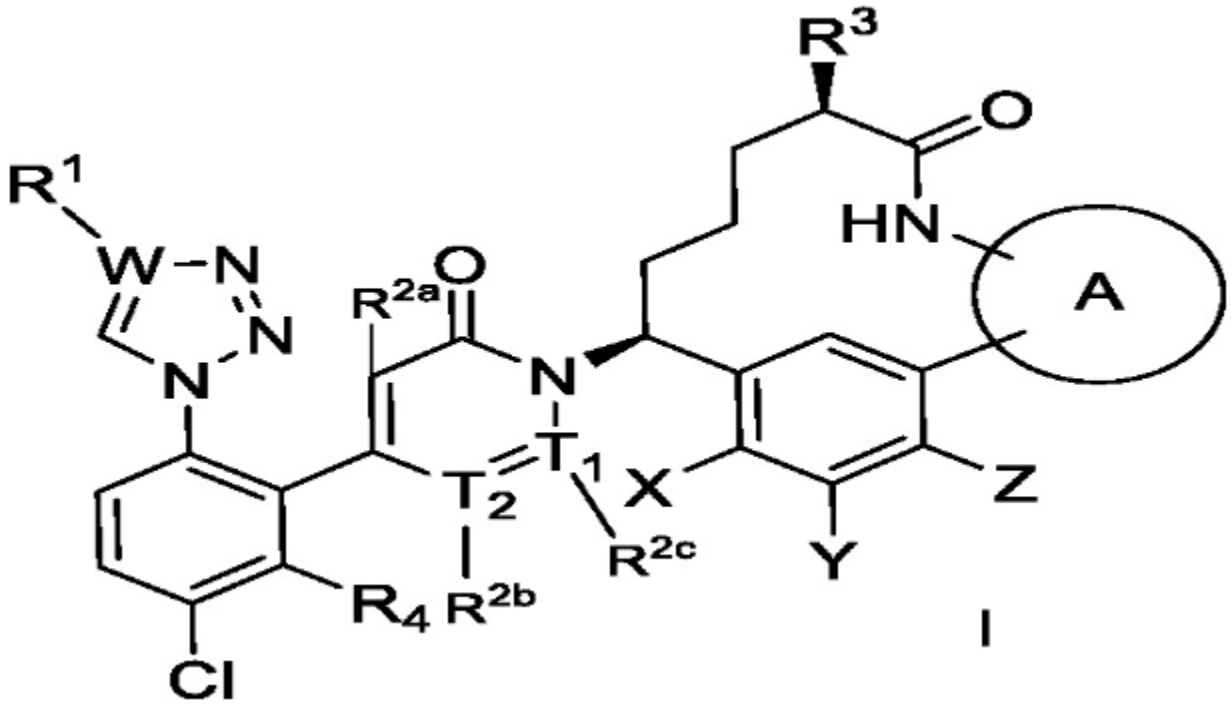

I

No. of Pages : 92 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202521042176 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : REUSABLE BEVERAGE CAN GRIP

(51) International classification	:B65D 25/28, B65D 23/10
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Rahul Krishnaji Bawane
Address of Applicant :Flat No. 5, Anthorium Building, Suryakiran Pharmacy Colony, Swarajnagari, Talegaon Dabhade, Tal. Maval Maharashtra India
2)Pimpri Chinchwad College of Engineering and Research
3)Anushka Adinath Dahiphale
4)Om Dinesh Badhe
(72)**Name of Inventor :**
1)Rahul Krishnaji Bawane
2)Anushka Adinath Dahiphale
3)Om Dinesh Badhe

(57) Abstract :
This invention provides a reusable beverage can grip that attaches to standard cylindrical cans. It is designed to enhance ergonomic handling, reduce slippage, and offer thermal insulation. Made from reusable elastic material, it fits snugly around cans without adhesives. The design may include texturing or contouring for improved comfort and decorative appeal. The product serves as an environmentally friendly and reusable alternative to disposable sleeves or foam grips.

No. of Pages : 7 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/12/2025
(21) Application No.202527128080 A
(43) Publication Date : 06/11/2026


(54) Title of the invention : Joint Components used for Joining External Component

(51) International classification	:B29C 49/20, B65D 23/10
(31) Priority Document No	:202323382083.9
(32) Priority Date	:11/12/2023
(33) Name of priority country	:China
(86) International Application No	:PCT/CN2024/090562
Filing Date	:29/04/2024
(87) International Publication No	:WO 2025/123561
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)MAN WAH FURNITURE MANUFACTURING (SHENZHEN) CO., LTD.
Address of Applicant :Minhua Industrial City, 189 Hongmian Road, Henggang Street, Longgang District Shenzhen, Guangdong 518001 China
(72)**Name of Inventor :**
1)CHEN, Weiming

(57) Abstract :
The present application relates to a joint components (100) for joining an external component (200), wherein the joint components (100) 5 comprises: A body (110) made of plastic and having the first outer surface (S1) in at least one region and having, in the at least one region, at least the first recessed portion (111) inwardly relatively to the first outer surface (S1), in the at least one region, the recessed portion (111) having an opening (115); and a joint component (120), the joint component (120) 10 having an joint portion (121) for joining the external component (200), wherein at least a portion of the joint component (120) is arranged within the recessed portion (111) and is restricted by the recessed portion (111) in a direction of load force (F) applied by the external component (200) to the joint component (120). The joint components of the present 15 application can form a stable connection between the joint component and the plastic body.

Fig.2

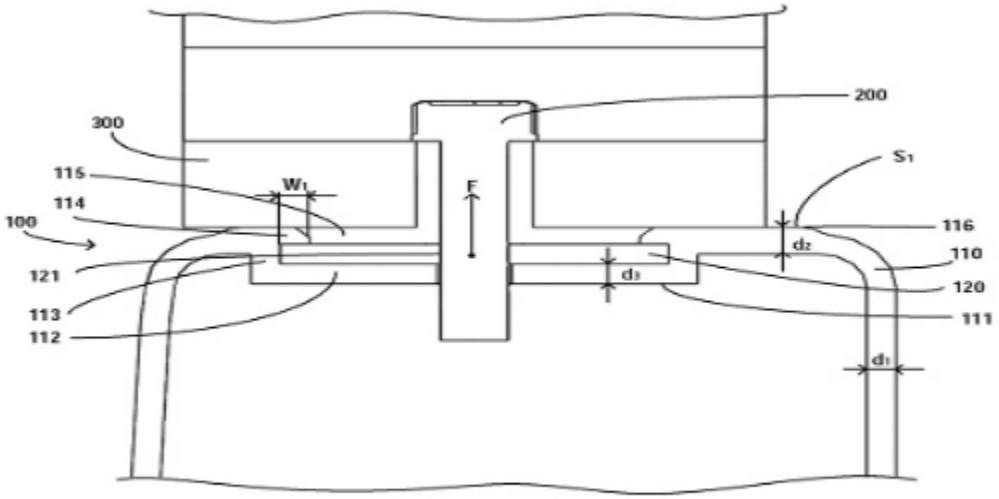

No. of Pages : 20 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202521042668 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : COVER PANEL INCLUDING A COVER THAT CAN BE REMOVED, AND APPLICATIONS OF THE SAME

	:	(71)**Name of Applicant :**
	E05D	**1)KAIRISH INNOTECH Private Ltd.**
(51) International classification	15/52,	Address of Applicant :72-73, 7th Floor, Plot 215, Free Press House, Free Press
	H05K	Journal Marg, Nariman Point, Mumbai 400021, India Mumbai Maharashtra India
	5/03	(72)**Name of Inventor :**
(31) Priority Document No	:NA	**1)DADACHANJI, Rishad Kairus**
(32) Priority Date	:NA	**2)TANDEL, Monik Vinodbhai**
(33) Name of priority country	:NA	
(86) International Application No	:NA	
Filing Date	:NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :

A cover panel 1 for covering an opening comprises a frame 5 defining the opening 6, and a cover 3 covering the opening in a closed condition. The frame 5 retains the cover 3 in the closed condition, and an actuating member 25 is used to switch the cover 3 to an opened condition in which it can be removed from the frame 5 to provide access to a back side BS thereof via the opening 6. The actuating member 25 is pivotably supported about a pivot axis 31 extending in parallel with a plane of the cover panel. Pivoting the actuating member 25 about its pivot axis 31 drives a displacement of the cover 3 perpendicular to the frame 5 to the opened condition, for removal of the cover 3 from the frame 5.

No. of Pages : 25 No. of Claims : 19

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202521042767 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : ELECTRIC DEHYDRATOR FOR SMALL SCALE FARMER

(51) International classification	:A23B7/02, F26B9/00, G05D23/19, F25B21/02
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)LAMBOR SHILPA MEENOR
Address of Applicant :G2/703, GANGA DHAM PHASE-2, MARKET YARD, PUNE-411037 Maharashtra India
2)DGAMA NEVAN PIEDADE
3)MANASA KRISHNA CHAITANYA ENDELA
4)DEORE PREM RAMESH
5)DANE ROHIT BHAUSAHEB
6)DIVATE BHUMIKA SANTOSH
(72)**Name of Inventor :**
1)MANASA KRISHNA CHAITANYA ENDELA

(57) Abstract :
The invention describes a compact, dual-mode vegetable dehydrator that integrates electric Nichrome heating and Peltier cooling within a single insulated chamber. a: an insulated single-chamber assembly fabricated from MDF with polyurethane insulation; Nichrome heating coils delivering up to 100; an TEC1-12704 Peltier modules (ATmax=67 °C) with anodized aluminium heat sinks that can be used for heating and cooling purposes It employs a precise drying rate of 0.01 kg/kg-h, reducing moisture content below 10% within 8 hours. The modular tray assembly accommodates diverse produce types and batch sizes, and the portable form factor supports deployment in resource-limited rural settings. Empirical trials on Pineapple and strawberries demonstrate energy efficiency and nutrient retention above 80%. an energy-efficient design that maintains low power consumption while achieving effective dehydration and cooling, reducing operational costs for small-scale farmers.

No. of Pages : 6 No. of Claims : 6

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :15/12/2025
(21) Application No.202524127020 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : OPTIMIZING AI MODEL EXECUTION ON AN EDGE DEVICE

(51) International classification	:G06F 9/50, G06F 8/40, G06N 20/00, G06N 3/02, G06N 3/045
(31) Priority Document No	:19/194,368
(32) Priority Date	:30/04/2025
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)MediaTek Inc.
Address of Applicant :No. 1, Dusing 1st Rd., Hsinchu Science Park, Hsinchu City 30078, Taiwan, R.O.C. Taiwan
(72)**Name of Inventor :**
1)Ji-Jhen LIN
2)Li-Ren HOU
3)Cheng-Sheng CHAN

(57) Abstract :
Parameter settings for compiling and executing AI models are optimized. The AI models are used in an application scenario that runs on edge devices. The parameter settings include compilation settings and execution settings, which further include at least hardware resource allocation for each AI model and an order in which the AI models are executed in the application scenario, respectively. The parameter settings are tuned using a genetic algorithm based on performance metrics to iteratively update the parameter settings in multiple iterations. In each iteration the performance metrics are generated by one or more target edge devices executing the AI models according to updated execution settings and the AI models are compiled according to updated compilation settings. At the end of the tuning, optimized execution settings and the AI models compiled with optimized compile-time settings are sent to edge devices for executing the AI models in the application scenario.

No. of Pages : 24 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :27/11/2025
(21) Application No.202527117990 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : APPARATUS FOR THE AUTOMATIC LOADING OF TUBULAR ARTICLES

(51) International classification :B65H 19/12
(31) Priority Document No :102023000011931
(32) Priority Date :12/06/2023
(33) Name of priority country :Italy
(86) International Application No :PCT/IT2024/050122
Filing Date :12/06/2024
(87) International Publication No :WO 2024/257135
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)I.M.A. INDUSTRIA MACCHINE AUTOMATICHE S.P.A.
Address of Applicant :via Emilia 428/442 40064 Ozzano dell'Emilia (BO) Italy
(72)**Name of Inventor :**
1)SPATAFORA, Mario

(57) Abstract :
The apparatus for the automatic loading of tubular articles in a machine using said articles comprises a spindle (10) associated with a support frame (11) according to a substantially horizontal axis (A) and adapted to support a plurality of articles (2) approached one another along the same spindle (10). Thrust means (20) are configured to cause the stepwise advancement of said articles (2) along said spindle.

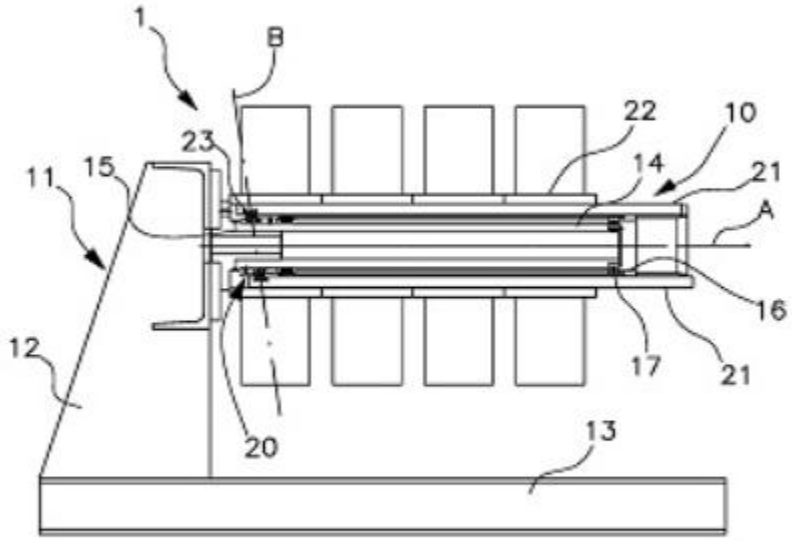


Fig.1

No. of Pages : 13 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202521043595 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : PROCESS FOR RECOVERING BATTERY GRADE VANADYL SULFATE FROM VANADIUM BEARING GASIFIER SLAG

(51) International classification	:C22B34/22, C22B3/44, C22B3/08, C22B7/00, C01G31/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)RUBAMIN PRIVATE LTD.
Address of Applicant :23, Shree Laxmi Industrial Estate, Dunia, Halol, Gujarat 389350, India Gujarat India
(72)**Name of Inventor :**
1)PADH, Bharat Chandrakant
2)RAMACHANDRAN, Suresh Kizhakkethil

(57) Abstract :
ABSTRACT PROCESS FOR RECOVERING BATTERY GRADE VANADYL SULFATE FROM VANADIUM BEARING GASIFIER SLAG The present disclosure provides a process for extracting battery grade vanadyl sulfate solution from vanadium-bearing gasifier slag (VBGS), comprising: (a) 5 leaching a roasted VBGS with a citric acid solution to produce a solid residue and a vanadium leach liquor; (b) subjecting the vanadium leach liquor to a multi-steps solvent extraction process to produce a raffinate and battery grade vanadyl sulfate solution; (c) recycling raffinate from the step (b) back to the step (a). 10 27

No. of Pages : 30 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202521043603 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AN INTELLIGENT VOICE ASSISTANT PLATFORM AND A SYSTEM FOR USER INTUITIVE EXPERIENCE

(51) International classification	:G10L13/02, G10L13/08, G10L15/00, G10L17/22, G06F40/20, G06N3/00, G06N20/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Jabade Vaishali Siddharth
Address of Applicant :Flat 101, Alliance Nakshatra, Plot 48, Tulshibagwale Colony, Sahakarnagar No 2, Pune-411009, Maharashtra Maharashtra India
(72)**Name of Inventor :**
1)Jabade Vaishali Siddharth

(57) Abstract :
The present invention relates to the AI-powered voice assistant platform and a system for the users to enable a seamless and intuitive experience for managing daily tasks, retrieving personalized information, and facilitating natural, context-aware conversations.

No. of Pages : 26 No. of Claims : 7

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202441083295 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A process for preparation of Self-Emulsifying Drug Delivery system for carotenoids

(51) International classification	:A61K0009107000, C07C0403240000, A61K0036280000, A61K0047100000, C12P0023000000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Ingex Botanicals Private Limited
Address of Applicant :No. 508, Medini, 60 Feet Road, F Block, Sahakaranagar, Bangalore-560 092, Karnataka, India Bangalore Karnataka India
(72)**Name of Inventor :**
1)Mr. Cheppattu Mohammed Abdullah Anzar
2)Mr. Molath Varkey Joseph
3)Mr. Mohamed Faizal
4)Mr. Padmanabhan Chettayil Prasad
5)Mr. Ramachandran Sundaram
6)Ms. Aluri Sri Lakshmi
7)Mr. Bharadwaj Gururaj Vadiraj
8)Mr. Earanimose Bineesh
9)Ms. Neethumol Benny

(57) Abstract :
Abstract A process for preparation of Self-Emulsifying Drug Delivery system for carotenoids [0086] The present invention discloses a process for preparation of marigold extract self-emulsifying drug delivery system for carotenoids using marigold oil blend. The invention is specific to two-step process comprising the preparation of marigold oil blend followed by marigold extract self-emulsifying drug delivery system especially for carotenoids. The process results in a self-emulsifying or self-micellizing system, which forms microscopic micelles upon incorporation of water and encapsulates the carotenoids within the core. The process results in effective drug delivery system with improved stability and bioavailability of carotenoids. (FIGURE 1)

No. of Pages : 37 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202441083875 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A METAL-SUPPORTED HALLOYSITE NANOCLAY CATALYST AND A PROCESS OF MAKING IT, AND A PROCESS OF SYNTHESIZING PARACETAMOL USING SAID CATALYST

(51) International classification	:B82Y30/00, B82Y5/00, B01J 21/16, B01J 23/755, C01B 21/48, C07C 39/06, C07C 213/02, C07C 233/25
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Apex Laboratories Private Limited
Address of Applicant :3rd floor, SIDCO Garment Complex, Guindy, Chennai 600032, Tamil Nadu, India Chennai Tamil Nadu India
(72)**Name of Inventor :**
1)Mr. Sulur, Vanangamudi Vishagan
2)Mr. Sulur, Subramaniam Vanangamudi
3)Dr. Lakshmi Narayanan Ramanathan
4)Prof. Ajayan Vinu
5)Mr. Ayush Kumar
6)Dr. Gurwinder Singh
7)Dr. Kavitha Ramadass

(57) Abstract :
A metal-supported halloysite nanoclay-based catalyst (HNT) is disclosed comprising halloysite nanoclay as base material and having tubular morphology and hydrophilic aluminol (Al–OH) groups on its internal lumen surface and hydrophobic siloxane (Si–O–Si) groups on its outside surface. Metal nanoparticles are uniformly loaded on said base material. Metal nanoparticles are selected from a group consisting of copper (Cu), cobalt (Co), iron (Fe), and nickel (Ni), either separately or in combination. Also disclosed is a process of making the metal-supported halloysite nanoclay-based catalyst. Further disclosed is a process to synthesise paracetamol using reduction of p-Nitrophenol to p-Aminophenol with Hydrogen in presence of a metal/porous catalyst followed by Acetylation of p Aminophenol to Paracetamol using acetic anhydride in the presence of the metal-supported halloysite nanoclay-based catalyst. Superior textural properties of HNT are a key advantage for higher nickel nanoparticle loading, enabling the desired selectivity and conversion efficiency of the catalyst. Representative Figure: Figure 2

No. of Pages : 49 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202541009581 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : Systems and methods for low ?V, cross current flow optimization in a battery

(51) International classification	:G08G1/01, H01M50/569, G01R31/36, H02J7/00, H02J7/04, H01M10/44, H02J7/54, H02J7/52
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SPIRO MOBILITY HOLDCO DMCC
Address of Applicant :Unit No. 2501F -2506F, JBC-2 CLUSTER V, JLT, DUBAI, U.A.E U.A.E.
(72)**Name of Inventor :**
1)SAMIR KUMAR MISHRA

(57) Abstract :
ABSTRACT Systems and methods for low ?V, cross current flow optimization in a battery Embodiments herein disclose systems and methods for managing low ?V, cross current flow optimization in a battery. Embodiments herein disclose an adaptive cross current flow mechanism, wherein a BMS can monitor and control the mechanism during entire operation cycle of active charge and discharge period and manage the charge process or balancing of the cells (based on need). FIG. 2

No. of Pages : 28 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202541009589 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : Methods and systems for intelligent step charging of a battery

(51) International classification	:H02J7/00, H02J7/90, H01M10/44, H01M10/052	(71)**Name of Applicant :** **1)SPIRO MOBILITY HOLDCO DMCC** Address of Applicant :Unit No. 2501F -2506F, JBC-2 CLUSTER V, JLT, DUBAI, U.A.E U.A.E.
(31) Priority Document No	:NA	(72)**Name of Inventor :** **1)SAMIR KUMAR MISHRA**
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No	:NA	
Filing Date	:NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :
ABSTRACT Methods and systems for intelligent step charging of a battery Embodiments herein disclose methods and systems for performing intelligent step charging of a battery. FIG. 1A

No. of Pages : 32 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :03/05/2025

(21) Application No.202541018442 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : NITROGEN-DOPED GRAPHENE-BASED ELECTROCHEMICAL CATALYST AND METHOD FOR ANION EXCHANGE MEMBRANE ELECTROLYSIS AND HYDROGEN PRODUCTION

(51) International classification	:C25B0001040000, C25B0013080000, C25B0009230000, C25B0011075000, C25B0011091000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)AGASTYA HYDROGEN PRIVATE LIMITED
Address of Applicant :PLOT NO 32 SY NO 147, LORVEN HOMES, PRAGATINAGAR, HYDERABAD, TELANGANA - 500090, INDIA. Hyderabad Telangana India

(72)**Name of Inventor :**
1)SHASHI KUMAR REDDY ARJULA
2)RAJESH KUMAR POLAGANI

(57) Abstract :
NITROGEN-DOPED GRAPHENE-BASED ELECTROCHEMICAL CATALYST AND METHOD FOR ANION EXCHANGE MEMBRANE ELECTROLYSIS AND HYDROGEN PRODUCTION Disclosed a system (100) and method (200) for hydrogen production using an anion exchange membrane (AEM) water electrolyzer comprising a nitrogen-doped graphene electrocatalyst layer (116, 120). The system includes an anion exchange membrane (102), a first electrode (104), a second electrode (106), a fluid delivery assembly (108), a power supply (110), a gas separation and collection assembly (112), and processing circuitry (114) configured to control operating parameters. At least one electrode includes nitrogen-doped graphene comprising pyridinic, pyrrolic, graphitic nitrogen species, or combinations thereof. The electrocatalyst exhibits high surface area, mesoporous structure, improved conductivity, and enhanced catalytic activity for oxygen evolution reaction and/or hydrogen evolution reaction. The system operates efficiently at reduced cell voltage with improved durability while reducing or eliminating precious metal catalyst usage.

No. of Pages : 34 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202541032314 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A MODULAR SHELVING SYSTEM

(51) International classification	:A47B 87/02, A47B 47/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)VELUTHEDATH PARAMBIL VIJAYA KUMAR
Address of Applicant :406, elegant berkeley, 227-228, hennur road, kalyan nagar post, Bangalore 560043, Karnataka, INDIA Bangalore Karnataka India
(72)**Name of Inventor :**
1)VELUTHEDATH PARAMBIL VIJAYA KUMAR

(57) Abstract :
ABSTRACT “A MODULAR SHELVING SYSTEM” The present disclosure relates to a modular shelving system (100) including a plurality of trays (300) interconnected to each other. Each tray includes a body (102) with a plurality of tapered surfaces (102a, 102b, 102c, 102d) and a pair of first provisions (106), defined on a first side of the body. The tray includes a pair of second provisions (108) opposite to the pair of first provisions. The second provisions are coupled to the first provisions of an adjacent tray for interconnecting the plurality of trays. The system includes a plurality of support structures (112) connected to each of the plurality of trays. The support structure incudes a column (114) connected to each of the first and second pair of provisions for supporting each of the plurality of trays. The trays can be easily interconnected to each other without requiring any fasteners. This reduces assembly time and manufacturing cost of the system. [Referred to Fig. 1]

No. of Pages : 33 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041512 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Solar Panel Funding Platform for Homeowners

(51) International classification	:G06Q50/06, G06Q30/00, G06Q40/00, G06Q20/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Vishruth Rajmohan
Address of Applicant :F102, Abode Valley, Kakkan Street, Potheri, Kattankulathur, Tamil Nadu, 603203 Tamil Nadu India
2)Kunal Sethia
(72)**Name of Inventor :**
1)Vishruth Rajmohan
2)Kunal Sethia

(57) Abstract :
The EcoFund app is a platform designed to connect homeowners, investors, and solar vendors, enabling solar panel installation without upfront costs. It allows homeowners to receive funding, have solar panels installed, and make payments based on energy consumption, while investors earn returns based on solar energy production.

No. of Pages : 17 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041521 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A METHOD TO OVERRIDE STEERING LOCK WITH PREDICTIVE ENGINE FAILURE AND VEHICLE-VEHICLE COMMUNICATION

(51) International classification	:B62D 5/04, B60R 25/021, B62D 6/00, B60W 50/02, B60W 30/18, H04W 4/40, B60W 50/029, H04W 4/46
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Limited
Address of Applicant :Post Box No 3000, Hosur Road, Adugodi, Bangalore – 560030, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Gowtham Balukutty

(57) Abstract :
ABSTRACT A method 100 to override steering lock with predictive engine failure is described. The method 100 comprises determining 110 if an engine of a vehicle is in an operative state, monitoring 120 a health of an engine, and determining if engine failure is imminent, and activating 130 a backup power steering power supply when engine failure is imminent, thereby overriding a vehicle steering lock function. The method 100 further comprises preventing 140 the steering lock from engaging if the vehicle is in a state of motion, and adjusting 150 a required steering effort of the vehicle based on the vehicle speed. The method 100 further comprises decreasing 160 the required steering effort for smoother control at high vehicle speed and increasing steering precision at low vehicle speed and broadcasting 170 an alert to surrounding vehicles by an electronic control unit to warn of engine failure in the vehicle engine.

No. of Pages : 8 No. of Claims : 7

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041522 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR METADATA MANAGEMENT IN AN ENTERPRISE DATA LAKEHOUSE ENVIRONMENT

(51) International classification	:G06F16/28, G06F16/25, G06N5/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bangalore – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Harsha Puttur Rajagopal
2)Shankar Datta M S H
3)Anubhav Tiwari
4)Roopa Sahadev Manappagol

(57) Abstract :
SYSTEM AND METHOD FOR METADATA MANAGEMENT IN AN ENTERPRISE DATA LAKEHOUSE ENVIRONMENT ABSTRACT A system (100) for metadata management in an enterprise data Lakehouse environment, comprising a metadata-driven framework (110) configured to store and manage metadata related to existing datasets, data models, quality checks, file validations, compliance policies, and housekeeping configurations in a centralized metadata repository (120). The system (100) also includes a generative artificial intelligence interface (130) configured to receive natural language inputs from a user regarding metadata operations and interpret intent of the natural language inputs to perform metadata configuration tasks. The Gen AI interface (130) automatically detects characteristics of new datasets, recommend and configure data quality checks and validation rules based on detected characteristics and enterprise policies. The Gen AI interface (130) monitors metadata configurations and suggest compliance-related enhancements based on applicable industry standards and organizational governance policies. FIG. 1

No. of Pages : 20 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041523 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A control unit for finetuning a vision language foundation model (VLFM) and a method thereof

(51) International classification	:G06N 20/00, G06N 3/08, G06F 18/214, G06N 3/0455, G06V 10/774
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bengaluru – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Jitendra Yasaswi Bharadwaj Katta
2)Sahana Muraleedhara Prabhu
3)Amit Arvind Kale

(57) Abstract :
Abstract A control unit for fine-tuning a vision language foundation model (VLFM) and a method thereof. The control unit 10 comprising an user interface 14, an embedding generation module 16, a scorer module 18, an image capturing unit 20. The control unit 10 trains the VLFM 12 using a domain specific dataset 22 received from a respective original equipment manufacturer (OEM) via the user interface 14 and generates embeddings 11 for each of the data point of the dataset 22 through the embedding generation module 16 and further transmits the generated embedding to the scorer module 18. The control unit 10 calculates a score to each of the embeddings 11 of the corresponding datapoint and checks a diversity factor compared to rest of the dataset 22 for obtaining a filtered dataset 22a and fine-tunes the VLFM 12 with the filtered dataset 22a to be deployed in atleast one application. (Figures1 & 2)

No. of Pages : 17 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041524 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A method detecting an anomaly in a process curve related to atleast one component using an intelligence model

(51) International classification	:G06F18/214, G06F21/50, G06F11/00, G06N5/00, G06N3/00, G06N20/00, G06F18/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bengaluru – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Birupaksha Pal
2)Poojari Rakshith
3)Sundeep Rayangowda Patil

(57) Abstract :
Abstract A method detecting an anomaly in a process curve related to atleast one component using an intelligence model. The intelligence model 11 is present in a control unit 10 and the control unit 10 comprises a user interface 14, a synthetic data generation module 16. In step S1, the intelligence model 11 is build and trained using multiple process curves 12 related to atleast one component 15. In step S2, a synthetic data 18 related to the process curves 12 of atleast one component 15 is generated using a hybrid model 11a present in the synthetic data generation module 16. In step S3, the intelligence model 11 is fine-tuned with the generated synthetic data 18. In step S4, the anomaly in the process curves 12 of atleast one component 15 is detected in a real-time environment , by the fine -tuned intelligence model 11.

No. of Pages : 15 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041525 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR PERSONALIZED CARE OF INDIVIDUALS

(51) International classification	:A61B0005000000, G08B0021040000, A61B0005110000, G16H0040670000, G16H0050200000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bangalore – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Sabyasachi Ghosal
2)Deepansh Menon
3)Rituraj Dutta
4)Anushiya Subramanian
5)Divya Vijay

(57) Abstract :
SYSTEM AND METHOD FOR PERSONALIZED CARE OF INDIVIDUALS ABSTRACT A system (100) for personalized care of individuals is disclosed. The system includes a wearable device (110) including a digital locking mechanism (170) operable using an OTP to lock/unlock the wearable device. The device includes a tamper detection mechanism (190) configured to notify a caregiver upon attempted removal or tampering with the wearable device. The device includes a health monitoring module (200) comprising sensors (120) for measuring patient vitals. The system includes a fall detection module (210) to detect impacts/falls of the user. The system includes a processing unit (180) to lock/unlock the wearable device using the OTP, receive data related to the user health, location, and fall detection to monitor condition of the user. The unit enables communication between the user, caregiver, and a doctor for personalized care. The system includes a virtual assistance module (230) to track emotional well-being and provide auditory prompts of the user. FIG. 1

No. of Pages : 22 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041526 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A METHOD FOR CONTROLLING A FLOW OF FUEL FROM A FUEL INJECTOR DURING OVER-RUN MODE

(51) International classification	:F02D 41/12, F02D 41/02, F01N 3/20, F02B 37/12, F02D 9/02, F02B 37/16
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Limited
Address of Applicant :Post Box No 3000, Hosur Road, Adugodi, Bangalore – 560030, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Bharadwaj Manchenahalli Krishnamurthy
2)Varuna Narasimhan Jagannathan
3)Bharathi Chandrasekaran

(57) Abstract :
ABSTRACT A method 100 for controlling a fuel flow from a fuel injector during an over-run mode of a vehicle is described. The method 100 comprises determining 110 if a vehicle is in an over-run mode, and an accelerator pedal of the vehicle is not depressed, and releasing 120 a resistance on a turbocharger, thereby allowing a turbine coupled to a compressor to freely run when exhaust gas impinges on a plurality of blade of the turbine. The method 100 further comprises opening 130 a throttle valve to a fully open position to enable fuel from a fuel tank to be supplied to the fuel injector, and enabling 140 fuel injection from a fuel injector if an exhaust gas temperature is lower than a threshold limit that is pre-determined by a user. The method 100 further comprises determining 150 if an exhaust gas temperature is lower than a pre-determined threshold limit. (Figure 1).

No. of Pages : 10 No. of Claims : 4

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041527 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A CONTROLLER AND METHOD TO OPERATE A STEERING SYSTEM OF A VEHICLE

(51) International classification	:B62D0005040000, B62D0006000000, B62D0015020000, B62D0003120000, B60W0010060000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Privat Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bangalore – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Karthickvel Alagusubramanian

(57) Abstract :
A CONTROLLER AND METHOD TO OPERATE A STEERING SYSTEM OF A VEHICLE Abstract The steering control system 104 of the vehicle 102 comprises the primary SCU 106 and the secondary SCU 108 of the first steering unit and the second steering unit respectively. The primary SCU 106 coupled to the primary motor to control the steering rack 110 position of the vehicle 102. The secondary SCU 108 coupled to the secondary motor to control the steering rack 110 position of the vehicle 102. The primary SCU 106 is electronically connected to the secondary SCU 108 via the first communication channel 112. The primary SCU 106 and the secondary SCU 108 receives the requested steering angle from the controller 114 of the vehicle 102 to maintain the redundancy mode in the steering system. The primary SCU 106 transmit the first message to the secondary SCU 108 via the second communication channel 116 which is redundant to the first communication channel 112. Figure 1

No. of Pages : 16 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041528 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A PREDICTIVE MAINTENANCE SYSTEM FOR CONVERTERS IN AUTOMOTIVE POWERTRAINS AND A METHOD THEREOF

(51) International classification	:G06N0003045000, G05B0023020000, G06N0003080000, B60W0010060000, G07C0005080000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bangalore – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Dr. Rahul Kumar Dubey

(57) Abstract :
A PREDICTIVE MAINTENANCE SYSTEM FOR CONVERTERS IN AUTOMOTIVE POWERTRAINS AND A METHOD THEREOF ABSTRACT A predictive maintenance system (100) for converters in automotive powertrains is disclosed. The system (100) includes a plurality of sensors (110) configured to collect real-time operating data from the automotive powertrains. The system (100) also includes a processing unit (120) comprising a feature selection module (130) configured to identify optimal input features from collected operating data. The processing unit (120) also includes a Temporal Convolutional Network (TCN) model (140) configured to process selected optimal input features and predict semiconductor junction temperature in real time. The predicted semiconductor junction temperature is used to enable proactive maintenance and prevent thermal failures. The system (100) enhances converter reliability, extend operational lifespan, and optimize thermal management in electric vehicles and hybrid electric vehicles. FIG. 1

No. of Pages : 23 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041529 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD TO DETECT AND MITIGATE LOCATION SIGNAL SPOOFING

(51) International classification	:G01S19/21, G01S19/22, G01S19/28, G01S19/42, H04W64/00, G01S1/24, G01S19/03, G01S19/48
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bangalore – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Sumitra Biswal
2)Vishal Gupta
3)Anish T S
4)Maheshwari G
5)Abhijit Giri
6)Bharath Kalyan Ganeshna
7)Kumar Abhishek

(57) Abstract :
SYSTEM AND METHOD TO DETECT AND MITIGATE LOCATION SIGNAL SPOOFING ABSTRACT A system (100) to detect and mitigate location signal spoofing is disclosed. The system (100) includes a plurality of sensors (110) configured to receive location signal data from a plurality of sources and network-based location verification. The system (100) includes a processing unit (120) comprising a threat profiling engine (130) configured to apply a multi-frequency and sensor fusion approach to verify integrity of received location signal data. The threat profiling engine (130) detect spoofing and jamming activities based on verified location signal data using anomaly detection algorithms. The processing unit (120) includes a mitigation engine (140) configured to provide mitigation actions comprising alerting operators, recommending adjusted positioning, and logging data for forensic analysis. FIG. 1

No. of Pages : 24 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041530 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A multi- agent framework for an automated data preparation & assessment and a method thereof

(51) International classification	:G06F16/20, G06F16/215, G06N20/00, G06N3/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**

1)Bosch Global Software Technologies Private Limited

Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bengaluru – 560095, Karnataka, India Bamgalore Karnataka India

2)Robert Bosch GmbH

(72)**Name of Inventor :**

1)Manojit Chakraborty

2)Amit Arvind Kale

(57) Abstract :

Abstract A multi- agent framework for an automated data preparation and assessment and a method thereof. The framework comprises a processing unit which receives input datasets (the dataset and the ideal dataset) and parses the ideal dataset for extracting attributes and rules . The processing unit receives the dataset and the attributes and the rules of the extracted ideal dataset for inspecting atleast one parameter of the dataset and generates an initial inspection result . The processing unit then validates relationships between the extracted attributes upon receiving the dataset and the inspection result and detects a discrepancy in atleast one validated relationship and performs a quantitative assessment and provides a numerical insights into the dataset's completeness . It provides a detailed description of dataset completeness issues and propose specific, actionable recommendations to make the dataset complete based on the identified issues and the extracted ideal dataset structure to generate a final report based on proposed recommendations and present it to an user via an output module. (Figures1 & 2)

No. of Pages : 21 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041531 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A control unit for processing a requirement document and a method thereof.

(51) International classification	:G06F40/30, G06F40/205, G06F40/186
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bengaluru – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Paheli Bhattacharya
2)Rishabh Gupta
3)Manojit Chakraborty

(57) Abstract :
Abstract A control unit for processing a requirement document and a method thereof. A control unit for extracting information from a requirement document. The control unit comprises an input module, extraction modules, an evaluation module, a quality check module, a memory module and an output module. The control unit receives and identifies a type of atleast one requirement document from an input module and transmits the requirement document to corresponding extraction module based on the identified requirement document. The control unit activates the identified extraction module for extracting data and for analyzes the requirement document structure. The control unit evaluates a quality of the extracted data based on a feedback from a user via the evaluation module and store the evaluations in the memory module. The control unit adjusts the quality checks of the evaluated data via the quality check module based on evaluation results for providing a final version of the requirement document through the output module. (Figures1 & 2)

No. of Pages : 19 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041532 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A SENSOR UNIT FOR A MOBILE DEVICE AND A METHOD OF OPERATION OF THE SAME

(51) International classification	:G06F 3/01, G06N 3/04, G06N 20/00, G06F 17/18
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bangalore – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Muhammad Parambath
2)LS Bharadwaj
3)Dibisha Thunoli Payyanvalappil

(57) Abstract :
A SENSOR UNIT FOR A MOBILE DEVICE AND A METHOD OF OPERATION OF THE SAME Abstract The sensor unit 104 to determine the gesture of the mobile device 102, the sensor unit 104 comprises the at least one IMU sensor 106 and the controller 108. The controller 108 receives the at least one signal from each of x-axis, y-axis and z-axis of the at least one IMU sensor 106 and calculate the variance of the at least one signal. The controller 108 compares the variance with the threshold value for the predetermined duration and determine the gesture of the mobile device 102 based on the comparison. The controller 108 classifies the gesture in the at least one gesture using the pre-trained machine learning model 110 and determine the gesture of the mobile device 102 based on the classification. The at least one gesture is selected from the group comprising of Out2In, Out2Out, In2In, and In2Out. Figure 1

No. of Pages : 18 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041533 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A METHOD TO GENERATE VIDEO CAPTIONS FROM AN INPUT VIDEO SEQUENCE AND A SYSTEM THEREOF

(51) International classification	:G06V20/40, G06T7/20, G06N20/00, G06T7/70
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bangalore – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Chiranjeevi Pojala
2)Jitendra Yasaswi Bharadwaj Katta
3)Amit Aravind Kale
4)Guruprasad Mahabaleshwar Hegde

(57) Abstract :
A METHOD TO GENERATE VIDEO CAPTIONS FROM AN INPUT VIDEO SEQUENCE AND A SYSTEM THEREOF Abstract Disclosed are techniques to generate video captions from an input video sequence. An AI system (10) comprises a metadata generator (1) configured to generate metadata from the input video sequence. The metadata comprises a set of outputs received when the input video sequence is inputted to at least a multi object tracker (5), a video segmentation module (6) , a 3D detector and tracker (7), and a point cloud processor (8) . A metadata processor (2) is configured to receive the metadata and a set of events related to the input video sequence, and process the metadata by mapping the input video sequence to an event selected from the set of events. A pre-trained AI model (3) configured to generate video captions based on the processed metadata. Figure 1

No. of Pages : 17 No. of Claims : 6

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041570 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : VEHICLE CLASSIFICATION TO CALCULATE AMOUNT FOR FASTAG

(51) International classification	:G06V20/50, G06N20/00, G06V10/764	
(31) Priority Document No	:NA	
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No	:NA	
Filing Date	:NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(71)**Name of Applicant :**
1)K.DEVIBALAN
Address of Applicant
:721,MMPURAM,URAPAKKAM,CHENNAI,TAMILNADU,INDIA.
PIN:603210 Tamil Nadu India
2)GOMATHI P
3)KEERTHANA P
4)HARINI S
(72)**Name of Inventor :**
1)K.DEVIBALAN
2)GOMATHI P
3)KEERTHANA P
4)HARINI S

(57) Abstract :
VEHICLE CLASSIFICATION TO CALCULATE AMOUNT FOR FASTAG" ABSTRACT: [0024] This project introduces an intelligent and automated toll collection system that classifies vehicles and computes toll charges in real time using an ESP32-CAM module ami YOLO-based object identification. The system's goal is to increase toll plaza efficiency by cutting down on processing time and manual labor. The ESP32-CAM takes pictures when cars get closer to the toll gate, and YOLO is used to process the photos in order to identify and categorize different kinds of vehicles, including cars, trucks, and buses. The associated toll amount is determined using preset rates based on the classification. This sum is automatically deducted from the user's associated account because it is completely integrated with the FASTag system. The suggested approach reduces human error, enhances traffic flow, and guarantees high vehicle recognition accuracy. A cost-effective and cutting-edge solution for contemporary toll administration, its scalable architecture also enables deployment across a variety of toll infrastructures.

No. of Pages : 13 No. of Claims : 5

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041579 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DERIVATIVES OF LIGNIN COMPRISING PHENOLIC AND AROMATIC ACIDS AND FORMULATION THEREOF

(51) International classification	:C08L0097000000, C05G0003800000, C07G0001000000, C08L0067020000, A23L0033160000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)FERTIS INDIA PVT. LTD.
Address of Applicant :6-3-668/10/56, Plot No 56 IstFloor Durga Nagar Colony, Punjagutta Hyderabad Telangana India 500082 Hyderabad Telangana India
(72)**Name of Inventor :**
1)KANUMURU, Rahul Raju
2)KOCHUMALAYIL, Shaji George
3)GARUDADRI, Lakshmi Prasanna Kumar
4)SURANENI, Ravikumar

(57) Abstract :
ABSTRACT DERIVATIVES OF LIGNIN COMPRISING PHENOLIC AND AROMATIC ACIDS AND FORMULATION THEREOF The disclosure relates to compositions comprising Lignin derivatives having molecular weight 300 D to 50 KD. The disclosure further relates to use of these compositions to improve the soil pH, convert unavailable forms of minerals into bio-available forms, improves nutrient use efficiency in plants, to overcome the ionic and osmotic stress and helps in controlling soil borne diseases and pests.

No. of Pages : 29 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041588 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD OF MANAGING RACKING OF A CIRCUIT BREAKER IN SWITCHGEAR UNITS AND A DEVICE THEREOF

(51) International classification :H02B11/127
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :NA
Filing Date :NA
(87) International Publication No : NA
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)ABB SCHWEIZ AG
Address of Applicant :Bruggerstrasse 66, 5400 Baden (CH) Switzerland
(72)**Name of Inventor :**
1)Nilesh Lokhande
2)Ravindra Borse
3)Rahul Hagawane
4)Sandeep Randive

(57) Abstract :
METHOD OF MANAGING RACKING OF A CIRCUIT BREAKER IN SWITCHGEAR UNITS AND A DEVICE THEREOF ABSTRACT 5 The present disclosure discloses method and device for managing racking of a circuit breaker in switchgear units. The method includes monitoring, by a processor (202), distance between panel contact (308) and shutter (310) of panel contact associated with switchgear unit, using first sensor (108). The shutter is moving in first direction away from panel contact. The method includes 10 monitoring, distance between panel contact and circuit breaker contact (306) associated with circuit breaker (304), using second sensor (110). The circuit breaker contact is moving in second direction towards panel contact. The method includes managing racking of circuit breaker by pausing movement of circuit breaker, when: (a) distance between the shutter and panel contact is less than predefined shutter distance; (b) distance between circuit breaker contact and panel contact 15 reaches predefined circuit breaker contact distance. Fig. 1

No. of Pages : 33 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041654 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ENABLING SENSING SERVICES IN A WIRELESS COMMUNICATION SYSTEM

(51) International classification	:H04W 4/30, H04W 12/00, H04W 12/08	(71)**Name of Applicant :** **1)Rakuten Mobile, Inc.** Address of Applicant :1-14-1 Tamagawa, Setagaya-ku, Tokyo 158-0094, Japan. Japan (72)**Name of Inventor :** **1)Manmeet Singh Bhangu** **2)Awn Muhammad**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No Filing Date	:NA :NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :
ENABLING SENSING SERVICES IN A WIRELESS COMMUNICATION SYSTEM The present disclosure discloses a method and a network system for enabling sensing services in a wireless communication system. The method comprises receiving a request for a sensing service comprising one or more sensing parameters, from a client application. The method comprises authorizing the sensing service based on subscription data associated with the client application and identifying one or more sensing entities in communication with the network system and associated with the sensing service, based on the one or more sensing parameters. The method further comprises configuring the one or more sensing entities with one or more operational parameters for performing sensing. Furthermore, the method comprises receiving sensing data from the one or more sensing entities, the sensing data including sensing result generated based on the one or more operational parameters and providing the sensing result to the client application. [Fig. 4]

No. of Pages : 35 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041663 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Standardized Waste Segregation System Using Color-Coded Dustbin Logos on Product Packaging

(51) International classification	:G06Q10/30, B65F1/14
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)M P NITHISH PRABA
Address of Applicant :6/421 Bajanai koil street,Sithalapakkam Tamil Nadu India
(72)**Name of Inventor :**
1)M P NITHISH PRABA

(57) Abstract :
The invention discloses a standardized system for waste segregation by introducing color-coded dustbin logos on product packaging. A green dustbin logo indicates biodegradable waste, while a red dustbin logo indicates non-biodegradable waste. This simple, visual guide assists consumers in correct disposal practices, improves municipal waste handling efficiency, and promotes environmental responsibility.

No. of Pages : 8 No. of Claims : 4

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041666 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ACCESS DEVICE TELEMETRY DATA REPORTING

(51) International classification	:H04L43/065, H04L43/0829, H04L43/0823, H04L1/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Hewlett Packard Enterprise Development LP
Address of Applicant :1701 East Mossy Oaks Road, Spring, Texas 77389, United States of America U.S.A.
(72)**Name of Inventor :**
1)DEVARAJAN, Venkatavaradhan

(57) Abstract :
Systems and methods described herein relate to telemetry reporting by an access device for other networking devices. An access device may generate its own error message or may receive error messages from the other networking devices. Based on the error message(s), the access device may generate telemetry data, which may consolidate telemetry data generation and reporting operations at the access device. Fig. 1.

No. of Pages : 45 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041713 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : MOUNTING DEVICE HAVING A RETRACTABLE LATCH UNIT FOR MOUNTING AN ACCESSORY IN A VEHICLE

(51) International classification	:B62J 9/20, B62J 7/00, B60R 11/00, E05B 83/36, E05C 19/02, B62J 9/27, F16B 21/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ATHER ENERGY LIMITED
Address of Applicant :3rd Floor, Tower D, IBC Knowledge Park, #4/1, Bannerghatta Main Road, Bengaluru - 560029, Karnataka, India Bengaluru Karnataka India
(72)**Name of Inventor :**
1)RAJESH, Chetan
2)NATH, Ashwin R

(57) Abstract :
A mounting device (96) includes latch unit (28) including latch base member (30) having enclosure (36) with through-opening (38) and a first push latch member (40). The latch base member (30) is configured to be aligned with first opening (42) in chassis panel (44) of vehicle (10) and coupled to chassis panel (44). The latch unit (28) further includes movable latch member (32) disposed in through-opening (38). The latch unit (28) further includes cap (34) coupled to movable latch member (32) and configured to be disposed within first opening (42) in chassis panel (44) of vehicle (10). The mounting device (96) further includes detachable member (84) having second push latch member (46), configured to be detachably coupled to cap (34) and movable latch member (32).

No. of Pages : 40 No. of Claims : 26

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041731 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DYNAMIC EMBEDDING PROCESS BASED ON SYSTEM RESOURCE UTILIZATION

(51) International classification	:G06F9/50, G06T1/60, G06F9/38
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Hewlett Packard Enterprise Development LP
Address of Applicant :1701 East Mossy Oaks Road, Spring, Texas 77389, United States of America U.S.A.
(72)**Name of Inventor :**
1)Koomthanam, Annmary Justine
2)Bhattacharya, Suparna
3)Foltin, Martin
4)Faraboschi, Paolo

(57) Abstract :
Systems and methods are provided for managing a dynamic embedding process based on current system resource utilization. In this way, the system resource utilization value may correspond to memory utilization, CPU or GPU consumption, or other use of a system component and the disclosed technology can adjust the embedding process based on these values.

No. of Pages : 51 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041733 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ROAMING-AWARE FLOW INFORMATION SYNCHRONIZATION IN AN OVERLAY NETWORK

(51) International classification	:H04L0012460000, H04L0047100000, H04L0045640000, H04L0009400000, H04L0045000000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Hewlett Packard Enterprise Development LP
Address of Applicant :1701 East Mossy Oaks Road, Spring, Texas 77389, United States of America U.S.A.
(72)**Name of Inventor :**
1)Nandy, Tathagata
2)Devarajan, Venkatavaradhan
3)Vijayan, Renjith

(57) Abstract :
A network device in an overlay network can determine a role for a client device subsequent to detecting the client device via a local port. The network device can determine a roaming indicator for a client device indicating whether it is to roam to another network device. The network device can allocate a virtual local area network (VLAN) to the client device based on the role and the roaming indicator. The network device can determine flow information of a data flow from the client device. The flow information can indicate a category of an application generating the data flow. The network device can send, based on a messaging protocol, a message comprising the flow information to a broker of the messaging protocol. Subsequently, the flow information is to be distributed by the broker to a set of network devices subscribing to receive flow information associated with the VLAN.

No. of Pages : 53 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041756 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : WIRE HOLDER CAP AND ASSEMBLY

(51) International classification	:H02K3/52, H02K1/14, H02K3/18, H02K3/28, H02K3/38
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)TE Connectivity Solutions GmbH
Address of Applicant :Mühlenstrasse 26, 8200 Schaffhausen, Switzerland Switzerland
2)Tyco Electronics (Shanghai) Co., Ltd.
(72)**Name of Inventor :**
1)MUTHUPANDI, Deepan Ponraj
2)INDI, Vinut
3)HUANG, Yongjian (Justin)

(57) Abstract :
The invention relates to a wire holder cap (100) for mounting to a stator frame (600) of a motor along a mounting direction (108), comprising a ring base (102) spanning a base plane (106). The wire holder cap (100) further comprises a plurality of wire retainers configured to retain at least one wire (200) and guide the at least one wire (200) along a wiring path (112) on an axial wire holder surface (110) of the ring base (102). The wire holder cap (100) further comprises a contact opening (134) extending along the base plane (106), configured to enable axial access to at least one wire (200) extending along the base plane (106). Some of the wire retainers (116) are located on opposite sides (203a, 203b) of the contact opening (134) along the base plane (106). A straight line (139) between the wire retainers (116) located on opposite sides (203a, 203b) of the contact opening (134) crosses the contact opening (134) parallel to the base plane (106). The invention further relates to an assembly (600) with the wire holder cap (100) and a stator frame (600) of a motor. (Fig. 5)

No. of Pages : 33 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041836 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : MAGNETIC ELEMENT FOR REMOVING DEBRIS FROM A FLUID IN A VEHICLE TRANSMISSION

(51) International classification	:B01D 35/06, B03C 1/02, F16H 57/04, H01F 7/02
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)VALEO EMBRAYAGES
Address of Applicant :81, avenue Roger Dumoulin, 80009, Amiens Cedex 2, France. Amiens Cedex 2 France
(72)**Name of Inventor :**
1)ARUNGULAVAN, Rajarajan
2)VERHOOG, Roel
3)KURUVILLA, Geogi
4)ERUSAPPAN, Thangavel
5)VARATHARASU, Jagadeesh
6)GURUDEVAN, Vinothini

(57) Abstract :
MAGNETIC ELEMENT FOR REMOVING DEBRIS FROM A FLUID IN A VEHICLE TRANSMISSION The present subject matter relates to a magnetic element (100) for removing magnetically attractable debris from a fluid. The magnetic element 100 includes a cylindrical body (1), extending in length in a direction along an axis X with a through hole (2) extending in the said axis X. The cylindrical body (1) comprises an outer periphery (3) and an inner periphery (4) defined by the through hole (2). The outer periphery (3) and the inner periphery (4) each defined by a cross sectional profile (5; 6) at any point along the length of the cylindrical body (1) and normal to the axis X. Further, the outer periphery (3) and/or the inner periphery (4) is having a non-circular shape. Figure for abstract: Fig.: 1

No. of Pages : 26 No. of Claims : 18

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041846 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD FOR PREVENTING AND DISSOLVING RENAL STONES USING ISOLATED SAPONINS FROM TRIBULUS TERRESTRIS

(51) International classification	:A61K0036185000, A61P0015000000, A61P0013120000, A61P0027160000, A61P0027020000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ANURADHA SUBRAMANIAN
Address of Applicant :39 Sandeep Av, 1st Main Road, Chinna Neelankarai , Chennai - , Tamil Nadu, India. Canada
(72)**Name of Inventor :**
1)ANURADHA SUBRAMANIAN

(57) Abstract :
The present invention relates to a method for preventing and dissolving renal stones using bioactive metabolites isolated from Tribulus terrestris. The method comprises extraction of dried plant material using a polar solvent to obtain a crude extract, followed by fractionation using a gel-based technique to isolate metabolites including saponins, glycosides, phenolics, tannins, and flavonoids. The isolated metabolites are characterized using analytical techniques such as spectroscopic and microscopic methods. The anti-urolithiatic efficacy is evaluated through in vitro crystallization assays involving calcium oxalate crystal growth, aggregation, and dissolution. Among the isolated metabolites, saponins exhibit a comparatively higher inhibitory and dissolution effect on calcium oxalate crystals. The invention provides a scientifically validated plant-based approach for inhibiting crystallization and promoting dissolution of renal stones, thereby offering a potential alternative to conventional treatment methods.

No. of Pages : 19 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041853 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR EXECUTING A FUNCTION IN A VEHICLE

(51) International classification	:G10L0015260000, G10L0015220000, G10L0015320000, G06N0003044000, G06F0003160000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ATHER ENERGY LIMITED
Address of Applicant :3rd Floor, Tower D, IBC Knowledge Park, #4/1, Bannerghatta Main Road, Bengaluru - 560029, Karnataka, India Bengaluru Karnataka India
(72)**Name of Inventor :**
1)ML, Adarsh
2)ATTIGERI, Maharudrappa M
3)MOGER, Vinayak Honnappa
4)PRITMANI, Manish Kumar

(57) Abstract :
Disclosed herein is a method (400) for executing a function using one or more interfacing entities in communication with a vehicle. The method comprises determining (402) at least one active interfacing entity among the one or more interfacing entities. The method comprises obtaining (404) the voice command input using the at least one active interfacing entity and transforming (406) the obtained voice command input into a transcribed text, using the at least one active interfacing entity. Furthermore, the method comprises determining (408) the function associated with the voice command input based on the transcribed text. The method comprises classifying (410) the function into an intent category and a frequency category. The method comprises determining (412) an execution path based on the classification and executing (414) the function based on the execution path.

No. of Pages : 42 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041873 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : VACUUM DRYING PROCESS FOR MANUFACTURING ANODE ELECTRODE WITH UNIFORM THICKNESS AND DENSITY

(51) International classification	:F26B0005040000, H01M0010040000, H01M0050107000, H01M0004040000, C22C0021000000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Ola Electric Mobility Limited
Address of Applicant :Regent Insignia, #414, 3rd Floor, 4th Block, 17th Main, 100 Feet Road, Koramangala, Bangalore, Karnataka, India-560034 Bangalore Karnataka India
(72)**Name of Inventor :**
1)Dr. Viresh Kumar
2)Prasanna Sekar
3)Sajin Kumar P

(57) Abstract :
The disclosure herein relates to a vacuum drying process (100) for uniform solvent removal from an anode for use in the cylindrical battery cell. The vacuum drying process (100) includes placing a calendered anode electrode into a vacuum chamber. Initially, a specific pressure and temperature are maintained to remove surface solvent. The pressure is then reduced at a controlled rate while maintaining the temperature for deeper solvent evaporation. This is followed by purging the vacuum chamber with an inert gas and gradually increasing pressure, and maintaining this state to aid in residual solvent removal. These steps are repeated cyclically until the desired solvent content is achieved, ensuring uniform drying across layers of the anode electrode in less time and achieving uniform thickness and density of the anode electrode for cylindrical cell manufacturing. Fig. 1

No. of Pages : 17 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041884 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : HEATSINK FOR A VEHICLE LIGHTING DEVICE

(51) International classification	:F21S 45/47, F21V 29/70, F21V 29/83, F28F 13/00, B33Y 80/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)VALEO VISION
Address of Applicant :34, rue Saint Andre, 93012 BOBIGNY Cedex, France.
BOBIGNY Cedex France
(72)**Name of Inventor :**
1)SINGH, Himanshu
2)SIDDHARTH, Partha

(57) Abstract :
The present invention pertains to a heatsink 200, for a vehicle lighting device. The heatsink 200, includes a base plate 102 having a first surface 102a and a second surface 102b. The first surface 102a supports one or more light sources 20. The heatsink 200 further includes a porous structure 220 formed on the second surface 102b of the base plate 102. The porous structure 220 includes a network of fluidly coupled orifices 222 formed by interconnected core members 224, such that the cooling air flows through the fluidly coupled orifices 222 to carry away the heat from the base plate 102. The heatsink 200 has advantages of improved cooling efficiency with reduced overall weight of the heatsink 200. Figure for the Abstract Fig.1

No. of Pages : 26 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041886 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD FOR PREPARING AND TREATING BAMBOO FABRIC WITH ENHANCED STRENGTH AND COMFORT CHARACTERISTICS

(51) International classification	:C08J0005240000, A61K0036899000, C08F0110020000, A61F0002820000, C04B0028140000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ANURADHA SUBRAMANIAN
Address of Applicant :39 Sandeep Av, 1st Main Road, Chinna Neelankarai, Chennai. Canada
(72)**Name of Inventor :**
1)ANURADHA SUBRAMANIAN

(57) Abstract :
The present invention relates to a method for extracting bioactive compounds from bamboo fabric using a solvent-based Soxhlet extraction system. The method comprises subjecting dried bamboo fabric to extraction using a solvent mixture comprising ethanol and toluene under controlled temperature and duration conditions, followed by concentration of the resultant extract under reduced pressure to obtain a solid residue. The process enables recovery of bioactive or lignocellulosic fractions while maintaining the structural integrity of the fabric. The treated bamboo fabric exhibits improved mechanical properties and surface characteristics relative to untreated fabric. The invention provides a reproducible and scalable approach for processing bamboo-based materials, making it suitable for applications in textile, pharmaceutical, and cosmetic industries.

No. of Pages : 20 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041942 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : USER EQUIPMENT (UE), NETWORK NODE AND METHOD FOR HANDLING TRANSMISSION CONFIGURATION INDICATOR (TCI) STATE

(51) International classification	:H04L0005000000, H04B0007060000, H04W0056000000, H04W0036000000, H04L0012280000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Nokia Technologies Oy
Address of Applicant :Karakaari 7, Espoo, 02610, Finland Finland
(72)**Name of Inventor :**
1)Riikka Karoliina DIMNIK
2)Smita SHETTY
3)Paolo BARACCA

(57) Abstract :
USER EQUIPMENT (UE), NETWORK NODE AND METHOD FOR HANDLING TRANSMISSION CONFIGURATION INDICATOR (TCI) STATE
Embodiments herein disclose a first User Equipment (UE) (110), a second apparatus (120) and method(s). The method (200) comprises transmitting, to the second apparatus (120), a measurement report including measurement result of at least one reference signal (RS) or with a further RS associated to the at least one RS and performing (204), downlink (DL) synchronization with the at least one RS within a delay window. The method (200) further comprises receiving (206), from the second apparatus (120), a command to switch or activate to a Transmission Configuration Indicator (TCI) state associated with the at least one RS; and switching (208) to or activating the TCI state. FIG. 2

No. of Pages : 36 No. of Claims : 11

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041943 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : USER EQUIPMENT (UE), NETWORK NODE AND METHOD FOR HANDLING TRANSMISSION OF REFERENCE SIGNAL

(51) International classification	:H04W24/10, H04L5/00, H04W72/12
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Nokia Technologies Oy
Address of Applicant :Karakaari 7, Espoo, 02610, Finland Finland
(72)**Name of Inventor :**
1)Riikka Karoliina DIMNIK
2)Smita SHETTY
3)Paolo BARACCA
4)Mihai ENESCU

(57) Abstract :
USER EQUIPMENT (UE), NETWORK NODE AND METHOD FOR HANDLING TRANSMISSION OF REFERENCE SIGNAL Embodiments herein disclose a first User Equipment (UE) (110), a second apparatus (120) and method(s). The method (200) comprises transmitting, to transmit, to a second apparatus (120), a report indicating measurement of at least one reference signal (RS) and trigger, based on the transmission of the report, reception of an aperiodic tracking reference signal (aTRS) from the second apparatus (120). FIG. 3

No. of Pages : 36 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041947 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SEENICS-TELEOPERABLE ANTERIOR SEGMENT IMAGING SYSTEM

(51) International classification	:G16H0010600000, G10L0015260000, G16H0050200000, G16H0030400000, A61B0034200000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SRINIVASAN, Karthik
Address of Applicant :708, Anna Nagar, Madurai, Tamil Nadu - 625020, India. Madurai Tamil Nadu India
(72)**Name of Inventor :**
1)SRINIVASAN, Karthik

(57) Abstract :
The present disclosure relates a system (200) and method (300) for portable AI-integrated high-resolution anterior segment imaging units (112-1, 112-2, 112-3) for real-time monitoring and detection of diseases through teleoperation. The present disclosure incorporates advanced optics for high-resolution imaging, a slit projection unit with a digitally operated mirror for precise illumination, and AI-powered diagnostic tools that analyze images in real-time for early disease detection. The proposed system integrates seamlessly with electronic medical records (EMRs), utilizing automated speech-to-text transcription to reduce manual data entry errors. The system (200) incorporates remotely controllable robotic suspension arm, which enhances accessibility for children and individuals with physical disabilities.

No. of Pages : 53 No. of Claims : 19

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041955 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A CYLINDRICAL BATTERY CELL ASSEMBLY AND METHOD OF CENTERING A JELLY ROLL WITH CYLINDRICAL CASING

(51) International classification	:H01M10/04, H01M50/543, H01M50/559, H01M50/564
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Ola Electric Mobility Limited
Address of Applicant :Regent Insignia, #414, 3rd Floor, 4th Block, 17th, 100 Feet Road, Koramangala, Bangalore- 560034, Karnataka, India Bangalore Karnataka India
(72)**Name of Inventor :**
1)PALANI, Sathishkumar
2)ANNADURAI, Sheenu
3)SELVARASU, Selvamani

(57) Abstract :
A CYLINDRICAL BATTERY CELL ASSEMBLY AND METHOD OF CENTERING A JELLY ROLL WITH CYLINDRICAL CASING The disclosure herein relates to a cylindrical battery cell assembly (100) and a method of centering a jelly roll (102) with a cylindrical casing (110). The assembly (100) includes a first alignment member (202A) positioned on a current collector disc (200), and a second alignment member (306) provided on an electrode terminal (300). The first alignment member engages with the second alignment member to align the current collector disc with the electrode terminal thereby centering the jelly roll with the cylindrical casing. This engagement improves alignment accuracy during assembly, reduces tolerance sensitivity, and enhances overall structural integrity of battery cell. The design of the current collector disc and electrode terminal provide increased contact surface area for enhanced electrical connectivity, support efficient manufacturing processes, and ensure reliable, consistent performance in high-volume production environments. Fig. 2

No. of Pages : 29 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041961 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A MODULAR MACHINING SYSTEM FOR MACHINING A WORKPIECE IN A RADIATION CHAMBER

(51) International classification	:B23Q 1/62, B23Q 1/01, B23Q 11/08, B23Q 1/44	(71)**Name of Applicant :** **1)AMTDC (Advanced Manufacturing Technology Development Centre)** Address of Applicant :Ground Floor, Block B, IIT-Madras Research Park, Kanagam Road, Taramani, Chennai, Tamil Nadu - 600 113, India Chennai Tamil Nadu India **2)Chennai Metco** **3)Ministry of Heavy Industries**
(31) Priority Document No	:NA	(72)**Name of Inventor :**
(32) Priority Date	:NA	**1)NIMMAGADDA, Ramesh Babu**
(33) Name of priority country	:NA	**2)RAMASUBRAMANIAN, Srikanth**
(86) International Application No	:NA	**3)RAJAGOPAL, Vairamuthu**
Filing Date	:NA	**4)BANNE, Omkar Ashok**
(87) International Publication No	: NA	**5)SRINIVASAN, Harish**
(61) Patent of Addition to Application Number	:NA	**6)KUMAR, Chankit**
Filing Date	:NA	**7)CHELLAMRAJA, Renganathan**
(62) Divisional to Application Number	:NA	**8)VADIVELU, Vigneswaran**
Filing Date	:NA	**9)MANI, Srinivasan**
		10)SUBRAMANI, Senthilkumar

(57) Abstract :

ABSTRACT OF THE INVENTION A MODULAR MACHINING SYSTEM FOR MACHINING A WORKPIECE IN A RADIATION CHAMBER A modular machining system (10) for machining workpiece (12) in radiation chamber (14), is disclosed. The modular machining system (10) includes supporting unit (16) having first slidable member (22) configured to be slidable along longitudinal direction (26) and second slidable member (24) detachably mounted on first slidable member (22) and configured to be slidable along lateral direction (28). The modular machining system (10) further includes tool holding unit (18) detachably mounted on second slidable member (24) of the supporting unit (16). Further, the modular machining system (10) includes tool (30) detachably coupled to tool holding unit (18). Additionally, modular machining system (10) includes work holding unit (20) disposed proximate and facing tool holding unit (18). The work holding unit (20) is configured to hold workpiece (12). The tool (30) is configured to machine workpiece (12) held by work holding unit (20).

No. of Pages : 21 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041976 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : “MANAGING A SPATIAL MAP (SM) DATA SOURCE SUBSCRIPTION AT SM SERVER IN A COMMUNICATION NETWORK”

(51) International classification	:G01C0021360000, G06F0016230000, G01C0021000000, G09B0029000000, G06Q0010063100
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Samsung Electronics Co., Ltd.
Address of Applicant :129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-742, Republic of Korea Republic of Korea
(72)**Name of Inventor :**
1)Arunprasath Ramamoorthy

(57) Abstract :
ABSTRACT “MANAGING A SPATIAL MAP (SM) DATA SOURCE SUBSCRIPTION AT SM SERVER IN A COMMUNICATION NETWORK” The present invention provides a method for managing a Spatial Map (SM) data source subscription at an SM server (101) in a communication network. The method enables the SM server (101) to receive a subscription request from a requester, including a VAL server or a SEAL server (301), and validate whether the requester is authorized based on security credentials. Upon successful authorization, the SM server (101) establishes a subscription associated with requester and stores corresponding subscription information. The method enables monitoring, based on subscribed event information, creation or deletion of an SM data source profile due to registration or de-registration of SM data sources, and changes in SM data source profile of SM data sources included in subscribed list. By transmitting subscription response including subscription identifier and indication of success or failure, the method improves secure subscription lifecycle management, event-driven monitoring, and efficient dissemination of relevant SM data source updates. FIG. 3

No. of Pages : 36 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541041983 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTHORIZATION BASED ON INTENT ASSOCIATED WITH PROMPT

(51) International classification	:G06F 21/62, H04L 9/40, G06F 40/30, H04W 12/08, G06N 20/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Nokia Technologies Oy
Address of Applicant :Karakaari 7, Espoo, 02610, Finland Finland
(72)**Name of Inventor :**
1)Chaitanya AGGARWAL
2)Borislava GAJIC
3)Divya G NAIR
4)Saurabh KHARE

(57) Abstract :
ABSTRACT AUTHORIZATION BASED ON INTENT ASSOCIATED WITH PROMPT Apparatuses, devices, methods and a computer readable medium for an authorization based on an intent associated with a prompt. In a method, a terminal device obtains a first prompt from a user, and translates the first prompt into a first intent. In accordance with a determination that the first intent is unauthorized, the terminal device sends to a first network device, a request for a second prompt as an alternative of the first prompt. The terminal device receives a set of second prompts from the first network device, and translates a second prompt from the set of second prompts, into a second intent. And in accordance with a determination that the second intent is authorized, the terminal device sends the second prompt and the second intent to the first network device, to verify authorization of the terminal device for the second intent.

No. of Pages : 73 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041985 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTHORIZATION BASED ON INTENT ASSOCIATED WITH PROMPT

(51) International classification	:H04W 12/40, H04W 12/06, H04L 9/32, H04L 9/40, G06Q 20/40
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Nokia Technologies Oy
Address of Applicant :Karakaari 7, Espoo, 02610, Finland Finland
(72)**Name of Inventor :**
1)Chaitanya AGGARWAL
2)Borislava GAJIC
3)Divya G NAIR
4)Saurabh KHARE

(57) Abstract :
ABSTRACT AUTHORIZATION BASED ON INTENT ASSOCIATED WITH PROMPT Apparatuses, devices, methods and a computer readable medium for an authorization based on an intent associated with a prompt. In a method, a terminal device obtains a first prompt from a user. The terminal device sends the first prompt to a first network device, to verify authorization of the terminal device for a first intent associated with the first prompt. Then, the terminal device receives, from the first network device, feedback for the first prompt to indicate that the terminal device is unauthorized for the first intent.

No. of Pages : 71 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041986 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTHORIZATION BASED ON INTENT ASSOCIATED WITH PROMPT

(51) International classification	:H04N0021643000, G10L0015180000, G06F0003048420, H04L0043100000, H04W0024100000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Nokia Technologies Oy
Address of Applicant :Karakaari 7, Espoo, 02610, Finland Finland
(72)**Name of Inventor :**
1)Chaitanya AGGARWAL
2)Borislava GAJIC
3)Divya G NAIR
4)Saurabh KHARE

(57) Abstract :
AUTHORIZATION BASED ON INTENT ASSOCIATED WITH PROMPT Apparatuses, devices, methods and a computer readable medium for an authorization based on an intent associated with a prompt. In a method, an apparatus obtains a first prompt from a user. The apparatus sends a second prompt associated with the first prompt to a first network device, to verify authorization of the apparatus for an intent associated with the second prompt. Then, the apparatus receives feedback for the second prompt from the first network device.

No. of Pages : 78 No. of Claims : 36

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041987 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTHORIZATION BASED ON INTENT ASSOCIATED WITH PROMPT

(51) International classification	:G06F40/10, G06F40/20, G06F40/30, G06F21/30, G06F21/44, G06N3/00, G06N20/00	(71)**Name of Applicant :** **1)Nokia Technologies Oy** Address of Applicant :Karakaari 7, Espoo, 02610, Finland Finland (72)**Name of Inventor :** **1)Chaitanya AGGARWAL** **2)Borislava GAJIC** **3)Divya G NAIR** **4)Saurabh KHARE**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No Filing Date	:NA :NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :
AUTHORIZATION BASED ON INTENT ASSOCIATED WITH PROMPT Apparatuses, devices, methods and a computer readable medium for an authorization based on an intent associated with a prompt. In a method, a terminal device obtains a first prompt from a user, and translates the first prompt into a first intent. In accordance with a determination that the first intent is unauthorized, the terminal device regenerates a second prompt from the first prompt. The terminal device translates the second prompt into a second intent. And in accordance with a determination that the second intent is authorized, the terminal device send the second prompt and the second intent to a first network device, to verify authorization of the terminal device for the second intent.

No. of Pages : 71 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541041997 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : Methods and Systems to define AI based Adaptive Protocol for RAN

(51) International classification	:H04W0084040000, G06F0003120000, H04W0072230000, H04L0041080600, H04W0004020000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Republic of Korea Republic of Korea
(72)**Name of Inventor :**
1)Neha Sharma
2)Arvind Ramamurthy

(57) Abstract :
ABSTRACT Methods and Systems to define AI based Adaptive Protocol for RAN Embodiments disclosed herein relate to methods (400) and systems (100) for defining an Artificial Intelligence (AI) adaptive protocol for a Radio Access Network (RAN). The methods (400) allow a User Equipment (UE) (102) to request, and network (104) to configure one or more radio parameters to be of dynamic nature, and use multiple values from pre-configured sets based on switching conditions. The methods (400) allow the network (104) to configure radio parameters along with a switching condition where the UE (102) may switch parameter values with or without acknowledgement from the network (104). The methods (400) provide a framework where radio configuration parameters can be of dynamically adapted based on contextual awareness. The methods (400) provide correlation, and prediction exchange between the UE (102) and network (104) in order to arrive at inter-dependent parameter configuration, and dynamic set configurations. FIG. 1

No. of Pages : 55 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541042000 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND SYSTEM FOR HANDLING SELECTION OF A LOWER LAYER TRIGGERED MOBILITY CELL IN NETWORK

(51) International classification	:H04W0048200000, H04W0036000000, H04W0048160000, H04W0024080000, G06T0003403800
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Samsung Electronics Co., Ltd.
Address of Applicant :129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea Republic of Korea
(72)**Name of Inventor :**
1)MURUGAIYAN, Vivek
2)DHANASEKAR, Keerthana
3)Nishant
4)JHA, Kailash, Kumar

(57) Abstract :
Disclosed herein is a method (700) for handling selection of at least one LTM cell in a network. The method (700) includes performing, by a user equipment (202), a cell selection due to one or more connection failures from the network. The method (700) includes performing, by the UE (202), scanning of a plurality of Near Radio (NR) frequencies in a plurality of lower layer triggered mobility (LTM) or conditional LTM candidate configurations, during the cell selection, to identify at least one LTM cell from the plurality of LTM or conditional LTM candidate configurations. The plurality of LTM or conditional LTM candidate configurations is stored in the UE. The method (700) includes initiating, by the UE (202), the cell selection of the identified at least one LTM cell.

No. of Pages : 51 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541042006 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : TITLE OF THE INVENTION Cricket Batting Training Apparatus with Telescopic Extension, Pivoting, and Clamping Mechanisms for Straight Stroke Guidance.

(51) International classification	:A63B 69/00, A63B 60/00, A63B 71/02, F16B 7/10
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Hemadri Bhanu Shashanka
Address of Applicant :Flat No. 101 Aditya Residency-Fortune Homes, Road No. 3 Gayathripuram, Kothapet. Telangana India
2)Janaki Burra
(72)**Name of Inventor :**
1)Hemadri Bhanu Shashanka
2)Janaki Burra

(57) Abstract :
ABSTRACT OF THE INVENTION The invention relates to a mechanically guided cricket-batting training apparatus designed to assist players in achieving correct swing alignment, trajectory control, and muscle memory. It includes a modular bat-holding system with a telescopic extension and pivoting mechanism, allowing controlled vertical descent and side-to-side movement to simulate various batting strokes. The device features a pivot assembly for lateral rotation and a bat-holding clamp that secures the bat with an adjustable strap. Its guided-drop functionality and flexible mounting options address key challenges in training, particularly for beginners, by emphasizing mechanical accuracy and physical guidance over post-analysis feedback. The modular structure ensures maintainability, adaptability to different heights, bat sizes, and practice environments. The invention provides real-time mechanical guidance, making it ideal for junior and intermediate players, and offers a structured method for effective batting practice without relying on electronic feedback.

No. of Pages : 32 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541042018 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A METHOD FOR CONTROLLING A FLOW OF FUEL FROM A FUEL INJECTOR DURING OVER-RUN MODE

(51) International classification	:F02D 41/12, F02D 41/02, F01N 3/20, F02B 37/12, F02D 9/02, F02B 37/16
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Limited
Address of Applicant :Post Box No 3000, Hosur Road, Adugodi, Bangalore – 560030, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Bharadwaj Manchenahalli Krishnamurthy
2)Varuna Narasimhan Jagannathan
3)Bharathi Chandrasekaran

(57) Abstract :
ABSTRACT A method 100 for controlling a fuel flow from a fuel injector during an over-run mode of a vehicle is described. The method 100 comprises determining 110 if a vehicle is in an over-run mode, and an accelerator pedal of the vehicle is not depressed, and releasing 120 a resistance on a turbocharger, thereby allowing a turbine coupled to a compressor to freely run when exhaust gas impinges on a plurality of blade of the turbine. The method 100 further comprises opening 130 a throttle valve to a fully open position to enable fuel from a fuel tank to be supplied to the fuel injector, and enabling 140 fuel injection from a fuel injector if an exhaust gas temperature is lower than a threshold limit that is pre-determined by a user. The method 100 further comprises determining 150 if an exhaust gas temperature is lower than a pre-determined threshold limit. (Figure 1).

No. of Pages : 10 No. of Claims : 4

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541042019 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A METHOD TO GENERATE A SYSTEM-ARCHITECTURAL MODEL AND A SYSTEM THEREOF

(51) International classification	:G06F40/30, G06F40/295, G06N5/04, G06F16/334
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bangalore – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Ganesh Lakshminarayanan Pattabi
2)Thamilarasi Thangathurai
3)Prashanth Manohar G
4)Solanki Chirag Dineshbhai

(57) Abstract :
A METHOD TO GENERATE A SYSTEM-ARCHITECTURAL MODEL AND A SYSTEM THEREOF Abstract Disclosed are techniques to generate a system-architectural model. An AI system (10) comprises an embedding module (1) configured to parse a set of specification documents to generate a set of text embeddings; a vector database (2) configured to store said set of text embeddings, a retrieval module (3) configured to receive a user prompt and retrieve the text embeddings from the vector database (2) based on said user prompt; an AI module (4) configured to generate an output based on the retrieved text embedding; and a model generation tool (5) configured to generate the system architectural model based on the output generated by the AI module (4) .

No. of Pages : 16 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202541042020 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A control system to control a comfort function in a vehicle and a method thereof

(51) International classification	:B60R 16/037, B60N 2/02, G06V 40/16, B62D 5/00, B60K 35/00, G06V 20/59
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bangalore – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Balaji Kuppusamy
2)Anush Barat Sudhagar
3)Srinivas Gunasekaran
4)Mayuresh Girish Shendkar

(57) Abstract :
A control system to control a comfort function in a vehicle and a method thereof Abstract Disclosed are techniques to control a comfort function in a vehicle. A control system (10) comprises a user recognition module (1) configured to detect a user parameter, a controller (2) configured to select a comfort function from a set of comfort functions based on the detected user parameter, actuate the selected comfort function, map the selected comfort function to the detected user parameter and store said map in a memory (3) of the control system (10), retrieve the selected comfort function from the memory when said user parameter is detected in a future event; and control the selected comfort function in said future event.

No. of Pages : 12 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541042021 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A CONTROLLER FOR DETERMINING A FAULT STATE IN ATLEAST ONE NOx SENSOR IN A VEHICLE AND A METHOD THEREOF

(51) International classification	:F01N0011000000, F01N0003200000, G06F0011070000, F01N0003080000, G01M0015100000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bangalore – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Vinit Kumar

(57) Abstract :
A CONTROLLER FOR DETERMINING A FAULT STATE IN ATLEAST ONE NOx SENSOR IN A VEHICLE AND A METHOD THEREOF ABSTRACT A controller 111 and a method for determining a fault state in atleast one NOx sensor 102 in a vehicle's 101 emission control system, particularly in a Selective Catalytic Reduction (SCR) application. The invention provides a sensor control unit 104 that receives NOx values and a vehicle control unit 106 that calculates NOx offset values. At the end of each drive cycle, the vehicle control unit 106 activates a diagnostic process when specific conditions are met, assessing the NOx sensor's 102 functionality. The vehicle control unit 106 calculates a deviation value of the NOx offset, that is further transmitted to a cloud repository 112 for further analysis. The controller 111 identifies patterns in NOx offset values, generates alerts for deviations, and predicts potential faults using an operative technique 114, thereby enhancing the reliability and performance of the vehicle's 101 emission control system and ensuring compliance with stringent emissions standards Figure 1.

No. of Pages : 18 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541042022 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AN ECU TO DETERMINE CRYSTALLIZATION OF DIESEL EXHAUST FLUID IN AN EXHAUST AFTER-TREATMENT SYSTEM

(51) International classification	:F01N 11/00, F01N 3/20, F01N 3/021, F01N 3/10
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bangalore – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Anil R Kashyap
2)Gowdhaman Abhimanyu
3)Bragatheeswaran Krishnan

(57) Abstract :
AN ECU TO DETERMINE CRYSTALLIZATION OF DIESEL EXHAUST FLUID IN AN EXHAUST AFTER-TREATMENT SYSTEM ABSTRACT The present invention relates to an Electronic Control Unit (ECU) 102 to determine crystallization of Diesel Exhaust Fluid (DEF) in the exhaust after-treatment system 100 and a method for the same. The ECU 102 is configured to receive a first temperature from a first temperature sensor 104, receive a second temperature from a second temperature sensor 106, characterized in that, the second temperature sensor 106 is positioned downstream of a mixer unit 1121 of a SCR (Selective Catalytic Reduction) system 112, compute an estimate temperature at position of the second temperature sensor 106 using the first temperature and a heat loss model, and determine crystallization of DEF when difference between the estimate temperature and the second temperature exceeds a predetermined threshold value. The predetermined threshold value is configurable. Figure 1.

No. of Pages : 15 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/04/2025

(21) Application No.202541042028 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR RECEIVING A WIDEBAND RADIO-FREQUENCY SIGNAL

(51) International classification	:H04J14/00, H04B1/00, G02B6/26, H04B10/61, H04B10/2575
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bharat Electronics Limited
Address of Applicant :Corporate Office, Outer Ring Road, Nagavara P.O., Bangalore 560045, India Bangalore Karnataka India
(72)**Name of Inventor :**
1)MAHESH, Lunavath
2)JOSEPH, Thejna Ros
3)TYAGI, Ranu
4)DAMACHERLA, Chiranjeevi

(57) Abstract :
A system (106) for receiving a wideband radio-frequency (RF) signal is disclosed. The system includes a receiving antenna (202) to detect the RF signal and an optical signal generation module (204) to generate a first and a second optical signals by splitting a master optical signal. The system (106) includes an optical signal modulation module (206) for modulating the first optical signal with the detected RF signal and a frequency comb generation module (208) for generating optical local oscillator (OLO) signals from the second optical signal. Further, the system (106) includes channelizing modules (210, 212) for generating channelized modulated optical signals and channelized sets of OLO signals corresponding to pre-defined frequency ranges. A pre-determined number of OLO signal selection modules (214-1, 214-2, …., 214-N) select OLO signals based on corresponding pre-defined frequency ranges, and an RF signal receiving module (216) processes the selected OLO signals to receive the RF signal.

No. of Pages : 33 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202541042153 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : Livestock Data management device using Raspberry Pi NAS

(51) International classification	:G16H0040670000, A01K0029000000, A61B0005010000, A01K0011000000, G01N0029240000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Abhishek Javali
Address of Applicant :#1443, 3rd Cross, AECS Layout, E-Block Karnataka India
2)CMR Institute of Technology, Bengaluru-560037
(72)**Name of Inventor :**
1)Eisha Akanksha

(57) Abstract :
The livestock data management system consists Farm Unit and Owner Unit. Farm Unit is equipped with a microcontroller, which interfaces with four sensors. Sensor 1 monitors environmental conditions, ensuring optimal livestock welfare. Sensor 2 provides a real-time count of the animals present on the farm. Sensor 3 functions as a biosensor to provide checks for healthcare, and sensor 4 works as a security module providing data security, integrity, trespassing and location of animals. The Owner unit is powered by another microcontroller, which acts as the central processing unit for both local and remote data storage. Additionally, display unit is connected to the microcontroller, providing a real-time visual interface for monitoring livestock data.

No. of Pages : 14 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202541042202 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ARMATURES AND ARMATURE ASSEMBLIES FOR USE WITH VALVES IN FUEL INJECTORS

(51) International classification :F16K 31/06
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :NA
Filing Date :NA
(87) International Publication No : NA
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)CUMMINS-SCANIA HPCR SYSTEM, LLC
Address of Applicant :500 Jackson Street, Columbus, Indiana 47201, USA U.S.A.
(72)**Name of Inventor :**
1)Quereeta Ranjan
2)Vivek Vasant Parab
3)Sandeep C. S.
4)Amol Jagannath Bobade

(57) Abstract :
Armatures and armature assemblies are disclosed for use in association with actuation of a valve, such as for fuel injectors, fuel cells, and/or fuel pumps. The armatures include a body having a first end with a flange and a shaft extending from the flange to a second end of the body. The second end includes a configuration to slow the velocity of the armature during closing of the valve to reduce stress on one or more components of the valve upon impact with the armature. The armatures can also or alternatively include a shaft configured to reduce end of injection delay. Fig. 1

No. of Pages : 31 No. of Claims : 25

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202541042268 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : VETIVER-INCORPORATED POLYMERIC MEMBRANE FOR WATER PURIFICATION AND METHOD OF PREPARATION THEREOF

(51) International classification	:C02F0001440000, C25B0001040000, H01M0008049920, B01D0061360000, B01D0071800000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ANURADHA SUBRAMANIAN
Address of Applicant :39 Sandeep Av, 1st Main Road, Chinna Neelankarai , Chennai. Chennai Tamil Nadu India
(72)**Name of Inventor :**
1)ANURADHA SUBRAMANIAN

(57) Abstract :
The present invention relates to a vetiver-incorporated polymeric membrane for water purification and a method of preparation thereof. The method comprises processing vetiver roots by cleaning, drying, and thermal treatment to obtain carbonized material, followed by pulverization into powder form. The powder is incorporated into a polymeric solution comprising polyether sulfone (PES) and a solvent, along with a stabilizing additive. The resulting mixture is subjected to stirring to obtain a homogeneous solution, which is cast onto a substrate and subjected to phase inversion by immersion in a non-solvent bath to form a porous membrane. The incorporation of vetiver-derived material within the polymeric matrix provides adsorption and antimicrobial characteristics, while the phase inversion process enables controlled pore formation. The membrane is suitable for applications in domestic, industrial, and agricultural water purification systems.

No. of Pages : 23 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202541042274 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR REAL-TIME PACKET SCHEDULING IN A NON-OPERATING SYSTEM BASED ENVIRONMENT

(51) International classification	:H04W 56/00, G01S 19/00, H04L 47/50, H04W 72/12, G06F 1/12
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bharat Electronics Limited
Address of Applicant :Corporate Office, Outer Ring Road, Nagavara P.O., Bangalore 560045, India Bangalore Karnataka India
(72)**Name of Inventor :**
1)GANESAN, Selvakumar
2)BARLA, Abhilasha
3)AHMED, Wasim
4)VENKATESH, Putta
5)SARIMELA, Valluri
6)CHAUDHARI, Shashikant Yeshwant

(57) Abstract :
A method (400) for real-time packet scheduling in a non-operating system (non-OS) and non-real-time OS based environment is disclosed. The method includes receiving (402), at a processing unit (202), one or more of a timing signal and navigational data from a Global Navigation Satellite System (GNSS) receiver (104), including Indian Regional Navigation satellite System. The method (404) includes detecting a Pulse Per Second (PPS) signal based on the received timing signal. The method (406) includes measuring one or more time intervals between consecutive PPS signals. The method includes (408) notifying a PPS event to a plurality of modules (206) via a predefined interface. The method (410) includes generating one or more data packets based on the measured one or more time intervals. The method includes scheduling the one or more data packets for transmission over at least one communication channel to one or more external devices (108) in real-time.

No. of Pages : 31 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202541042420 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : CONTAINER CLOSURE SYSTEM FOR BORTEZOMIB INJECTION FOR IMPROVED STABILITY AND EASE OF ADMINISTRATION

(51) International classification	:A61M0005320000, A61M0005200000, A61M0005310000, A61K0009000000, A61K0009080000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)ETICO LIFESCIENCES PRIVATE LIMITED
Address of Applicant :Plot No 121&122, ALEAP Industrial Estate, Pragathi Nagar, Kukatpally, Hyderabad Telangana India 500090 Hyderabad Telangana India

(72)**Name of Inventor :**
1)Venkata Radha Krishna Bodagala
2)Shanmukha Srinivas Mule
3)Vivek Pamula
4)Venu Gopala Krishna Melam
5)Manoj Babu Sanaka

(57) Abstract :
The present disclosure pertains to a ready-to-use injection system for an injectable formulation of a drug product. In particular, the present disclosure pertains to a ready to use injection system for bortezomib injectable formulation, configured to provide a container having minimal or substantially no headspace. The ready-to-use injection system of the present disclosure enhances the stability of bortezomib formulation by reducing oxidative degradation associated with headspace oxygen (HSO). Further, the closure system reduces the risk of exposure of the cytotoxic drug to healthcare personnel, minimizes the potential for needlestick injuries, and improves ease of administration by providing a ready-to-use presentation that obviates the need for reconstitution or complex handling. Additionally, the system eliminates the need for stringent headspace oxygen control typically required in conventional vial-based systems.

No. of Pages : 38 No. of Claims : 21

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2025
(21) Application No.202541042431 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : Emotion-Aware VR Systems for Integrating Adaptive Virtual Environments with Hardware-Aligned Surroundings

(51) International classification	:G06F3/01, G06T19/00, A61B5/00, G06V10/82, G10L25/63
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Gnaneswari Gnanaguru
Address of Applicant :G-007 Gopalan Grandeur Apartments, Hoodi Circle, Bengaluru-560048. Bengaluru Karnataka India
2)CMRIT
(72)**Name of Inventor :**
1)Gnaneswari Gnanaguru
2)CMRIT

(57) Abstract :
Virtual Reality (VR) devices are evolving rapidly, integrating advancements in artificial intelligence, sensor technology, and immersive experiences. A promising direction is the ability of VR systems to adapt the virtual environment based on the user's mood. This concept merges psychology, neuroscience, and technology to create personalized and emotionally intelligent virtual experiences.

No. of Pages : 11 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :01/05/2025

(21) Application No.202541042437 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : PRESSURE ENERGY HARVESTER USING PIEZO ELECTRICS BASED ON BERNOULLIS PRINCIPLE

(51) International classification	:H02N0002180000, H10N0030300000, F02B0039100000, H01M0008043200, H01M0008047460
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)RAMA KOTESWARA RAO PAMARTHI
Address of Applicant :AGIRIPALLI Andhra Pradesh India
(72)**Name of Inventor :**
1)Dr P Rama Koteswara Rao
2)Dr S Venkata Achuta Rao
3)Dr GNV Vibhav Reddy

(57) Abstract :
The pressure energy harvester using piezo electric based on Bernoullis principle is a system which generates electricity with piezo electrics. The application of pressure is must for the electricity generation. An air is designed in such a way that upper part is more curved than the lower part. According to the Bernoullis principle more pressure is created when the velocity of air is low. Here, more pressure is created below the airfoil. Piezo electrics are fixed below the airfoil and the electricity is generated. We can arrange piezoes in parallel or in series combination to get required output.

No. of Pages : 9 No. of Claims : 4

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/05/2025
(21) Application No.202541042489 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A PROCESS FOR THE PREPARATION OF N3-(PIPERIDIN-4-YL)PYRIDINE-2,3-DIAMINE

(51) International classification	:C07D 401/04, C07D 471/04, C07D 213/74, C07D 211/58, C07B 43/04, A61K 31/444, A61K 31/506, A61P 25/06
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Vasudha Pharma Chem Limited
Address of Applicant :78/A Vengalrao Nagar Telangana India
(72)**Name of Inventor :**
1)MANTENA VENKATA RAMA RAJU
2)MANTENA ASHOK SRINIVASA RAJU
3)MANTENA ANAND
4)PHANI KUMAR BALUSU
5)Ampolu Trinadha Rao
6)Bojja Venkateswara Reddy
7)Lokavarapu Vijaya Kumar
8)Ramba Simhachalam

(57) Abstract :
The present invention relates to a novel process for the synthesis of N3-(piperidin-4-yl) pyridine-2,3-diamine compound of formula A which is a key intermediate in the synthesis of Rimegepant, its analogues or their salts thereof. Formula A

No. of Pages : 17 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202541042502 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND SYSTEM FOR PROVIDING INTENSITY-BASED VIRTUAL REALITY (VR) CONTENT TO PATIENTS DURING RADIOTHERAPY PROCEDURES

(51) International classification	:A61N 5/10, G06F 3/01, G06T 19/00, G06N 20/00, G06V 10/82
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)L&T TECHNOLOGY SERVICES LIMITED
Address of Applicant :DLF IT SEZ Park, 2nd Floor – Block 3, 1/124, Mount Poonamallee Road, Ramapuram, Chennai - 600 089, Tamil Nadu, India. Chennai Tamil Nadu India
(72)**Name of Inventor :**
1)SAKTHIVEL RAMACHANDRAN

(57) Abstract :
This disclosure relates to method and system for providing intensity-based Virtual Reality (VR) content to patients during radiotherapy procedures. The method may include receiving, through one or more sensors, real-time data corresponding to a patient subjected to a VR experience during a radiotherapy procedure. The method may further include predicting in real-time, via a ML model, a target neural oscillation frequency of the patient for the radiotherapy procedure based on the tumor position, the spatial position, the neural oscillation frequency, and the radiation intensity of the radiotherapy procedure. For the radiation intensity, the method may further include performing, via the ML model, a first comparison between the neural oscillation frequency with the target neural oscillation frequency. The method may further include providing the intensity-based VR content to the patient through a VR device associated with the patient. [To be published with FIG. 7]

No. of Pages : 42 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/05/2025
(21) Application No.202541042503 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TADALAFIL-LOADED NANOEMULGEL FOR TRANSDERMAL DELIVERY

(51) International classification	:A61K 9/107, A61K 9/06, A61K 31/4985, C07D 471/14, A61P 9/14, A61K 47/32, C08L 33/02, A61K 47/16
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Dr. Shery Jacob
Address of Applicant :Thottungal Garden View, H.No.445, Ward No.1, Mallappally West P.O., Pathanmthitta District-Kerala-689585, India Mallappally West Kerala India
(72)**Name of Inventor :**
1)Dr. Shery Jacob
2)Sai H. S. Boddu
3)Anroop B. Nair

(57) Abstract :
TADALAFIL-LOADED NANOEMULGEL FOR TRANSDERMAL DELIVERY The present invention relates to a topical nanoemulsion and nanoemulgel preparation for administering PDE5 inhibitor. A surprisingly good systemic bioavailability is observed with this dosage form. The resulting composition has improved bioavailability and efficacy and can be used to inhibit phosphodiesterase 5 in a patient in need of such treatment for Raynaud's phenomenon. Particularly, the present invention provides a stable and bioavailable nanoemulgel formulation of Tadalafil for the treatment of Raynaud's phenomenon.

No. of Pages : 45 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202541042552 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND SYSTEM FOR PROCESSING USER QUERIES USING LLMS ON RESOURCE CONSTRAINED DEVICES

(51) International classification	:G06N3/02, G06F9/50, G06F16/3329
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)L&T TECHNOLOGY SERVICES LIMITED
Address of Applicant :DLF IT SEZ Park, 2nd Floor – Block 3, 1/124, Mount Poonamallee Road, Ramapuram, Chennai - 600 089, Tamil Nadu, India. Chennai Tamil Nadu India
(72)**Name of Inventor :**
1)VIKRAM SUBRAMANI
2)SUDHIR BHADAURIA

(57) Abstract :
This disclosure relates to a method and system for processing user queries using Large Language Models (LLMs) on resource constrained devices. The method may include receiving, via a user interface, an LLM, a configuration file of the LLM, a weight file of the LLM, and hardware details of a user device. The method may further include determining a plurality of chunks of the LLM based on the architecture details of the LLM and the hardware details of the user device. The method may further include creating a plurality of LLM submodules and a corresponding plurality of partitioned weight files based on the plurality of chunks and the weight file. The method may further include sequentially processing, via one or more parallel processing threads, a user query through the plurality of LLM submodules using the corresponding plurality of partitioned weight files, to obtain an output. FIG. 3

No. of Pages : 25 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202541042652 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : FUEL RAIL FOR FUEL SYSTEM OF AN INTERNAL COMBUSTION ENGINE

(51) International classification	:F02M 55/02, F02M 55/00	(71)**Name of Applicant :** **1)CUMMINS-SCANIA HPCR SYSTEM, LLC** Address of Applicant :500 Jackson Street, Columbus, Indiana 47201, USA U.S.A.
(31) Priority Document No	:NA	(72)**Name of Inventor :**
(32) Priority Date	:NA	**1)Animesh Nandy**
(33) Name of priority country	:NA	**2)Wilber Beale Delano, Jr**
(86) International Application No	:NA	**3)Santos Burrola Marrufo**
Filing Date	:NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :
A fuel rail for a fuel system includes a single, monolithic rail body extending from a first end to a second end opposite the inlet end. The first end is configured for engagement to a high pressure fuel line. A flow passage extends from the second end to an end wall within the fuel rail and a first end passage extends from the first end through the end wall to the flow passage. Fig. 2

No. of Pages : 18 No. of Claims : 19

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202541042660 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND SYSTEM FOR PERFORMING CONTEXT-AWARE L4S FOR ENHANCINGLATENCY IN NEXT-GENERATION NETWORKS

(51) International classification	:H04L0047244100, H04L0043026000, H04W0072230000, H04L0047241600, H04L0047800000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129 Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Republic of Korea Republic of Korea
(72)**Name of Inventor :**
1)Kovvuri Jayendra Reddy
2)Madhan Raj Kanagarathinam
3)Arun Padmanabh Bhagavath

(57) Abstract :
METHOD AND SYSTEM FOR CONGESTION MANAGEMENT IN A COMMUNICATION NETWORK ABSTRACT 5 The present disclosure relates to the field of communication network that discloses a method and system for congestion management in a communication network. The system and method comprise monitoring traffic flow generated by one or more applications executing on a client device. Further, the system and method comprise classifying the traffic flow generated by the 10 one or more applications into one or more categories based on one or more criteria, wherein the one or more categories comprise at least a Real-Time (RT) traffic belonging to RT application, Non-Real Time (NRT) traffic belonging to RT application and NRT traffic belonging to NRT application. Thereafter, the system and method comprise selectively applying a Low Latency, Low Loss, Scalable Throughput (L4S) congestion control protocol, 15 to the one or more applications where the traffic flow is classified as the RT traffic belonging to RT application. FIG.12 Monitor traffic flow generated by one or more applications executing on a client device Classify the traffic flow generated by the one or more applications into one or more categories based on one or more criteria Selectively apply the L4S congestion control protocol, to the one or more applications where the traffic flow is classified as RT traffic belonging to RT application 1200 1201 1203 1205 FIG.12

No. of Pages : 40 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202541042672 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : RFID BASED WOMEN SAFETY SYSTEM

(51) International classification	:G08G1/01, H04W4/90, G07C9/00, G08B25/10, B60Q1/52, G08B21/02	(71)**Name of Applicant :** **1)HINDUSTHAN INSTITUTE OF TECHNOLOGY** Address of Applicant : HINDUSTHAN INSTITUTE OF TECHNOLOGY (AUTONOMOUS), VALLEY CAMPUS, POLLACHI HIGHWAY, COIMBATORE -641032 9994630696 hitprincipal@hindusthan.net Tamil Nadu India
(31) Priority Document No	:NA	(72)**Name of Inventor :**
(32) Priority Date	:NA	**1)Dr.C.NATARAJAN**
(33) Name of priority country	:NA	**2)Dr.M.DURAIPANDIAN**
(86) International Application No	:NA	**3)R.BANU PRIYA**
Filing Date	:NA	**4)S.GOKUL**
(87) International Publication No	: NA	**5)K.B.KABILAN**
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :

Safer transportation of women employees in the night or even in the day time has been a critical issue as it is often found that if they miss the bus/cab or ride the wrong bus/cab with no way to track them. This project intends to find yet another solution to solve this problem by developing a safety system that will control the entry and exit of employees from the buses through an efficient methodology. The proposed system will control the entry and exit of employees using RFID (Radio Frequency Identification) and GSM technologies to ensure the entering and exiting of all employees in a safer manner. The system will do ail the process and allow the employee to be tracked while entering and leaving the bus. If the bus journey is successful from the source to destination, it will send an SMS to the management to inform its departure and arrival. It also gives the continuous information about the bus with the help of GPS. If the driver exceeds the speed limit, a message will be sent to the management that the driver is rash driving. In case of accidents, for the safely of employees, it also has Accident Detection System to inform the Ambulance and Rolice of the accident site and arrange for necessary steps to control the situation. The employee can be tracked by the management and the guardian throughout the travel with the help of this system. It also has automatic street light control system that can be implemented in low density areas. It helps to automatically turn ON and OFF according to the intensity of light and the movement of any vehicles.

No. of Pages : 9 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/05/2025
(21) Application No.202541042714 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : PROCESS FOR PREPARATION OF BRILAROXAZINE AND ITS INTERMEDIATES

(51) International classification	:C07D 413/12, C07D 265/36, C07D 295/096, C07C 309/04, C01D 1/02, C07C 19/01, C07B 41/12, A61P 25/18
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Dr. Reddy's Laboratories Limited
Address of Applicant :House No. 8-2-337 Street Road No. 3, Banjara Hills, City Hyderabad, State Telangana, Country India. Hyderabad Telangana India
(72)**Name of Inventor :**
1)Srinivas ORUGANTI
2)Saikat SEN
3)Vishnu Vardhana Vema Reddy EDA
4)Nilesh Shashikant Bhawsar

(57) Abstract :
ABSTRACT PROCESS FOR PREPARATION OF BRILAROXAZINE AND ITS INTERMEDIATES The present application relates to a process for preparation of Brilaroxazine (I) or its pharmaceutically acceptable salts thereof. The present application also relates to the process for preparation of intermediates and their application in the preparation of Brilaroxazine (I) or its pharmaceutically acceptable salts thereof.

No. of Pages : 24 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/05/2025
(21) Application No.202541042716 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COCRYSTALS OF PURINE ALKALOIDS WITH ORGANIC ACIDS, THEIR DERIVATIVES AND POLYPHENOLS

(51) International classification	:A61K0031522000, A61K0031520000, A61K0008490000, C07D0473120000, A61K0036185000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)FERTIS INDIA PVT. LTD.
Address of Applicant :6-3-668/10/56, Plot No 56 IstFloor Durga Nagar Colony, Punjagutta Hyderabad Telangana India 500082 Hyderabad Telangana India
(72)**Name of Inventor :**
1)KANUMURU, Rahul Raju
2)KOCHUMALAYIL, Shaji George
3)SURANENI, Ravikumar
4)VANA, Murali Mohanarao

(57) Abstract :
ABSTRACT COCRYSTALS OF PURINE ALKALOIDS WITH ORGANIC ACIDS, THEIR DERIVATIVES AND POLYPHENOLS The disclosure relates to cocrystals of purine alkaloids with organic acids, their derivatives or polyphenols; process for the preparation and compositions thereof. More particularly, the disclosure relates to cocrystals of purine alkaloids like theacrine theobromine, theophylline, paraxanthine and methylliberine; compositions comprising the cocrystals and various uses of the compositions.

No. of Pages : 54 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202541042718 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : RLNC based adaptive data transmission methods and systems for RLC in RANs

(51) International classification	:H03M13/00, H04L1/00, H04W28/00, H04L47/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Republic of Korea Republic of Korea
(72)**Name of Inventor :**
1)Srihari Das Sunkada Gopinath
2)Naveen Kumar

(57) Abstract :
ABSTRACT RLNC based adaptive data transmission methods and systems for RLC in RANs Embodiments disclosed herein relate to methods (500, 600) and systems (200) for providing Random Linear Network Coding (RLNC) based adaptive data transmission in a Radio Access Network (RAN). The RLNC is integrated with Radio Link Control (RLC) mechanisms to reduce Automatic Repeat Request (ARQ) retransmission delays in lossy environments. The methods (500, 600) provide a prediction-based dynamic enabling and adaptation of RLNC allowing for a dynamic switch between different variants of RLNC, based on network conditions to achieve optimal processing. The methods (500, 600) include encoding and decoding mechanisms for generating and recovering coded Protocol Data Units (PDUs) using RLNC, with detailed inclusion of metadata in the encoded packet. The methods (500, 600) include performing peer-to-peer RLC communication, and Packet Data Convergence Protocol (PDCP)-to-RLC communication. FIG. 2

No. of Pages : 62 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/05/2025
(21) Application No.202541042749 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : LOW COMPLEXITY RADAR PROCESSING BASED ON THE DISCRETE ZAK TRANSFORM (DZT)

(51) International classification	:H04L27/26, H04L27/00, H04L27/12, H04L27/20, H04L5/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Cohere Technologies, Inc.
Address of Applicant :2331 Zanker Road, San Jose, California 95131, United States of America U.S.A.
(72)**Name of Inventor :**
1)Ronny HADANI
2)Saif Khan Mohammed
3)Arthur Robert Calderbank

(57) Abstract :
LOW COMPLEXITY RADAR PROCESSING BASED ON THE DISCRETE ZAK TRANSFORM (DZT) ABSTRACT A method of wireless communication, comprising: generating, at an output of a transmission filter in delay-Doppler (DD) domain, a transmission waveform 5 from an input waveform that has a dimension of N x M in a delay-Doppler (DD) domain and comprises a discrete DD domain periodic signal with periodicity L = N*M in both delay domain and Doppler domain; and controlling a transceiver to transmit the transmission waveform. Here, L, N and M are positive integers. 10 Fig. 3 & 4

No. of Pages : 68 No. of Claims : 21

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202541042806 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : ENERGY-EFFICIENT RETROFIT SYSTEM FOR AUTOMATION OF RING FRAME SPINNING MACHINES

(51) International classification	:D01H0013320000, D01H0001360000, G05B0019050000, D01H0001300000, F15B0011160000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Apparent Power Control Systems
Address of Applicant :TS-11, SIDCO, Micro Industrial Estate, Thirumudivakkam, Chennai 600 044. Chennai Tamil Nadu India
(72)**Name of Inventor :**
1)P. Sivashanmugam
2)R. Rahul Srivatsav

(57) Abstract :
ABSTRACT The present invention relates to an energy-efficient retrofit system for ring frame spinning machines in textile manufacturing. It replaces mechanical variator drives with a Permanent Magnet (PM) motor-driven system (101), gear-driven ring rail mechanisms with a servo-controlled system (201), and pneumatic actuators with electronic actuators, all integrated into a PLC (300) based intelligent control system. The PM motor ensures precise spindle speed control with reduced energy loss, while the servo-controlled ring rail enhances cop-building precision. The PLC unit automates machine functions with real-time monitoring via a touchscreen interface. A VFD-controlled pneumafil fan optimizes air suction dynamically, improving efficiency and reducing energy costs. This smart automation retrofit enhances yarn quality, operational efficiency, and sustainability, making it a cost-effective solution for textile mills. [Fig. 1]

No. of Pages : 21 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/05/2025
(21) Application No.202541042818 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND SYSTEM FOR DECOMPRESSION BY PARALLEL BLOCK PROCESSING

(51) International classification	:G06F17/00, G06F5/00, H04L69/04, H03M7/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129, Samsung-ro, Yeongtong-gu Suwon-si Gyeonggi-do 16677 KR Republic of Korea
(72)**Name of Inventor :**
1)ARNAB ROY
2)MADHUR JUNEJA
3)KIRAN KOLAR CHANDRASEKHARAN
4)NILAY NITIN BIRMOLE
5)WOORAM YANG
6)JIHOON NAM

(57) Abstract :
METHOD AND SYSTEM FOR DECOMPRESSION BY PARALLEL BLOCK 5 PROCESSING ABSTRACT [0019] The present disclosure relates to the field of parallel block processing that discloses a 10 method and system for decompression by parallel block processing. The processor allocates (113) allocates plurality of compressed data blocks to each of plurality of parallel decoders based on stored metadata information corresponding to each of plurality of parallel decoders. Further, processor (113) determines based on information stored in each of plurality of compressed data blocks, presence of data dependency in each of allocated plurality of 15 compressed data blocks while processing allocated plurality of compressed data blocks by each of corresponding plurality of parallel decoders. Therefore, the processor (113) decompresses each of plurality of compressed data blocks by the corresponding plurality of parallel decoders, using one of in-order block processing technique or out-of-order block processing technique, based on determined presence of data dependency to provide an efficient parallel block 20 processing system. FIG.2A

No. of Pages : 42 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202541042851 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR GENERATING A SIMULATION-READY SPARSE THREE-DIMENSIONAL SURFACE OF A CHIP LAYOUT

(51) International classification	:G06F30/398, G06F30/39, G06F30/20, G06T17/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Samsung Electronics Co., Ltd.
Address of Applicant :129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea Republic of Korea
(72)**Name of Inventor :**
1)SHARMA, Sameer
2)JANDIAL, Siddhrath
3)AGASHE, Shashank Shrikant
4)BALAKRISHNA, Kumar
5)KUMAR, Gaurav

(57) Abstract :
System (320) and method (900) for generating a simulation-ready sparse three-dimensional (3D) surface of a chip layout are described. The method includes receiving (902) parameterized 3D model comprising plurality of elemental 3D blocks, etching information The etching information identifies an etching cycle in the parameterized 3D model that represents the chip layout. The method includes generating (904) the sparse 3D surface comprising etch pockets based on the etching information. The etch pockets are configured to interrupt the etching cycle. The method includes assigning (906) a rendering order to each of the plurality of elemental 3D blocks for reducing the etching cycle based on a manufacturing sequence. An elemental 3D block corresponding to upper manufacturing sequence is assigned higher rendering order than elemental 3D block corresponding to lower manufacturing sequence. The method includes generating (908) the simulation-ready sparse 3D surface based on the plurality of etch pockets and the rendering order.

No. of Pages : 40 No. of Claims : 18

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/05/2025

(21) Application No.202541042884 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR CONTROLLING A VOICE COMMAND-BASED AUTONOMOUS VEHICLE

(51) International classification	:G05D 1/00, G10L 15/22, G10L 15/26, B60W 60/00, G06F 3/16
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bharat Electronics Limited
Address of Applicant :Corporate Office, Outer Ring Road, Nagavara P.O., Bangalore 560045, India Bangalore Karnataka India
(72)**Name of Inventor :**
1)SOHNI, Ankit
2)MITTAL, Virendra Kumar

(57) Abstract :
A system (110) and method (500) for controlling a voice command-based autonomous vehicle (108) are disclosed. The method (500) includes recognizing a voice command of one or more registered users based on detecting a radio frequency (RF) signal. The recognized voice command is converted into a text message using a voice-to-text converter. A command message is generated by comparing the text message with a predefined codebook comprising one or more waypoints, wherein the one or more waypoints include at least one of a longitude and a latitude. The method (500) further includes generating at least one of a motion vector and an error signal based on the generated command message. The method (500) further includes controlling the autonomous vehicle (108) based on the generated at least one of the motion vector and the error signal.

No. of Pages : 35 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :03/05/2025

(21) Application No.202541042992 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : The Advanced Bio-camera in Ophthalmology in Human beings

(51) International classification	:A61P0035000000, G06T0007194000, G06F0016220000, G06T0007110000, A61B0003117000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)jitendra
Address of Applicant :jitendra sunte s/o shivaraj sunte old town chowdi galli bhalki 585328 M:9353613244 Karnataka India
(72)**Name of Inventor :**
1)jitendra

(57) Abstract :
The best bio-camera, which is capturing images and videos from the entire universe, including all sky levels, is a tedious task using currently available cameras, but from this paper, one can capture all images and videos easily by the concept of ophthalmology. The principle of a camera and the hypothesis of a camera are anything that can be converted into a camera, which may be things that are physical or biological. The eye part is lenses and iris as in connected to a series from upper 7 sky levels and thus behaves as a bio-camera. The particular sky-level species determines who is first and who is next for series connection. On planet Earth, all kinds of species are present, but in the universe, there is a separation of all kinds of species. Thus, one can segregate the species belonging to a particular sky level. Also, prakriti's role is that nature's beauty is so important, which requires the making and building of bio-cameras through ophthalmology. In this paper, design and behavior characterization is done by camera. The principle of Jupiter and Venus is taken into consideration.

No. of Pages : 4 No. of Claims : 5

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/05/2025
(21) Application No.202541043039 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ELEVATOR LANDING DOOR WITH THERMAL RESISTANCE TO CONTROL THERMAL EXPANSION DUE TO SUNLIGHT

(51) International classification	:B66B 13/30, B66B 13/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)WITTUR HOLDINGS GMBH
Address of Applicant :ROHRBACHSTRASSE 26-30, WIEDENZHAUSEN BAYERN, GERMANY Germany
2)WITTUR ELEVATOR COMPONENTS INDIA PRIVATE LIMITED
(72)**Name of Inventor :**
1)S. Deepak Prashanth
2)R. Swaminathan
3)R. Raja

(57) Abstract :
Elevator landing door with thermal resistance to control thermal expansion due to sunlight. The elevator door panel (A) comprising of a base panel (1) wherein the base panel (1) has a runby profile (8) at the leading edge of the door panel (1) wherein the runby profile (8) acts as a barrier during fire incidents and insulates the doors from the heat; a hemming (7) at the trailing edge of the door panel (A) which is of 180 degrees reinforces the door panel (A); horizontal stiffeners (5) wielded to the vertical stiffeners (2) at the base panel (1) along with the hemming (7) at the trailing edge of the door panel (A) reinforces the door panel to achieve minimal deformation during the rise of ambient temperature to maintain minimal gap (9) between door and frame (C) which eliminate rubbing of door panel (A) with the frame (C) during open and close without affecting the performance of the door panel (A) and avoid unpleasant noise.

No. of Pages : 17 No. of Claims : 4

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :03/05/2025

(21) Application No.202541043047 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Solid state forms of N-[3-[6-amino-5-[2-[methyl(prop-2-enoyl)amino] ethoxy]pyrimidin-4-yl]-5-fluoro-2-methylphenyl]-4-cyclopropyl-2-fluorobenzamide

(51) International classification :A61P0003100000, C07D0239470000, A61P0001000000, C07C0309300000, A61K0031513000

(31) Priority Document No :NA

(32) Priority Date :NA

(33) Name of priority country :NA

(86) International Application No :NA

Filing Date :NA

(87) International Publication No : NA

(61) Patent of Addition to Application Number :NA

Filing Date :NA

(62) Divisional to Application Number :NA

Filing Date :NA

(71)**Name of Applicant :**

1)CRAMSN Research Park Private Limited

Address of Applicant :CRAMSN Research Park Private Limited Plot No:4, Phase: IV, Sy. No 258, 275 to 280,119 to 140,IDA Pashamylaram(V), Patancheru (M), Sangareddy(Dist.), Hyderabad, Pincode-502307, Telangana state, India Hyderabad Telangana India

(72)**Name of Inventor :**

1)Vijayavitthal Thippannachar Mathad

2)Ismail

3)Bommarapu Venkatesham

4)Pavan kalyan C S

5)Samadhan Bharat Shelake

6)Sheik Rehana Anjum

(57) Abstract :

Abstract Title of the Invention: Solid state forms of N-[3-[6-amino-5-[2-[methyl(prop-2-enoyl)amino] ethoxy]pyrimidin-4-yl]-5-fluoro-2-methylphenyl]-4-cyclopropyl-2-fluorobenzamide. The present invention relates to a solid state forms of N-[3-[6-amino-5-[2-[methyl(prop-2-enoyl)amino]ethoxy]pyrimidin-4-yl]-5-fluoro-2-methylphenyl]-4-cyclopropyl-2-fluorobenzamide which is referred to as Remibrutinib and represented by the following structural formula-1, Formula-1 The present invention also relates to a process for the preparation of solid state forms of Remibrutinib.

No. of Pages : 25 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :03/05/2025

(21) Application No.202541043049 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : Process for the preparation of crystalline form of N-(Cyanomethyl)-4-(2-{[4-(morpholin-4-yl)phenyl]amino}pyrimidin-4-yl)benzamide or its pharmaceutically acceptable salts

(51) International classification	:A61K0031537700, C07D0413140000, A61K0031541000, C07D0239420000, C07D0413120000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)MSN Laboratories Private Limited, R&D Center
Address of Applicant :MSN Laboratories Private Limited, R&D Center Plot No. 12, Phase-IV, Sy No. 119 to 140, 258, 275 to 280, IDA, Pashamylaram (Vil), Patancheru (Mdl), Sangareddy (Dist), Telangana, India -502307 Hyderabad Telangana India
(72)**Name of Inventor :**
1)Srinivasan Thirumalai Rajan
2)Sagyam Rajeshwar Reddy
3)Kammari Balraju
4)Kamutam Sathish

(57) Abstract :
Abstract Title of the invention: Process for the preparation of crystalline form of N-(Cyanomethyl)-4-(2-{[4-(morpholin-4-yl)phenyl]amino}pyrimidin-4-yl)benzamide dihydrochloride The present invention relates to a process for the preparation of crystalline form of N-(Cyanomethyl)-4-(2-{[4-(morpholin-4-yl)phenyl]amino}pyrimidin-4-yl)benzamide dihydrochloride of formula-1a. The structure of formula-1a is shown below: Formula-1a.

No. of Pages : 10 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :04/05/2025
(21) Application No.202541043105 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TriSunX : A Mixed-Metal Halide Semiconductor for Lead-Free Solar Energy Conversion

(51) International classification	:H01L0031032000, H01L0031039200, H10K0085600000, H10K0102100000, H01L0031048000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Kunduru Ranjith Kumar
Address of Applicant :Hanamkonda, Warangal, Telangana, India. Telangana India
(72)**Name of Inventor :**
1)Kunduru Ranjith Kumar

(57) Abstract :
TriSunX is a quaternary halide semiconductor comprising tin (Sn), copper (Cu), zinc (Zn), and halogens (F, Cl, Br, or I). It is designed to be a lead-free, stable, and highly efficient photovoltaic material for solar energy conversion. This compound leverages the synergistic electronic properties of its constituent metals to achieve broad-spectrum light absorption and superior carrier mobility, making it suitable for next-generation thin-film solar cells.

No. of Pages : 8 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :04/05/2025
(21) Application No.202541043128 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A PEDAL POWERED ELECTRICITY GENERATING DEVICE

(51) International classification	:G06Q0050000000, G06F0011140000, G06Q0030025100, G06Q0030022600, G06F0003010000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GOGREENVERZ PRIVATE LIMITED
Address of Applicant :GOGREENVERZ, 2/123B, MAIN ROAD, SETHIRABALAPURAM, MAYILADUTHURAI - 609806, TAMIL NADU SETHIRABALAPURAM Tamil Nadu India
(72)**Name of Inventor :**
1)PRABAKARAN KRISHNA MURTHY
2)SATHYAKUMAR GANESAN

(57) Abstract :
A pedal powered electricity generating device is disclosed. Said device broadly comprises: an at least a pedalling member (2); an energy generating member (3); a pack for a leccy supplying member (4); an output port (5); an at least a communication facilitating member (6); an application on a computing device (7); and the cloud (8). The disclosed device offers at least the following advantages: is simple in construction; is eco-friendly and sustainable; is customisable; possesses energy storage capabilities; provides for real-time tracking; and/or provides for user engagement.

No. of Pages : 19 No. of Claims : 4

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202541043194 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SOLID FORMS OF ENCUKALNER AND PROCESS FOR THE PREPARATION THEREOF

(51) International classification	:C07D 217/04, C07D 217/06, C07C 233/05, C07D 403/06, A61K 9/20, A61P 43/00, C07C 15/06, C07C 15/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Dr. Reddy's Laboratories Limited
Address of Applicant :House No. 8-2-337 Street Road No. 3, Banjara Hills City Hyderabad State Telangana Country India Hyderabad Telangana India
(72)**Name of Inventor :**
1)MD Sirazoddin
2)Sharmistha Pal

(57) Abstract :
SOLID FORMS OF ENCUKALNER AND PROCESS FOR THE PREPARATION THEREOF The present invention relates to amorphous solid dispersion and crystalline form of Encukalner and process for preparation thereof.

No. of Pages : 30 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :05/05/2025

(21) Application No.202541043309 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD OF AUTONOMOUS SALES ANALYSIS AND OPTIMIZATIONUSING AI

(51) International classification	:G06Q 30/0202, G06N 20/00, G06Q 30/0201, G06Q 10/04, G06N 3/08, G06F 40/20
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)R. Sathish Kumar
Address of Applicant :C1008, Happiness Towers, Pacifica Aurum,Padur, OMR, Chennai , Tamil Nadu India
(72)**Name of Inventor :**
1)R. Sathish Kumar

(57) Abstract :
SYSTEM AND METHOD OF AUTONOMOUS SALES ANALYSIS AND OPTIMIZATION USING AI The present disclosure relates to a of autonomous sales analysis and optimization. The system (100) includes a user interface device (102) configured to enable a user to input selections, receive forecast results, receive AI-generated operational suggestions, and input follow-up queries. The system (100) further includes an information processing apparatus (104) communicatively coupled to the user interface device (102) via a communication network (106). The information processing apparatus (104) comprises processing circuitry (110) configured to retrieve historical sales data from a cloud-based database (108) via a data ingestion module (112), generate a predictive forecast using a forecasting engine (114), and transmit the predictive forecast to an AI analysis engine (116) for generating operational suggestions. An interactive query module (118) refines the operational suggestions based on natural language queries. A visualization engine (120) renders the results, and a persistence module (122) stores outputs into the cloud-based database (108) for future reference. Fig. 1 is the reference figure.

No. of Pages : 14 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :05/05/2025

(21) Application No.202541043339 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : ACCELERATION OF EM WAVES

(51) International classification	:H03B5/02, H03B5/04, H03B5/36, H04B1/00, H04B7/00, H03B28/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)CHALVARAJAN PRABHAKAR
Address of Applicant :OLD 14/1, NEW 6, 4TH CROSS, JAI BHARATH N, BENGALURU KARNATAKA INDIA-560033 Karnataka India
(72)**Name of Inventor :**
1)CHALVARAJAN PRABHAKAR

(57) Abstract :
Abstract of the Invention: We all believed that velocity of Electromagnetic waves is a constant and invariant in vacuum. But now I found a way to accelerate the Velocity of Electromagnetic ways using the equation v= n A. where v is velocity of EM waves, n is frequency and A. is wavelength. Here ⁄let us take v velocity variable with time instead of constant, then we get equation dv/dt = n dA./dt +), dn/dt where dv/dt represents acceleration. This is the governing equation for accelerating the EM Radio waves. Using extra oscillator consisting of' time. variable inductor and capacitor along with normal oscillator, we can accelerate the EM radio waves. This will lind huge application in long range communication systems as it will avoid time delay in transmission and reception of' EM radio waves. It will also improve the accuracy of GPS systems. It will also highly helpful in future when Humans send probes to explore our Galaxy very far off distance from our mother planet Earth whereby we will be getting information from the probes without any time delay.

No. of Pages : 8 No. of Claims : 1

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :05/05/2025

(21) Application No.202541043363 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A MULTILAYER HANDHELD BAG

(51) International classification	:B65D 33/06, B65D 33/00, B65D 30/20
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)FLIPKART INTERNET PRIVATE LIMITED
Address of Applicant :Buildings Alyssa, Begonia & Clover, Embassy Tech Village, Outer Ring Road, Devarabeesanahalli Village, Bengaluru - 560103, Karnataka, India Bengaluru Karnataka India
(72)**Name of Inventor :**
1)RAJ, Rohit
2)SURVE, Ashish
3)J, Sri Krishnan

(57) Abstract :
The present disclosure relates to a multilayer handheld bag [100]. The multilayer handheld bag [100] comprises a plurality of side walls [102] formed by a first set of layers [106]. Further, the multilayer handheld bag [100] comprises a bottom wall [104] attached to the plurality of side walls [102], wherein the bottom wall [104] formed by a second set of layer [108]. Furthermore, the multilayer handheld bag [100] comprises an opening, wherein the opening is formed by assembling the plurality of side walls [102] and the bottom wall [104] at a target angle. FIG. 1A

No. of Pages : 23 No. of Claims : 11

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202541043405 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A CONTROLLER OF A VEHICLE IN A COOPERATIVE PLATOON CONTROL (CPC) SYSTEM AND METHOD THEREOF

(51) International classification	:G05D0001000000, G08G0001000000, B60W0010060000, G16H0050300000, B60W0030165000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Bosch Global Software Technologies Private Limited
Address of Applicant :123, Industrial Layout, Hosur Road, Koramangala, Bangalore – 560095, Karnataka, India Bangalore Karnataka India
2)Robert Bosch GmbH
(72)**Name of Inventor :**
1)Kevin Schmidt
2)Laura Beermann
3)Anushri Pradeep
4)Vinnakota Mythreya

(57) Abstract :
A CONTROLLER OF A VEHICLE IN A COOPERATIVE PLATOON CONTROL (CPC) SYSTEM AND METHOD THEREOF Abstract The CPC system 100 operable in control frameworks/schemes (or control function), namely, a centralized framework, a decentralized framework and standard framework, characterized in that, the controller 112 configured to monitor operation of the centralized framework, detect presence of an abnormality in the centralized framework during the monitoring operation, and switch the control framework from the centralized framework to the decentralized framework on presence of the abnormality. The platoon comprises lead vehicle 106 and member vehicles 104. The present invention ensures safe and optimal control of the platoon 114, a hybrid control strategy is disclosed that integrates centralized, decentralized, and standard frameworks. In other words, cloud/edge based centralized control of the CPC system 100 with fallback decentralized control is disclosed. The controller 112 executes the blended dwell time to switch between the control frameworks incase of abnormality and with the abnormality is resolved. Figure 1

No. of Pages : 24 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202541043474 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : APPARATUSES, METHODS AND COMPUTER PROGRAMS FOR DATA COLLECTION

(51) International classification	:H04W24/10, H04W24/02, H04W24/08, H04W8/24, H04W76/27
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, 02610 Espoo, Finland Finland
(72)**Name of Inventor :**
1)GUMASTE, Laxmanarao
2)HASSAN, Sakira
3)SAEED, Umar

(57) Abstract :
A UE (110) configured to: receive (901), from a network (100), configuration information (911) comprising a configuration (912) for configuring the UE to perform a data collection procedure; determine (902) that the configuration does not meet a condition (921); transmit (903), to the network, first information (931) comprising an indication (932) that the configuration has been determined not to meet the condition; determine (904), after transmitting the first information, that the configuration meets the condition; transmit (905) second information (951) comprising an indication (952) that the configuration meets the condition; wherein the transmitting is based on the determining that the configuration meets the condition; and perform (906) the data collection procedure, wherein the performing of the data collection procedure is based on the transmitting of the second information, and wherein the data collection procedure is performed based on the configuration that has been determined to have met the condition. FIG. 9

No. of Pages : 83 No. of Claims : 18

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :05/05/2025

(21) Application No.202541043486 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : CONNECTOR DEVICE WITH DUAL-LOCKING AND ICING IMPACT MITIGATION FOR SECURE FLUID TRANSFER

(51) International classification	:H01R0013639000, H01R0013520000, H01R0009050000, A61B0005000000, H01R0013627000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ZENATHOM PRIVATE LIMITED
Address of Applicant :RANKA BUILDING, NO 224 80/3 3RD FLOOR, VIJINAPUR VILLAGE, OMR,KRISHNARAJAPURAM R S, BANGALORE NORTH, BANGALORE- 560016, KARNATAKA BANGALORE Karnataka India
(72)**Name of Inventor :**
1)Sai Teja Manne
2)Sudesh Damodara Shetty
3)Vijeth G

(57) Abstract :
CONNECTOR DEVICE WITH DUAL-LOCKING AND ICING IMPACT MITIGATION FOR SECURE FLUID TRANSFER A connector device with dual-locking and icing impact mitigation for secure fluid transfer is provided. The connector device 100 includes primary locking assembly 102, primary lock securing assembly 104, secondary locking assembly 106, and lock control assembly 108. Upon insertion into mating receptacle of vehicle, radially movable locking elements of primary locking unit 110 are actuated by primary locking sleeve 112 to engage corresponding locking profile, maintaining engaged state. Actuation of pull-back lever 130 causes axial displacement of securing sleeve 118 to locked position, thereby inhibiting retraction of primary locking sleeve 112. Piston 122 disposed along fluid conduit is maintained in closed position prior to fluid introduction and transitions to flow-enabled position upon introduction of fluid under pressure. Movement of piston 122 actuates secondary lock securing unit 126 to inhibit movement of securing sleeve under pressurized conditions. Holding arm 128 provides environmental protection, including mitigation of ice accumulation. FIG. 1

No. of Pages : 28 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202541043510 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : APPARATUSES, METHODS AND COMPUTER PROGRAMS FOR DATA COLLECTION

(51) International classification	:H04W24/10, H04W24/02, H04L5/00, H04W8/24
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, 02610 Espoo, Finland Finland
(72)**Name of Inventor :**
1)GUMASTE, Laxmanarao
2)HASSAN, Sakira
3)SAEED, Umar

(57) Abstract :
A UE (110) configured to: receive (210), from a network (100), configuration information (211) comprising a configuration (212) for configuring the UE to perform a data collection procedure; determine (202) that the received configuration meets a condition (221); transmit (203), to the network, first information (231), wherein the first information comprises an indication (231) that the received configuration has been determined to meet the condition; and perform (204) the data collection procedure, wherein the performing of the data collection procedure is based at least in part on the transmitting of the first information, and wherein the data collection procedure is performed based at least in part on the configuration that has been determined to have met the condition. FIG. 2

No. of Pages : 84 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :05/05/2025

(21) Application No.202541043523 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : “METHOD AND SYSTEM FOR MANAGING CONNECTION WITH A USER EQUIPMENT THROUGH RECONFIGURABLE INTELLIGENT SURFACES”

(51) International classification	:H04B 7/06, H04B 7/04, H04L 25/02, H04W 24/10	(71)**Name of Applicant :** **1)TEJAS NETWORKS LIMITED** Address of Applicant :Plot No. 25, JP Software Park, Electronic City, Phase-I, Hosur Road, Bangalore - 560 100, Karnataka, India Bangalore Karnataka India (72)**Name of Inventor :** **1)Gautam Kumar Rai** **2)Jishnu Aravindakshan**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No Filing Date	:NA :NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :

The present disclosure discloses a method (800) and a system (108) for managing a connection with a User Equipment (UE) (104) through a Reconfigurable Intelligent Surface (RIS) in a network. The method (800) comprises establishing (802) the connection with the UE (104) from a first Base Station (BS) (102a) using a Base Station (BS)-User Equipment (UE) direct link. Further, the method (800) comprises receiving (804) a set of parameters associated with the UE (104) from the UE (104) based on the established connection. The set of parameters comprises one or more of a measurement report and a feedback signal. The method (800) comprises switching (806) from the BS-UE direct link to a BS-RIS-UE link based on the received set of parameters. The method (800) comprises establishing (808) the connection with the UE (104) through the RIS (106) using the BS-RIS-UE link. [Figure 1]

No. of Pages : 50 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202541043556 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : RECONFIGURABLE INTELLIGENT SURFACE (RIS) ASSISTED COMMUNICATION IN A CELLULAR NETWORK

(51) International classification	:H04B0007040000, H04B0007155000, H04B0007060000, H04B0007026000, H04W0088100000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)TEJAS NETWORKS LIMITED
Address of Applicant :JP Software Park, Plot No. 25, Sy. No. 13, 14, 17, 18 Konnapana Agrahara Village, Begur Hobli, Bengaluru 560100 Karnataka, India Bengaluru Karnataka India
(72)**Name of Inventor :**
1)Gautam Kumar Rai
2)Jishnu Aravindakshan
3)Sriganesh Rajendran

(57) Abstract :
ABSTRACT RECONFIGURABLE INTELLIGENT SURFACE (RIS) ASSISTED COMMUNICATION IN A CELLULAR NETWORK The present disclosure relates to a method (600) and a system (200) for Reconfigurable Intelligent Surface (RIS) assisted communication in a cellular network. A RIS Specific Controller (RSC) (202, 318) communicates with a base station (204, 308) via a first interface (Rb), and with a RIS Reflecting Surface Hardware (RRSH) (206, 306) via a second interface (Rr). The present disclosure provides one or more signalling protocols to establish a communication network comprising the base station (204, 308), the RSC (202, 318), the RRSH (206, 306), and a User Equipment (UE) (208). Fig. 2

No. of Pages : 35 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :05/05/2025

(21) Application No.202541043598 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AN AUTOMATED SYSTEM FOR DETECTING RUN-OUT IN VEHICLE WHEEL RIM

(51) International classification	:G01M 17/013, G01B 7/28, G01B 5/20, G01B 5/207, B07C 5/08, B07C 5/344, B23K 37/04, B41K 3/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Sampath Ravi Narayanan
Address of Applicant :MICROCON MACHINE TECH PVT. LIMITED, No. 125B, Sy. No. 94, 96, Hebbagodi Village, Bommasandra Industrial Area, Bangalore, Karnataka – 560099, India Karnataka India
2)G H Vijai kumar
(72)**Name of Inventor :**
1)Sampath Ravi Narayanan
2)G H Vijai kumar

(57) Abstract :
Disclosed here, is a system for detecting run-out in vehicle wheel-rim and method thereof, comprises loading station 102 with a primary conveyor 116 and a first beam sensor to detect placement of wheel-rim. A measuring station 104, which features a secondary conveyor 118, a lifting platform 124, sensors for vehicle wheel rim presence, a centralizing mechanism 120, measuring unit 110, auto-adjusting collet chuck 140, with spindle unit 138. The measuring unit 110 comprises two LVDTs, two rollers, and a top clamp unit 122. The marking station 106 uses a tertiary conveyor 128 and a marking mechanism 130 to mark the wheel-rim based on test results. The system includes a rejection station 108 for handling wheel rims that fail the testing operation. The control unit 112 orchestrates the movement between stations, processes results, and displays them on a user interface 114, ensuring thorough inspection and accurate measurement of vehicle wheel rims. Figure 1

No. of Pages : 23 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :05/05/2025

(21) Application No.202541043609 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : “HANDLING THIRD-PARTY USER IDENTITY INFORMATION IN A COMMUNICATION NETWORK”

(51) International classification	:H04L 65/1016, H04L 65/1101, H04W 12/02	(71)**Name of Applicant :** **1)Samsung Electronics Co., Ltd.** Address of Applicant :129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-742, Republic of Korea Republic of Korea (72)**Name of Inventor :** **1)Ashok Kumar Nayak** **2)Sushmitha Shree Sriram Kumar** **3)Lalith Kumar**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No Filing Date	:NA :NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :

“HANDLING THIRD-PARTY USER IDENTITY INFORMATION IN A COMMUNICATION NETWORK” Present invention provides a method for handling third-party user identity information in a communication network. The method includes receiving, by the IP Multimedia Subsystem (IMS) network, an INVITE request or a MESSAGE request. The method further includes detecting, by the IMS network, that an Application Server (AS) for signing or verification of third-party user identity information is not reachable or is not invoked. The method also includes rejecting, by the IMS network, the INVITE request or the MESSAGE request with a response code. Additionally, the method includes forwarding a SIP INVITE or the MESSAGE without the third-party user identity information. FIG. 4

No. of Pages : 37 No. of Claims : 11

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202541043614 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD FOR DETECTING A HOT FLASH EPISODE AND A SYSTEM THEREOF

(51) International classification	:A61B0005000000, A61B0005024000, A61P0009000000, A61B0005110000, G16H0040630000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ULTRAHUMAN HEALTHCARE PVT LTD
Address of Applicant :AM Chambers, 2nd & 3rd Floor, Survey No 49/1, 49/3 Garvebhavipalya, 7th Mile, Hosur Main Road, Bommanahalli, Karnataka, India, 560068 Bommanahalli Karnataka India
(72)**Name of Inventor :**
1)Aditi Bhattacharya
2)Aditi Shanmugam
3)Apurva Hendi
4)Bhuvan Srinivasan
5)Mohit Kumar
6)Vatsal Singhal

(57) Abstract :
METHOD FOR DETECTING A HOT FLASH EPISODE AND A SYSTEM THEREOF A system (300) for detecting vasomotor symptoms includes a wearable device (310) worn by a user (102) having sensors (312) that monitor physiological parameters including skin temperature, heart rate, and heart rate variability. A separate smart home device (320) has sensors (322) that monitor environmental parameters including ambient temperature and humidity surrounding the user (102). A mobile device (330) coupled with the wearable device (310) and smart home device (320) includes a processor (332) and machine learning engine(333). The processor (332) receives the physiological and environmental parameters, detects an event by comparing real-time skin temperature with a dynamically adjusted circadian threshold, determines an event type pertaining to a vasomotor-induced, exercise-induced, or environmentally-induced event, and estimates a confidence score associated with the event type to detect a vasomotor symptom. [Figure 3]

No. of Pages : 31 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202541043619 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR SIMULATING OPTIMAL PARAMETERS FOR BATCH PROCESSING

(51) International classification	:G06N 3/098, G06N 3/084, G06F 9/50, G06F 40/284, G06F 16/40	(71)**Name of Applicant :** **1)Accenture Global Solutions Limited** Address of Applicant :3 Grand Canal Plaza, Grand Canal Street Upper, Dublin 4, Ireland Ireland (72)**Name of Inventor :** **1)VASUDEVA RAO, Anand Yegati** **2)KUMAR M.K, Vijaya** **3)JOSHI, Sarang Padmakar** **4)SAHA, Dibyendu** **5)KHAMITKAR, Raghunandan** **6)PATIL, Hemant Chandrakant**
(31) Priority Document No	:NA	
(32) Priority Date	:NA	
(33) Name of priority country	:NA	
(86) International Application No	:NA	
Filing Date	:NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number	:NA	
Filing Date	:NA	
(62) Divisional to Application Number	:NA	
Filing Date	:NA	

(57) Abstract :
SYSTEM AND METHOD FOR SIMULATING OPTIMAL PARAMETERS FOR BATCH PROCESSING System and method for simulating optimal parameters for batch processing are disclosed. The method includes receiving multimedia training data from a plurality of data sources, generating tokens corresponding to the multimedia training data received using a Natural Language model, obtaining, from the plurality of data sources, data characteristics of the multimedia training data, based on the generated tokens, and simulating the multimedia training data and the tokens, to predict a processing time and a throughput of the multimedia training data, using selected LLMs, based on historical data and the obtained data characteristics. The method further includes, determining at least one of a computation time, a time to process the multimedia training data of a pre-determined size, a complexity level, and detected number of tokens, using DNN-based models, estimating at least one of a processing time, a throughput rate, and a number of batches required to process the multimedia training data, determining an optimal configuration and a size of the multimedia training data, required for a batch processing of the multimedia training data based on the estimated at least one of the processing time, the throughput rate, and the number of batches required to process the multimedia training data, and dynamically fine-tuning the multimedia training data, the selected LLMs and the DNN-based models based on the determined optimal configuration and the size of the multimedia training data. FIG. 1

No. of Pages : 59 No. of Claims : 22

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202541043624 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND SYSTEM FOR MANAGING LOW-LATENCY COMMUNICATION IN A COMMUNICATION NETWORK

(51) International classification	:H04W 36/18, H04W 36/08, H04W 84/12, H04W 88/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129, Samsung-ro, Yeongtong-gu Suwon-si Gyeonggi-do 16677, Republic of Korea. Republic of Korea
(72)**Name of Inventor :**
1)Manasi Ekkundi
2)Rishabh Roy
3)Karthik Srinivasa Gopalan

(57) Abstract :
IN/PA-1850 K & S PARTNERS AGENT FOR THE APPLICANT Digitally signed and filed through E-filing METHOD AND SYSTEM FOR MANAGING LOW-LATENCY COMMUNICATION IN A COMMUNICATION NETWORK ABSTRACT The present disclosure relates to a method and system for managing low-latency communication in a communication network. The method comprises selecting a target AP from one or more candidate APs during a preparation phase of a roaming procedure. The method further comprises transmitting a first reconfiguration request message to an Access Point (AP), during an execution phase of the roaming procedure. Further, the method comprises receiving a first reconfiguration response message from the AP, based on the transmitted first reconfiguration request message, in which the first reconfiguration response message comprises at least a Down Link (DL) drain time of the selected target AP. Furthermore, the method comprises managing the low-latency communication in the communication network, based on the received first reconfiguration response message. [FIG. 2 is a reference figure]

No. of Pages : 76 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202541043625 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : “PROVIDING SENSING SERVICES IN A WIRELESS COMMUNICATION SYSTEM”

(51) International classification	:H04W24/08, H04W24/10, H04W64/00, H04W4/38, H04W12/02, H04L67/51
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Samsung Electronics Co., Ltd
Address of Applicant :129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742 Republic of Korea Republic of Korea
(72)**Name of Inventor :**
1)Ashok Kumar Nayak

(57) Abstract :
ABSTRACT ‘‘PROVIDING SENSING SERVICES IN A WIRELESS COMMUNICATION SYSTEM Embodiments disclosed herein provides a methods and system for providing sensing services in a wireless communication system. The method includes receiving a sensing service request directly from an application function (AF) node (300) if the AF node (300) is in a trusted domain or via a network exposure function (NEF) node (304) if the AF node (300) is outside of the trusted domain. Further, the method includes authorizing the sensing service request received from the NEF node (304) or directly from the AF node (300). Further, the method includes transmitting a sensing service response to the NEF node (304) or to the AF node (300) upon authorization of the sensing service request. The sensing service request indicates either an acceptance or a rejection of the sensing service request. Further, the method includes performing a sensing service operation upon authorization of the sensing service request. Fig. 4

No. of Pages : 27 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :05/05/2025

(21) Application No.202541043627 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : REVOKING AUTHORIZATION OF SENSING SERVICE REQUEST ASSOCIATED WITH APPLICATION FUNCTION IN WIRELESS COMMUNICATION SYSTEM

(51) International classification	:H04W12/082, H04W4/38, H04W12/06, H04W60/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129, Samsung-ro Yeongtong-gu, Suwon-si, Gyeonggi-do Republic of Korea 16677 Republic of Korea
(72)**Name of Inventor :**
1)Ashok Kumar Nayak

(57) Abstract :
ABSTRACT “REVOKING AUTHORIZATION OF SENSING SERVICE REQUEST ASSOCIATED WITH APPLICATION FUNCTION IN WIRELESS COMMUNICATION SYSTEM” Embodiment herein disclose a method for revoking authorization of a sensing service request associated with an application function in a wireless communication system (1000) by a network entity (100). The method includes detecting at least one event. The at least one event includes at least one of: the network entity (100a) receiving a sensing service request to terminate a sensing service from at least one of: an Network Exposure Function (NEF) entity (200) and an Application Function (AF) entity (300); the network entity (100a) deciding to terminate a sensing service operation after identifying that an ongoing sensing service is completed, and the network entity (100a) identifying for a need to terminate the sensing service based on an updated authorization data received from a SPF entity (400). Further, the method includes terminating or revoking the sensing service operation. FIG. 5

No. of Pages : 44 No. of Claims : 7

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202541043628 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : Methods and systems for managing sensing parameters in a wireless communication network

(51) International classification	:H04W0016140000, H04W0074080800, G06V0040120000, G01N0021030000, H04L0012280000
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Republic of Korea Republic of Korea
(72)**Name of Inventor :**
1)Ashok Kumar Nayak

(57) Abstract :
ABSTRACT Methods and systems for managing sensing parameters in a wireless communication network Embodiments disclosed herein relate to methods (400) and systems (100) for managing a sensing operation in a wireless communication network by configuring one or more sensing parameters to one or more sensing entities (106) for wireless sensing services. A Sensing Service Function (SSF) is introduced as a network entity (102) for sending the sensing parameters directly to the sensing entities (106) in case of a direct connection between the SSF (102) and the sensing entities (106). Alternatively, the SSF (102) is configured for sending the sensing parameters indirectly to the sensing entities (106) over a sensing service container via an Access and Mobility Management Function (AMF). FIG. 1

No. of Pages : 31 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :05/05/2025

(21) Application No.202541043629 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : AUTHORIZING SENSING SERVICE REQUEST OF APPLICATION FUNCTION (AF) IN WIRELESS COMMUNICATION SYSTEM

(51) International classification	:H04W24/10, H04W28/24, H04W4/38, H04L67/12, H04L41/0803, H04L41/5003, H04L67/53, H04W64/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129, Samsung-ro Yeongtong-gu, Suwon-si, Gyeonggi-do Republic of Korea 16677 Republic of Korea
(72)**Name of Inventor :**
1)Ashok Kumar Nayak

(57) Abstract :
ABSTRACT “AUTHORIZING SENSING SERVICE REQUEST OF APPLICATION FUNCTION (AF) IN WIRELESS COMMUNICATION SYSTEM” The embodiments herein achieve a method for authorizing a sensing service request of an application function (AF) in a wireless communication system (1000) by a Sensing Service Function (SSF) entity (100). The method includes receiving a sensing service request for invoking a sensing service from at least one of: an AF entity (300) directly if the AF entity (300) is inside a trusted domain or via the NEF entity (200) if the AF entity (300) is outside the trusted domain. Further, the method includes sending a request to retrieve an AF authorization data to an SPF entity (400) based on the sensing service request. Further, the method includes receiving a response comprising the AF authorization data from the SPF entity (400) based on the request. FIG. 1

No. of Pages : 48 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :05/05/2025

(21) Application No.202541043879 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND SYSTEM FOR HARQ AND ARQ INTERWORKING IN BEYOND 5G AND 6G RAN

(51) International classification	:H04L1/1812, H04L1/18, H04L5/00, H04L41/16
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Samsung Electronics Co., Ltd.
Address of Applicant :129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea Republic of Korea
(72)**Name of Inventor :**
1)DESHMUKH, Aneesh Narendra
2)SHARMA, Neha

(57) Abstract :
Disclosed herein is a method (800) for adaptive retransmission in a wireless communication system. The method includes transmitting (802), by a Radio Link Control (RLC) layer, one or more protocol data units (PDUs) to a Medium Access Control (MAC) layer to begin a Hybrid Automatic Repeat Request (HARQ) procedure. It further includes receiving (804) transmission related metrics from the MAC layer and predicting (806) an early HARQ failure based on those metrics. Upon predicting failure, the method signals (808) the MAC layer to halt HARQ retransmissions for PDUs linked to the ongoing HARQ process. The method also includes receiving (810) identification information of PDUs for which retransmission has been skipped and initiating an Automatic Repeat reQuest (ARQ) procedure for those PDUs. This approach enables proactive failure detection and efficient retransmission control, improving system reliability while reducing unnecessary HARQ retransmission overhead.

No. of Pages : 64 No. of Claims : 26

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :13/11/2025

(21) Application No.202544110801 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A SYSTEM AND METHOD TO PREDICT LYMPH NODE STATUS IN PATIENTS WITH CANCER USING PRE-OPERATIVE PARAMETERS AND MACHINE LEARNING

(51) International classification	:G16H50/20, G16H10/60, G16H20/10, G16H20/40, G16H40/63, G06N3/0464, H04L9/40
(31) Priority Document No	:63/799,585
(32) Priority Date	:04/05/2025
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Jashna Oza
Address of Applicant :4883 Lago Vista Cir, San Jose, CA 95129, US U.S.A.
2)Dushyant Mandlik
(72)**Name of Inventor :**
1)Jashna Oza
2)Dushyant Mandlik

(57) Abstract :
The present invention provides a system (102) and method for the automated prediction of pathological cancer parameters using only preoperative data, thereby enhancing early decision-making in oncology. By curating and preprocessing clinical, radiological, and non-pathological patient data, the system (102) employs multiple machine learning models (112) to predict key pathological features such as tumor stage (pT), nodal stage (pN), depth of invasion (DOI) etc. The use of a voting-based ensemble mechanism improves accuracy and robustness, with the system generating confidence scores and prediction accuracy statistics for each parameter. Based on the predicted pathological features, the invention further calculates the final pathological cancer stage and assists in determining the need for neck node metastasis surgery. The invention reduces reliance on invasive post-surgical histopathology, enhances clinical efficiency, and supports personalized cancer treatment planning. It is scalable, adaptable to various healthcare systems, and supports federated learning for continuous improvement.

No. of Pages : 26 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/05/2025
(21) Application No.202547051676 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ALKALINE WATER ELECTROLYZER FOR HYDROGEN PRODUCTION PROVIDED WITH AUXILIARY GASKET ELEMENTS

(51) International classification	:C25B 9/60, C25B 1/04
(31) Priority Document No	:202510513362.9
(32) Priority Date	:23/04/2025
(33) Name of priority country	:China
(86) International Application No	:PCT/CN2025/094158
Filing Date	:12/05/2025
(87) International Publication No	:WO 2026/222829
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)JIANGSU SHUANGLIANG HYDROGEN ENERGY TECHNOLOGY CO., LTD.
Address of Applicant :No.117 Xili Road, Ligang Street, Jiangyin City Wuxi, Jiangsu 214400 China
(72)**Name of Inventor :**
1)JIANG, Rongfang
2)ZHANG, Hengbiao
3)MAO, Hongcai

(57) Abstract :
The present invention relates to the technical field of electrolyzers, and specifically relates to an alkaline water electrolyzer for hydrogen production provided with auxiliary gasket elements. Said alkaline water electrolyzer comprises auxiliary gasket elements arranged between an end compression plate and an end electrode plate of an alkaline water electrolyzer for hydrogen production, the auxiliary gasket elements being elastic, and the auxiliary gasket elements being not in contact with an internal electrolyte of the alkaline water electrolyzer for hydrogen production. The present invention can optimize and improve the stress state of sealing gaskets, thereby addressing the problem that sealing gaskets are prone to damage due to pressure fluctuations in electrolyzers and thermal expansion and contraction which are caused by frequent start-ups and shutdowns. In particular, the present invention solves the problem that sealing gaskets adjacent to end electrode plates are more prone to failure and damage, thereby improving the operational reliability and safety of alkaline water electrolyzers for hydrogen production.

No. of Pages : 15 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/05/2025
(21) Application No.202547051754 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : HYDROGEN-PRODUCING ALKALINE WATER ELECTROLYZER USING EXTERNAL PRESSURE COMPENSATION SYSTEM

(51) International classification :C25B 9/19, C25B 15/02
(31) Priority Document No :202510513362.9
(32) Priority Date :23/04/2025
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/094161
Filing Date :12/05/2025
(87) International Publication No :WO 2026/222830
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)JIANGSU SHUANGLIANG HYDROGEN ENERGY TECHNOLOGY CO., LTD.
Address of Applicant :No.117 Xili Road, Ligang Street, Jiangyin City Wuxi, Jiangsu 214400 China
(72)**Name of Inventor :**
1)JIANG, Rongfang
2)ZHANG, Hengbiao
3)MAO, Hongcai

(57) Abstract :
The present invention relates to the technical field of electrolyzers, and specifically relates to a hydrogen-producing alkaline water electrolyzer using an external pressure compensation system. The hydrogen-producing alkaline water electrolyzer comprises an external pressure compensation system arranged at one end or two ends thereof, wherein a compensation thrust of the external pressure compensation system acts on an end pressure plate of the hydrogen-producing alkaline water electrolyzer. The present invention can optimize and improve the stress states of sealing gaskets, solve the problem of the sealing gaskets being prone to damage due to pressure changes in an electrolyzer and thermal expansion and contraction caused by frequent startups and shutdowns of the electrolyzer, and especially solve the problem of sealing gaskets close to end electrode plates being more prone to failure and damage, thereby improving the operation reliability and operation safety of the hydrogen-producing alkaline water electrolyzer.

No. of Pages : 22 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :30/10/2026

(21) Application No.202642130026 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : USER-HIERARCHY BASED PERMISSIONS FOR CONSTRUCT-MODIFICATION TAGS

(51) International classification	:G06F 9/45, G06F 9/44, G06F 8/41, G06F 17/30, G06F 21/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filed on	:202341011006 :17/02/2023

(71)**Name of Applicant :**

1)ZOHO CORPORATION PRIVATE LIMITED

Address of Applicant :ESTANCIA IT PARK, PLOT NO. 140 & 151, GST ROAD, VALLANCHERRY VILLAGE, CHENGALPATTU TALUK, KANCHIPURAM DISTRICT, TAMIL NADU- 603202, INDIA KANCHIPURAM DISTRICT Tamil Nadu India

(72)**Name of Inventor :**

1)SRIDHAR VEMBU

2)AKSHHAYAA S

3)JOSEPH SATHYA KUMAR

4)BALAMURUGAN K E

5)SURESH KUMAR R

6)MOHAMED ISMAIL KAJA MYDEEN

7)RAMESH KUMAR GOVINDARAJ

(57) Abstract :

A method is described for controlling access to programming constructs based on construct-modification tags and a developer-hierarchy. A statement naming a construct is encountered with an associated tag conveying a compiler request to limit access to that construct. Responsive to the construct-modification tag, access is granted to the developer identified as the author of the construct and to any developer ranked above that developer within the hierarchy, while access is excluded from other developers at or below that rank. A developer's permission level is further compared against a threshold to determine whether source code can be stored directly or requires a construct-modification tag identifying the construct as permitted for storing the source code with that construct. [Figure 15A]

No. of Pages : 70 No. of Claims : 23

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/11/2026

(21) Application No.202642130892 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEMS AND METHODS FOR COMPILE-TIME LINK TYPE OBJECT MANAGEMENT

(51) International classification	:G06F 9/44, G06F 9/45, G06F 8/41, G06F 11/36, G06F 9/445
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filed on	:202341002897 :13/01/2023

(71)**Name of Applicant :**
1)ZOHO CORPORATION PRIVATE LIMITED
Address of Applicant :ESTANCIA IT PARK, PLOT NO. 140 & 151, GST ROAD, VALLANCHERRY VILLAGE, CHENGALPATTU TALUK, KANCHIPURAM DISTRICT, TAMIL NADU- 603202, INDIA KANCHIPURAM DISTRICT Tamil Nadu India
(72)**Name of Inventor :**
1)SRIDHAR VEMBU
2)AKSHHAYAA S
3)PADMA J
4)SHALINI LAKSHMI A J
5)SIBA MISHRA
6)VANAJA RAMASWAMY
7)BALAMURUGAN R
8)BALAMURUGAN K E
9)ARVIND SUDARSHAN K
10)JOSEPH SATHYA KUMAR
11)SURESH K V
12)BARADHAN V
13)SUDHEER A. GRANDHI

(57) Abstract :
A source code including a first data type defining a first object and a second data type defining a second object linked to the first object is compiled by identifying an object-management construct directed to one of the data types. The object-management construct defines object-management instructions for affecting the corresponding object. During compilation, an event-handler construct associated with the object-management construct and the data type is located, the event-handler construct defining event-handler instructions executed at runtime. The compiler verifies whether the event-handler instructions include predetermined criteria. When the predetermined criteria are satisfied, the event-handler instructions allow the object-management instructions to affect the object. The predetermined criteria may include evaluating creation, update, or deletion constraints or determining the existence of linked objects. [Figure 1]

No. of Pages : 46 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/11/2026

(21) Application No.202642131000 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : CONSTRUCT-ASSOCIATED CANDIDATE TAG FOR DEVELOPMENT-PHASE COMPILER REQUESTS

(51) International classification	:G06F 8/41, G06F 9/45, G06F 9/44, G06F 11/36, G06F 8/30
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filed on	:202341011006 :17/02/2023

(71)**Name of Applicant :**
1)ZOHO CORPORATION PRIVATE LIMITED
Address of Applicant :ESTANCIA IT PARK, PLOT NO. 140 & 151, GST ROAD, VALLANCHERRY VILLAGE, CHENGALPATTU TALUK, KANCHIPURAM DISTRICT, TAMIL NADU- 603202, INDIA
KANCHIPURAM DISTRICT Tamil Nadu India
(72)**Name of Inventor :**
1)SRIDHAR VEMBU
2)AKSHHAYAA S
3)JOSEPH SATHYA KUMAR
4)BALAMURUGAN K E
5)SURESH KUMAR R
6)MOHAMED ISMAIL KAJA MYDEEN
7)RAMESH KUMAR GOVINDARAJ

(57) Abstract :
ABSTRACT Construct-modification tags (106) conveying development-phase compiler requests (108) are introduced into source code (105) to facilitate communication between developers, identify areas that need developer attention, send directives to a compiler (120), and other development features in an integrated development environment (100), during the software development phase. A CANDIDATE tag (106) conveys a request to a compiler (120) to identify multiple candidate constructs (107), compile each set of candidates or sets of multiple candidates into executables, and profile the compiled executables (1925). Results of the profiling can be compared and a best candidate or set of candidates selected based on one or more of various criteria. A CANDIDATE tag (106) may incorporate properties, permissions, and generate notifications. Methods ensure that tags (106) no longer remain in source code (105) once the software development process enters the production phase. Figure 19A

No. of Pages : 71 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :03/11/2026

(21) Application No.202642131497 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : CONSTRUCT-MODIFICATION DEACTIVATION TAG FOR DEVELOPMENT-PHASE COMPILER REQUESTS

(51) International classification	:G06F 8/41, G06F 9/45, G06F 9/44, G06F 11/36, G06F 8/30
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filed on	:202341011006 :17/02/2023

(71)**Name of Applicant :**

1)ZOHO CORPORATION PRIVATE LIMITED

Address of Applicant :ESTANCIA IT PARK, PLOT NO. 140 & 151, GST ROAD, VALLANCHERRY VILLAGE, CHENGALPATTU TALUK, KANCHIPURAM DISTRICT, TAMIL NADU- 603202, INDIA KANCHIPURAM DISTRICT Tamil Nadu India

(72)**Name of Inventor :**

1)SRIDHAR VEMBU

2)AKSHHAYAA S

3)JOSEPH SATHYA KUMAR

4)BALAMURUGAN K E

5)SURESH KUMAR R

6)MOHAMED ISMAIL KAJA MYDEEN

7)RAMESH KUMAR GOVINDARAJ

8)SIBA MISHRA

9)VANAJA RAMASWAMY

10)PADMA J

11)SHALINI LAKSHMI A J

12)SUDHEER A. GRANDHI

(57) Abstract :

Construct-modification tags conveying development-phase compiler requests are introduced into source code to facilitate communication between developers, identify areas that need developer attention, send directives to a compiler, and other development features in an integrated development environment, during the software development phase. A DEACTIVATE tag conveys a request to a compiler to deactivate an associated construct, as well as to find and deactivate dependencies of the construct. A DEACTIVATE tag may incorporate properties, permissions, and generate notifications, including a condition for evaluation, the deactivation conditionally responsive to the result of the condition evaluation. Methods ensure that tags no longer remain in source code once the software development process enters the production phase. FIG 5B

No. of Pages : 71 No. of Claims : 25

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :09/02/2026
(21) Application No.202644013714 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR AUTOMATIC REPORTING OF ADVERSE DRUG REACTIONS

(51) International classification	:G16H 70/40, G16H 10/60, G16H 20/10, G16H 40/20, G06N 5/02
(31) Priority Document No	:19/195,147
(32) Priority Date	:30/04/2025
(33) Name of priority country	:U.S.A.
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)ACCENTURE GLOBAL SOLUTIONS LIMITED
Address of Applicant :3 Grand Canal Plaza Upper Grand Canal Street Dublin, Ireland 4 Ireland
(72)**Name of Inventor :**
1)Prashant Singh
2)Parag Bapu Rane
3)Sumit Jagdish Ramchandani
4)Mukesh Kumar Chaudhary
5)Saurabh Juneja
6)Vaswati Ghosh

(57) Abstract :
ABSTRACT SYSTEM AND METHOD FOR AUTOMATIC REPORTING OF ADVERSE DRUG REACTIONS 5 Method, system, and non-transitory computer-readable medium for automatic reporting of an adverse drug reaction are disclosed. In an aspect, data associated with a plurality of agents of an agent tree is retrieved. Further, task data of each agent of the plurality of agents is retrieved. 10 Furthermore, the retrieved data associated with the plurality of agents and the task data of each agent of the plurality of agents are analyzed for refining task prompts and delegation of one or more tasks to an agent of the plurality of agents. Based upon the analyzing, a list of optimum parameters and interaction of the agent with other agent of the plurality of agents is generated. Also, using the list of optimum parameters, one or more backstories are generated for training the 15 agent of the plurality of agents. For example, the agent is trained for automatic reporting of the adverse drug reaction. [FIG. 7]

No. of Pages : 51 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :19/03/2026
(21) Application No.202644033184 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : FAST ACTUATION DETECTION FOR A COMPUTER PERIPHERAL DEVICE

(51) International classification	:G06F 3/033, G06F 3/0354, G06F 3/038, G06F 3/0338, G06F 3/01
(31) Priority Document No	:19/197,870
(32) Priority Date	:02/05/2025
(33) Name of priority country	:U.S.A.
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Logitech Europe S.A.
Address of Applicant :EPFL - Quartier de l'Innovation, Daniel Borel Innovation Center, Lausanne 1015, Switzerland Switzerland
(72)**Name of Inventor :**
1)Frederic Alexis Guillaume De Goumoens
2)Léo Victor Pedro Zeender
3)Virgile Hernicot

(57) Abstract :
A computer mouse comprises a keyplate, a conductive element coupled to the keyplate, a sensor element configured to detect a magnetic field of the conductive element and generate sensor data corresponding to the detected magnetic field, and one or more processors configured to determine a position of the conductive element relative to the sensor element based on the sensor data, determine a velocity of the conductive element relative to the sensor element based on the sensor data, and determine key press and key release events of the keyplate based on the position and velocity of the conductive element relative to the sensor element. The one or more processors may be configured to adjust a position, velocity, and/or acceleration sensitivity threshold that changes a sensing resolution that affects a number of accidental key press and/or key release events.

No. of Pages : 79 No. of Claims : 21

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :23/04/2026
(21) Application No.202644051679 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SEAT ARRANGEMENT

(51) International classification	:B60N 2/30, B60N 2/90, B60N 2/36, B64D 11/06, B60N 2/20
(31) Priority Document No	:25305627.9
(32) Priority Date	:30/04/2025
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ALSTOM HOLDINGS
Address of Applicant :48 Rue Albert Dhalenne, 93400 ST OUEN SUR SEINE, FRANCE France
(72)**Name of Inventor :**
1)MARGAS, Slawomir
2)HENNEQUIN, Valentin

(57) Abstract :
Title: “Seat arrangement” Abstract A tip-up seat arrangement (10) for a passenger vehicle comprising: a fixed frame (12, 13) comprising a reference surface (12.1) with a lower edge (12.2); a seat cushion (16) comprising an upper surface (16.1), a lower surface (16.2), and a distal edge (16.3); and a backrest (14) 5 comprising an outer surface (14.1), wherein when the seat cushion (16) is in a lower position, the backrest (14) is flush with the reference surface (12.1); and when the seat cushion (16) is in an upper position, it forms an ischiatic support for a passenger, and the backrest (14) is retracted away. FIG.3

No. of Pages : 21 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :27/04/2026

(21) Application No.202644053280 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : CONTACT ARRANGEMENT WITH INSERTION BEHAVIOR INDEPENDENT OF INSERTION DIRECTION AND KIT

(51) International classification	:H04R 7/10, H01H 33/85, H01H 50/54, H04B 3/18, G09C 1/12
(31) Priority Document No	:10 2025 116 823.7
(32) Priority Date	:30/04/2025
(33) Name of priority country	:Germany
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)TE Connectivity Solutions GmbH
Address of Applicant :Mühlenstrasse 26, 8200 Schaffhausen, Switzerland Switzerland
(72)**Name of Inventor :**
1)FERTIG, Jochen
2)BLEICHER, Martin
3)BURGHARD, Michael
4)MASAK, Stefan
5)MAIROSER, Andre
6)HETRICK, Ryan
7)BRAUN, Stefan
8)BRANDT, Jochen
9)MERKLE, Andreas
10)SCHOELLHAMMER, Steffen
11)MAGNE, Claire
12)ALAMO ALONSO, Alberto
13)HOCHBAUER, Georg
14)LANDGRAF, Fabian

(57) Abstract :
The invention relates to a contact arrangement (1) into which at least one plug contact (4), in particular a flat contact, can be inserted in at least two insertion directions (6a, 6b, 6c, 6d), wherein the contact arrangement comprises: a receptacle (2) into which the at least one plug contact can be inserted along a first insertion direction (6a) and along a second insertion direction (6b), wherein the first insertion direction and the second insertion direction (6b) enclose an opening angle (8), a pressure spring arrangement (10) arranged at least in part in the receptacle and comprising at least one pressure spring element (12), wherein the pressure spring arrangement is configured to press the at least one plug contact in a direction perpendicular to the first and second insertion directions, wherein each pressure spring element extends with a deviation (26) of at most 15° along or perpendicular to the angle bisector (24) of the opening angle. A plug contact with at least similar insertion behavior can be inserted into such a contact arrangement from different directions. (Figure 2)

No. of Pages : 24 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/04/2026
(21) Application No.202644054781 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD, APPARATUS & COMPUTER PROGRAM

(51) International classification	:H04L5/00, H04W80/02, H04L1/1812, H04L1/1822
(31) Priority Document No	:25173684.9
(32) Priority Date	:30/04/2025
(33) Name of priority country	:EPO
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)Nokia Technologies Oy
Address of Applicant :Karakaari 7, 02610 Espoo, Finland Finland
(72)**Name of Inventor :**
1)Tomasz IZYDORCZYK
2)Klaus Ingemann PEDERSEN
3)Guillermo POCOVI

(57) Abstract :
ABSTRACT METHOD, APPARATUS & COMPUTER PROGRAM In some examples there is provided a user equipment comprising: means for receiving, from an access node, information indicating a value for a first timer and information indicating a value for a second timer; means for receiving, from the access node, a first downlink transmission; means for starting, based on the first downlink transmission, the first timer and the second timer; and means for, based on the first timer and the second timer, sending, to the access node, a scheduling request for providing hybrid automatic repeat request (HARQ) feedback associated with at least the first downlink transmission. (FIG. 7)

No. of Pages : 47 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/04/2026
(21) Application No.202644054783 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD, APPARATUS & COMPUTER PROGRAM

(51) International classification	:G01R 17/22, G01N 21/80, G01D 7/00, G01P 15/04, G01K 3/02	(71)**Name of Applicant :** **1)Nokia Technologies Oy** Address of Applicant :Karakaari 7, 02610 Espoo, Finland Finland (72)**Name of Inventor :** **1)Tomasz IZYDORCZYK** **2)Klaus Ingemann PEDERSEN** **3)Guillermo POCOVI**
(31) Priority Document No	:25173693.0	
(32) Priority Date	:30/04/2025	
(33) Name of priority country	:EPO	
(86) International Application No Filing Date	:NA :NA	
(87) International Publication No	: NA	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :
ABSTRACT METHOD, APPARATUS & COMPUTER PROGRAM In some examples there is provided a user equipment comprising: means for receiving, from an access node, information indicating a value for a first timer and information indicating a value for a second timer; means for receiving, from the access node, a first downlink transmission; means for starting, based on the first downlink transmission, the first timer and the second timer; means for, based on the first timer and the second timer, sending, to the access node, a scheduling request for providing hybrid automatic repeat request (HARQ) feedback associated with at least the first downlink transmission when the first downlink transmission is properly received by the user equipment; and means for refraining from sending, to the access node, a scheduling request for providing HARQ feedback associated with the first downlink transmission when the first downlink transmission is not properly received by the user equipment. (FIG. 12)

No. of Pages : 47 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/04/2026
(21) Application No.202644054784 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD, APPARATUS & COMPUTER PROGRAM

(51) International classification	:H04N 19/164, H04N 21/00, G01S 1/26, H04N 21/2747, H04B 1/48
(31) Priority Document No	:25173673.2
(32) Priority Date	:30/04/2025
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Nokia Technologies Oy
Address of Applicant :Karakaari 7, 02610 Espoo, Finland Finland
(72)**Name of Inventor :**
1)Tomasz IZYDORCZYK
2)Klaus Ingemann PEDERSEN
3)Guillermo POCOVI

(57) Abstract :
ABSTRACT METHOD, APPARATUS & COMPUTER PROGRAM In some examples there is provided a user equipment comprising: means for receiving, from an access node, information indicating a value for a first timer; means for receiving, from the access node, a first downlink transmission; means for starting, based on the first downlink transmission, the first timer; and means for, based on expiry of the first timer, sending, to the access node, a scheduling request for providing hybrid automatic repeat request (HARQ) feedback associated with at least the first downlink transmission. (FIG. 3)

No. of Pages : 45 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/04/2026
(21) Application No.202644054787 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD, APPARATUS & COMPUTER PROGRAM

(51) International classification	:G01R 1/40, G04F 1/00, G01D 4/12, G01D 13/24, G01P 15/04
(31) Priority Document No	:25173690.6
(32) Priority Date	:30/04/2025
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)Nokia Technologies Oy
Address of Applicant :Karakaari 7, 02610 Espoo, Finland Finland
(72)**Name of Inventor :**
1)Tomasz IZYDORCZYK
2)Klaus Ingemann PEDERSEN
3)Guillermo POCOVI

(57) Abstract :
ABSTRACT METHOD, APPARATUS & COMPUTER PROGRAM In some examples there is provided a user equipment comprising: means for receiving, from an access node, information indicating a value for a second timer, the second timer indicating a maximum amount of time which the user equipment has to send a scheduling request for providing hybrid automatic repeat request (HARQ) feedback within; means for receiving, from the access node, a first downlink transmission; means for starting, based on the first downlink transmission, the second timer; and means for, based on the second timer, sending, to the access node, the scheduling request for providing HARQ feedback associated with at least the first downlink transmission. (FIG. 5)

No. of Pages : 46 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2026
(21) Application No.202644055303 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ARTIFICIAL INTELLIGENCE (AI)-BASED TECHNIQUES FOR CONTENT GENERATION AND MODIFICATION

(51) International classification	:H04N 21/4722, H04N 21/472, H04N 21/85, H04N 21/83, H04N 21/84
(31) Priority Document No	:19/195,154
(32) Priority Date	:30/04/2025
(33) Name of priority country	:U.S.A.
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)GOOGLE LLC
Address of Applicant :1600 Amphitheatre Parkway, Mountain View, California 94043, USA U.S.A.
(72)**Name of Inventor :**
1)Todd Shaiman
2)Joshua Rowe
3)Min Ji Hong
4)Karen Angeli Vertierra
5)Benjamin Guy Alexander Pawle
6)Michael Colville
7)George Joseph Rickerby

(57) Abstract :
Methods and systems for artificial intelligence (AI)-based techniques for content generation and modification. A user query including a request to generate content in accordance with a content concept is received. A prompt for an AI model trained to perform operations associated with content generation is generated based on the received query. The prompt includes an expanded version of the request to generate the content in accordance with the content concept. The generated prompt is provided as an input to the AI model. An output of the AI model is obtained, the output including content item(s) generated based on the expanded version of the request in accordance with the generated prompt and further based on existing content of electronic document(s) associated with a user associated with the user query and/or the content concept. A user interface (UI) of a client device is updated to include the content item(s).

No. of Pages : 58 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202645129246 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TRAINING COLLABORATIVE ROBOTS THROUGH USER DEMONSTRATIONS

(51) International classification	:B25J 9/16, G05D 1/02, B25J 13/00, G05B 19/4155, G05B 13/02
(31) Priority Document No	:17/201,443
(32) Priority Date	:15/03/2021
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filed on	:202244008008 :15/02/2022

(71)**Name of Applicant :**
1)Intel Corporation
Address of Applicant :2200 Mission College Boulevard, Santa Clara, California 95054, USA U.S.A.
(72)**Name of Inventor :**
1)Venkataraman Natarajan
2)Gagan Acharya

(57) Abstract :
The present disclosure provides describes to train a multi policy ML model to control robots in a multi-robot system in collaborating to perform a task. For example, trajectories associated with manipulating an object to perform the collaborative task can be determined and an ML model trained to output control actions for the robots in the multi-robot system to collaborate to complete the task.

No. of Pages : 42 No. of Claims : 7

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :13/05/2026
(21) Application No.202647060719 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ACCELERATE DATABASE JOIN PERFORMANCE USING MULTI-OBJECT INDEX

(51) International classification	:G06F 16/21, G06F 16/2455, G06F 16/22
(31) Priority Document No	:19/188198
(32) Priority Date	:24/04/2025
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/EP2025/063223 :14/05/2025
(87) International Publication No	:WO 2026/223907
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)KYNDRYL, INC.
Address of Applicant :One Vanderbilt Avenue, 15th Floor New York, NY 10017 United States of America New York, New York 10017 U.S.A.
(72)**Name of Inventor :**
1)LAKSHMINARASIMHAN, Sriram
2)FORMATO, Marci
3)CHARAN, Gonella Vamsi

(57) Abstract :
Embodiments relate to determining a join operation in pre-existing query statements where a frequency of the join operation meets a frequency condition and the join operation includes a first column of a first table and a second column of a second table. Aspects include, in response to meeting the frequency condition, building a multi-object index having the first and second column of the first and second tables, where the multi-object index includes first record identifiers for the first column and second record identifiers for the second column. Aspects include, in response to receiving a new join operation having the first and second columns for the first and second tables, determining that the multi-object index includes the first and second columns for the first and second tables, and outputting row data of the first and second tables based on the first and second record identifiers to fulfill the new join operation.

No. of Pages : 41 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :26/10/2026
(21) Application No.202647127319 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TECHNIQUES FOR REDUCING INTERFERENCE FOR PHASE CODE FREQUENCY MODULATED CONTINUOUS WAVE (PC-FMCW) SENSING SIGNALS

(51) International classification	:H04W 24/10, G01S 13/00
(31) Priority Document No	:18/742317
(32) Priority Date	:13/06/2024
(33) Name of priority country	:U.S.A.
(86) International Application No	:PCT/US2025/026405
Filing Date	:25/04/2025
(87) International Publication No	:WO 2025/259378
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)QUALCOMM INCORPORATED
Address of Applicant :ATTN: International IP Administration 5775 Morehouse Drive San Diego, California 92121-1714 U.S.A.
(72)**Name of Inventor :**
1)DUAN, Weimin
2)LIU, Kangqi
3)XU, Huilin

(57) Abstract :
Disclosed are techniques for wireless sensing. In an aspect, a sensing node receives, from a sensing entity, a. configuration to report interference measurements, obtains, at a first time, one or more sensing measurements of one or more first sensing reference signals transmitted by a transmitter sensing node, obtains, at the first time, one or more interference measurements of one or more second sensing reference signals transmitted by one or more aggressor sensing nodes, and transmits, to the sensing entity, an interference measurement report including at least the one or more interference measurements.

No. of Pages : 70 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :26/10/2026
(21) Application No.202647127326 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DATABASE OFFLOAD WITH NODE-TO-NODE COMMUNICATION

(51) International classification	:H04L 67/1095, G06F 16/23, H04L 67/1008, H04L 69/16, H04L 67/1097
(31) Priority Document No	:18/749340
(32) Priority Date	:20/06/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/027312 :01/05/2025
(87) International Publication No	:WO 2025/264312
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SERVICENOW, INC.
Address of Applicant :2225 Lawson Lane Santa Clara, CA 95054 U.S.A.
(72)**Name of Inventor :**
1)BARRON-KRAUS, Kyle
2)FIORELLI, Benedetto
3)MISRA, Vinamra
4)MATURI, Shasank
5)JAIN, Kavish
6)MILTON, Andre, Michel

(57) Abstract :
An example embodiment may involve conducting, by an application node, an operation with a database node, wherein the application node and the database node are both within a computational instance of nodes; transmitting, by the application node and to each of a plurality of destination application nodes, a message relating to the operation, wherein the plurality of destination application nodes are also within the computational instance of nodes; and updating, by each of the plurality of destination application nodes, respective local storage of data relating to the operation.

No. of Pages : 42 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :26/10/2026
(21) Application No.202647127332 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD FOR MANAGING DATA TRANSMISSION IN A COMMUNICATION NETWORK

(51) International classification	:H04L 1/1829, H04L 1/1867
(31) Priority Document No	:2404848.0
(32) Priority Date	:04/04/2024
(33) Name of priority country	:U.K.
(86) International Application No	:PCT/EP2025/059191
Filing Date	:03/04/2025
(87) International Publication No	:WO 2025/210190
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)CANON KABUSHIKI KAISHA
Address of Applicant :30-2 SHIMOMARUKO 3-CHOME OHTA-KU, Tokyo 146-8501 Japan
(72)**Name of Inventor :**
1)EL KOLLI, Yacine
2)VISA, Pierre
3)LAGRANGE, Pascal

(57) Abstract :
A method for managing data transmission in a communication network operating in a radio link control acknowledge mode, the network comprising a transmitter and a receiver, the method at the transmitter comprising: stopping retransmission of a protocol data unit, PDU, to the receiver in dependence on a discard timer associated with the PDU exceeding a discard timer threshold value.

No. of Pages : 28 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :26/10/2026
(21) Application No.202647127341 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : OPTICAL LAMINATE, ELLIPTICALLY POLARIZING PLATE, AND ORGANIC EL DISPLAY DEVICE

(51) International classification	:G02B 5/30, G09F 9/00, G09F 9/30, H10K 50/86, H10K 59/10
(31) Priority Document No	:2024-061419
(32) Priority Date	:05/04/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/013365 :01/04/2025
(87) International Publication No	:WO 2025/211366
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)DAI NIPPON PRINTING CO., LTD.
Address of Applicant :1-1, Ichigaya-kaga-cho 1-chome, Shinjuku-ku, Tokyo 1628001 Japan
(72)**Name of Inventor :**
1)ISHII Norio
2)AMANO Hiroko
3)MURAYAMA Yusuke

(57) Abstract :
Provided is an optical laminate including a first liquid crystal layer and a second liquid crystal layer. The first liquid crystal layer and the second liquid crystal layer contain a liquid crystal composition that is in a twist alignment in which the thickness direction of the optical laminate serves as the helical axis. The chiral pitch of the liquid crystal composition in the first liquid crystal layer and the second liquid crystal layer is 2-40 μm. The alignment direction of the liquid crystal composition at the surface of the first liquid crystal layer facing the second liquid crystal layer is different from the alignment direction of the liquid crystal composition at the surface of the second liquid crystal layer facing the first liquid crystal layer.

No. of Pages : 68 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :26/10/2026

(21) Application No.202647127349 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MOTION DETECTION AND ESTIMATION USING SAR

(51) International classification :G01S 13/90
(31) Priority Document No :24167768.1
(32) Priority Date :28/03/2024
(33) Name of priority country :EPO
(86) International Application No :PCT/EP2025/057424
Filing Date :18/03/2025
(87) International Publication No :WO 2025/201971
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)ICEYE OY
Address of Applicant :Maarintie 6 02150 Espoo Finland
(72)**Name of Inventor :**
1)FRIBERG, Tapio

(57) Abstract :
Data obtained from synthetic aperture radar "SAR" image acquisition apparatus on a satellite, operating in orbit around Earth, is processed to form looks at a target area on Earth at different points in time. Dense optical flow is computed to identify apparent motion between successive looks and to determine apparent velocity for at least some pixels between successive looks. The apparent velocity is converted into actual velocity by correction for the relative motion between the platform and the target. A 2D velocity map of motion in the target area may be generated.

No. of Pages : 31 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :26/10/2026

(21) Application No.202647127354 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : PERFORMANCE REPORTING IN DUAL CONNECTIVITY AND SPLIT ARCHITECTURE

(51) International classification :H04W 24/10
(31) Priority Document No :20245379
(32) Priority Date :28/03/2024
(33) Name of priority country :Finland
(86) International Application No :PCT/EP2025/057111
Filing Date :14/03/2025
(87) International Publication No :WO 2025/201924
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)PANTELIDOU, Anna
2)HELMERS, Hakon

(57) Abstract :
There is provided an apparatus, a method and a computer program product. In accordance with an embodiment the method comprises obtaining performance measurement configuration by a first entity of a first network element of a wireless communication network; sending the performance measurement configuration in any of a user equipment context related or bearer context related request to a second entity of the first network element to configure the performance measurement in the second entity of the first network element; receiving at the first entity of the first network element an acknowledgement message to the user equipment related or bearer context related request from the second entity of the first network element; and receiving from the second entity of the first network element a performance report related to the performance measurement performed by the second entity of the first network element.

No. of Pages : 44 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :26/10/2026

(21) Application No.202647127387 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A DOWN-THE-HOLE DRILLING APPARATUS

(51) International classification	:E21B 4/14
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:PCT/SE2024/050286
Filing Date	:28/03/2024
(87) International Publication No	:WO 2025/206992
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)EPIROC DRILLING TOOLS AKTIEBOLAG
Address of Applicant :Box 521 737 25 Fagersta Sweden
(72)**Name of Inventor :**
1)LILJA, Thomas
2)BRAM, Johan
3)GUSTAVSSON, Magnus

(57) Abstract :
A down-the-hole drilling apparatus (100a; 100b) comprising top and bottom ends (102, 104) and a coupler (106) for coupling to a drill string (202) The apparatus (100a; 100b) is configured to hold a drill bit (108) and comprises a fluid-operated piston (110) for striking the drill bit (108). Top and bottom working chambers (114, 112) are configured to be alternately evacuated and fed with fluid for the fluid-operation of the piston (110). The apparatus (100a; 100b) comprises: a fluid feed system (116) for inflow fluid streams (118) to the top and/or bottom working chambers (114, 112); a fluid exhaust system (120) for exhaust fluid streams (122) from the top and/or bottom working chambers (114, 112); and a check valve (124a; 124b) configured both as a fluid inlet valve and as a fluid exhaust valve. The fluid exhaust system (120) comprises one or more exhaust ports (126a; 126b) opening to the ambient (204). The fluid exhaust system (120) comprises one or more first passages (128a; 128b) for guiding exhaust fluid streams (122) outside the check valve (124a; 124b) from the top and/or bottom working chambers (114, 112) to the exhaust port/-s (126a; 126b).

No. of Pages : 25 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :27/10/2026
(21) Application No.202647127869 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM AND METHOD FOR IMPROVING PATIENT TREATMENT

(51) International classification	:G16H 10/60, G16H 40/20, G16H 40/63, G16H 70/20, A61B 5/00
(31) Priority Document No	:18/625657
(32) Priority Date	:03/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/016556 :20/02/2025
(87) International Publication No	:WO 2025/212190
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)UNIVERSITY OF MARYLAND MEDICAL SYSTEM CORPORATION
Address of Applicant :900 Elkridge Landing Road 1 West, Suite 159 Linthicum Heights, MD 21090 U.S.A.
(72)**Name of Inventor :**
1)ZHANG, Hao Howard
2)BAME, William Porter
3)LIU, Enhao
4)ENNETT, Colleen Michelle
5)D'SOUZA, Warren Dean

(57) Abstract :
Examples of the disclosure include a method of operating a patient-discharge-optimization system to improve medical outcomes, the method comprising: accessing, from memory and/or storage, historical patient flow information including a plurality of timestamped events for each of a plurality of patients; converting, by the discharge-optimization system, the historical patient flow information into standardized flow information having a standardized format defined by a plurality of standardized parameters; generating, by the discharge-optimization system, a plurality of models, each model indicating an effect of modifying at least one parameter of the standardized parameters for each of the patients; deriving, by the discharge-optimization system and based on the models, an optimal discharge histogram for one or more days; forecasting, based on the historical patient flow information, an anticipated future number of discharges for the day(s); deriving an optimal patient discharge timetable for the day(s); and providing the optimal patient discharge timetable to users.

No. of Pages : 41 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :27/10/2026
(21) Application No.202647127909 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DRIVER HOLDER FOR FASTENING INCLINED ABUTMENT

(51) International classification :A61C 8/00, A61C 1/08
(31) Priority Document No :10-2024-0043192
(32) Priority Date :29/03/2024
(33) Name of priority country :Republic of Korea
(86) International Application No :PCT/KR2025/000443
Filing Date :08/01/2025
(87) International Publication No :WO 2025/206544
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)OSSTEMIMPLANT CO., LTD.
Address of Applicant :3 Magokjungang 12-ro, Gangseo-gu, Seoul 07789 Republic of Korea
(72)**Name of Inventor :**
1)LEE, Young Seok
2)YOON, Ji Hoon

(57) Abstract :
An embodiment of the present invention provides a driver holder for fastening an inclined abutment, which is fastened to an implant implanted to be inclined at a preconfigured angle with respect to a fastening direction of a prosthesis and has a first fastening passage part corresponding to the fastening direction of the prosthesis and a second fastening passage part corresponding to an implantation direction of the implant, the driver holder comprising: a first penetration part into which a handle member coupled to the first fastening passage part of the inclined abutment is inserted, and which has a first penetration hole extending therethrough in a first direction corresponding to the fastening direction of the prosthesis; and a second penetration part into which a fastening driver for providing a rotational force to a screw member for fastening the inclined abutment to the implant through the second fastening passage part of the inclined abutment is inserted, and which has a second penetration hole extending therethrough in a second direction corresponding to the implantation direction of the implant.

No. of Pages : 18 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :27/10/2026
(21) Application No.202647127920 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TUNABLE RADIO FREQUENCY FRONT-END (RFFE) CIRCUITRY

(51) International classification	:H04B 1/00, H04B 1/18
(31) Priority Document No	:202441045708
(32) Priority Date	:13/06/2024
(33) Name of priority country	:India
(86) International Application No	:PCT/US2025/032833
Filing Date	:09/06/2025
(87) International Publication No	:WO 2025/259577
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)QUALCOMM INCORPORATED
Address of Applicant :ATTN: International IP Administration 5775 Morehouse Drive San Diego, California 92121-1714 U.S.A.
(72)**Name of Inventor :**
1)ZHANG, Xiangdong
2)DHAMANI, Naushad
3)SENVELI, Sukru
4)UZUNKOL, Mehmet
5)MAHESHWARI, Rishab
6)HE, Allen
7)SPRING, Ryan Scott Castro
8)WANG, Xinwei
9)GATTA, Francesco

(57) Abstract :
Certain aspects of the present disclosure are directed towards an apparatus for wireless communication. The apparatus generally includes: a first receive chain including a first tunable filter; a second receive chain including a second tunable filter, wherein at least one of the first tunable filter or the second tunable filter is configured to receive control signaling to configure the at least one of the first tunable filter or the second tunable filter in one of multiple configurations including a first configuration for processing a signal within a first band, a second configuration for processing a signal within a second band, and a third configuration for processing a signal within a wide band spanning the first band and the second band; and a switch circuit coupled to the first receive chain and the second receive chain.

No. of Pages : 27 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :27/10/2026

(21) Application No.202647128051 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVEMENTS ON SIGNALING INTER PREDICTION MODE

(51) International classification	:H04N 19/105, H04N 19/176, H04N 19/503, H04, H
(31) Priority Document No	:63/701647
(32) Priority Date	:01/10/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:19/207254 :13/05/2025
(87) International Publication No	:WO 2026/075699
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)TENCENT AMERICA LLC
Address of Applicant :2747 Park Boulevard Palo Alto, California 94306 U.S.A.
(72)**Name of Inventor :**
1)ZHAO, Liang
2)LIU, Shan
3)LIU, Tianqi
4)PERINGASSERY KRISHNAN, Madhu
5)LIN, Ting-Lan

(57) Abstract :
The various implementations described herein include methods and systems for coding video. In one aspect, a method includes receiving a video bitstream comprising a plurality of blocks including a current block. The method includes determining that the current block is encoded using motion information from a first reference block and a second reference block. The method includes (i) when the first and second reference blocks are in different reference frames, selecting a compound inter prediction mode for the current block from a first set of compound inter prediction modes, and (ii) when the first and second reference blocks are in a same reference frame, selecting the compound inter prediction mode for the current block from a second set of compound inter prediction modes. The method includes reconstructing the current block using the compound inter prediction mode and the motion information from the first and second reference blocks.

No. of Pages : 33 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026

(21) Application No.202647128225 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : C-RNTI ASSIGNMENT

(51) International classification :H04W 74/0833
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :PCT/CN2024/086161
Filing Date :04/04/2024
(87) International Publication No :WO 2025/208565
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, Espoo 02610 Finland
(72)**Name of Inventor :**
1)WEN, Ping Ping
2)YUAN, Ping

(57) Abstract :
Example embodiments of the present disclosure relate to cell radio network temporary identifier (C-RNTI) assignment. In an aspect, a terminal device transmits a preamble in a random access channel (RACH). The terminal device receives a random access response (RAR) including a temporary cell radio network temporary identifier (TC-RNTI) in a message 2 (Msg2). The terminal device transmits a message 3 (Msg3) and receives a message 4 (Msg4) based on the TC-RNTI. Based on determining that the Msg4 includes a C-RNTI associated with a contention resolution identity of the terminal device, the terminal device determines the C-RNTI as a C-RNTI of the terminal device. In this way, the solution avoids downlink signaling storm and better supports orthogonal cover code (OCC) in uplink to enhance the uplink capacity.

No. of Pages : 31 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128229 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CELL MEASUREMENTS AND REPORTING FOR CELL SWITCH

(51) International classification	:H04L 5/00, H04W 24/10, H04W 36/00, H04B 7/06, H04L 27/26
(31) Priority Document No	:202441028257
(32) Priority Date	:05/04/2024
(33) Name of priority country	:India
(86) International Application No Filing Date	:PCT/EP2025/056766 :12/03/2025
(87) International Publication No	:WO 2025/209795
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)GOYAL, Sanjay
2)SELVAGANAPATHY, Srinivasan
3)MEDINA, Daniel
4)KOSKELA, Timo
5)MICHALOPOULOS, Diomidis

(57) Abstract :
The present disclosure relate to the field of telecommunication and in particular to devices, methods, apparatuses and computer readable storage media for enabling cell measurements and reporting for cell switching. For example, there is provided a user device comprising at least one processor, and at least one memory storing instructions that, when executed by the at least one processor, cause the user device at least to: obtain a plurality of CSI report configurations, wherein the plurality of CSI report configurations are configured with a same uplink resource for transmitting at least one CSI report; select at least one CSI report configuration among the plurality of CSI report configurations based on at least one first criterion; perform at least one CSI measurement based on the selected at least one CSI report configuration; and transmit, to a network device via the uplink resource, the at least one CSI report including the at least one CSI measurement.

No. of Pages : 40 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026

(21) Application No.202647128230 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : FLAVOUR MODIFYING INGREDIENT

(51) International classification	:A23L 2/56, A23L 27/10, A23L 27/12, A23L 27/00
(31) Priority Document No	:63/572804
(32) Priority Date	:01/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/EP2025/058522 :27/03/2025
(87) International Publication No	:WO 2025/209935
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GIVAUDAN SA
Address of Applicant :Chemin de la Parfumerie 5 1214 Vernier Switzerland
(72)**Name of Inventor :**
1)BHOWMIK, Tarun
2)ONUMA, Yosuke
3)STIDHAM, Laura
4)MYAKA, Stefka Ivanova

(57) Abstract :
The present disclosure relates to a method for making a flavour modifying ingredient for a carbonated soft drink, wherein the method comprises (i) subjecting tomato pomace to enzymatic hydrolysis and/or fermentation to form a treated tomato pomace; and (ii) extracting at least a portion of the treated tomato pomace with a solvent. The present disclosure also relates to flavour compositions and beverages comprising the flavour modifying ingredients in amounts effective to improve the sweetness, mouthfeel and/or taste of beverages.

No. of Pages : 30 No. of Claims : 19

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128256 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : FEED COMPOSITION AND FEED ADDITIVE, WHICH COMPRISE CATECHIN AND VITAMIN K

(51) International classification :A23K 20/121, A23K 20/174
(31) Priority Document No :10-2024-0044253
(32) Priority Date :01/04/2024
(33) Name of priority country :Republic of Korea
(86) International Application No :PCT/KR2024/096689
Filing Date :11/12/2024
(87) International Publication No :WO 2025/211543
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)CJ CHEILJEDANG CORPORATION
Address of Applicant :330, Dongho-ro, Jung-gu, Seoul 04560 Republic of Korea
(72)**Name of Inventor :**
1)SON, Kyuyeol
2)KIM, Dae Jin
3)KIM, Hee-yeon
4)MOON, Jun Ok
5)KIM, Jung-woong
6)CHAE, Jongpyo
7)EOM, Dong Hyun
8)JANG, Jeong Hwa
9)HAN, Seung Eun
10)LEE, Bo Ram

(57) Abstract :
The present application relates to: a feed composition or a feed additive, which comprise catechin and vitamin K; a method for inhibiting bile salt hydrolase (BSH) activity of an animal by using catechin and vitamin K or the feed composition comprising same; and a method for improving intestinal health of an animal.

No. of Pages : 25 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128257 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : PON FAULT NOTIFICATION IN A MULTI-HOMED PROTECTION ENVIRONMENT

(51) International classification :H04Q 11/00
(31) Priority Document No :18/625357
(32) Priority Date :03/04/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2025/021940
Filing Date :28/03/2025
(87) International Publication No :WO 2025/212403
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)CIENA CORPORATION
Address of Applicant :8150 Maple Lawn Boulevard, Suite 300 Fulton, MD 20759 USA U.S.A.
(72)**Name of Inventor :**
1)HOLNESS, Marc
2)MARION, Jean-Christophe
3)LORDELLO, Claudio
4)HAQ, Mohammad, Furqan

(57) Abstract :
An Optical Line Terminal, OLT, (14A, 14B) with Passive Optical Network, PON, protection (12) includes a transmitter and receiver in a Standby state, grouped with additional OLTs. Circuitry detects faults (24, 50, 70) within the PON (10), activates the transmitter upon detection (52, 54), and subsequently verifies fault clearance (56). If cleared, the OLT transitions from Standby to Active state and notifies an associated router (18A, 18B) (60). If the fault persists, the transmitter is turned off (62). The OLT can be implemented as a pluggable module in routers, communicating state changes by toggling pins or via register reads. Coordination between multiple OLTs is unnecessary, thereby preventing an Active/Active state (110).

No. of Pages : 14 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128266 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CELL MEASUREMENTS AND REPORTING FOR CELL SWITCH

(51) International classification :H04W 36/00, H04L 5/00, H04W 24/10
(31) Priority Document No :202441028261
(32) Priority Date :05/04/2024
(33) Name of priority country :India
(86) International Application No :PCT/EP2025/055264
Filing Date :27/02/2025
(87) International Publication No :WO 2025/209739
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)GOYAL, Sanjay
2)SELVAGANAPATHY, Srinivasan
3)MEDINA, Daniel
4)KOSKELA, Timo
5)MICHALOPOULOS, Diomidis

(57) Abstract :
The present disclosure relate to the field of telecommunication and in particular to devices, methods, apparatuses and computer readable storage media for enabling cell measurements and reporting for cell switching For example, there is provided a user device comprising at least one processor, and at least one memory storing instructions that, when executed by the at least one processor, cause the user device at least to: obtain a channel state information, CSI, report configuration; perform at least one first CSI measurement on the at least one first resource set; select one or more resource sets from the at least one second resource set based on the at least one first CSI measurement and at least one criterion; perform at least one second CSI measurement on the selected one or more second resource sets; and transmit the CSI report including the at least one second CSI measurement to a network device using the uplink resources.

No. of Pages : 52 No. of Claims : 35

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026

(21) Application No.202647128278 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM INFORMATION ACQUISITON

(51) International classification	:H04W 48/12, H04W 76/28, H04W 52/02
(31) Priority Document No	:20245396
(32) Priority Date	:03/04/2024
(33) Name of priority country	:Finland
(86) International Application No	:PCT/EP2025/054973
Filing Date	:25/02/2025
(87) International Publication No	:WO 2025/209726
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)BLUSZCZ, Jakub Janusz
2)KOSKINEN, Jussi-Pekka
3)TURTINEN, Samuli Heikki

(57) Abstract :
An apparatus comprising means for: determining information for controlling acquisition of at least part of system information; determining, when the apparatus is in a radio resource control, RRC, idle or RRC inactive mode and is using a discontinuous reception, DRX, cycle longer than a system information modification period, whether to acquire at least part of system information based, at least in part, on the information for controlling acquisition of at least part of system information; and acquiring at least part of system information in response to determining that at least part of system information should be acquired.

No. of Pages : 40 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128282 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND PROGRAM FOR CORRECTING WELDING CURRENT WAVEFORM

(51) International classification :B23K 9/095, B23K 9/073
(31) Priority Document No :2024-058645
(32) Priority Date :01/04/2024
(33) Name of priority country :Japan
(86) International Application No :PCT/JP2025/012796
Filing Date :28/03/2025
(87) International Publication No :WO 2025/211275
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)PANASONIC INTELLECTUAL PROPERTY MANAGEMENT CO., LTD.
Address of Applicant :22-6, Moto-machi, Kadoma-shi, Osaka 5710057 Japan
(72)**Name of Inventor : NA**
Address of Inventor : NA

(57) Abstract :
A method for correcting a welding current waveform disclosed herein comprises first to third steps. In the first step, a basic waveform of a welding current Aw is prepared. In the second step, the basic waveform is described by a function using, as variables, a current command value Is, a plate thickness D of a base material 200 that is an object to be welded, and time t. In the third step, the basic waveform is corrected by substituting an actual-use command value Is1 used to weld the base material 200 for the current command value Is in the function described in the second step S2, and substituting an actual-use plate thickness D1 used to weld the base material 200 for the plate thickness D in the function. The corrected basic waveform is acquired as a welding current waveform.

No. of Pages : 25 No. of Claims : 6

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128294 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BULGING AMOUNT MEASUREMENT DEVICE, BULGING AMOUNT MEASUREMENT METHOD, AND SLAB MANUFACTURING METHOD

(51) International classification :B22D 11/16
(31) Priority Document No :2024-083898
(32) Priority Date :23/05/2024
(33) Name of priority country :Japan
(86) International Application No :PCT/JP2025/015772
Filing Date :23/04/2025
(87) International Publication No :WO 2025/243769
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)JFE STEEL CORPORATION
Address of Applicant :2-3, Uchisaiwai-cho 2-chome, Chiyoda-ku, Tokyo 1000011 Japan
(72)**Name of Inventor :**
1)NAKAMURA Keisuke

(57) Abstract :
Provided is a bulging amount measurement device capable of measuring the bulging amount of a cast slab in a non-contact manner even in an environment in which a large amount of steam is generated at a high temperature. The present invention pertains to a bulging amount measurement device for measuring the bulging amount of a cast slab cast by a continuous casting machine, the bulging amount measurement device comprising: a two-dimensional laser distance meter that is provided on both sides in a long side direction and/or a short side direction of a cast slab in which solidification has been completed, and measures the distance to the cast slab from a plurality of positions in the short side direction and/or the long side direction; and a calculation device that calculates the bulging amount on a short side and/or a long side of the cast slab by using the distance measured by the two-dimensional laser distance meter. The two-dimensional laser distance meter emits blue laser light having a wavelength of 360-480 nm onto the cast slab.

No. of Pages : 30 No. of Claims : 7

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128301 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD OF MANUFACTURING THREE-DIMENSIONAL (3-D) OBJECTS BY PRESSING AND/OR THERMOFORMING A SUBSTANTIALLY PLANAR WEB COMPRISING A CELLULOSE-BASED MATERIAL, AND 3-D OBJECT OBTAINED THEREBY

(51) International classification	:B31B 50/14, B31B 50/59, B31B 50/74, B31B 50/46, B31F 1/00
(31) Priority Document No	:102024000007531
(32) Priority Date	:04/04/2024
(33) Name of priority country	:Italy
(86) International Application No Filing Date	:PCT/EP2025/059359 :04/04/2025
(87) International Publication No	:WO 2025/210267
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)BLUETHINK S.P.A.
Address of Applicant :PIAZZA SAN CARLO 197 10123 TORINO Italy
(72)**Name of Inventor :**
1)PINARELLO, Giordano
2)BAILINI, Alessandro

(57) Abstract :
A process to manufacture three-dimensional articles by press and/or thermo-forming a substantially flat web comprising a cellulose-based material is provided; the process includes: providing more than one flat web as a dry intermediate product with a density included between 50 and 250 Kg/m3, each dry intermediate product comprising the cellulose-based material in an amount between 40% and 95% by weight and a binder material between 5% and 50% by weight; making a predetermined number of through cuts through the dry intermediate product defining a plurality of interconnected portions; superimposing the flat webs one on the other to obtain a multi-layer stack of flat webs and positioning the multi-layer stack in a form-shaping tool; activating the form-shaping tool to thermoform a three-dimensional article, wherein the interconnected portions move with respect to each other during the press- and/or thermo-forming, superimpose each other and are then irremovably interconnected in the three-dimensional article.

No. of Pages : 38 No. of Claims : 19

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128330 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DISTRIBUTED AGGREGATIONS FOR DISTRIBUTED STORAGE SYSTEMS

(51) International classification	:G06F 3/06, G06F 16/23, G06F 16/27
(31) Priority Document No	:18/626721
(32) Priority Date	:04/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/023026 :03/04/2025
(87) International Publication No	:WO 2025/212939
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GOOGLE LLC
Address of Applicant :1600 Amphitheatre Parkway Mountain View, California 94043 U.S.A.
(72)**Name of Inventor :**
1)NIEMITZ, Steven
2)MAGRINO, Thomas Robert
3)MCERLEAN, Douglas Moore

(57) Abstract :
A method includes receiving, at a first node of a plurality of nodes of a distributed database, an update request for an aggregate value stored at the first node. The update request includes a first sequencer. Based on receiving the update request for the aggregate value, the method includes updating the aggregate value based on the update request, storing a log record of the update to a changelog, and transmitting the update request to each other node. After updating the aggregate value, the method includes receiving, from a second node, a reset request for the aggregate value. The reset request includes a second sequencer. The method includes determining that the reset request predates the update request. Based on determining that the reset request predates the update request, the method includes resetting the aggregate value and updating the aggregate value based on the update request.

No. of Pages : 19 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128336 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TBS DETERMINATION FOR SBFD

(51) International classification	:H04L 5/00, H04L 5/26
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:PCT/CN2024/086238
Filing Date	:05/04/2024
(87) International Publication No	:WO 2025/208617
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7, Espoo 02610 Finland
(72)**Name of Inventor :**
1)GAO, Jie
2)NHAN, Nhat-Quang
3)POCOVI, Guillermo
4)SUN, Jing Yuan
5)MALDONADO, Roberto
6)YUK, Youngsoo

(57) Abstract :
Embodiments of the present disclosure relate to a solution for determining TBS for SBFD. In an aspect, a terminal device may determine a transport block size (TBS) for a transport block to be conveyed by a scheduled physical downlink shared channel (PDSCH) based on at least one of: a scaling factor, a first number, or a time domain resource configuration, wherein the PDSCH is scheduled in a slot comprising at least one subband full duplex (SBFD) symbol. The terminal device may receive the scheduled PDSCH conveying the transport block with the determined TBS. Embodiments of the present disclosure can minimize unused RBs, maintain an expected or low actual code rate, and avoid performance degradation.

No. of Pages : 38 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128347 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY

(51) International classification	:H01M 50/284, H01M 50/213
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:PCT/JP2024/016072 :24/04/2024
(87) International Publication No	:WO 2025/224880
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)HONDA MOTOR CO., LTD.
Address of Applicant :2-3, Toranomon 2-chome, Minato-ku, Tokyo 1058404 Japan
(72)**Name of Inventor :**
1)TAGUMA Takahiro
2)SASAKI Nozomi

(57) Abstract :
A battery (20) has a case (40) that accommodates a battery cell (32). The case (40) comprises a first compartment (44a), a third compartment (45), and a second compartment (44b) that are aligned in a first direction and an opening part (48) that exposes the third compartment (45) to the outside. The battery (20) includes a sensor (61) that acquires information about the battery cell (32), a sensor line (62) that is connected at one end to the sensor (61) and at another end to an output unit (63), and a component (25) that has an input unit (26) into which a signal acquired at the sensor (61) is inputted. The output unit (63) and the input unit (26) are exposed to the inside of the opening part (48).

No. of Pages : 26 No. of Claims : 5

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128358 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : VALVE UNIT AND BOOSTER VALVE

(51) International classification	:F16K 27/12, F16K 31/122
(31) Priority Document No	:2024-060619
(32) Priority Date	:04/04/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2024/042485 :02/12/2024
(87) International Publication No	:WO 2025/210958
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SMC CORPORATION
Address of Applicant :5-5, Kyobashi 1-chome, Chuo-ku, Tokyo 1040031 Japan
(72)**Name of Inventor :**
1)SOMEYA Kazutaka

(57) Abstract :
A valve unit (10) comprising: a main valve (12) that alternately connects an exhaust port (14a) and a compressed air supply source (22) to a compressed air device; a main valve casing (14) that houses the main valve (12); a dew condensation prevention cover (16) that covers the outside of the main valve casing (14) and forms a cover air flow path (18) together with the main valve casing (14); and a cover air supply port (32) that communicates with one end of the cover air flow path (18) and supplies a portion of compressed air supplied from the compressed air supply source (22).

No. of Pages : 26 No. of Claims : 11

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128360 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MILD COORDINATED RESET NEUROMODULATION BY ENTRAINMENT

(51) International classification	:A61N 1/36, A61B 5/00, A61M 21/00, A61H 1/00
(31) Priority Document No	:10 2024 109 309.9
(32) Priority Date	:03/04/2024
(33) Name of priority country	:Germany
(86) International Application No Filing Date	:PCT/EP2025/051112 :17/01/2025
(87) International Publication No	:WO 2025/209677
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)CURETEC GMBH
Address of Applicant :Bismarckstr. 20 68723 Plankstadt Germany
(72)**Name of Inventor :**
1)HAUPTMANN, Christian

(57) Abstract :
The present invention relates to an apparatus for desynchronizing neuronal activity, comprising a set of N=2 stimulation units, each adapted to provide a respective stimulus to a user upon activation, wherein the respective stimulus is characterized by a repetition frequency and synthesized by the apparatus based on at least one parameter, such that the respective stimulus is characterized by a repetition frequency that corresponds to a frequency of the neuronal activity; and means for individually activating the simulation units of the set such that stimuli provided by different stimulation units are mutually phase-shifted by a fraction of 2p.

No. of Pages : 27 No. of Claims : 21

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128401 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DETERMINING THE ROOT CAUSE OF FAULTS IN INDUSTRIAL PLANTS WITH GENERATIVE MACHINE LEARNING

(51) International classification :G05B 23/02
(31) Priority Document No :24167461.3
(32) Priority Date :28/03/2024
(33) Name of priority country :EPO
(86) International Application No :PCT/EP2025/058275
Filing Date :26/03/2025
(87) International Publication No :WO 2025/202289
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)ABB SCHWEIZ AG
Address of Applicant :Bruggerstrasse 66 5400 Baden Switzerland
(72)**Name of Inventor :**
1)FECHNER, Tobias
2)MANCA, Gianluca
3)BUELOW, Fabian
4)TAN, Ruomu

(57) Abstract :
A computer-implemented method (100) for determining the root cause (6) of a fault (2) in an industrial plant (1), comprising the steps of: • providing (110) a query (3) as to the root cause of a suspected fault (2) of the industrial plant or one of its assets, and/or of symptoms (2a) in which this suspected fault (2) manifests itself; • processing (120) the query (3), said processing comprising determining, from the query (3), at least a type (2b) of the suspected fault (2), and the suspected location (2c) of this fault (2) in the industrial plant (1); • providing (130), to a generative machine learning model, GMLM (4), at least: o the query (3), o the determined type (2b) and suspected location (2c) of the fault (2), and o dynamic context information (5) about the industrial plant (1), said dynamic context (5) including at least state variables and/or measurement values captured in the industrial plant (1) and/or a control system thereof, thereby obtaining an output (4a) that is indicative of at least one candidate root cause (6*); and • determining (160), from the output (4a) of the GMLM (4), the sought root cause (6).

No. of Pages : 26 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128455 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DEVICE-ASSISTED STATIONARY MODE

(51) International classification	:H04W 64/00, G01S 5/00, G06N 3/02, G06N 20/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:PCT/US2024/031638 :30/05/2024
(87) International Publication No	:WO 2025/250132
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GOOGLE LLC
Address of Applicant :1600 Amphitheatre Parkway Mountain View, California 94043 U.S.A.
(72)**Name of Inventor :**
1)CESARES CANO, Jose Andres
2)ANG, Peter Pui Lok
3)LI, Chengzhi

(57) Abstract :
A user equipment (UE) (102) in a mobile cellular network (100) implements one or more techniques to relax radio resource management mobility (RRM) actions. For example, the UE selects, based on a stationary confidence rank (214) indicating a confidence level in an assessment that the UE is in a stationary state, a set of conditions (216) for one or more stationary modes (138). The UE implements a stationary mode of the one or more stationary modes or a non-stationary mode based on the selected set of conditions. Responsive to whether the stationary mode or the non-stationary mode is implemented at the UE, the UE selectively performs one or more RRM relaxation actions (218) to relax or reduce RRM actions at the UE.

No. of Pages : 36 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128487 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMPOSITION FOR INHIBITING BILE SALT HYDROLASE COMPRISING EPICATECHIN AS ACTIVE INGREDIENT AND USE THEREOF

(51) International classification :A23K 20/121
(31) Priority Document No :10-2024-0044254
(32) Priority Date :01/04/2024
(33) Name of priority country :Republic of Korea
(86) International Application No :PCT/KR2024/096687
Filing Date :11/12/2024
(87) International Publication No :WO 2025/211542
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)CJ CHEILJEDANG CORPORATION
Address of Applicant :330, Dongho-ro, Jung-gu, Seoul 04560 Republic of Korea
(72)**Name of Inventor :**
1)SON, Kyuyeol
2)CHAE, Jongpyo
3)MOON, Jun Ok
4)PARK, Si-nae
5)KIM, Hee-yeon

(57) Abstract :
The present application relates to: a composition for inhibiting bile salt hydrolase (BSH) comprising epicatechin as an active ingredient; a method for inhibiting bile salt hydrolase of an animal using same; and a use of catechin for inhibiting bile salt hydrolase.

No. of Pages : 17 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128509 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COVER ASSEMBLY

(51) International classification	:H01M 10/653, H01M 10/6567, H01M 50/103, H01M 50/15, H01M 50/184
(31) Priority Document No	:10 2024 109 275.0
(32) Priority Date	:03/04/2024
(33) Name of priority country	:Germany
(86) International Application No	:PCT/EP2025/050020
Filing Date	:02/01/2025
(87) International Publication No	:WO 2025/209675
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)CARL FREUDENBERG KG
Address of Applicant :Höhnerweg 2-4 69469 Weinheim Germany
(72)**Name of Inventor :**
1)MORGENSTERN, Stefan
2)NAHRWOLD, Olaf

(57) Abstract :
The invention relates to a cover assembly (1) of a battery cell with immersion cooling, wherein the cover assembly (1) has an inner side and an outer side, the cover assembly comprising: a metal base plate (2); a first terminal (3) which is arranged in a through-opening (20) in the base plate (2); a sealing element (5) which secures and seals the first terminal (3) to the base plate (2), wherein the sealing element (5) is arranged in the through-opening (20) and is designed to seal a first connection region (6) between the first terminal (3) and the sealing element (5) and a second connection region (7) between the base plate (2) and the sealing element (5) and to establish a connection between the first terminal (3) and the base plate (2), wherein the sealing element (5) is a one-piece component having a first sub-region (5a) made of a first material and a second sub-region (5b) made of a second material, wherein the first material is different from the second material, and wherein the first sub-region (5a) is exposed exclusively to the inner side of the cover assembly and the second sub-region (5b) is exposed exclusively to the outer side of the cover assembly.

No. of Pages : 9 No. of Claims : 11

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026

(21) Application No.202647128546 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMMUNICATION METHOD AND APPARATUS, AND SYSTEM

(51) International classification :H04W 24/08
(31) Priority Document No :202410458817.7
(32) Priority Date :15/04/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/088444
Filing Date :11/04/2025
(87) International Publication No :WO 2025/218589
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)HUAWEI TECHNOLOGIES CO., LTD.
Address of Applicant :Huawei Administration Building, Bantian, Longgang District Shenzhen, Guangdong 518129 China
(72)**Name of Inventor :**
1)DU, Rui
2)TANG, Zhuqing
3)HUANG, Lei
4)HAN, Xiao

(57) Abstract :
A communication method and apparatus, and a system, which are applied to the technical field of communications, and can be applied to IEEE 802.11 series protocols, such as 802.11bf protocol or 802.11ax next-generation Wi-Fi protocol or IEEE 802.11be next-generation Wi-Fi protocol or integrated millimeter wave (IMMW), and can be applied to Wi-Fi AI, ultra-wideband (UWB), etc. The method comprises: a sensing initiator being capable of sending a control frame at a low frequency, and sending a sensing PPDU at a high frequency, or receiving the sensing PPDU at the high frequency; and a ranging responder being capable of sending a control frame at the low frequency, and sending a ranging PPDU at the high frequency, or receiving the ranging PPDU at the high frequency. The control frame may include, but is not limited to, a polling frame, an NDPA frame, a sounding trigger frame, and a report trigger frame. The method can effectively improve the flexibility of a sensing process or a ranging process, and can improve the sensing performance or the ranging performance.

No. of Pages : 88 No. of Claims : 37

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128547 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SSB CONFIGURATION METHOD AND COMMUNICATION APPARATUS

(51) International classification :H04W 56/00, H04W 72/232, H04W 72/23
(31) Priority Document No :202410574798.4
(32) Priority Date :08/05/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/091870
Filing Date :28/04/2025
(87) International Publication No :WO 2025/232630
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)HUAWEI TECHNOLOGIES CO., LTD.
Address of Applicant :Huawei Administration Building, Bantian, Longgang District Shenzhen, Guangdong 518129 China
(72)**Name of Inventor :**
1)HUANG, Xiuxuan
2)YU, Xichen
3)WANG, Yi
4)JIAO, Shurong
5)MADIER, Louis

(57) Abstract :
The present application provides an SSB configuration method and a communication apparatus. The method comprises: an access network device sends downlink control information (DCI) to a terminal, the DCI indicating an SSB transmission configuration of a first cell; and the terminal receives an SSB in the first cell on the basis of the SSB transmission configuration. Thus, the method can dynamically indicates SSB transmission configurations of cells by means of DCI, thereby helping to update SSB transmission configurations in time.

No. of Pages : 31 No. of Claims : 22

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128548 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMMUNICATION METHOD AND APPARATUS

(51) International classification :H04W 72/23
(31) Priority Document No :202410454460.5
(32) Priority Date :15/04/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/073730
Filing Date :21/01/2025
(87) International Publication No :WO 2025/218302
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)HUAWEI TECHNOLOGIES CO., LTD.
Address of Applicant :Huawei Administration Building Bantian, Longgang District Shenzhen, Guangdong 518129 China
(72)**Name of Inventor :**
1)WEI, Dongdong
2)TANG, Hao
3)MA, Jianglei
4)QIU, Jing

(57) Abstract :
A communication method and apparatus, relating to the field of communications and capable of solving the problem caused by aggregating carriers from different operators by means of carrier aggregation. The communication method comprises: receiving first configuration information from a network device; and communicating with the network device on the basis of the first configuration information. The first configuration information is used for indicating a virtual carrier comprising a plurality of sub-blocks; the virtual carrier corresponds to a segment of consecutive frequency domain resources; the first configuration information comprises frequency domain physical resource position information of each sub-block in a corresponding physical carrier; and said frequency domain physical resource position information indicates a frequency domain physical resource position for data transmission in the physical carrier corresponding to the sub-block.

No. of Pages : 45 No. of Claims : 30

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026

(21) Application No.202647128549 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMMUNICATION METHOD, DEVICE AND SYSTEM

(51) International classification :H04W 24/10
(31) Priority Document No :202410588304.8
(32) Priority Date :09/05/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/090193
Filing Date :21/04/2025
(87) International Publication No :WO 2025/232525
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)HUAWEI TECHNOLOGIES CO., LTD.
Address of Applicant :Huawei Administration Building, Bantian, Longgang District Shenzhen, Guangdong 518129 China
(72)**Name of Inventor :**
1)ZHANG, Mengchen
2)ZHANG, Yanqing
3)XU, Haibo
4)LIM, Seau Sian

(57) Abstract :
The present application relates to the technical field of communications, and discloses a communication method, device and system. When a first preset condition is satisfied, a terminal device sends to a base station first information for indicating, in data to be transmitted, the data volume of non-delay-critical data and/or the remaining time corresponding to the non-delay-critical data, so that the base station also knows non-delay-critical data information on the basis of knowing delay-critical data information. In this way, the base station can more comprehensively know a state of the data to be transmitted of the terminal device, so as to better schedule transmission resources, thereby preventing abnormal packet loss caused by a resource allocation problem of the terminal device, and improving the data transmission performance and efficiency of the terminal device.

No. of Pages : 50 No. of Claims : 24

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026

(21) Application No.202647128574 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : HINGE ASSEMBLY AND FOLDABLE ELECTRONIC DEVICE COMPRISING SAME

(51) International classification :G06F 1/16
(31) Priority Document No :10-2024-0045272
(32) Priority Date :03/04/2024
(33) Name of priority country :Republic of Korea
(86) International Application No :PCT/KR2025/004285
Filing Date :01/04/2025
(87) International Publication No :WO 2025/211724
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129, Samsung-ro, Yeongtong-gu Suwon-si Gyeonggi-do 16677 Republic of Korea
(72)**Name of Inventor :**
1)PARK, Jaebeom

(57) Abstract :
The present disclosure relates to a hinge assembly and a foldable electronic device comprising same. The foldable electronic device according to an embodiment of the present disclosure comprises: a first housing; a second housing; a hinge assembly; and a flexible display, wherein the hinge assembly comprises: a first shaft; a second shaft; a first arm coupled to the first shaft; a second arm coupled to the second shaft; a first cam member moving along with the first shaft when the first arm is rotated; and a second cam member moving along with the second shaft when the second arm is rotated.

No. of Pages : 47 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :28/10/2026

(21) Application No.202647128584 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : METHODS FOR PREDICTING GENOMIC ANTIBIOTIC SUSCEPTIBILITY USING ANTIBIOTIC-INDUCED MUTATIONAL SIGNATURES

(51) International classification	:C12Q 1/689, G01N 33/50, A61K 31/424, A61K 31/47, A61P 11/00
(31) Priority Document No	:63/573680
(32) Priority Date	:03/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/022769 :02/04/2025
(87) International Publication No	:WO 2025/212789
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)THE ADMINISTRATORS OF THE TULANE EDUCATIONAL FUND
Address of Applicant :1440 Canal St., #8432 New Orleans, Louisiana 70112-2632 U.S.A.

(72)**Name of Inventor :**
1)HALL, Kalen
2)WILLIAMS, Leonard
3)PURSELL, Zachary
4)MORICI, Lisa

(57) Abstract :
The present disclosure provides methods for predicting drug resistance in a subject with a Pseudomonas infection based on the detection of antibiotic-induced mutational signatures of Pseudomonas species.

No. of Pages : 77 No. of Claims : 36

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :28/10/2026

(21) Application No.202647128592 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : A FIXTURE FOR FUNCTIONAL TESTING OF A BEARING CAGE AND A METHOD FOR FUNCTIONAL TESTING OF A BEARING CAGE

(51) International classification	:G01M 13/04, G01M 99/00
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:PCT/EP2024/064103
Filing Date	:22/05/2024
(87) International Publication No	:WO 2025/242303
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)AKTIEBOLAGET SKF
Address of Applicant :41550 Göteborg Sweden
(72)**Name of Inventor :**
1)WESTLING, Eric Kim Gustav
2)FREDEN, Jens Håkan
3)SPIONECK, Rene
4)PAEPKE, Lennart
5)WANNERSKOG, Lars Christer
6)JOHANSSON, Björn

(57) Abstract :
The present disclosure relates to a fixture (1) for functional testing of a roller bearing cage (10) for a roller bearing, the roller bearing cage (10) comprising a first annular portion (12) and a second annular portion (13), a plurality of pillars (14) interconnecting the first annular portion (12) and the second annular portion (13), adjacent pairs of the plurality of pillars (14) each defining a pocket (15) for holding a roller (11), the roller bearing cage (10) having a rotation axis (R), wherein the fixture (1) is configured to be attached to the roller bearing cage, the fixture (1) having a circumferential extension (CE) about a fixture (1) centre axis (R1) which is aligned with the rotation axis (R) of the roller bearing cage when the fixture (1) is attached to the roller bearing cage (10), wherein the circumferential extension (CE) of the fixture (1) is less than 360 degrees, and the fixture (1) is configured to hold at least one roller (11) at a predefined radial position relative to the roller bearing cage, when being attached to the roller bearing cage and when the roller bearing cage (10) is rotated in relation to the fixture (1). The present disclosure also relates to a system and a method for functional testing of a roller bearing cage (10).

No. of Pages : 13 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128594 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY

(51) International classification	:H01M 50/284, H01M 50/204, H01M 50/213	(71)**Name of Applicant :** **1)HONDA MOTOR CO., LTD.** Address of Applicant :2-3, Toranomon 2-chome, Minato-ku, Tokyo 1058404 Japan
(31) Priority Document No	:NA	
(32) Priority Date	:NA	(72)**Name of Inventor :** **1)TAGUMA Takahiro** **2)DEGUCHI Shinichiro**
(33) Name of priority country	:NA	
(86) International Application No Filing Date	:PCT/JP2024/016053 :24/04/2024	
(87) International Publication No	:WO 2025/224873	
(61) Patent of Addition to Application Number Filing Date	:NA :NA	
(62) Divisional to Application Number Filing Date	:NA :NA	

(57) Abstract :
This battery has a case (40) for accommodating battery cells (32). The case (40) is provided with a first chamber (44a) and a second chamber (44b), and a third chamber (45). The first chamber (44a) and the second chamber (44b) accomodate the battery cells (32), and are arranged in a first direction. The third chamber (45) forms a space between the first chamber (44a) and the second chamber (44b). Components 51a, 51b electrically connected to the battery cells (32) are disposed inside the third chamber (45).

No. of Pages : 29 No. of Claims : 6

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128601 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : LUMINOUS DEVICE FOR A MOTOR VEHICLE COMPRISING AN ARRAY OF ELECTROLUMINESCENT ELEMENTS

(51) International classification	:B60Q 1/00, B60Q 1/50, F21S 45/43, F21S 43/19, B60R 11/02
(31) Priority Document No	:FR2404576
(32) Priority Date	:30/04/2024
(33) Name of priority country	:France
(86) International Application No	:PCT/EP2025/061791
Filing Date	:29/04/2025
(87) International Publication No	:WO 2025/229041
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)VALEO VISION
Address of Applicant :IP Department 34, Rue Saint André 93012 BOBIGNY Cedex France
(72)**Name of Inventor :**
1)VAL, Alexandre
2)BEAUVAL, Thomas
3)AFONSO, Jose

(57) Abstract :
Disclosed is a luminous device (1) for a motor vehicle, comprising: - a luminous display screen (3) comprising an array of electroluminescent elements arranged on a first face (31), the display screen (3) comprising a first electrical connection means (71); - a device (5) for controlling the electroluminescent elements, which is arranged facing a second face (32) of the display screen (3) opposite the first face (31), and which comprises a second electrical connection means (72) connected to the first electrical connection means (71); - a carrier (9) arranged between the display screen (3) and the control device (5), and comprising fastening means (81, 82) for fastening them to the carrier (9), the carrier (9) comprising a through-aperture (10) through which the electrical connection means (71, 72) connected directly to each other extend.

No. of Pages : 19 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128602 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : OPTICAL COMPONENT FOR A VEHICLE

(51) International classification	:F21S 43/14, F21S 43/241, F21S 43/20
(31) Priority Document No	:202410543908.0
(32) Priority Date	:30/04/2024
(33) Name of priority country	:China
(86) International Application No Filing Date	:PCT/EP2025/061531 :28/04/2025
(87) International Publication No	:WO 2025/228887
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)VALEO VISION
Address of Applicant :34, Rue Saint André 93012 BOBIGNY Cedex France
(72)**Name of Inventor :**
1)ZHOU, Haiqing
2)MERLIN, Cedric

(57) Abstract :
The present application discloses an optical component (1) used for a vehicle, the optical component comprising: a light source, and an optical module (10) which is arranged to correspond to the light source (11); and a deflection film (12), which is located downstream of an optical path of the optical module (10), and is configured to deflect light from the optical module (10). The present application further discloses a light-emitting device and a vehicle.

No. of Pages : 17 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128603 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : FLAVOUR MODIFYING INGREDIENT

(51) International classification	:A23L 19/00, A23L 27/10, A23L 27/00
(31) Priority Document No	:63/572825
(32) Priority Date	:01/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/EP2025/058519 :27/03/2025
(87) International Publication No	:WO 2025/209932
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GIVAUDAN SA
Address of Applicant :Chemin de la Parfumerie 5 1214 Vernier Switzerland
(72)**Name of Inventor :**
1)BHOWMIK, Tarun
2)ONUMA, Yosuke
3)STIDHAM, Laura
4)MYAKA, Stefka Ivanova

(57) Abstract :
The present disclosure relates to a method for making a flavour modifying ingredient, wherein the method comprises subjecting tomato pomace to enzymatic hydrolysis and/or fermentation to form a treated tomato pomace that is useful for modifying the flavour and/or mouthfeel of food products, such as meat analog products, high-moisture extruded food products, and ketchup products.

No. of Pages : 24 No. of Claims : 26

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128604 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : HYBRID FLOW BALANCED RESTRICTIVE PASSAGE IN COMMON RAIL INJECTORS

(51) International classification	:F02M 61/04, F02M 61/12
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:PCT/US2024/029833
Filing Date	:17/05/2024
(87) International Publication No	:WO 2025/239898
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)CUMMINS-SCANIA HPCR SYSTEM, LLC
Address of Applicant :500 Jackson Street Columbus, Indiana 47201 U.S.A.
(72)**Name of Inventor :**
1)GOSWAMI, Anil
2)KONAKANCHI, Hanumantharao
3)LUCAS, Michael Andrew
4)BARTHOLOMEW, Darin

(57) Abstract :
A plunger (12) for assembly with a fuel injector body (102) of a fuel injector (10). The plunger (12) includes an elongated body having a longitudinal axis that spans along a length of the elongated body. The elongated body (13) includes a guide section arranged between an upper section (76) and a tip section (78), wherein the guide section includes an upper guide (22) longitudinally offset a distance from a lower guide (14). The upper guide (22) defines a relief orifice (40) that includes a central axis (17) that extends through and intersects with the longitudinal axis (15). The lower guide (14) has an outer diameter that includes a plurality of radial portions (30) configured to extend radially outwardly from the longitudinal axis (15). The lower guide (14) includes a plurality of elongated surfaces (32) alternatingly arranged with the plurality of radial portions (30). The relief orifice (40) and the plurality of elongated surfaces (32) are ground from an outer diameter of the elongated body (13).

No. of Pages : 15 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :28/10/2026

(21) Application No.202647128606 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND DEVICE FOR ALLOCATING SL-PRS TRANSMISSION RESOURCE WHEN PERFORMING SIDELINK POSITIONING IN MOBILE COMMUNICATION SYSTEM

(51) International classification	:H04W 64/00, H04W 24/08, H04L 5/00, H04W 72/25, G01S 5/00
(31) Priority Document No	:10-2024-0045335
(32) Priority Date	:03/04/2024
(33) Name of priority country	:Republic of Korea
(86) International Application No Filing Date	:PCT/KR2025/004326 :02/04/2025
(87) International Publication No	:WO 2025/211740
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129, Samsung-ro, Yeongtong-gu Suwon-si Gyeonggi-do 16677 Republic of Korea
(72)**Name of Inventor :**
1)LEE, Taeseop
2)YU, Jeongseok

(57) Abstract :
The present disclosure relates to a 5G or 6G communication system for supporting a higher data transmission rate. A method performed by a first terminal in a wireless communication system according to the present disclosure comprises the steps of: receiving assistance information for transmitting a sidelink positioning reference signal (PRS); and transmitting the sidelink PRS to a second terminal when the assistance information includes first information for triggering sidelink PRS transmission of the first terminal.

No. of Pages : 41 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128650 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BLOOD COLLECTION TUBE HOLDER WITH SLIDABLE NEEDLE SAFETY DEVICE

(51) International classification	:A61M 5/32, A61B 5/15, A61M 39/20
(31) Priority Document No	:63/574060
(32) Priority Date	:03/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/021855 :27/03/2025
(87) International Publication No	:WO 2025/212382
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)RETRACTABLE TECHNOLOGIES, INC.
Address of Applicant :511 Lobo Lane Little Elm, TX 75068 U.S.A.
2)SHAW, Thomas, J.
(72)**Name of Inventor :**
1)SHAW, Thomas, J.
2)LARDAS, Benjamin, John

(57) Abstract :
Systems and methods are disclosed that include providing a blood collection tube with a unitarily molded barrel having a cylindrical body portion that defines a barrel cavity, a slot extending longitudinally along the cylindrical body portion, and opposing rails that extend longitudinally along edges of the cylindrical body portion formed by the slot. A dual-ended needle is retained within the barrel. A needle safety device having a pair of channels that receive the rails of the barrel is slidably engaged with the barrel between a first retracted position that exposes a venipuncture end of the needle for selective use of the blood collection tube holder and a second extended position that positions a needle tip shield of the needle safety device at least partially around the venipuncture end of the needle to protect a user from accidental needle sticks after use of the blood collection tube holder.

No. of Pages : 20 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128663 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ADAPTIVE NAVIGATION WITHIN A THREE-DIMENSIONAL ENVIRONMENT

(51) International classification	:G06F 3/01, G06F 3/04812, G06F 3/04815
(31) Priority Document No	:63/641804
(32) Priority Date	:02/05/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/027554 :02/05/2025
(87) International Publication No	:WO 2025/231399
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GOOGLE LLC
Address of Applicant :1600 Amphitheatre Parkway Mountain View, California 94043 U.S.A.
(72)**Name of Inventor :**
1)FRANCO, Mar Gonzalez
2)PATEL, Khushman Jayantilal
3)GONZALEZ, Eric Jordan
4)AHUJA, Karan
5)ABRAMYAN, Lucy
6)CHENG, Li-Te
7)PAYNE, Lee
8)COLACO, Andrea
9)SHENOY, Sharayu

(57) Abstract :
In some aspects, the techniques described herein relate to a method including receiving a first location in a two-dimensional space and determining a second location in a three-dimensional space based on the first location in the two-dimensional space. The method can also include determining a depth of the second location in the three-dimensional space based on a distance of the second location from at least one object.

No. of Pages : 39 No. of Claims : 38

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026

(21) Application No.202647128681 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AN APPARATUS, A METHOD AND A COMPUTER PROGRAM FOR VIDEO CODING AND DECODING

(51) International classification	:H04N 19/117, H04N 19/159, H04N 19/172, H04N 19/46, H04N 19/70
(31) Priority Document No	:20245452
(32) Priority Date	:10/04/2024
(33) Name of priority country	:Finland
(86) International Application No Filing Date	:PCT/EP2025/056848 :13/03/2025
(87) International Publication No	:WO 2025/214699
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)HANNUKSELA, Miska Matias
2)CRICRÌ, Francesco

(57) Abstract :
A method comprising: inferring or indicating a processing order comprising multiple processing stages; inferring or indicating a noninitial processing stage among the multiple processing stages; encoding a first indication that the noninitial processing stage is invoked to one or more indicated pictures; and associating the first indication with at least one reconstructed picture, wherein the one or more indicated pictures differ from the at least one reconstructed picture.

No. of Pages : 83 No. of Claims : 22

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128699 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHODS AND COMPOSITIONS FOR REDUCING EXPRESSION OF TAU

(51) International classification	:C12N 15/113, C12N 15/11, A61K 31/7088, C07K 14/47, A61P 25/28
(31) Priority Document No	:63/574847
(32) Priority Date	:04/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/023019 :03/04/2025
(87) International Publication No	:WO 2025/212933
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ENCODED THERAPEUTICS, INC.
Address of Applicant :341 Oyster Point Blvd. South San Francisco, California 94080 U.S.A.
(72)**Name of Inventor :**
1)TATAVARTY, Vedakumar
2)TAI, Chao
3)CHEN, Szu-Ying
4)RANDLES, Sawyer
5)LIU, Serena
6)DIAZ DE ARCE, Alexander Jordan
7)TAN, Steven
8)DHANOTA, Puja
9)AERAN, Rangoli
10)CHEN, Ron
11)WEBER, Alexandra
12)VALENTINE, Kristen
13)MAIER, Katarina
14)TAGLIATELA, Stephanie
15)BELLE, Archana
16)PODA, Suresh
17)TANENHAUS, Anne
18)HOSUR, Raghavendra

(57) Abstract :
The present disclosure provides methods and compositions for the treatment of Tauopathies, including Alzheimer's Disease (AD) and Frontotemporal Dementia and Parkinsonism Linked to Chromosome 17 (FTDP-17), by inhibiting expression of the MAPT gene. Aspects of the disclosure provide engineered inhibitory RNA agents, e.g., siRNA, miRNA, and antisense oligonucleotides, that knock down endogenous mutated or wild-type MAPT transcripts in neuronal cells in a subject. Expression vectors encoding the engineered inhibitory RNA agents, e.g., in an AAV vector, are also provided.

No. of Pages : 90 No. of Claims : 62

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128720 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CLAMP AND METHOD FOR INTEGRATING A COMPONENT INTO A WORKPIECE

(51) International classification	:B21J 15/02, B21J 15/14, B21J 15/32, B21J 15/42, B23K 9/20
(31) Priority Document No	:FR2403441
(32) Priority Date	:03/04/2024
(33) Name of priority country	:France
(86) International Application No Filing Date	:PCT/FR2025/050265 :02/04/2025
(87) International Publication No	:WO 2025/210315
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GROJEAN, Alex
Address of Applicant :150 rue du 155ième RI 55200 COMMERCY France
(72)**Name of Inventor :**
1)GROJEAN, Alex

(57) Abstract :
This clamp (1) comprises a frame (10), a blankholder arm (40) comprising a blankholder (41), an insertion arm (50) comprising a punch (51) intended to cooperate with a die (31) to integrate the component (6) into the workpiece (5), and a counter-bearing arm (30) comprising the die (31). The insertion arm (50) and the blankholder arm (40) are movable relative to each other between an open position and a closed position. The insertion arm (50) and the counter-bearing arm (30) are movable relative to each other between an open position and a closed position. Drive means move the insertion arm (50) and the counter-bearing arm (30) relative to each other into the open or closed position.

No. of Pages : 35 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :28/10/2026

(21) Application No.202647128739 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : CHANNELWISE FEATURE REORIENTATION AND MERGING WITH NEIGHBOURING FEATURES FOR ROBUST LOW COMPLEXITY DNN BASED AUDIO PROCESSING

(51) International classification	:G06N 3/045, G06F 18/213, G06N 3/0464, G06V 10/44, G06V 10/82
(31) Priority Document No	:24173478.9
(32) Priority Date	:30/04/2024
(33) Name of priority country	:EPO
(86) International Application No	:PCT/EP2025/061545
Filing Date	:28/04/2025
(87) International Publication No	:WO 2025/228896
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)FRAUNHOFER-GESELLSCHAFT ZUR FÖRDERUNG DER ANGEWANDTEN FORSCHUNG E.V.
Address of Applicant :Hansastraße 27c 80686 München Germany
(72)**Name of Inventor :**
1)SHETU, Shrishti Saha
2)CHETUPALLI, Srikanth Raj
3)MACK, Wolfgang
4)DESIRAJU, Naveen Kumar
5)MARTINEZ APONTE, Jose Miguel
6)VITTAPPAN, Sharvin
7)MABANDE, Edwin
8)THIERGART, Oliver
9)BÖHME, Martina
10)KURUDUGANAHALLI SUDHINDRA RAO, Nagashree
11)MILANO, Guendalina
12)FRANCIS, Maria Avitha
13)MAHNE, Dirk
14)WILD, Moritz
15)EFTEKHARI, Hesam
16)CAPPELLATO, Alessio

(57) Abstract :
There is disclosed an apparatus (10) for processing an input information signal (20), comprising: * a feature extractor (100) for extracting a set of features (102) from the input information signal (20), the set of features (102) having a first shape, * a feature block generator (200, CR1) configured to reshape the set of features (102) from a first shape to a second shape by: - segmenting (210) the set of features (102) into at least 3 feature subsets (212, 212a-212h), each feature subset (212, 212a-212h) having a specific shape, - performing a subsampling (220, 220a, 220b) of the feature subsets (212) to generate a plurality of feature blocks (222, 222a-222d) by stacking a selected set of the subsampled feature subsets feature subsets (212, 212a-212h) along a first dimension, - creating (230) a feature hyper-block (332) of the second shape by stacking the plurality of feature blocks (222, 222a-222d) along a second dimension, * a neural network processor (300, D1) configured to process the feature hyper block (332) to obtain a first result (380); and * an output post-processor (P2, 700) configured to post-process the result (380) to construct an output information signal (40) and/or to output a classification result.

No. of Pages : 41 No. of Claims : 22

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :28/10/2026

(21) Application No.202647128746 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND APPARATUS FOR TRANSMITTING AND RECEIVING UPLINK REFERENCE SIGNAL IN WIRELESS COMMUNICATION SYSTEM

(51) International classification	:H04L 5/00, H04W 72/231, H04W 72/1268, H04J 3/16, H04W 72/232
(31) Priority Document No	:10-2024-0044376
(32) Priority Date	:01/04/2024
(33) Name of priority country	:Republic of Korea
(86) International Application No Filing Date	:PCT/KR2025/004281 :01/04/2025
(87) International Publication No	:WO 2025/211721
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677 Republic of Korea

(72)**Name of Inventor :**
1)JANG, Youngrok
2)KIM, Taekhoon
3)ABEBE, Ameha Tsegaye
4)JI, Hyoungju

(57) Abstract :
The disclosure relates to a 5th-generation (5G) or 6th-generation (6G) communication system for supporting a higher data transmission rate. Provided is a method performed by a user equipment (UE), that includes transmitting, to a base station (BS), capability information regarding codebook-based 8Tx physical uplink shared channel (PUSCH), receiving, from the BS, sounding reference signal (SRS) configuration information including information of a SRS resource set, in case that a usage of the SRS resource set is identified as a codebook, based on the information of the SRS resource set, identifying that a value of nrofSRS-Ports-n8 is applied to all of a plurality of SRS resources in the SRS resource set and transmitting at least one SRS based on the value of nrofSRS-Ports-n8.

No. of Pages : 113 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026

(21) Application No.202647128752 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AN APPARATUS, A METHOD AND A COMPUTER PROGRAM FOR VIDEO CODING AND DECODING

(51) International classification	:H04N 19/117, H04N 19/159, H04N 19/172, H04N 19/46, H04N 19/70
(31) Priority Document No	:20245449
(32) Priority Date	:10/04/2024
(33) Name of priority country	:Finland
(86) International Application No Filing Date	:PCT/EP2025/056853 :13/03/2025
(87) International Publication No	:WO 2025/214700
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)HANNUKSELA, Miska Matias
2)CRICRÌ, Francesco

(57) Abstract :
A method comprising: inferring or indicating a processing order comprising multiple processing stages; inferring or indicating a noninitial processing stage among the multiple processing stages; encoding a first indication that the noninitial processing stage is invoked to one or more indicated pictures; and associating the first indication with at least one reconstructed picture, wherein the one or more indicated pictures differ from the at least one reconstructed picture

No. of Pages : 86 No. of Claims : 30

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647128878 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SIGNALING TO SUPPORT ON-DEMAND SYSTEM INFORMATION BLOCK TYPE ONE

(51) International classification :H04W 48/10, H04W 88/08, H04W 52/02
(31) Priority Document No :202441028260
(32) Priority Date :05/04/2024
(33) Name of priority country :India
(86) International Application No :PCT/EP2025/053442
Filing Date :10/02/2025
(87) International Publication No :WO 2025/209702
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)BALASUBRAMANIAM, Sankaran
2)SAYED HASSAN, Mohamad
3)KHLASS, Ahlem
4)LASELVA, Daniela
5)HELMERS, Hakon

(57) Abstract :
Disclosed is a method performed by a central unit, the method comprising: receiving, from a first distributed unit controlling a first cell or from a second distributed unit controlling a second cell, configuration information associated with a wake-up signal for requesting an on-demand system information block type one, SIB1, of the second cell; broadcasting the configuration information associated with the wake-up signal via the first distributed unit or via the second distributed unit; and transmitting, to the second distributed unit controlling the second cell, a request for updating a master information block of the second cell to indicate at least one of: that an on-demand SIB1 transmission mode is activated for the second cell, or that an SIB1 transmission is deactivated for the second cell.

No. of Pages : 68 No. of Claims : 11

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647128911 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND APPARATUS FOR FRACTIONAL MEASUREMENT GAPS

(51) International classification	:H04W 24/10, H04W 56/00, H04W 72/0446, H04W 72/542
(31) Priority Document No	:63/574595
(32) Priority Date	:04/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/FI2025/050141 :24/03/2025
(87) International Publication No	:WO 2025/210296
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)CAUDURO DIAS DE PAIVA, Rafael
2)HARRIS, John
3)PEDERSEN, Klaus, Ingemann
4)KAIKKONEN, Jorma, Johannes

(57) Abstract :
A method and apparatus are disclosed for configuring fractional measurement gaps. As described herein, a fractional gap pattern, in which a measurement gap duration is divided into N parts (where N is an integer greater than one), may reduce scheduling latency and/or pre-scheduling. In this regard, for measurement gap occasions, one fractional measurement gap may be used for measurements, and/or the other fractional measurement gaps may be available for scheduling. The subdivision of the measurement gap into N parts may be such that there may be an overlap between one or more subdivisions. The measurement gap duration may be subdivided based on dynamically- determined criteria, for example, if a baseline measurement gap coincides with data arrivals and/or allocations, a gap pattern may be further subdivided into additional parts.

No. of Pages : 47 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202647128945 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : OPTICAL MODULE AND MOTOR VEHICLE

(51) International classification :F21S 43/14, F21S 43/20, F21S 43/50
(31) Priority Document No :202410544285.9
(32) Priority Date :30/04/2024
(33) Name of priority country :China
(86) International Application No :PCT/EP2025/061415
Filing Date :25/04/2025
(87) International Publication No :WO 2025/228835
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)VALEO VISION
Address of Applicant :34, Rue Saint André 93012 BOBIGNY Cedex France
(72)**Name of Inventor :**
1)XIE, Qiao
2)LI, Yunze
3)FANG, Dan
4)LI, Jinyu

(57) Abstract :
An optical module (100), comprising: a substrate (10); a plurality of light source assemblies (20); a grille member (30), wherein the grille member (30) comprises a plurality of gratings (310), the plurality of gratings (310) extend in respective extension directions to intersect with each other to form a plurality of grids (320), each of the plurality of grids (320) defines a cavity (330), at least one light source assembly (20) is positioned in the cavity (330) of each grid (320), and the extension directions (EDI, ED2) are parallel to a surface (S) of the substrate (10); and a light projection element (40), wherein each of the plurality of gratings (310) has a height in a height direction (H), the heights of the plurality of gratings (310) vary at least partially to match the shape of an inner surface of the light projection element (40) facing the grille member (30), and the height direction (H) is perpendicular to the surface (S) of the substrate (10).

No. of Pages : 18 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026

(21) Application No.202647128959 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COORDINATION OF TERMINAL-INITIATED REPORTING

(51) International classification	:H04L 5/00, H04W 24/10
(31) Priority Document No	:20245404
(32) Priority Date	:04/04/2024
(33) Name of priority country	:Finland
(86) International Application No	:PCT/EP2025/054988
Filing Date	:25/02/2025
(87) International Publication No	:WO 2025/209727
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)KOSKELA, Timo
2)KARJALAINEN, Juha Pekka
3)HAKOLA, Sami-Jukka

(57) Abstract :
There are provided measures for coordination of terminal-initiated reporting. Such measures exemplarily comprise transmitting a notification indicative of an intention to transmit a radio condition report, determining, based on at least one configured reporting parameter, reporting occasion resources out of a sequence of reporting occasion resources as reporting resources to be used for transmission of said radio condition report, and transmitting said radio condition report in said reporting resources to be used for transmission of said radio condition report, wherein said at least one configured reporting parameter is indicative of a relationship between notification occasion resources utilized for said notification and said reporting resources to be used for transmission of said radio condition report.

No. of Pages : 50 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026

(21) Application No.202647129018 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SIGNALING TO SUPPORT ON-DEMAND SYSTEM INFORMATION BLOCK TYPE ONE

(51) International classification	:H04W 48/10, H04W 52/02, H04W 88/08
(31) Priority Document No	:202441028259
(32) Priority Date	:05/04/2024
(33) Name of priority country	:India
(86) International Application No	:PCT/EP2025/053450
Filing Date	:10/02/2025
(87) International Publication No	:WO 2025/209704
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)BALASUBRAMANIAM, Sankaran
2)SAYED HASSAN, Mohamad
3)KHLASS, Ahlem
4)LASELVA, Daniela
5)HELMERS, Hakon

(57) Abstract :
Disclosed is a method comprising method performed by a first central unit controlling a first cell, the method comprising: receiving, from a second central unit controlling a second cell, a request to broadcast configuration information associated with a wake-up signal for requesting an on-demand system information block type one, SIB1, of the second cell; and based on receiving the request, broadcast the configuration information associated with the wake-up signal for requesting the on-demand SIB1 of the second cell.

No. of Pages : 68 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026

(21) Application No.202647129028 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHODS, SYSTEMS AND APPARATUS FOR PROCESSING GASEOUS STREAMS INCLUDING CARBON DIOXIDE

(51) International classification :F25J 3/08, F25J 1/02
(31) Priority Document No :63/572846
(32) Priority Date :01/04/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2025/022335
Filing Date :31/03/2025
(87) International Publication No :WO 2025/212518
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)FROSTCARBON, INC.
Address of Applicant :15525 W. 56th Ave., Suite 200 Arvada, Colorado 80002 U.S.A.
(72)**Name of Inventor :**
1)ABARR, Miles Lindsey
2)FRAZIER, Scott Raymond
3)BENCE, Christopher Stephen
4)MARKEY, Ethan James
5)YOUNG, Jeffrey Michael

(57) Abstract :
Apparatus, systems, and methods for processing gaseous streams including CO2 are disclosed. A method for performing a hot compression on a gaseous input stream including carbon dioxide (CO2) involves mixing the gaseous input stream with at least a portion of a CO2 depleted gaseous stream to generate a gaseous input stream having a CO2 concentration that meets a target CO2 concentration. Another method involves compressing the gaseous input stream in a hot compressor to generate a hot compressed gaseous stream and extracting thermal energy from the hot compressed gaseous stream for storage in a thermal energy store. An apparatus for cooling and compressing a hot compressed gaseous stream to facilitate removal of carbon dioxide (CO2) from the stream is also disclosed. A CO2 separator apparatus for extracting carbon dioxide (CO2) from a cold compressed gaseous stream is also disclosed.

No. of Pages : 35 No. of Claims : 55

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129059 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : PRINTING UPON CURVED SURFACES

(51) International classification :G03G 15/16, B41J 2/005, G03G 15/00
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :PCT/US2024/030052
Filing Date :17/05/2024
(87) International Publication No :WO 2025/239903
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P.
Address of Applicant :10300 Energy Drive Spring, Texas 77389 U.S.A.
(72)**Name of Inventor :**
1)VEIS, Alex
2)PORTNOY, Vitaly
3)KEDEM, Amir

(57) Abstract :
In an example, a print apparatus comprises a conveyor to hold an object to be printed upon, wherein the object comprises a curved surface and the conveyer is to convey the object; and a print transfer surface, to carry an image to be printed upon the object. The print transfer surface may be to engage with the object at an engagement region such that the image is transferred from the print transfer surface to the object to print the image on the object. The conveyor may convey the object on a path which is parallel with the shape of the print transfer surface over the engagement region, and may convey the object in an opposite direction to the print transfer surface over the engagement region.

No. of Pages : 16 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129066 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SPRAY NOZZLE ASSEMBLY WITH MULTIPLE DISCHARGE ORIFICES AND INDEPENDENT FLOW CONTROL

(51) International classification	:F02C 3/30, B05B 1/20
(31) Priority Document No	:63/637739
(32) Priority Date	:23/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/022795 :02/04/2025
(87) International Publication No	:WO 2025/226417
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SPRAYING SYSTEMS CO.
Address of Applicant :North Avenue and Schmale Road, P.O. Box 7900 Wheaton, Illinois 60187-7901 U.S.A.
(72)**Name of Inventor :**
1)VIDUSEK, Daniel

(57) Abstract :
A spray nozzle assembly (10) includes a nozzle body (12) supporting a plurality of spray nozzles (24). The plurality of spray nozzles are divided into a plurality of different stages (28, 30). The nozzle body includes a first fluid distribution passage (32) that communicates with a first spray nozzle stage (28) and a second fluid distribution passage (34) that communicates with a second spray nozzle stage (30). A nozzle inlet (14) includes a plurality of fluid inlets (40, 42) including a first fluid inlet (40) that communicates with the first fluid distribution passage (32) of the nozzle body and a second fluid inlet (42) that communicates with the second fluid distribution passage (34) of the nozzle body. Control of fluid flow through the first fluid distribution passage to the first spray nozzle stage and through the second fluid distribution passage to the second spray nozzle stage adjusts a total spray volume or a flow rate of the spray nozzle assembly.

No. of Pages : 10 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026

(21) Application No.202647129069 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : NICKEL-MANGANESE BEARING CARBONATE PRECURSOR MATERIAL AND A METHOD FOR PREPARING THE SAME

(51) International classification	:C01G 53/00, H01M 4/505, C01G 53/50, C01G 53/82, H01M 4/525
(31) Priority Document No	:24168186.5
(32) Priority Date	:03/04/2024
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:PCT/EP2025/059048 :03/04/2025
(87) International Publication No	:WO 2025/210114
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)UMICORE
Address of Applicant :Rue du Marais 31 1000 Brussels Belgium
(72)**Name of Inventor :**
1)ZNAIGUIA, Raja
2)ARSZELEWSKA, Violetta
3)DRIESEN, Kris
4)KUMAKURA, Shinichi

(57) Abstract :
Present disclosure relates to a nickel-manganese bearing carbonate precursor material with a narrow span, its use for preparing a cathode active material; to a cathode active material for rechargeable batteries, to a method for preparing this nickel-manganese bearing carbonate precursor material and a method for preparing the cathode active material; and to a battery comprising said cathode active material.

No. of Pages : 20 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :29/10/2026

(21) Application No.202647129080 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : EVENT DEFINITION FOR CONDITIONAL LAYER 1/LAYER 2-TRIGGERED MOBILITY EXECUTION BASED ON TRANSMISSION CONFIGURATION INDICATOR STATE

(51) International classification	:H04W 36/00, H04W 36/36
(31) Priority Document No	:63/574238
(32) Priority Date	:03/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/SE2025/050294 :02/04/2025
(87) International Publication No	:WO 2025/212018
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)
Address of Applicant :. 164 83 Stockholm Sweden
(72)**Name of Inventor :**
1)DA SILVA, Icaro Leonardo
2)BERGQVIST, Jens
3)ORSINO, Antonino

(57) Abstract :
A communication device configured to provide an event definition for conditional layer 1/layer 2-triggered mobility (LTM) execution based on transmission configuration indicator (TCI) state The communication device can determine (440) that a triggering condition is met based on a difference between a first measurement and a second measurement. The first measurement can be associated with a LTM candidate cell and the second measurement can be associated with a serving cell for which a TCI state is activated. Responsive to the triggering condition being met, the communication device can perform (450) a conditional LTM lower layer procedure.

No. of Pages : 59 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129084 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : RADIO LINK FAILURE IN CELLULAR COMMUNICATION NETWORKS

(51) International classification :H04W 24/02, H04W 36/00, H04W 56/00
(31) Priority Document No :20245429
(32) Priority Date :05/04/2024
(33) Name of priority country :Finland
(86) International Application No :PCT/EP2025/058335
Filing Date :26/03/2025
(87) International Publication No :WO 2025/209906
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)ELMALI, Ugur Baran
2)SPAPIS, Panagiotis
3)BALAN, Irina-Mihaela
4)WEGMANN, Bernhard
5)KOLLÁR, Martin
6)KARABULUT, Umur

(57) Abstract :
According to an example aspect of the present disclosure, there is provided an apparatus comprising at least one processing core and at least one memory storing instructions that, when executed by the at least one processing core, cause the apparatus at least to receive from a first serving node a request to perform a random access channel, RACH, -less handover from a source cell to a first target cell, determine a radio link failure, RLF, after performing an attempt for the RACH-less handover to the first target cell, determine a first timing advance, TA, value used by the apparatus for the RACH-less handover, receive, after determining that the RACH-less handover of the apparatus to the first target cell failed, from a second node serving a second target cell, a second TA value to be used by the apparatus to set up a connection to the second target cell, set up the connection to the second target cell using the second TA value and transmit to the second target cell a report comprising information on the first TA value and the second TA value.

No. of Pages : 28 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129128 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ION IMPLANTER AND LINEAR ACCELERATOR HAVING POLYGONAL BACKBONE

(51) International classification	:H05H 7/22, H01J 37/317
(31) Priority Document No	:18/627283
(32) Priority Date	:04/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/018879 :07/03/2025
(87) International Publication No	:WO 2025/212222
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)APPLIED MATERIALS, INC.
Address of Applicant :3050 Bowers Avenue Santa Clara, California 95054 U.S.A.
(72)**Name of Inventor :**
1)WEBB, Aaron P.
2)SCHALLER, Jason M.
3)PARK JR., William Herron
4)TAM, Wai Ming
5)CZAJKA, Chris
6)SIMMONS, Michael C.
7)BONECUTTER, Luke
8)BLAHNIK, David T.
9)CARRELL, Michael Mason

(57) Abstract :
A linear accelerator apparatus may include a beamline enclosure that defines a polygonal backbone, and a plurality of acceleration stages, disposed along a length of the beamline enclosure. A given acceleration stage may include a drift tube assembly to conduct an ion beam therethrough, a resonator, coupled to deliver an RF signal to the drift tube assembly, and a quadrupole assembly to shape the ion beam,. As such, at a first acceleration stage, a first resonator may be disposed along a first side of the polygonal backbone, and at a second acceleration stage, adjacent to and downstream of the first acceleration stage, a second resonator may be disposed along a second side of the polygonal backbone, different from the first side.

No. of Pages : 12 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129141 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY CASE, ENERGY STORAGE APPARATUS, AND ELECTRIC DEVICE

(51) International classification	:H01M 50/169, H01M 50/131
(31) Priority Document No	:202420644942.2
(32) Priority Date	:29/03/2024
(33) Name of priority country	:China
(86) International Application No	:PCT/CN2024/142193
Filing Date	:25/12/2024
(87) International Publication No	:WO 2025/200644
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)XIAMEN HITHIUM ENERGY STORAGE TECHNOLOGY CO., LTD.
Address of Applicant :No.1, Benyuan Road, Tongxiang High-Tech City, Torch High-Tech Zone Xiamen, Fujian 361100 China
(72)**Name of Inventor :**
1)ZHAO, Xue
2)JIANG, Shuo

(57) Abstract :
The present application provides a battery case, an energy storage apparatus, and an electric device. The battery case comprises a bottom case and a top cover. The bottom case comprises a main case and a reinforcing rib. The main case is provided with an accommodating cavity and an opening, wherein the accommodating cavity is formed inside the main case, and the opening is located on the outer surface of the main case and is communicated with the accommodating cavity. The reinforcing rib is fixedly connected to cavity side wall surfaces of the accommodating cavity, is spaced apart from the opening and a cavity bottom wall surface of the accommodating cavity, and extends in the circumferential direction of the main case; first sub-reinforcing portions of the reinforcing rib each comprise a step surface facing the opening; second sub-reinforcing portions of the reinforcing rib are located on the sides of the first sub-reinforcing portions facing away from the step surfaces, and are fixedly connected to the first sub-reinforcing portions; and in the direction from the opening to the cavity bottom wall surface, the thickness of the second sub-reinforcing portions gradually decreases. The top cover is located on the accommodating cavity, is welded to the cavity side wall surfaces, abuts against the step surfaces, and also closes the opening.

No. of Pages : 13 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129142 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SANITARY DEVICE HAVING A LIQUID FEED

(51) International classification	:E03C 1/04, B05B 1/04, B05B 17/08, E03C 1/05
(31) Priority Document No	:10 2024 109 329.3
(32) Priority Date	:03/04/2024
(33) Name of priority country	:Germany
(86) International Application No Filing Date	:PCT/EP2025/058727 :31/03/2025
(87) International Publication No	:WO 2025/209985
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)HASENKOPF INDUSTRIE MANUFAKTUR GMBH
Address of Applicant :Stöcklstraße 1-2 84561 Mehring Germany
(72)**Name of Inventor :**
1)LÖCHELT, Patrick
2)ROCKINGER, Wilhelm
3)ILCHMANN, Florian
4)LECHNER, Florian

(57) Abstract :
The invention relates to a sanitary device having a liquid feed, comprising a device inner region and a device edge which delimits the device inner region, a water feed which can be actuated by means of a water feed controller and a controllable, preferably electrical and/or pneumatic feed valve, wherein the water feed controller has a sensor for providing a feed request signal, wherein the sensor is arranged under the surface of the device edge, wherein the water feed is arranged in the device inner region and has a slot opening.

No. of Pages : 19 No. of Claims : 28

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129171 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SELECTIVE PASSIVATION OF SILICON OXIDE CONTAINING FILMS UTILIZING ORGANOAMINO-ALKOXYSILANES

(51) International classification	:H01L 21/3105, H01L 21/32, H01L 21/02
(31) Priority Document No	:63/575106
(32) Priority Date	:05/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/EP2025/059336 :04/04/2025
(87) International Publication No	:WO 2025/210255
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)MERCK PATENT GMBH
Address of Applicant :Frankfurter Strasse 250 64293 Darmstadt Germany
2)VERSUM MATERIALS US, LLC
(72)**Name of Inventor :**
1)LEI, Xinjian
2)MACDONALD, Matthew R.
3)LIU, Po-Chun
4)GLIEGE, Marisa

(57) Abstract :
A method for selectively passivating a surface of a substrate, wherein the surface of the substrate includes at least a first surface comprising a dielectric and at least a second surface comprising another dielectric material or metal. The method includes the step of exposing the first and second surfaces to at least one the organoamino-alkoxysilane selectively reacts with the dielectric to passivate the first surface thereby leaving the second surface substantially unreacted.

No. of Pages : 76 No. of Claims : 24

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129177 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COVER ASSEMBLY FOR A BATTERY CELL

(51) International classification	:H01M 50/15, H01M 50/188, H01M 50/553
(31) Priority Document No	:10 2024 109 272.6
(32) Priority Date	:03/04/2024
(33) Name of priority country	:Germany
(86) International Application No Filing Date	:PCT/EP2024/079900 :23/10/2024
(87) International Publication No	:WO 2025/209666
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)CARL FREUDENBERG KG
Address of Applicant :Höhnerweg 2-4 69469 Weinheim Germany
(72)**Name of Inventor :**
1)MORGENSTERN, Stefan
2)NEUBERGER, Sören
3)NAHRWOLD, Olaf
4)TRABER, Boris
5)LEICHNER, Tim
6)BOSCOLO, Marco
7)BURO, Maurizio

(57) Abstract :
The invention relates to a cover assembly for a battery cell, the cover assembly comprising: a metal base plate (2); at least one terminal (3, 4) which is arranged in a through-opening (20) in the base plate (2); and a sealing element (5, 5') which secures and seals the terminal to the base plate (2), wherein the sealing element (5, 5') is arranged in the through-opening (20) and is designed to seal a first connection region (6) between the terminal (3, 4) and the sealing element (5) and a second connection region (7) between the base plate (2) and the sealing element (5, 5'), and to establish a connection between the terminal (3, 4) and the base plate (2).

No. of Pages : 8 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129181 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SIGNALING TO SUPPORT ON-DEMAND SYSTEM INFORMATION BLOCK TYPE ONE

(51) International classification	:H04W 48/14, H04W 52/02
(31) Priority Document No	:202441028258
(32) Priority Date	:05/04/2024
(33) Name of priority country	:India
(86) International Application No	:PCT/EP2025/053444
Filing Date	:10/02/2025
(87) International Publication No	:WO 2025/209703
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)BALASUBRAMANIAM, Sankaran
2)SAYED HASSAN, Mohamad
3)KHLASS, Ahlem
4)LASELVA, Daniela
5)HELMERS, Hakon

(57) Abstract :
Disclosed is a method comprising receiving, from a first cell or from a second cell, configuration information associated with a wake-up signal for requesting an on-demand system information block type one, SIB1 of the second cell; receiving, from the first cell or from the second cell, duration information indicating a validity duration of the configuration information associated with the wake-up signal; transmitting the wake-up signal based on the configuration information and within the validity duration, wherein the wake-up signal indicates an identifier associated with the second cell; and receiving the on-demand SIB1 of the second cell from the first cell or from the second cell.

No. of Pages : 68 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129196 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SECURITY ALGORITHM MANAGEMENT IN COMMUNICATION NETWORK ENVIRONMENT

(51) International classification	:H04L 9/40, H04L 9/32, H04W 12/106, H04W 12/37, H04L 9/14
(31) Priority Document No	:2404634.4
(32) Priority Date	:01/04/2024
(33) Name of priority country	:U.K.
(86) International Application No Filing Date	:PCT/IB2025/053404 :01/04/2025
(87) International Publication No	:WO 2025/210501
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)ORKOPOULOS, Stawros
2)MAVUREDDI DHANASEKARAN, Ranganathan
3)P NAIR, Suresh

(57) Abstract :
Techniques are disclosed for security algorithm management. For example, a method includes receiving, at the data transmitting entity associated with a communication network, one or more data packets for transmission to a data receiving entity associated with the communication network, selecting, at the data transmitting entity, one or more security algorithms to be applied to the one or more data packets, wherein the selection is made between one or more first security algorithms configured with a first key length and one or more second security algorithms configured with a second key length, applying, at the data transmitting entity, the selected one or more security algorithms to the one or more data packets, and transmitting, from the data transmitting entity, the one or more data packets to the data receiving entity, in response to the application of the selected one or more security algorithms to the one or more data packets.

No. of Pages : 27 No. of Claims : 18

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129208 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMPOSITIONS CONTAINING PEROXYACID TO INHIBIT GROWTH OF SPOREPRODUCING ORGANISMS IN ANIMAL FEED AND RELATED METHODS

(51) International classification	:A01N 37/02, A23K 20/105, A23K 10/00, A01P 1/00
(31) Priority Document No	:63/633368
(32) Priority Date	:12/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/024620 :14/04/2025
(87) International Publication No	:WO 2025/217651
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)KEMIN INDUSTRIES, INC.
Address of Applicant :1900 Scott Avenue Des Moines, Iowa 50317 U.S.A.
(72)**Name of Inventor :**
1)SALAKLANG, Jatuporn
2)THNG, Agnes Hwee Hong
3)CHIRAKKAL, Haridasan

(57) Abstract :
The present invention relates to a food or feed additive that contains one or more peroxyacid in an amount effective to inhibit or control the growth of a spore-producing organism, including but not limited to molds and yeast, particularly under high moisture conditions. Another aspect of the present invention relates to using a composition containing an effective amount of one or more peroxyacid to inhibit or control the growth of mold in an animal's diet. Another aspect of the invention relates to using compositions containing an effective amount of one or more peroxyacids to detoxify mycotoxins. Another aspect of the present invention relates to a kit for treating animal feed to control the growth of spore-producing organisms comprising a peroxypropionic acid concentrate and a buffered solution.

No. of Pages : 32 No. of Claims : 45

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026

(21) Application No.202647129216 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMPOSITION FOR TREATMENT OF PERIODONTAL DISEASE AND RELATED METHOD

(51) International classification	:A61K 9/00, A61K 9/06, A61K 38/17, A61K 47/10, A61K 47/14
(31) Priority Document No	:24168328.3
(32) Priority Date	:03/04/2024
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:PCT/EP2025/059035 :03/04/2025
(87) International Publication No	:WO 2025/210108
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)OROCIDIN A/S
Address of Applicant :Vandtårnsvej 62A, 1. B 2860 Søborg Denmark
(72)**Name of Inventor :**
1)HOLM, Per
2)NORLING, Thomas
3)WEHNERT, Allan

(57) Abstract :
Disclosed is a composition suitable for treatment of periodontal disease. The composition comprises the peptide LL37 (SEQ ID NO: 1) in admixture with a gelling agent/mixture, which upon introduction into a periodontal pocket increases its viscosity. Also disclosed is an injection device comprising the composition. A method for treatment of periodontal disease is also disclosed.

No. of Pages : 22 No. of Claims : 38

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129333 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY

(51) International classification :H01M 50/531
(31) Priority Document No :202411428319.4
(32) Priority Date :14/10/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/125229
Filing Date :29/09/2025
(87) International Publication No :WO 2026/081860
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)CALB GROUP CO., LTD.
Address of Applicant :No. 1 Jiangdong Road, Jintan District Changzhou, Jiangsu 213000 China
(72)**Name of Inventor :**
1)LIU, Yang
2)XU, Jiuling
3)MA, Chaojie

(57) Abstract :
The present invention relates to the technical field of batteries. Provided is a battery, which comprises a battery cell, a housing, a positive electrode post assembly and a negative electrode post assembly. The battery cell is arranged in the housing; the positive electrode post assembly and the negative electrode post assembly are arranged on the housing; and the battery cell comprises a battery cell body, a positive electrode tab and a negative electrode tab. In the length direction of the battery, the positive electrode tab and the negative electrode tab are led out from two ends of the battery cell body, the positive electrode tab and the negative electrode tab being respectively welded to the positive electrode post assembly and the negative electrode post assembly; the thickness of the positive electrode tab is greater than the thickness of the negative electrode tab, and the width of the negative electrode tab in the width direction of the battery is greater than the width of the positive electrode tab in the width direction of the battery. The battery has high energy density, high reliability, and good overall overcurrent capacity.

No. of Pages : 16 No. of Claims : 24

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129351 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY PACK

(51) International classification :H01M 50/284
(31) Priority Document No :202411428316.0
(32) Priority Date :14/10/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/124819
Filing Date :28/09/2025
(87) International Publication No :WO 2026/081849
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)CALB GROUP CO., LTD.
Address of Applicant :No. 1 Jiangdong Road, Jintan District Changzhou, Jiangsu 213000 China
(72)**Name of Inventor :**
1)TANG, Lei
2)LI, Liangchen
3)WANG, Chao

(57) Abstract :
Disclosed in the present invention is a battery pack. The battery pack comprises a case, a battery assembly, and a battery pack disconnect unit; the case is internally provided with a battery compartment and an electrical compartment separated by a partition beam; the battery assembly is arranged in the battery compartment, and the battery pack disconnect unit is arranged in the electrical compartment; the battery pack disconnect unit comprises a housing, a circuit board, and electronic components connected to the circuit board, the circuit board is arranged in the housing, and the electronic components are arranged on board surfaces on both sides of the circuit board. By applying the present solution, the board surface area of the circuit board of the battery pack disconnect unit can be reduced, the space occupied by the battery pack disconnect unit in the battery pack can be reduced, the size of the electrical compartment can be effectively decreased, and more of the accommodating space in the case of the battery pack can be allocated to the battery compartment, thereby providing strong technical support for improving the overall battery energy density.

No. of Pages : 12 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129365 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY

(51) International classification :H01M 50/30, H01M 50/102, H01M 10/04
(31) Priority Document No :202411525405.7
(32) Priority Date :30/10/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/123594
Filing Date :24/09/2025
(87) International Publication No :WO 2026/091999
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)CALB GROUP CO., LTD.
Address of Applicant :No. 1 Jiangdong Road, Jintan District Changzhou, Jiangsu 213000 China
(72)**Name of Inventor :**
1)LIU, Yang
2)XU, Jiuling
3)MA, Chaojie

(57) Abstract :
The embodiments of the present application provide a battery, comprising a housing, explosion-proof valves, and a cell located in the housing. The housing comprises two oppositely disposed large surfaces, i.e., a first large surface and a second large surface, wherein the first large surface and the second large surface each comprise two oppositely disposed long sides and two oppositely disposed short sides; four small surfaces, i.e., two oppositely disposed first side surfaces and two oppositely disposed second side surfaces, are disposed between the first large surface and the second large surface; the first side surfaces are connected to the short sides, and the second side surfaces are connected to the long sides; the joint of the first large surface and each first side surface is recessed towards the second large surface to form a recessed portion, a tab lead-out end is arranged opposite the recessed portion, the recessed portion forms a protruding portion with the first side surface and part of the second large surface, and a tab is at least partially accommodated in the protruding portion; and transition surfaces are formed between the second side surfaces and the recessed portions. The explosion-proof valves are arranged on the second side surfaces, and the maximum distance between the explosion-proof valves and the transition surfaces ranges from 0.1 mm to 10 mm. When the battery undergoes thermal runaway, the burst position is more concentrated, thus being more conducive to directional exhaust.

No. of Pages : 13 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202647129419 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ELECTRONIC DEVICE INCLUDING FLEXIBLE PRINTED CIRCUIT BOARD

(51) International classification	:H05K 1/14, H05K 1/11, H05K 1/02, G02B 27/01
(31) Priority Document No	:10-2024-0085758
(32) Priority Date	:28/06/2024
(33) Name of priority country	:Republic of Korea
(86) International Application No Filing Date	:PCT/KR2025/007592 :02/06/2025
(87) International Publication No	:WO 2026/005323
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129 Samsung-ro Yeongtong-gu, Suwon-si Gyeonggi-do 16677 Republic of Korea
(72)**Name of Inventor :**
1)SON, Joonyoung
2)LEE, Jinchoul
3)SON, Muchang
4)YUN, Juhwan
5)YOON, Hyunseung
6)JEONG, Junmyeong

(57) Abstract :
A wearable electronic device is provided. The wearable electronic device includes a frame accommodating at least one lens or at least one display, a temple connected to an end of the frame, and a flexible printed circuit board (FPCB) having at least a portion disposed on the temple and extending along the longitudinal direction. The flexible printed circuit board includes: a plurality of substrate layers which have one or more circuit lines formed on a surface thereof and are disposed to overlap each other along the thickness direction; and at least one connection layer disposed between the plurality of substrate layers and connecting the surfaces of the substrate layers adjacent to each other. When the flexible printed circuit board is viewed in the thickness direction, the flexible printed circuit board includes a first circuit area having formed therein a data line for transmitting a data signal, and the at least one connection layer does not overlap the first circuit area.

No. of Pages : 80 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129518 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CANDIDATE CELL CHANNEL STATE INFORMATION-REFERENCE SIGNAL CONFIGURATION FOR CELL SWITCH

(51) International classification	:H04L 5/00, H04W 36/00
(31) Priority Document No	:202441028191
(32) Priority Date	:05/04/2024
(33) Name of priority country	:India
(86) International Application No	:PCT/EP2025/054938
Filing Date	:25/02/2025
(87) International Publication No	:WO 2025/209724
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)GOYAL, Sanjay
2)KOSKELA, Timo
3)SELVAGANAPATHY, Srinivasan
4)HÖHNE, Hans Thomas
5)ASHRAF, Shehzad Ali
6)DOSTI, Endrit

(57) Abstract :
A method, apparatus and computer program product are provided for provisioning channel state information reference signal (CSI-RS) configurations to a user equipment (UE) for layer-one (L1) measurement and cell configuration. In the context of a method, the method includes receiving at least CSI-RS configuration for a candidate cell from a network node, the at least one CSI-RS configuration comprising: a first set of CSI-RS configurations for L1 measurement; and a second set of CSI-RS configurations for candidate cell configuration; executing a cell switch to the candidate cell in response to a control message from the network node; and determining a subset of CSI-RSs of the candidate cell for at least one of beam management or CSI reporting based on the first set of CSI-RS configurations and the second set of CSI-RS configurations.

No. of Pages : 50 No. of Claims : 28

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129546 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CANDIDATE CELL CHANNEL STATE INFORMATION-REFERENCE SIGNAL CONFIGURATION FOR CELL SWITCH

(51) International classification	:H04L 5/00, H04W 36/00, H04W 36/08, H04W 24/10, H04W 72/044
(31) Priority Document No	:202441028196
(32) Priority Date	:05/04/2024
(33) Name of priority country	:India
(86) International Application No Filing Date	:PCT/EP2025/055099 :26/02/2025
(87) International Publication No	:WO 2025/209734
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)GOYAL, Sanjay
2)KOSKELA, Timo
3)SELVAGANAPATHY, Srinivasan
4)HÖHNE, Hans Thomas
5)ASHRAF, Shehzad Ali
6)DOSTI, Endrit

(57) Abstract :
A method, apparatus and computer program product are provided for provisioning channel state information reference signal (CSI-RS) configurations to a user equipment (UE) for layer-one (L1) measurement and cell configuration. In the context of a method, the method includes receiving at least CSI-RS configuration for a candidate cell from a network node, the at least one CSI-RS configuration comprising: a first set of CSI-RS configurations for L1 measurement; and a second set of CSI-RS configurations for candidate cell configuration; executing a cell switch to the candidate cell in response to a control message from the network node; and determining a subset of CSI-RSs of the candidate cell for at least one of beam management or CSI reporting based on the first set of CSI-RS configurations and the second set of CSI-RS configurations.

No. of Pages : 50 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129553 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : INTERNET OF THINGS DEVICE AND NODE

(51) International classification :H04W 74/00, H04W 4/70, H04W 88/04
(31) Priority Document No :24168425.7
(32) Priority Date :04/04/2024
(33) Name of priority country :EPO
(86) International Application No :PCT/EP2025/058488
Filing Date :27/03/2025
(87) International Publication No :WO 2025/209929
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)PANASONIC INTELLECTUAL PROPERTY CORPORATION OF AMERICA
Address of Applicant :2050 W 190th Street, Suite 450 Torrance, CA 90504 U.S.A.
(72)**Name of Inventor :**
1)SHARIATMADARI, Hamidreza
2)SUZUKI, Hidetoshi

(57) Abstract :
Provided is an Internet of Things, IoT, device, comprising a transceiver which, in operation, receives a trigger signal; and circuitry which, in operation, determines whether or not the IoT device may access an uplink channel for data transmission, based on the trigger signal and a condition which is pre-obtained or indicated by the trigger signal. Provided is a node, comprising circuitry which, in operation, determines a condition for determination of whether or not an Internet of Things, IoT, device may access an uplink channel for data transmission; and a transceiver which, in operation, transmits a trigger signal indicating the condition. Provided is a node, comprising circuitry which, in operation, determines a transmitted signal strength of a trigger signal for determination of whether or not an IoT device may access an uplink channel for data transmission, based on the trigger signal and a condition; and a transceiver which, in operation, transmits a trigger signal according to the determined transmitted signal strength.

No. of Pages : 49 No. of Claims : 21

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129558 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : FIRST NETWORK NODE, DEVICE, SECOND NETWORK NODE AND METHODS PERFORMED THEREBY, FOR HANDLING SENSING INFORMATION

(51) International classification	:H04W 12/02, G01S 13/06, H04W 4/029, H04W 4/38, H04W 24/10
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:PCT/SE2024/050309 :04/04/2024
(87) International Publication No	:WO 2025/211997
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)
Address of Applicant :164 83 Stockholm Sweden
(72)**Name of Inventor :**
1)STAVRIDIS, Athanasios
2)BALDEMAIR, Robert
3)NOVOTNY, Jiri
4)ARKKO, Jari

(57) Abstract :
A method performed by a first network node (111). The method is for handling sensing information. The first network node (111) operates in a first wireless communications network (101). The first network node (111) sends (302) a first indication indicating that a sensing procedure is to be performed in a location. The location comprises a second network node (112) or a device (130), operating in the first wireless communications network (101) or in a second wireless communications network (102). The first network node (111) obtains (304), responsive to the sent first indication, a second indication from at least one of the second network node (112) and the device (130). The second indication indicates first information to be excluded from second information obtained, or to be obtained, during the sensing procedure. Publ.

No. of Pages : 58 No. of Claims : 22

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026

(21) Application No.202647129587 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : IMPROVED MULTIPLE ACCESS FOR A-IOT DEVICES

(51) International classification :H04W 74/00
(31) Priority Document No :PCT/CN2024/086186
(32) Priority Date :04/04/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/086792
Filing Date :02/04/2025
(87) International Publication No :WO 2025/209510
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)
Address of Applicant :SE-164 83 Stockholm Sweden
(72)**Name of Inventor :**
1)FELTRIN, Luca
2)SINGH, Bikramjit
3)WANG, Min
4)ENBUSKE, Henrik
5)PHAM VAN, Dung
6)NARAYANAN, Revathy
7)HÖGLUND, Andreas
8)ZHANG, Zhang
9)KADAN VEEDU, Sandeep Narayanan

(57) Abstract :
The present disclosure is related to terminal device, communication devices, and methods for improved multiple access for A-IoT devices. A method at a terminal device comprises: transmitting, to a communication device, a first message for a channel access procedure over a first resource in a first frequency region; and transmitting, to the communication device, at least one second message for the channel access procedure over a second resource in a second frequency region.

No. of Pages : 34 No. of Claims : 19

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129614 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : PROPOLIS VIRUCIDAL ORAL SPRAY

(51) International classification	:A61K 9/00, A61K 47/10
(31) Priority Document No	:PUV 2024-41873
(32) Priority Date	:31/03/2024
(33) Name of priority country	:Czech Republic
(86) International Application No Filing Date	:PCT/CZ2025/050027 :28/03/2025
(87) International Publication No	:WO 2025/209614
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GR - NANO A.S.
Address of Applicant :U Zahradniho mesta 3189/2 106 00 Praha 10, Zabehlice Czech Republic
(72)**Name of Inventor :**
1)BALUSKA, Arnost

(57) Abstract :
The technical solution relates to a propolis virucidal oral spray, which contains 16.1 % to 18.1 % by weight of propolis extract, and 72.5 % by weight of ethanol enriched with menthol and the remainder up to 100 % by weight of the mixture is water. The preparation, applied in the form of a spray, forms a protective film (liquid veil) on the mucous membrane of the mouth and nose, which protects the user from infection.

No. of Pages : 5 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026

(21) Application No.202647129637 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEMS AND METHODS FOR ORGAN PERFUSION

(51) International classification	:A01N 1/143, A61B 8/12, A61L 27/38, A01N 1/10, C12N 5/075
(31) Priority Document No	:63/575410
(32) Priority Date	:05/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/023196 :04/04/2025
(87) International Publication No	:WO 2025/213048
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)O-PAD IRELAND LP
Address of Applicant :70 Sir John Rogerson's Quay Dublin 2 Ireland
(72)**Name of Inventor :**
1)BERGLUND, Erik

(57) Abstract :
Provided herein are perfusion systems (e.g., a perfusion system with a an acoustic volume sensor) that deliver a composition comprising at least one agent that induces expression of OCT3/4, SOX2, c-MYC, KLF4, NANOG, and/or LIN28 in an organ (e.g., a kidney, a liver, a. heart, a lung, a pancreas). Also provided herein are methods and compositions suitable for use with the perfusion systems.

No. of Pages : 148 No. of Claims : 75

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129656 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AQUEOUS DISPERSION COMPRISING DESTRUCTURED STARCH

(51) International classification :C08L 3/02, C09D 103/02, D21H 17/28
(31) Priority Document No :102024000007453
(32) Priority Date :04/04/2024
(33) Name of priority country :Italy
(86) International Application No :PCT/EP2025/059256
Filing Date :04/04/2025
(87) International Publication No :WO 2025/210220
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NOVAMONT S.P.A.
Address of Applicant :Via G. Fauser 8 28100 Novara Italy
(72)**Name of Inventor :**
1)SAGLIANO, Angela
2)FERRON, Lucia

(57) Abstract :
The present invention relates to an aqueous dispersion comprising destructured starch, at least one polymer containing hydrophilic groups in or outside the main chain, at least one polyfunctional compound and at least one non-ionic dispersant additive having a hydrophilic- lipophilic balance (HLB) index of less than 15, use of said dispersion in a coating process and the coating composition obtained from said dispersion.

No. of Pages : 25 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026

(21) Application No.202647129683 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : TWO-PART STOPPER AND PROCESS FOR MAKING SAME

(51) International classification :A61M 5/315, A61L 31/14
(31) Priority Document No :18/635482
(32) Priority Date :15/04/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2025/024255
Filing Date :11/04/2025
(87) International Publication No :WO 2025/221598
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)BECTON, DICKINSON AND COMPANY
Address of Applicant :1 Becton Drive Franklin Lakes, NJ 07417 U.S.A.
(72)**Name of Inventor :**
1)PRAIS, Alfred, W.
2)POSEY, Glenn, S.
3)FORCINITI, Leandro

(57) Abstract :
The invention relates, in general, to various elastomeric, polymeric, and/or rubber formulations that can be used to form two-part, or dual-formulation, stopper designs where at least a portion of the stopper is formed using a low temperature processing step while the remainder of the stopper is formed using a high temperature processing step, methods of making same, and uses for such stoppers.

No. of Pages : 26 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026

(21) Application No.202647129691 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ARTICLE TRANSPORT FACILITY

(51) International classification :B65G 1/04
(31) Priority Document No :2024-060744
(32) Priority Date :04/04/2024
(33) Name of priority country :Japan
(86) International Application No :PCT/JP2025/012814
Filing Date :28/03/2025
(87) International Publication No :WO 2025/211278
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)DAIFUKU CO., LTD.
Address of Applicant :2-11, Mitejima 3-chome, Nishiyodogawa-ku, Osaka-shi, Osaka 5550012 Japan
(72)**Name of Inventor :**
1)PIMPARKAR Siddhi
2)IWATA Masashige
3)SAKAUE Haruya
4)HORIE Satoshi

(57) Abstract :
This article transport facility comprises: tiered transport devices (4) disposed in a plurality of tiers; a lifting transport device for transporting articles (W) in the vertical direction (Z); and a carry-out device. The lifting transport device is provided with an upper lifting unit (6U) and a lower lifting unit (6L). A control system executes, as a selection process for selecting an article (W) to be received by each of the upper lifting device (6U) and the lower lifting device (6L), a first selection process for causing the lowermost tiered transport device (4) at the lower level (Z1), among the tiered transport devices (4) on which the articles (W) to be received by the upper lifting device (6U) are disposed, to be positioned at the upper level (Z2), i.e., higher than the uppermost tiered transport device (4) at the upper level (Z2), among the tiered transport devices (4) on which the articles (W) to be received by the lower lifting device (6L) are disposed.

No. of Pages : 22 No. of Claims : 5

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129693 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MOVABLE ASSEMBLY FIXTURE FOR A ROTOR BLADE

(51) International classification	:B29C 70/44, B29C 70/54, B29D 99/00, B25J 5/00, B66F 9/06
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:PCT/US2024/025910 :24/04/2024
(87) International Publication No	:WO 2025/226264
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GE VERNOVA INFRASTRUCTURE TECHNOLOGY LLC
Address of Applicant :300 Garlington Road Greenville, SC 29615 U.S.A.
(72)**Name of Inventor :**
1)BARSLEV, Henrik
2)JOHNSON, Jonathan
3)BELOTE, Michael

(57) Abstract :
A method for assembling a rotor blade includes securing a blade root section of the rotor blade to a movable assembly fixture. The movable assembly fixture has a counterbalance for stabilizing the blade root section in the movable assembly fixture. The method also includes transporting the movable assembly fixture adjacent to a mold of the rotor blade. The mold has one or more fiber layers placed therein. The method includes aligning the blade root section with the mold via the movable assembly fixture. Moreover, the method includes vertically moving the blade root section up or down via the movable assembly fixture to precisely position the blade root section atop the one or more fiber layers in the mold at a predetermined angle. Further, the method includes infusing the blade root section and the one or more fiber layers together with a resin material to form the rotor blade.

No. of Pages : 14 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129709 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : IMAGE PROCESSING METHOD, AND PREDICTIVE MODEL BASED ON RESULTS OF NEMATODE TAXIS BEHAVIOR WITH RESPECT TO CANCER PATIENT URINE

(51) International classification :G01N 33/493, G01N 33/48, G06T 5/94, G06T 7/00
(31) Priority Document No :2024-063490
(32) Priority Date :10/04/2024
(33) Name of priority country :Japan
(86) International Application No :PCT/JP2025/014266
Filing Date :10/04/2025
(87) International Publication No :WO 2025/216273
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)HIROTSU BIO SCIENCE INC.
Address of Applicant :22F, The New Otani GARDEN COURT, 4-1, Kioicho, Chiyoda-ku, Tokyo 1020094 Japan
(72)**Name of Inventor :**
1)HIROTSU Takaaki
2)FUJITANI Takeo
3)HATAKEYAMA Hideyuki
4)UNGKULPASVICH Umbhorn

(57) Abstract :
The present disclosure provides a method for processing an image in which a distribution of nematodes after motion in a taxis behavior assay of nematodes with respect to a urine sample obtained from a subject is recorded. The method of the present disclosure involves, for example, performing one or more processes selected from the group consisting of: (i) a process for cutting out, from the image, an image of a urine sample placement portion and a surrounding portion around the entire circumference thereof, including the nematodes, and (ii) a process for emphasizing the nematodes in the image.

No. of Pages : 23 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026

(21) Application No.202647129717 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEMS AND METHODS FOR KIDNEY PERFUSION

(51) International classification	:A61K 35/12, A61K 35/545, A61K 38/17, A61M 1/14, A61P 13/12
(31) Priority Document No	:63/575429
(32) Priority Date	:05/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/023181 :04/04/2025
(87) International Publication No	:WO 2025/213038
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)O-PAD IRELAND LP
Address of Applicant :70 Sir John Rogerson's Quay Dublin 2 Ireland
(72)**Name of Inventor :**
1)BERGLUND, Erik

(57) Abstract :
Provided herein are perfusion systems (e.g., a perfusion system with an acoustic volume sensor) that deliver a composition comprising at least one agent that induces expression of OCT3/4, SOX2, c-MYC, KLF4, N.ANOG, and/or LIN28 in the kidney. Also provided herein are methods and compositions suitable for use with the perfusion systems.

No. of Pages : 131 No. of Claims : 75

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129726 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEMS AND METHODS FOR SPECTRAL FEATURE LEARNING FOR AUDIO

(51) International classification :G10L 13/047, G10L 19/06, G10L 25/30
(31) Priority Document No :20240100354
(32) Priority Date :14/05/2024
(33) Name of priority country :Greece
(86) International Application No :PCT/US2025/028514
Filing Date :08/05/2025
(87) International Publication No :WO 2025/240229
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)QUALCOMM INCORPORATED
Address of Applicant :Attn: International IP Administration 5775 Morehouse Drive San Diego, California 92121-1714 U.S.A.
(72)**Name of Inventor :**
1)RAO MV, Achuth
2)SKORDILIS, Zisis Iason
3)RAJENDRAN, Vivek

(57) Abstract :
Systems and techniques for audio coding and/or audio processing are described. In some examples, an audio system receives audio. The audio system extracts a spectral feature from the audio using a trained machine learning model. In some examples, the trained machine learning model includes fully connected layers with one or more block diagonal matrices and/or one or more band diagonal matrices as parameters. In some examples, the trained machine learning model includes a projection layer. The audio system encodes the spectral feature to generate an encoded feature associated with the audio. In some examples, the audio system extracts pitch information from the audio. In some examples, the audio system outputs the encoded feature and/or the pitch (e.g., to a decoder that decodes the encoded feature and generates reconstructed audio based on the decoded feature and/or the pitch).

No. of Pages : 68 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129727 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : UPDATING PARAMETERS OF MACHINE-LEARNING CODEC BASED ON CHANNEL CONDITIONS

(51) International classification :G10L 19/005, G10L 25/30, H04N 19/65
(31) Priority Document No :20240100340
(32) Priority Date :14/05/2024
(33) Name of priority country :Greece
(86) International Application No :PCT/US2025/028452
Filing Date :08/05/2025
(87) International Publication No :WO 2025/240215
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)QUALCOMM INCORPORATED
Address of Applicant :ATTN: International IP Administration 5775 Morehouse Drive San Diego, California 92121-1714 U.S.A.
(72)**Name of Inventor :**
1)RAJENDRAN, Vivek
2)SKORDILIS, Zisis Iason
3)RICO ALVARINO, Alberto
4)BARAZIDEH, Reza
5)SAUTIERE, Guillaume Konrad

(57) Abstract :
A device includes a memory configured to store parameters of a machine-learning (ML) codec. The device also includes one or more processors configured to obtain channel condition data indicating channel conditions experienced by a first radio frontend during a first communication session. The one or more processors are configured to obtain updated parameters of the ML codec based on the channel condition data.

No. of Pages : 163 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129737 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : HIGH EFFICIENCY MINIMUM HEADROOM AND CV CONTROL AT LOW PWM DIM LEVEL

(51) International classification	:H05B 45/10, H05B 45/325, H05B 45/347, H05B 45/395
(31) Priority Document No	:24168958.7
(32) Priority Date	:08/04/2024
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:PCT/EP2025/058837 :01/04/2025
(87) International Publication No	:WO 2025/214819
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SIGNIFY HOLDING B.V.
Address of Applicant :High Tech Campus 48 5656 AE Eindhoven Netherlands
(72)**Name of Inventor :**
1)TAO, Haimin
2)KAHLMAN, Henricus, Marius, Joseph, Maria
3)ARULANDU, Karnekumar

(57) Abstract :
The invention relates to a driver for driving a load. The driver comprises an input for receiving an input voltage, a rectifier for rectifying the input voltage to a rectified voltage, a power converter for converting the rectified voltage into a bus voltage, a current regulator couplable in series with the load and arranged to regulate a current through the load by pulse width modulating the current through the load, a controller adapted to receive a dimming signal and arranged for controlling the current regulator based on the received dimming signal, a headroom sensor for sensing a voltage over the current regulator, wherein the controller is arranged to control the power converter to regulate the voltage over the current regulator based on the sensed voltage over the current regulator. The controller is arranged to determine a duty cycle for the pulse width modulation based on the dimming signal, wherein the controller is further arranged to control the power converter to regulate the voltage over the current regulator by using the dimming signal for regulating the voltage over the current regulator.

No. of Pages : 15 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026

(21) Application No.202647129738 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : A METHOD FOR COMMISSIONING LIGHTING DEVICES

(51) International classification :H05B 47/175
(31) Priority Document No :PCT/CN2024/086013
(32) Priority Date :03/04/2024
(33) Name of priority country :China
(86) International Application No :PCT/EP2025/058087
Filing Date :25/03/2025
(87) International Publication No :WO 2025/209877
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)SIGNIFY HOLDING B.V.
Address of Applicant :High Tech Campus 48 5656 AE Eindhoven Netherlands
(72)**Name of Inventor :**
1)WANG, Jingjing
2)WANG, Gang
3)MAES, Jérôme, Eduard
4)LIU, Xiaoqi
5)GU, Peihua
6)DONG, Peiliang

(57) Abstract :
A method and a system for commissioning lighting systems using augmented reality glasses (7). During the commissioning the augmented reality glasses 7 determine the next to-be-configured luminaire (2, 4, 5) while the installer (1) is configuring the current luminaire (3). While the installer (1) is configuring or commissioning the first luminaire (3), the augmented reality glasses (7) device prompts another un-commissioned luminaire (2, 4, 5) to blink. If the blinking luminaire (2,4, 5) is in the field of vision (8) of the augmented reality glasses (7) it is selected as the next to be configured, otherwise another luminaire (4,5) is prompted to blink instead.

No. of Pages : 13 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129740 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY CASE AND BATTERY PACK

(51) International classification :H01M 50/291
(31) Priority Document No :202411604062.3
(32) Priority Date :12/11/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/128682
Filing Date :20/10/2025
(87) International Publication No :WO 2026/103441
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)CALB GROUP CO., LTD.
Address of Applicant :No. 1 Jiangdong Road, Jintan District Changzhou, Jiangsu 213000 China
(72)**Name of Inventor :**
1)NIE, Junfeng
2)WANG, Shuaifeng

(57) Abstract :
Disclosed in the present invention are a battery case and a battery pack. The battery case comprises a bottom plate, an enclosure frame and a partition beam assembly. The enclosure frame is arranged around the bottom plate, the enclosure frame is fixedly connected to the bottom plate, and the bottom plate and the enclosure frame form an accommodating compartment, which is configured to place a battery therein. The partition beam assembly comprises a first beam body, a second beam body and a first connecting component, wherein the first beam body extends in a first direction, and the second beam body extends in a second direction, the first direction and the second direction being arranged at a first included angle which ranges from 85° to 95°, and both being parallel to a large surface of the bottom plate; by means of the partition beam assembly, the accommodating compartment is partitioned into a plurality of sub-accommodating compartments; and the first connecting component comprises two first side plate portions and a first bottom plate portion, which are connected to each other, wherein the first bottom plate portion is fixedly connected to the first beam body in the second direction, the two first side plate portions are arranged spaced apart in the first direction and are both connected to the second beam body in the first direction, and the projection of the second beam body in the second direction covers the first bottom plate portion.

No. of Pages : 18 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129753 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : PEDAL-SHIFT TYPE CRANK ROTATION DRIVE MECHANISM

(51) International classification	:B62M 3/06, B62M 1/26
(31) Priority Document No	:2024-072851
(32) Priority Date	:26/04/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/080021 :29/01/2025
(87) International Publication No	:WO 2025/225741
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)UCHIKAWA, Yasuo
Address of Applicant :5-313, Harie, Shin-asahi-cho, Takashima-shi, Shiga 5201502 Japan
(72)**Name of Inventor :**
1)UCHIKAWA, Yasuo

(57) Abstract :
(Technical field to which the invention belongs) This invention relates to a crank rotation drive mechanism that includes left and right pedals that alternately apply external forces to a pair of left and right crank arms attached to a crankshaft, and an output part that rotates integrally with the crankshaft. (Technical problem to be solved) To provide a crank rotation drive mechanism that does not require a large amount of leg strength and can be used for a long period of time. (Key points of the solution) A pedal-shift type crank rotation drive mechanism Z is provided which includes a pair of left and right crank arms CA and a crank rotation shaft CX2 fixed to a crankshaft CX1 pivotally supported on a frame F or the like, a pair of left and right swing arms A pivotally supported on a fixed swing fulcrum axis A4 located away from the crankshaft CX1, a first slider S1 that is pivotally supported on the crank rotation shaft CX2 and that moves back and forth along the longitudinal direction of the swing arm A, a second slider S2 that abuts or does not abut on the first slider S1 and intermittently moves back and forth, and a pedal P that is attached to a block S21 in front of the second slider and that swings the swing arm A to rotate the crankshaft CX1 while tracing a substantially oval trajectory, rotation output being applied to the output part 5. (Main use of the invention) In addition to general bicycles, tricycles for physically disabled people or for business use, fitness equipment, or labor-saving devices and equipment, etc.

No. of Pages : 36 No. of Claims : 2

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129754 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY

(51) International classification	:H01M 10/04, H01M 50/102, H01M 50/148, H01M 50/531
(31) Priority Document No	:202411506971.3
(32) Priority Date	:28/10/2024
(33) Name of priority country	:China
(86) International Application No Filing Date	:PCT/CN2025/123926 :25/09/2025
(87) International Publication No	:WO 2026/092011
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)CALB GROUP CO., LTD.
Address of Applicant :No. 1 Jiangdong Road, Jintan District Changzhou, Jiangsu 213000 China
(72)**Name of Inventor :**
1)LIU, Yang
2)XU, Jiuling
3)MA, Chaojie

(57) Abstract :
A battery, comprising a casing (1), a battery core (2), and blocking members (3). The casing (1) comprises a casing body (11) and a cover plate (12), the casing body (11) has a bottom wall (111), first side walls (112), and second side walls (113). The bottom wall (111) is disposed opposite to the cover plate (12). One of two opposite sides of each first side wall (112) is connected to the bottom wall (111), and the other side is connected to the corresponding second side wall (113), and the included angle between the first side wall (112) and the second side wall (113) is greater than 90° and less than 150°. The battery core (2) comprises a battery core body (21) and tabs (22) led out from at least one end of the battery core body (21), each end surface of the battery core body (21) from which the tabs (22) are led out is a first end surface, and the orthographic projection of the joint between each first side wall (112) and the corresponding second side wall (113) on the plane where the corresponding first end surface is located is located within the first end surface. At least part of each blocking member (3) is located between the corresponding first end face and the joint between the corresponding first side wall (112) and second side wall (113). A thermal runaway airflow rushing out from each first end surface is blocked by the blocking members (3) and does not directly impact the weak joints between the first side walls (112) and the second side walls (113), thereby avoiding the problem that an explosion-proof valve cannot be normally opened due to the joints being broken through first.

No. of Pages : 13 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129757 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY CASE AND VEHICLE

(51) International classification	:H01M 50/249, H01M 50/244, H01M 50/236
(31) Priority Document No	:202411428317.5
(32) Priority Date	:14/10/2024
(33) Name of priority country	:China
(86) International Application No Filing Date	:PCT/CN2025/127178 :13/10/2025
(87) International Publication No	:WO 2026/081971
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)CALB GROUP CO., LTD.
Address of Applicant :No. 1 Jiangdong Road, Jintan District Changzhou, Jiangsu 213000 China
(72)**Name of Inventor :**
1)YE, Zhenxing

(57) Abstract :
Disclosed in the present application are a battery case and a vehicle. The battery case comprises a case body and a beam body. The case body at least comprises a case bottom wall and case side walls, the case bottom wall and the case side walls enclosing an accommodating cavity, and the accommodating cavity being used for accommodating batteries. The beam body is fixedly arranged within the accommodating cavity, and the beam body comprises an upper beam and a lower beam that are jointed, the upper beam and the lower beam each having a U-shaped structure, and the opening of the upper beam and the opening of the lower beam being arranged facing each other; at least part of beam side walls of the upper beam overlap at least part of beam side walls of the lower beam; at least part of the overlap sections of the beam side walls of the upper and lower beams is arranged in a direction perpendicular to the case bottom wall; the beam side walls of the lower beam are located between the two beam side walls of the upper beam; and a ratio L1/L2 of the height L1 of the beam side walls of the lower beam to the height L2 of the upper beam is 0.06-1. The battery case has reduced costs while having improved structural strength.

No. of Pages : 17 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129770 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : POSITIVE ELECTRODE SHEET AND LITHIUM-ION BATTERY

(51) International classification :H01M 4/136, H01M 4/58, H01M 10/0525
(31) Priority Document No :202411436264.1
(32) Priority Date :15/10/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/088791
Filing Date :14/04/2025
(87) International Publication No :WO 2026/081440
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)CALB GROUP CO., LTD.
Address of Applicant :No. 1, Jiangdong Avenue, Jintan District Changzhou, Jiangsu 213200 China
(72)**Name of Inventor :**
1)SHAN, Xuyi
2)LI, Yanan
3)LI, Zhongzhong
4)ZHANG, Xiaoyang
5)HE, Leqiu

(57) Abstract :
A positive electrode sheet and a lithium-ion battery. The positive electrode sheet comprises a current collector and a positive electrode material compounded on the current collector, wherein the positive electrode material comprises a positive electrode active material. The positive electrode active material is selected from lithium manganese iron phosphate, and the D90 particle size of the lithium manganese iron phosphate particles, the tensile strength s of the positive electrode sheet, and the compacted density PD of the positive electrode sheet satisfy the relational expression as shown in inequality (I): 1600 μm·MPa/(g/cm3)D90/PD×s4800μm·MPa/(g/cm3)(I).

No. of Pages : 29 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129839 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : GAS INJECTOR FOR AN INTERNAL COMBUSTION ENGINE

(51) International classification :F02M 21/02
(31) Priority Document No :2404728.4
(32) Priority Date :03/04/2024
(33) Name of priority country :U.K.
(86) International Application No :PCT/EP2025/059011
Filing Date :02/04/2025
(87) International Publication No :WO 2025/210094
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)PHINIA DELPHI LUXEMBOURG SARL
Address of Applicant :5 Avenue du Swing 4367 Belvaux Luxembourg
(72)**Name of Inventor :**
1)DIDIER, François
2)LESIEUR, Cyrille

(57) Abstract :
A gas injector (10) for an internal combustion engine, extending along an injector axis (A) from a proximal side (P) to a distal side (D) and comprising an injector body (12) defining a channel (20) extending from a proximal inlet portion (14) to a distal outlet portion (18) having an outlet opening (22) surrounded by a valve seat (24); an outwardly-opening pintle (26) having a pintle shaft (28) and pintle head (30). The pintle shaft (28) comprises a hollow length (28.1) extending along the injector axis, and the pintle comprises a proximal aperture (26.1) and a distal aperture (26.2). At least two flexible sealing membranes (40, 40') extend between the injector body (12) and the pintle shaft (28), the sealing membranes (40, 40') being axially spaced and configured to sealingly isolate the axial gas passage from an intermediate portion (44) of the gas injector (10). The intermediate portion (44) at least partially surrounds the pintle shaft (28) and being adapted to contain lubricating fluid. An armature is arranged in said intermediate portion and comprises at least one axial through-hole to allow flow of lubricating fluid between distal and proximal armature sides. Damping means are arranged is the intermediate portion (44) and are configured to at least partially obturate the flow cross section through the through-hole during at least part of a distal movement and/or proximal movement of the armature. The damping means may the damping means may comprise one proximal and/or distal flexible blade (50) per armature through-hole (48) arranged to cooperate with the through-hole to partially obturate flow therethrough.

No. of Pages : 16 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129860 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD FOR LOCATING AT LEAST ONE DISCONTINUITY OF A WHEEL-TRACKWAY CONTACT

(51) International classification	:B61L 23/04, B61L 25/02
(31) Priority Document No	:24020104.6
(32) Priority Date	:04/04/2024
(33) Name of priority country	:EPO
(86) International Application No	:PCT/EP2025/059206
Filing Date	:04/04/2025
(87) International Publication No	:WO 2025/210201
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)VOESTALPINE SIGNALING AUSTRIA GMBH
Address of Applicant :Alpinestraße 1 8740 Zeltweg Austria
(72)**Name of Inventor :**
1)GÄNSER, Hans-Peter
2)FICHTENBAUER, Sebastian
3)VELIC, Dino

(57) Abstract :
The invention relates to a method for locating at least one discontinuity of a wheel-trackway contact along a wheel-trackway contact trajectory when a wheel (11) of a rail vehicle or train passes over one or more trackway components (1) of a railway track, in which method at least one sensor signal is detected which represents the time profile of a mechanical-dynamic load on the trackway component (1) on the basis of a wheel-trackway interaction in at least one spatial direction, wherein the detected sensor signal comprises a first and a second local extremum (A, B) which are assigned known reference features of the railway track, in particular of the trackway component (1), which reference features are arranged at a regional distance from one another, and wherein at least a third local extremum (C) of the sensor signal occurring at a temporal distance from the first and the second local extremum (A, B) is determined as the discontinuity of the wheel-trackway contact, and the position of the discontinuity is determined according to the temporal distance of the local extrema (A, B, C) and preferably on the basis of the known regional distance between the reference features.

No. of Pages : 22 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129876 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DETERMINING EVENT TRIGGERING FOR REPORTING

(51) International classification :H04W 24/02, H04W 24/10, H04W 36/00
(31) Priority Document No :20245384
(32) Priority Date :02/04/2024
(33) Name of priority country :Finland
(86) International Application No :PCT/IB2025/053426
Filing Date :01/04/2025
(87) International Publication No :WO 2025/210515
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)KOSKELA, Timo
2)KARJALAINEN, Juha Pekka
3)HAKOLA, Sami-Jukka

(57) Abstract :
A method comprises determining, at the user equipment, whether at least one reporting event triggering condition is met, wherein the at least one reporting event triggering condition is related to at least one of: a time domain parameter, at least one time instance, or a counter; and, in response to determining that the at least one reporting event triggering condition is met, triggering a reporting event, wherein the reporting event includes providing, to a network element, at least one measurement report.

No. of Pages : 39 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129877 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SPATIAL RENDERING OF REVERBERATION

(51) International classification :H04S 7/00
(31) Priority Document No :63/573617
(32) Priority Date :03/04/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/EP2025/057206
Filing Date :17/03/2025
(87) International Publication No :WO 2025/209819
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)MATE, Sujeet Shyamsundar
2)LEPPÄNEN, Jussi Artturi
3)ERONEN, Antti Johannes
4)HARJU, Otto Viljami

(57) Abstract :
A method for an apparatus for spatial rendering of reverberation, the method comprising: obtaining a bitstream for a virtual scene, the bitstream for a virtual scene comprising at least one reverberation parameter associated with a first acoustic environment, and at least one acoustic space connection information associated with the first acoustic environment; obtaining at least one second acoustic environment and associated position data; associating the second acoustic environment with the first acoustic environment based on at least one of the associated position data and the at least one acoustic space connection information; determining at least first reverberation processing based on the association between the second acoustic environment and the first acoustic environment; and generating a reverberated audio signal based on the at least one reverberation parameter and the at least first reverberation processing applied to at least one sound source audio signal.

No. of Pages : 37 No. of Claims : 21

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129878 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : EXTENDED REALITY APPLICATIONS IN MOBILE COMMUNICATION NETWORKS

(51) International classification	:H04L 67/101, H04L 41/5067, H04L 65/80, H04L 67/131
(31) Priority Document No	:210/2024
(32) Priority Date	:02/04/2024
(33) Name of priority country	:PAKISTAN
(86) International Application No Filing Date	:PCT/EP2025/057751 :21/03/2025
(87) International Publication No	:WO 2025/209847
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)VENMANI, Daniel Philip
2)HE, Xuan
3)AHSAN, Saba
4)BIATEK, Thibaud
5)ILLAHI, Gazi Karam

(57) Abstract :
A user equipment (UE) comprises means for performing operations comprising: transmitting, to an application function (AF) of a communication network, one or more metrics determined for a split rendering session associated with an extended reality (XR) media content stream, the split rendering session established between the UE and a first split rendering server; the one or more metrics comprising one or more of: a quality of service (QoS)metric, a quality of experience (QoE) metric, a key performance indicator (KPI) for the first split rendering server, or a metric associated with the XR media content stream; receiving, from the AF, a list of split rendering servers, each capable of continuing the XR media content stream after relocation of the split rendering session from to a respective split rendering server of the list; receiving, from the AF, metadata associated with the list of split rendering servers; and selecting a split rendering server from the list based on the metadata.

No. of Pages : 49 No. of Claims : 21

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129940 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD FOR SCREENING FOR LACTIC ACID BACILLUS, LACTIC ACID BACILLUS, AND CLEANING COMPOSITION, FOOD AND DRINK PRODUCT, AND COSMETIC PRODUCT EACH CONTAINING SAME

(51) International classification	:C12N 1/00, A61K 9/08, A61K 31/19, A61K 33/40, A61K 35/742
(31) Priority Document No	:2024-073349
(32) Priority Date	:30/04/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/016432 :30/04/2025
(87) International Publication No	:WO 2025/229998
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)HANAMISUI CO., LTD.
Address of Applicant :Central Park Tower La Tour Shinjuku #609, 6-15-1 Nishi-Shinjuku, Shinjuku-ku, Tokyo 1600023 Japan
(72)**Name of Inventor :**
1)ITO Masahiro
2)PANG Jihwan
3)NACHI Hideki
4)SATO Yoichi
5)KATAOKA Misaki
6)ASO Mio
7)NETSU Nanae
8)TAKADA Toshihiko

(57) Abstract :
[Problem] The present invention provides: a lactic acid bacillus effective for women’s health in the fields of gynecology, urology, and the like; a method for screening for the lactic acid bacillus; and a cleaning composition, a food and drink product, and a cosmetic product each containing the lactic acid bacillus. [Solution] A method for screening for a lactic acid bacillus according to the present invention comprises: a culturing step for infecting cells with Lactobacillus crispatus and culturing the infected cells; a measuring step for measuring an HßD-2 production-inducing ability from the cultured cells; and a selecting step for performing the culturing step and the measuring step on a plurality of strains of the Lactobacillus crispatus, comparing HßD-2 production-inducing abilities obtained through the measuring step, and selecting a strain having a high HßD-2 production-inducing ability.

No. of Pages : 26 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129942 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CANDIDATE CELL CHANNEL STATE INFORMATION-REFERENCE SIGNAL CONFIGURATION FOR CELL SWITCH

(51) International classification	:H04W 24/10, H04W 36/00
(31) Priority Document No	:202441028162
(32) Priority Date	:05/04/2024
(33) Name of priority country	:India
(86) International Application No	:PCT/EP2025/056062
Filing Date	:06/03/2025
(87) International Publication No	:WO 2025/209759
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)GOYAL, Sanjay
2)KOSKELA, Timo
3)SELVAGANAPATHY, Srinivasan
4)HÖHNE, Hans Thomas
5)ASHRAF, Shehzad Ali
6)DOSTI, Endrit

(57) Abstract :
A method, apparatus and computer program product are provided for provisioning channel state information reference signal (CSI-RS) configurations to a user equipment (UE) for layer-one (L1) measurement and cell configuration. In the context of a method, the method includes receiving at least CSI-RS configuration for a candidate cell from a network node, the at least one CSI-RS configuration comprising: a first set of CSI-RS configurations for L1 measurement; and a second set of CSI-RS configurations for candidate cell configuration; executing a cell switch to the candidate cell in response to a control message from the network node; and determining a subset of CSI-RSs of the candidate cell for at least one of beam management or CSI reporting based on the first set of CSI-RS configurations and the second set of CSI-RS configurations.

No. of Pages : 50 No. of Claims : 37

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647129944 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : INSTRUCTION CACHING SCHEME FOR HIGH PERFORMANCE RISC PROCESSORS

(51) International classification	:G06F 12/0895, G06F 12/0846, G06F 12/0871, G06F 9/30, G06F 12/1045
(31) Priority Document No	:63/644700
(32) Priority Date	:09/05/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/027839 :06/05/2025
(87) International Publication No	:WO 2025/235421
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)TENSTORRENT USA, INC.
Address of Applicant :7717 Southwest Pkwy, Building #3, Suite 200 Austin, Texas 78735 U.S.A.
(72)**Name of Inventor :**
1)VENKATACHAR, Ashok T
2)KOTHINTI, Vignyan
3)BEHL, Rahul

(57) Abstract :
Systems and methods related to instruction caching schemes are disclosed herein. A set of leading groups of bits in a set of instructions from a cache may be evaluated, in parallel and using a pre-decoder circuit, at a set of locations in the set of instructions. The set of locations may be spaced apart by a length of the smallest expected instruction and the lengths of the expected instructions may be multiples of the length of the smallest expected instruction. A set of instruction sizes associated with the set of locations may be determined from the set of leading groups of bits and stored in a set of entries in a pre-decoded instruction cache. The instructions may be decoded using a decoder circuit and the set of entries. The pre-decoded instruction cache and the pre-decoding processes may reduce the latency of decoding instructions.

No. of Pages : 41 No. of Claims : 33

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026

(21) Application No.202647130011 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ACTIVE LOW-E TRANSPARENT STRUCTURE

(51) International classification	:H02S 20/26, H10F 77/14, H10F 10/17
(31) Priority Document No	:63/573828
(32) Priority Date	:03/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/IL2025/050253 :18/03/2025
(87) International Publication No	:WO 2025/210625
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ARBELL ENERGY LTD.
Address of Applicant :Hatabak 5 4700310 Ramat Hasharon Israel
(72)**Name of Inventor :**
1)ARBELL, Matan

(57) Abstract :
An active low-e transparent structure (1), in particular for building-integrated photovoltaics applications, comprising a transparent substrate (70) on which at least a first layered structure (20) is arranged; said layered structure (20) comprises: a superlattice film (80) consisting of a superlattice structure (10) sandwiched between a first dielectric layer (81) and a second dielectric layer (82) and two transparent conductor layers (91, 92), between which said superlattice film (80) is sandwiched; Said superlattice structure (10) comprises a plurality of superimposed layers of nanocrystals and is configured to generate a flow of electrons across said layers when it is irradiated by solar radiation (S).

No. of Pages : 27 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647130024 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : REUSABLE PORTABLE SHIPPING CONTAINER

(51) International classification	:B65D 88/12, B65D 43/16, B63B 25/00, B65D 90/54, B65D 25/20
(31) Priority Document No	:19/048145
(32) Priority Date	:07/02/2025
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:19/048145 :07/02/2025
(87) International Publication No	:WO 2026/169266
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)EMBER LIFESCIENCES, INC.
Address of Applicant :4607 Lakeview Canyon Rd. Suite 426 Westlake Village, California 91361 U.S.A.
(72)**Name of Inventor :**
1)ALEXANDER, Clayton
2)LEE, Damian
3)SPECK, Robert, James
4)MALAK, Kevin, Michael
5)JAMES, Simon, David

(57) Abstract :
A reusable shipper container has a container body with a payload chamber for holding goods and a lid operable to access the payload chamber. The reusable shipper container also has a tablet display screen detachably coupled to the container body. The reusable shipper container also has an inner lid assembly with one or more doors selectively movable between a first position over the payload chamber to close the payload chamber, and a second position to allow access to the payload chamber. The reusable shipper container can have a display screen on an underside of the lid that can auto-display information or autoplay videos, for example, when the lid is open and/or the shipper container has arrived at its destination.

No. of Pages : 34 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026

(21) Application No.202647130138 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY PACK

(51) International classification	:H01M 50/24, H01M 50/244, H01M 50/209
(31) Priority Document No	:202411548866.6
(32) Priority Date	:01/11/2024
(33) Name of priority country	:China
(86) International Application No	:PCT/CN2025/128677
Filing Date	:20/10/2025
(87) International Publication No	:WO 2026/092203
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)CALB GROUP CO., LTD.
Address of Applicant :No. 1 Jiangdong Road, Jintan District Changzhou, Jiangsu 213000 China
(72)**Name of Inventor :**
1)YAN, Tinglu
2)WANG, Shuaifeng

(57) Abstract :
The present application relates to the technical field of batteries, and particularly to a battery pack, comprising a battery module and a case, wherein the battery module is arranged in the case; the battery module comprises battery cells; each battery cell is provided with poles, and the poles are arranged on a large surface of the battery cell and close to the end portions of the battery cell in the length direction. The battery pack further comprises a potting adhesive; the potting adhesive is at least partially connected between the end portion of the battery module in the length direction and an end beam of the case; the bonding area of the potting adhesive and a metal region of the battery module is S1, the bonding area of the potting adhesive and the case is S2, and the value range of S1/S2 is 1/5-1/2. In the present application, the potting adhesive simultaneously has the functions of insulation, fixing and sealing, improves the installation stability of the battery module, increases the energy density of the battery pack, and ensures the insulation and sealing performances of the battery module.

No. of Pages : 14 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647130143 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY COVER PLATE ASSEMBLY AND BATTERY

(51) International classification	:H01M 50/562, H01M 50/552, H01M 50/147, H01M 50/174
(31) Priority Document No	:202411746538.7
(32) Priority Date	:02/12/2024
(33) Name of priority country	:China
(86) International Application No Filing Date	:PCT/CN2025/129188 :22/10/2025
(87) International Publication No	:WO 2026/118696
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)CALB GROUP CO., LTD.
Address of Applicant :No. 1 Jiangdong Road, Jintan District Changzhou, Jiangsu 213000 China
(72)**Name of Inventor :**
1)LIU, Yang
2)XU, Jiuling

(57) Abstract :
A battery cover plate assembly and a battery. The battery cover plate assembly comprises a cover plate (2), a copper-aluminum composite terminal post (1) and an insulating member, wherein the copper-aluminum composite terminal post (1) comprises a tab welding section (111), an output section (13) and a connecting section (12), a plurality of protrusions (112) configured to be welded to a tab (72) being provided on the end face of the end of the tab welding section (111) close to the tab (72), and the connecting section (12) connecting the end of the tab welding section (111) away from the tab (72) to the output section (13); the cover plate (2) is provided with a through hole, and the connecting section (12) at least partially passes through the through hole; and the insulating member is arranged on the periphery of the copper-aluminum composite terminal post (1) and passes through the through hole, such that the copper-aluminum composite terminal post (1) is insulated from the cover plate (2). The copper-aluminum composite terminal post (1) comprises a copper layer and an aluminum layer, wherein the side close to the tab (72) is the copper layer, and the side away from the tab (72) is the aluminum layer; the copper layer comprises a copper layer main body and the protrusions (112); and the thickness of the copper layer main body is a, the thickness of the aluminum layer is b, the distance between the orthographic projections of adjacent protrusions (112) on the end face of the end of the tab welding section (111) close to the tab (72) is L, and 0.009=(a/b)/L=3. When (a/b)/L satisfies the range, the problem of the aluminum layer and the insulating member being easily deformed and melted when the copper-aluminum composite terminal post (1) is welded to the tab (72) can be solved.

No. of Pages : 11 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647130145 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : GLASS FIBER FILLED THERMOPLASTIC FLAME RETARDANT COMPOSITION

(51) International classification :C08L 69/00
(31) Priority Document No :24171337.9
(32) Priority Date :19/04/2024
(33) Name of priority country :EPO
(86) International Application No :PCT/EP2025/060123
Filing Date :11/04/2025
(87) International Publication No :WO 2025/219284
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)SABIC GLOBAL TECHNOLOGIES B.V.
Address of Applicant :Urmonderbaan 22, Building 130 6167 RD Geleen Netherlands
(72)**Name of Inventor :**
1)PATIL, Prashant
2)K, Rukmini
3)GAUR, Vivek

(57) Abstract :
The present invention relates to a thermoplastic composition comprising, based on the weight of the thermoplastic composition, from 79 - 94 wt.% of aromatic polycarbonate, from 5 - 25 wt.% of glass fibers, preferably non-bonding glass fibers, from 0.10 - 0.50 wt.% of halogen free flame retardant salt, from 0.2 - 5 wt.% of a polysiloxane, from 0 – 2 wt.% of anti-drip agent, and from 0 - 3 wt.% of further components, wherein the sum of the components is 100 wt.% and wherein the thermoplastic composition has or is selected to have a UL94 rating of V0 performed at 1.5 mm. The invention moreover relates to an article comprising the thermoplastic composition.

No. of Pages : 21 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026
(21) Application No.202647130146 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY

(51) International classification :H01M 50/586, H01M 50/593, H01M 50/102
(31) Priority Document No :202411525409.5
(32) Priority Date :30/10/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/123942
Filing Date :25/09/2025
(87) International Publication No :WO 2026/092012
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)CALB GROUP CO., LTD.
Address of Applicant :No. 1 Jiangdong Road, Jintan District Changzhou, Jiangsu 213000 China
(72)**Name of Inventor :**
1)LIU, Yang
2)XU, Jiuling
3)MA, Chaojie

(57) Abstract :
The present invention provides a battery, comprising a case, a battery cell, supports, and support members. The battery cell, the supports, and the support members are all located in the case; the battery cell comprises a battery cell body and tabs; the case has a first wall surface; each support comprises two support portions and a bottom plate connected between the two support portions; the bottom plate and the two support portions support the first wall surface from the same side; in a first direction, the two support portions are spaced apart and a tab accommodating cavity is formed between the two support portions; each tab extends from the battery cell body into the corresponding tab accommodating cavity; each support member is used for being mounted in the corresponding tab accommodating cavity; and in the first direction, the maximum length of each support member is L1, and the spacing between the two support portions is L2, wherein L1L2, such that after the support member is mounted in the tab accommodating cavity, two sides of the support member respectively abut against the two support portions. The case of the battery has good deformation resistance.

No. of Pages : 11 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :31/10/2026
(21) Application No.202647130200 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BATTERY

(51) International classification	:H01M 4/136, H01M 4/131, H01M 4/36, H01M 4/525, H01M 4/58
(31) Priority Document No	:202411525404.2
(32) Priority Date	:30/10/2024
(33) Name of priority country	:China
(86) International Application No Filing Date	:PCT/CN2025/088370 :10/04/2025
(87) International Publication No	:WO 2026/091415
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)CALB GROUP CO. LTD.
Address of Applicant :No. 1 Jiangdong Road, Jintan District Changzhou, Jiangsu 213000 China
(72)**Name of Inventor :**
1)SHAN, Xuyi
2)LI, Jialun
3)DONG, Xingfang

(57) Abstract :
The present application relates to the technical field of lithium-ion batteries, and in particular to a battery. By controlling the percentage of the total molar amount of a trivalent nickel element and a tetravalent nickel element in a lithium-ion battery to the total molar amount of a nickel element in a nickel-based positive electrode material, a molar ratio of the nickel-based positive electrode material to a positive electrode active material, and an H+ growth rate of a positive electrode sheet, the gas production rate of the battery can be remarkably reduced, and the close contact between electrode sheets and a separator of the battery is ensured, thereby reducing the internal resistance of the battery, and improving the cycle performance of the battery.

No. of Pages : 26 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :31/10/2026
(21) Application No.202647130272 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD FOR PRODUCING A GELLING COLLAGEN COMPONENT

(51) International classification :A23L 29/281, C07K 14/78
(31) Priority Document No :10 2024 112 560.8
(32) Priority Date :03/05/2024
(33) Name of priority country :Germany
(86) International Application No :PCT/EP2025/061976
Filing Date :30/04/2025
(87) International Publication No :WO 2025/229134
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)GELITA AG
Address of Applicant :Uferstrasse 7 69412 Eberbach Germany
(72)**Name of Inventor :**
1)HAHN, Martin
2)KLINGLER, Florian
3)VON HIPPEL, Lukas

(57) Abstract :
The invention relates to a method for producing a gelling collagen component from at least one non-gelling, recombinantly produced component; to a gelling collagen component that can be produced using the method according to the invention; to the use thereof; and to products containing the gelling collagen component according to the invention.

No. of Pages : 32 No. of Claims : 18

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :31/10/2026
(21) Application No.202647130283 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : FERRITIC STAINLESS STEEL SHEET

(51) International classification	:C22C 38/00, C21D 1/76, C21D 9/00, C21D 9/46, C22C 38/44
(31) Priority Document No	:2024-075094
(32) Priority Date	:07/05/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/003825 :05/02/2025
(87) International Publication No	:WO 2025/234175
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)JFE STEEL CORPORATION
Address of Applicant :2-3, Uchisaiwai-cho 2-chome, Chiyoda-ku, Tokyo 1000011 Japan
(72)**Name of Inventor :**
1)INOUE Keishi
2)OIKAWA Shinji
3)YANO Takayoshi
4)ISHII Tomohiro

(57) Abstract :
Provided is a ferritic stainless steel sheet excellent in brazability when performing brazing heat treatment at high temperature and press formability, and excellent in corrosion resistance after the brazing heat treatment. This ferritic stainless steel sheet has a component composition of, in mass%, C: 0.003-0.030%, Si: 0.01-1.30%, Mn: 0.05-0.30%, P: 0.050% or less, S: 0.020% or less, Cr: 24.0-28.0%, Ni: 1.60-2.50%, Mo: 1.50-3.00%, Al: 0.001-0.150%, Ti: 0.01-0.35%, and N: 0.030% or less, with the balance being Fe and unavoidable impurities, and has an average r value of 1.2 or more.

No. of Pages : 37 No. of Claims : 4

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :31/10/2026
(21) Application No.202647130299 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DYNAMIC SLIMMABLE NEURAL NETWORK FOR SEQUENTIAL DATA PROCESSING

(51) International classification	:G06N 3/045, G06N 3/082
(31) Priority Document No	:24174339.2
(32) Priority Date	:06/05/2024
(33) Name of priority country	:EPO
(86) International Application No	:PCT/EP2024/070766
Filing Date	:22/07/2024
(87) International Publication No	:WO 2025/232989
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)FRAUNHOFER-GESELLSCHAFT ZUR FÖRDERUNG DER ANGEWANDTEN FORSCHUNG E.V.
Address of Applicant :Hansastraße 27c 80686 München Germany
(72)**Name of Inventor :**
1)ELMINSHAWI, Mohamed Ibrahim Helmy
2)CHETUPALLI, Srikanth Raj
3)HABETS, Emanuel
4)TORCOLI, Matteo

(57) Abstract :
There is disclosed an apparatus (100, 200, 300, 400, 500) comprising: an input interface (101) to receive an input segment (102) of an input sequential data; a neural network, NN, processor (110) to derive an output result (104) by processing the input segment (102) through a NN having a number of layers (111) from a first layer to a last layer, the NN using a predetermined number of deactivatable units which are selectively deactivatable; a gating module (120) configured to deactivate at least one deactivatable unit based on the input segment (102) and/or on at least one intermediate output segment (112, 123), an output interface (103) configured to provide an output (104) derived from the last layer of the NN.

No. of Pages : 56 No. of Claims : 61

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130428 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : LEGGED ROBOT

(51) International classification	:B25J 5/00, B25J 13/00
(31) Priority Document No	:2024-065892
(32) Priority Date	:16/04/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/011667 :25/03/2025
(87) International Publication No	:WO 2025/220441
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)MAN-MACHINE SYNERGY EFFECTORS, INC.
Address of Applicant :648-1, Aoji-cho, Kusatsu-shi, Shiga 5250041 Japan
(72)**Name of Inventor :**
1)KANAOKA Katsuya

(57) Abstract :
This legged robot comprises a hybrid controller 20A including: an automatic balance controller 10A that outputs a first torque command related to automatic balance maintenance; and a leg controller 21 that outputs a second torque command based on a control at will. The automatic balance controller 10A includes: a horizontal direction controller 11 that outputs a third torque command pertaining to a torque to be generated by an actuator of a joint of a leg 31 so that the body is substantially vertically above the sole; and a pressure center controller 12 that outputs a fourth torque command pertaining to a torque to be generated by the actuator of the joint of the leg 31 so that the pressure center point of the ground reaction force received by the sole from a ground surface 50 is at a predetermined position on the sole. The automatic balance controller 10A outputs, as a first torque command, a torque command indicating the total torque amount indicated by the third torque command and the fourth torque command. The present invention provides a legged robot in which balance is maintained more reliably than in the past.

No. of Pages : 33 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130432 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SECONDARY BATTERY

(51) International classification	:H01M 10/0587, H01M 10/04, H01M 50/56, H01M 50/107, H01M 50/117
(31) Priority Document No	:2024-062967
(32) Priority Date	:09/04/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/013970 :08/04/2025
(87) International Publication No	:WO 2025/216229
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)PANASONIC INTELLECTUAL PROPERTY MANAGEMENT CO., LTD.
Address of Applicant :22-6, Moto-machi, Kadoma-shi, Osaka 5710057 Japan
(72)**Name of Inventor : NA**
Address of Inventor : NA

(57) Abstract :
This secondary battery comprises: an electrode group in which a positive electrode, a negative electrode provided with a negative electrode current collector, and a separator interposed between the positive electrode and the negative electrode are wound; an electrolyte; an exterior body that accommodates the electrode group and the electrolyte and that has a cylindrical lateral part and a bottom part; and a negative electrode lead that connects the negative electrode to the inner surface of the bottom part of the exterior body. The inner surface of the lateral part of the exterior body has a first region and a second region. The first region is covered with an insulating layer. The negative electrode has an outermost circumferential portion disposed on the outermost circumference of the electrode group. The negative electrode current collector at the outermost circumferential portion is in contact with the second region. The proportion of the area of the first region with respect to the total area of the first region and the second region is 35-60%.

No. of Pages : 29 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130520 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : INDICATION OF STORE AND FORWARD FOR NTN

(51) International classification	:H04B 7/185, H04W 84/06
(31) Priority Document No	:63/575383
(32) Priority Date	:05/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No	:PCT/IB2025/053601
Filing Date	:04/04/2025
(87) International Publication No	:WO 2025/210593
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)
Address of Applicant :SE-164 83 Stockholm Sweden
(72)**Name of Inventor :**
1)PASCUAL PELAYO, Ignacio Javier
2)YAVUZ, Emre
3)RUNE, Johan
4)KHAN, Talha
5)ZHANG, Zhang

(57) Abstract :
According to some embodiments, a method is performed by a wireless device. The method comprises receiving via system information message an indication from a network node indicating that a serving non-terrestrial network (NTN) network node is operating or will operate in store and forward mode and performing an operation with respect to the serving NTN network node based on the indication.

No. of Pages : 64 No. of Claims : 27

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130582 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ARTICULATING MEDICAL STAND

(51) International classification	:A61B 50/24, A61B 50/33, B32B 7/12, B65D 1/34, C08G 18/10
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:PCT/US2024/023949 :10/04/2024
(87) International Publication No	:WO 2025/216735
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)UNIVERSAL TECH CORPORATION
Address of Applicant :15833 W. Judd Street Ettrick, WI 54627 U.S.A.
(72)**Name of Inventor :**
1)KRIESEL, Matthew, Wayne
2)GOODENOUGH, Troy, Bradley

(57) Abstract :
An inventive articulating medical stand comprises a lower horizontal support member, a vertical support member, an upper horizontal support member, a tray mounting member and an adhesive medical tray member. The vertical support member is connected to the lower horizontal support member and is capable of vertical height adjustment, and optionally axial rotational adjustment. One end of the upper horizontal support member is connected to the vertical support member and is capable of axial rotational adjustment. The tray mounting member is slideably connected to the upper horizontal support member and is capable of linear adjustment along the longitudinal length of the upper horizontal support member. The tray mounting member is also capable of angular rotational adjustment with respect to the longitudinal axis of the upper horizontal support member.

No. of Pages : 66 No. of Claims : 33

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130606 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MICROCAPSULE ENCAPSULATING WATER-SOLUBLE SUBSTANCE

(51) International classification	:A61K 47/34, A61K 9/52, A61K 9/107, A61K 31/7088, A61K 38/00
(31) Priority Document No	:2024-063469
(32) Priority Date	:10/04/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/014158 :09/04/2025
(87) International Publication No	:WO 2025/216262
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)TORAY INDUSTRIES, INC.
Address of Applicant :1-1, Nihonbashi-Muromachi 2-chome, Chuo-ku, Tokyo 1038666 Japan
(72)**Name of Inventor :**
1)ARAKANE, Toru
2)TAKAKI, Suguru
3)HORIUCHI, Yasuhide
4)UEOKA, Hiroki
5)ISOWAKI, Akiharu

(57) Abstract :
The main purpose of the present disclosure is to provide a preparation which contains a polymer and in which a water-soluble substance exhibits excellent stability. The inventors of the present invention found that a preparation in which a water-soluble substance exhibits excellent stability can be provided by a microcapsule encapsulating a water-soluble substance, said microcapsule comprising the water-soluble substance and a polymer that has a chemical structure in which polyalkylene glycol and polyhydroxyalkanoic acid are bonded, wherein the total volume of an aqueous phase in a W/O emulsion prepared from the polymer by the following method is 0.025-0.25 cm3/g, as measured by differential scanning calorimetry (heating method). W/O emulsion preparation method: 50 mg of the polymer is dissolved in 500 µL of a 0.5w/v% sorbitan monooleate/dichloromethane solution, 100 µL of water is added, and then a resultant solution is irradiated with ultrasonic waves to prepare the W/O emulsion.

No. of Pages : 74 No. of Claims : 8

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130689 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : OPTICAL DEVICE

(51) International classification	:B42D 25/29, B42D 25/328, B42D 25/364, G02B 5/18, G02B 5/30
(31) Priority Document No	:24168722.7
(32) Priority Date	:05/04/2024
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:PCT/EP2025/056727 :12/03/2025
(87) International Publication No	:WO 2025/209793
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ROLIC TECHNOLOGIES AG
Address of Applicant :Gewerbestrasse 18 4123 Allschwil Switzerland
(72)**Name of Inventor :**
1)PRECHTEL, Hans Leonhard
2)URBANSKI, Martin

(57) Abstract :
The present invention relates to an optical device comprising a first layer that comprises an alignment surface defining an alignment direction, wherein said alignment direction varies periodically in the azimuthal orientation, defining a grating pitch, in a grating direction within the first layer; and a second layer being arranged adjacent to the first layer so that an alignment interface is formed between the first and second layer, wherein, in a cross-section parallel to the first layer, said second layer includes a patterned area comprising sections of chiral nematic liquid crystals, and wherein an orientation direction of the chiral nematic liquid crystals just within the patterned area of the second layer at the alignment interface is set by the alignment direction defined by the alignment surface of the first layer. In addition, present invention relates to an optical arrangement comprising a first and second optical device. Moreover, present invention relates to a method for manufacturing an optical device and the use of such optical device.

No. of Pages : 32 No. of Claims : 19

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130695 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CLAMPING WEDGE DEVICE FOR A POLE GAP

(51) International classification	:H02K 15/50, H02K 15/16
(31) Priority Document No	:24174769.0
(32) Priority Date	:08/05/2024
(33) Name of priority country	:EPO
(86) International Application No	:PCT/EP2025/062053
Filing Date	:02/05/2025
(87) International Publication No	:WO 2025/233238
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)FLENDER GMBH
Address of Applicant :Alfred-Flender-Str. 77 46395 Bocholt Germany
(72)**Name of Inventor :**
1)TOT, Caba
2)FEILHUBER-SEIDL, Stefan

(57) Abstract :
The invention relates to a clamping wedge device (10) for insertion into a pole gap of a rotor of an electric machine, having a first clamping part (12), a second clamping part (14), and an expansion part (16), wherein the first and second clamping parts 12, 14 and the expansion part (16) extend substantially in a main extension direction R, and also having a plurality of pairs of slide-on slopes (181, 182), wherein the slide-on slopes (181, 182) of a pair are designed to be moveable relative to one another in the main extension direction R and, depending on the position of the slide-on slopes (181, 182) of a pair relative to one another, an extension orthogonal to the main extension direction R of the first and second clamping parts 12, 14 can be adjusted with respect to one another. This solution involving the clamping wedge device (10) has the advantage of being relatively small, convenient and easy to handle. It also only requires accessibility from one axial side, which is the maintenance side anyway.

No. of Pages : 8 No. of Claims : 12

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130696 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : PLANTS WITH IMPROVED AGRONOMIC CHARACTERISTICS THROUGH INCREASED EXPRESSION OF THE APC7 GENE

(51) International classification	:C12N 15/82, C12N 15/29, C12N 15/63, A01H 6/00
(31) Priority Document No	:1020240067827
(32) Priority Date	:05/04/2024
(33) Name of priority country	:Brazil
(86) International Application No Filing Date	:PCT/BR2025/050126 :03/04/2025
(87) International Publication No	:WO 2025/208196
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)HAPISEEDS PESQUISA E DESENVOLVIMENTO LTDA
Address of Applicant :Rua Hélio de Almeida, s/n°, Incubadora de empresas COPPE/UFRJ, Prédio 1, Cidade Universitária 21941-614 Rio de Janeiro RJ Brazil
2)UNIVERSIDADE FEDERAL DO RIO DE JANEIRO
(72)**Name of Inventor :**
1)SILVA HEMERLY, Adriana
2)DE ARAÚJO LOPES, Bruna Gino
3)DA FONSECA MONTESSORO, Patrícia
4)KÖHN CARNEIRO, Aline
5)THIEBAUT ANDRADE ZANON BARROSO, Flávia
6)SILVA COELHO, Fernanda
7)CARDOZO ROSMAN, Aline

(57) Abstract :
The present invention relates to a genetic modification for improving plant characteristics that are useful in agriculture. Specific embodiments provide uses of plants containing said genetic modification, as well as methods for producing plants containing said genetic modification, and plant products obtainable from same.

No. of Pages : 52 No. of Claims : 50

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026

(21) Application No.202647130701 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MANUFACTURE OF DISULFIDE BONDED PEPTIDES

(51) International classification :C07K 1/113
(31) Priority Document No :24174039.8
(32) Priority Date :03/05/2024
(33) Name of priority country :EPO
(86) International Application No :PCT/EP2025/062109
Filing Date :02/05/2025
(87) International Publication No :WO 2025/229200
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)BACHEM HOLDING AG
Address of Applicant :Hauptstrasse 144 4416 Bubendorf Switzerland
(72)**Name of Inventor :**
1)KLEINSMANN, Alexander
2)MALESEVIC, Miroslav
3)SCHÖNLEBER, Ralph O.

(57) Abstract :
Methods for the manufacture of disulfide bonded peptides are provided. These methods rely on the use of dehydroascorbic acid as oxidizing agent and are advantageous in that they are applicable to aggregation-prone peptides, reduce the formation of unwanted side products, avoid working with highly diluted samples of peptide and oxidizing agent, and thereby allow for economic as well as environmentally friendly production.

No. of Pages : 59 No. of Claims : 22

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130794 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : IMMERSION NOZZLE FOR CONTINUOUS CASTING OF STEEL AND CONTINUOUS CASTING METHOD FOR STEEL

(51) International classification :B22D 11/10
(31) Priority Document No :2024-068554
(32) Priority Date :19/04/2024
(33) Name of priority country :Japan
(86) International Application No :PCT/JP2025/013160
Filing Date :31/03/2025
(87) International Publication No :WO 2025/220478
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)SHINAGAWA REFRA CO., LTD.
Address of Applicant :7-12, Marunouchi 1-chome, Chiyoda-ku, Tokyo 1000005 Japan
(72)**Name of Inventor :**
1)NIITSUMA Hiroyasu
2)FUJITA Keigo

(57) Abstract :
The purpose of the present invention is to prevent embrittlement of a power line part material due to generation of zirconium carbide inside a powder line part and to prevent the occurrence of resulting sudden trouble such as perforation of the powder line part. The present invention provides an immersion nozzle for continuous casting, said immersion nozzle being characterized in that: a molten steel flow passage 5 includes an upper flow part 50 to which an inflow port 3 is provided, a lower flow part 52 to which a discharge port 4 is provided, and a boundary part 51 which is located at the boundary between the upper flow part 50 and the lower flow part 52; the equivalent circle diameter DU of the upper flow part 50 is set to be larger than the equivalent circle diameter DL of the lower flow part 52; the boundary part 51 is provided at a position higher than the position of a powder line part 6; and a lining layer 7 which is made of a material differing from a zirconia/graphite material and which has a thickness of not less than 8 mm is provided inside the powder line part 6.

No. of Pages : 14 No. of Claims : 7

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130876 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : NON-INVASIVE PREDICTION OF INSULIN RESISTANCE USING SENSOR DATA

(51) International classification	:G16H 50/30, G16H 50/20, G16H 50/70, G16H 40/63, A61B 5/11
(31) Priority Document No	:63/642369
(32) Priority Date	:03/05/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/027242 :01/05/2025
(87) International Publication No	:WO 2025/231209
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GOOGLE LLC
Address of Applicant :1600 Amphitheatre Parkway Mountain View, California 94043 U.S.A.
(72)**Name of Inventor :**
1)METWALLY, Ahmed Mohamed Ibrahim Abdelhadi
2)PRIETO, Javier L.

(57) Abstract :
A computing system, a computer implemented method, and a wearable computing device to predict insulin resistance in a wearer of the wearable computing device without requiring additional invasive testing other than test data that may already be available, although not required, is provided. For instance, a machine-learned model is trained to predict insulin resistance in the wearer of the wearable computing device based at least in part on non-invasive biometric data associated with the wearer. Then, one or more non-transitory computer-readable media cause the computing system to perform operations via one or more processors. The operations include receiving the non-invasive biometric data from one or more sensors associated with the wearable computing device; and implementing the machine-learned model to determine if the non-invasive biometric data associated with the wearer is indicative of insulin resistance.

No. of Pages : 29 No. of Claims : 34

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130877 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SOFTWARE-MANAGED BUFFER SHARING BETWEEN MULTIPLE CONTEXTS

(51) International classification :G06F 12/1009, G06F 9/48
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :PCT/US2024/028030
Filing Date :06/05/2024
(87) International Publication No :WO 2025/234979
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)GOOGLE LLC
Address of Applicant :1600 Amphitheatre Parkway Mountain View, California 94043 U.S.A.
(72)**Name of Inventor :**
1)WANG, Dong
2)CHENG, Scott Wang-Yip
3)OIZUMI, Munenori

(57) Abstract :
Methods, systems, and apparatus for a computing device that includes a multi-context processing system that includes multiple processing blocks, in which each processing block is configured to continually process data received from multiple different contexts using buffers, in which each buffer is stored in an associated memory subsystem. The system includes a data processing apparatus configured to execute instructions to perform operations for implementing multiple page managers to manage the allocation of pages of the buffers in the associated memory subsystems for multiple respective groups of processing blocks. The operations include configuring, by each page manager, a respective hardware page table for each processing block of a group of processing blocks managed by the page manager.

No. of Pages : 20 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130878 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SPLIT PROCESSING FOR RENDERING

(51) International classification :A63F 13/52, G06F 9/451
(31) Priority Document No :63/641344
(32) Priority Date :01/05/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2025/027030
Filing Date :30/04/2025
(87) International Publication No :WO 2025/231098
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)GOOGLE LLC
Address of Applicant :1600 Amphitheatre Parkway Mountain View, California 94043 U.S.A.
(72)**Name of Inventor :**
1)REBUSCHATIS, Max Kane
2)SMITH, Benjamin
3)ABI-SAAD, Jay
4)STERNFELD, Daniel
5)ELCOTT, Sharif
6)TRAORE, Moussa
7)KAESER, Dominik Philemon

(57) Abstract :
According to at least one implementation, a method of operating a computing device includes identifying an instruction stored in memory by an application, the instruction configured to modify a virtual object. The method also includes determining a change associated with content displayed for the application based on the instruction and executing the change associated with the content.

No. of Pages : 29 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130884 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : RANDOM ACCESS METHOD AND APPARATUS, AND COMMUNICATION SYSTEM

(51) International classification	:H04W 72/04, H04W 74/08
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:PCT/CN2024/092484 :10/05/2024
(87) International Publication No	:WO 2025/231906
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)1FINITY INC.
Address of Applicant :1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi Kanagawa 211-8588 Japan
(72)**Name of Inventor :**
1)JIANG, Qinyan
2)WANG, Xin

(57) Abstract :
The embodiments of the present application provide a random access method and apparatus, and a communication system. The method comprises: within a cell, sending a random access preamble (PRACH) in a first valid RO and/or a second valid RO, wherein the first valid RO is within a flexible time-domain resource and/or an uplink time-domain resource, and the second valid RO is within a downlink time-domain resource that overlaps with a first time-domain resource and/or a flexible time-domain resource that overlaps with the first time-domain resource, or, the first valid RO is located within a flexible time-domain resource and/or an uplink time-domain resource that does not overlap with the first time-domain resource, and the second valid RO is located within the first time-domain resource.

No. of Pages : 74 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647130917 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : RANDOM ACCESS METHOD AND APPARATUS, AND COMMUNICATION SYSTEM

(51) International classification :H04W 74/00
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :PCT/CN2024/092381
Filing Date :10/05/2024
(87) International Publication No :WO 2025/231852
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)1FINITY INC.
Address of Applicant :1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588 Japan
(72)**Name of Inventor :**
1)JIANG, Qinyan
2)ZHANG, Jian

(57) Abstract :
Embodiments of the present application provide a random access method and apparatus, and a communication system. The method comprises: in a cell, sending a random access preamble (PRACH) in a first valid RO and/or a second valid RO, wherein the first valid RO is located within a flexible time domain resource and/or an uplink time domain resource, and the second valid RO is located within a downlink time domain resource overlapping a first time domain resource and/or a flexible time domain resource overlapping the first time domain resource.

No. of Pages : 71 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/11/2026

(21) Application No.202647130949 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND APPARATUS FOR SUPPORTING CONDITIONAL LTM WITHOUT RANDOM ACCESS IN MOBILE COMMUNICATION SYSTEM

(51) International classification	:H04W 36/00, H04W 36/36
(31) Priority Document No	:10-2024-0060766
(32) Priority Date	:08/05/2024
(33) Name of priority country	:Republic of Korea
(86) International Application No Filing Date	:PCT/KR2025/006106 :07/05/2025
(87) International Publication No	:WO 2025/234745
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677 Republic of Korea
(72)**Name of Inventor :**
1)JIN, Seungri
2)HWANG, June

(57) Abstract :
The present disclosure relates to a 5G or 6G communication system for supporting a higher data transmission rate. A user equipment (UE) according to one embodiment of the present disclosure may: receive, from a base station, an RRC reconfiguration message including conditional LTM configuration information; perform L1 measurement on one or more candidate cells for the conditional LTM; identify, from among the one or more candidate cells, a candidate cell for which the L1 measurement satisfies a condition of an event configured on the basis of the conditional LTM configuration information; and perform uplink transmission through a CG resource on the basis of a TA value for the identified candidate cell.

No. of Pages : 56 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026

(21) Application No.202647131102 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD, APPARATUS AND COMPUTER PROGRAM RELATING TO IDENTIFYING EXPIRED DATA UNITS TO A RECEIVER

(51) International classification	:H04W 28/02, H04L 47/34
(31) Priority Document No	:2404835.7
(32) Priority Date	:04/04/2024
(33) Name of priority country	:U.K.
(86) International Application No	:PCT/IB2025/053373
Filing Date	:31/03/2025
(87) International Publication No	:WO 2025/210483
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)AMIRI, Abolfazl
2)SEBIRE, Benoist Pierre
3)KOSKINEN, Henri Markus

(57) Abstract :
There is disclosed an apparatus comprising: means for processing data units for transmission in accord with a packet data convergence protocol, PDCP; means for creating a report comprising information providing a sequence number of at least one data unit, and a time period associated with the at least one data unit of the set; and means for sending the report to a receiver to which the data units are processed to be sent.

No. of Pages : 25 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :02/11/2026

(21) Application No.202647131103 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : APPARATUS, METHOD AND COMPUTER PROGRAM FOR OPTIMIZATION OF A GAZE AWARE RENDERING AND ENCODING PROCESS

(51) International classification	:H04N 21/4728, H04N 21/6587
(31) Priority Document No	:2404753.2
(32) Priority Date	:03/04/2024
(33) Name of priority country	:U.K.
(86) International Application No	:PCT/EP2025/057254
Filing Date	:17/03/2025
(87) International Publication No	:WO 2025/209824
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)ILLAHI, Gazi Karam
2)BIATEK, Thibaud
3)CURCIO, Igor Danilo Diego
4)GÜL, Serhan

(57) Abstract :
There is provided an apparatus comprising a split rendering client comprising means for sending, to a split rendering server, metadata for a virtual camera associated with the split rendering client, sending, to the split rendering server, a request for adaptation of a gaze based optimization profile for a split rendering session, wherein the request for adaptation of the gaze based optimization profile comprises an indication of an adaptation to the gaze based optimization profile, receiving, from the split rendering server, an encoded video frame, decoding the encoded video frames to generate a decoded video frame and displaying the decoded video frame.

No. of Pages : 33 No. of Claims : 46

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026

(21) Application No.202647131108 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AIR GAP SLEEVE ASSEMBLY FOR AN ELECTRIC DRIVE MODULE

(51) International classification	:H02K 9/193, H02K 5/10, H02K 5/02, B60K 11/02, B60K 1/00
(31) Priority Document No	:63/631705
(32) Priority Date	:09/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/023550 :08/04/2025
(87) International Publication No	:WO 2025/217095
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)AMERICAN AXLE & MANUFACTURING, INC.
Address of Applicant :One Dauch Drive Detroit, MI 48211-1198 U.S.A.
(72)**Name of Inventor :**
1)VALENTE, Paul, J.
2)DOWNS, James, P.
3)GRIDER, Steven, M.
4)HUBBARD, Nicholas, S.

(57) Abstract :
A sleeve assembly for an electric drive module of a vehicle includes an elongated tubular sleeve, having an inner diameter and an outer diameter, configured to fit concentrically between a rotor assembly of an electric motor and a stator assembly of the electric motor; a first end cap received at one axial end of the elongated tubular sleeve forming a fluid tight seal between the first end cap and the elongated tubular sleeve; a second end cap received at an opposite axial end of the elongated tubular sleeve forming a fluid tight seal between the second end cap and the elongated tubular sleeve, such that the elongated tubular sleeve comprises a non-electrically conductive material and at least one of the first end cap or the second end cap is formed from a different non-electrically conductive material.

No. of Pages : 15 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026

(21) Application No.202647131115 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SERRATED TRAILING EDGE PANEL FOR A WIND TURBINE BLADE

(51) International classification :F03D 1/06
(31) Priority Document No :24168457.0
(32) Priority Date :04/04/2024
(33) Name of priority country :EPO
(86) International Application No :PCT/EP2025/059279
Filing Date :04/04/2025
(87) International Publication No :WO 2025/210224
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)LM WIND POWER A/S
Address of Applicant :Jupitervej 6 6000 Kolding Denmark
(72)**Name of Inventor :**
1)HERRIG, Andreas
2)HURAULT, Jeremy Pierre
3)WANG, Guannan

(57) Abstract :
A serrated panel (70) for a wind turbine blade (10) is provided. The serrated panel (70) is configured to be attached to the trailing edge (20) of the wind turbine blade (10) to form a one or more, preferably a plurality of, serrations (80) at the trailing edge (20) of the wind turbine blade (10), The serrated panel comprises a base part (72) for attachment to the trailing edge (20) of the wind turbine blade (10), the base part (72) comprising a first longitudinal end (73) for arrangement nearest a tip end of the wind turbine blade, a second longitudinal end (74) for arrangement nearest a root end of the wind turbine blade, a first side (75) for arrangement nearest a leading edge of the blade, and a second side (76) for arrangement farthest from the leading edge of the blade. One or more serrations (80) extend from the second side (76) of the base part (72), wherein each serration (80) comprises: a base portion (81) proximal to the second side (76) of the base part (72), an apex portion (82) distal to the second side (76) of the base part (72), a first side portion (83) arranged nearest the first longitudinal end (73) of the base part (72), and a second side portion (84) arranged nearest the second longitudinal end (74) of the base part (72). Each of the serrations (80) have a corrugated cross-sectional profile with alternating grooves (85) and ridges (86) as seen in a transverse direction between the first side portion (83) and the second side portion (84) along at least a mid-range portion (87) between the base portion (81) and the apex portion (82), wherein the corrugated cross-sectional profile at the mid-range portion (87) comprises at least one groove (85) and one ridge (86), preferably a plurality of both grooves (85) and ridges (86).

No. of Pages : 18 No. of Claims : 19

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026

(21) Application No.202647131184 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ENHANCED OPERATIONS FOR SIMULTANEOUS TRANSMISSIONS

(51) International classification	:H04W 52/14, H04W 52/34, H04W 52/36, H04W 52/42
(31) Priority Document No	:20245445
(32) Priority Date	:10/04/2024
(33) Name of priority country	:Finland
(86) International Application No Filing Date	:PCT/IB2025/053714 :08/04/2025
(87) International Publication No	:WO 2025/215542
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)DEGHEL, Matha
2)SAAD, Majed
3)LEHTI, Arto
4)SIVANESAN, Kathiravetpillai

(57) Abstract :
For at least two temporally overlapping uplink transmissions for which corresponding allocations are multiplexed in a frequency domain on a same cell, determining, by a UE at least two maximum transmit power levels to use for the allocations for the at least two temporally overlapping uplink transmissions. The UE determines transmission power for individual ones of the at least two temporally overlapping uplink transmissions based on at least one of the determined at least two maximum transmit power levels. The UE performs the at least two temporally overlapping uplink transmissions to a network element using corresponding determined transmission power. The network element schedules the UE to transmit the at least two temporally overlapping uplink transmissions. The network element receives, from the UE, the at least two temporally overlapping uplink transmissions associated with at least two maximum transmit power levels.

No. of Pages : 32 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026

(21) Application No.202647131204 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : NEW ADAE ANALYTICS ON COLLISION DETECTION

(51) International classification :H04W 4/02
(31) Priority Document No :63/631265
(32) Priority Date :08/04/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/IB2025/053706
Filing Date :08/04/2025
(87) International Publication No :WO 2025/215534
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)
Address of Applicant :SE-164 83 Stockholm Sweden
(72)**Name of Inventor :**
1)YUE, Jing
2)XU, Wenliang
3)PASTUSHOK, Igor

(57) Abstract :
Systems and methods related to collision detection in a wireless communications system are disclosed. In one embodiment, a method performed by an Analytics Data Analytics Enablement (ADAE) server comprises obtaining ranging and/or sidelink positioning data of one or more User Equipments (UEs) and location information for objects and/or UEs from one or more data producers. The method further comprises deriving analytics data for collision detection of at least one of the one or more UEs based on the ranging and/or sidelink positioning data of the one or more UEs and the location information for objects and/or UEs and providing the analytics data for collision detection to a consumer. In this manner, ADAE server can perform collision detection based on inputs from a wide range of data producers, which will increase collision detection accuracy.

No. of Pages : 26 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :02/11/2026
(21) Application No.202647131214 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMPOSITIONS AND METHODS FOR INCREASING PHOSPHOROUS AVAILABILITY

(51) International classification :C12N 9/16, C12N 15/82
(31) Priority Document No :63/631142
(32) Priority Date :08/04/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2025/023378
Filing Date :07/04/2025
(87) International Publication No :WO 2025/217017
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NOVOZYMES A/S
Address of Applicant :Krogshoejvej 36 Bagsvaerd, DK-2880 Denmark
2)NOVONESIS PLANT BIOSOLUTIONS A/S
(72)**Name of Inventor :**
1)KLUBER, Laurel Anne
2)KAASGAARD, Svend Gunnar
3)SKOV, Lars Kobberoee
4)HYNICKA, Justin

(57) Abstract :
The present invention relates to cleaning compositions comprising polypeptides having peptidoglycan degradation activity, as well as use of the cleaning compositions for cleaning of an item such as a textile or a surface.

No. of Pages : 137 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026
(21) Application No.202647131216 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DEVICES AND METHODS FOR ALIGNMENT OF PAST CHANNEL STATE INFORMATION

(51) International classification :H04W 24/10
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :PCT/CN2024/092046
Filing Date :09/05/2024
(87) International Publication No :WO 2025/231735
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NEC CORPORATION
Address of Applicant :7-1, Shiba 5-chome, Minato-ku Tokyo 108-8001 Japan
(72)**Name of Inventor :**
1)HE, Zhen
2)GUAN, Peng
3)WANG, Gang

(57) Abstract :
Embodiments of the present disclosure provide a solution for alignment of past channel state information. In a solution, a first device determines time related information of a first channel state information (CSI) report to be transmitted and a second CSI report which is previously transmitted. The time related information indicates correlation between the first CSI report and the second CSI report. The first device determines a first past CSI for the first CSI report at least based on a second past CSI and the time related information. Both the first past CSI and the second past CSI are associated with a first layer corresponding to the first CSI report and the second CSI report. In addition, the first device performs communication of the first CSI report with a second device at least based on the first past CSI.

No. of Pages : 45 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026
(21) Application No.202647131222 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MULTI-LAYER BIODEGRADABLE POLYMER MULCH FILMS WITH CORRESPONDING CARBON BLACK MASTERBATCHES

(51) International classification	:B32B 27/36, B32B 27/06, B32B 27/18, A01G 13/02, C08J 5/18
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:PCT/CN2024/087046 :10/04/2024
(87) International Publication No	:WO 2025/213391
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)CABOT CORPORATION
Address of Applicant :Two Seaport Lane, Suite 1400 Boston, Massachusetts 02210 U.S.A.
(72)**Name of Inventor :**
1)LIU, Tianyao

(57) Abstract :
Multi-layer biodegradable mulch films include a top layer that is sunlight/UV resistant, and a bottom layer designed to withstand soil moisture and/or pH effects. The films have an extended service life, followed by a rapid degradation. Specific masterbatches are formulated to prepare the different film layers. Carbon black having specific properties can be incorporated in at least some of these masterbatches.

No. of Pages : 33 No. of Claims : 25

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026
(21) Application No.202647131241 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : PARALLEL PROCESSING SYSTEMS AND METHODS FOR FACILITATING BITSTREAM SECURITY

(51) International classification	:H04L 9/32, H04L 29/06, H04L 9/08, H04L 9/30, H04L 9/00
(31) Priority Document No	:18/628585
(32) Priority Date	:05/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:18/628585 :05/04/2024
(87) International Publication No	:WO 2025/213120
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)LATTICE SEMICONDUCTOR CORPORATION
Address of Applicant :5555 NE Moore Ct. Hillsboro, Oregon 97124 U.S.A.
(72)**Name of Inventor :**
1)VOGT, Tim

(57) Abstract :
Various techniques are provided to implement parallel processing systems and methods for facilitating bitstream security. In one example, a method includes receiving a bitstream, a signature associated with the bitstream, predetermined authentication data associated with the bitstream, and a public key associated with a provider of the bitstream. The method further includes verifying the signature based on the predetermined authentication data. The method further includes computing authentication data based on the bitstream and verifying the predetermined authentication data based on the computed authentication data. The method further includes determining an integrity associated with content of the bitstream. The method further includes performing a mitigation action when the signature verification result indicates an unsuccessful authentication, the authentication data verification result indicates an unsuccessful authentication, and/or an integrity result indicates a failed integrity check. Related systems and devices are provided.

No. of Pages : 32 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026
(21) Application No.202647131310 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DEVICES AND METHODS FOR COMMUNICATION

(51) International classification :H04L 5/00
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :PCT/CN2024/092091
Filing Date :09/05/2024
(87) International Publication No :WO 2025/231760
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NEC CORPORATION
Address of Applicant :7-1, Shiba 5-chome, Minato-ku Tokyo 108-8001 Japan
(72)**Name of Inventor :**
1)XU, Minghui
2)LI, You
3)WANG, Gang

(57) Abstract :
Embodiments of the present disclosure provide a solution for ambient Internet of Things (IoT) device. A first communication device determines, based on at least one of: type information or energy harvesting information of the second communication device or payload associated with the second communication device, a signal frame structure for at least one of: a transmission to the second communication device, or a reception from the second communication device. The first communication deivce transmits, to the second communication device, a configuration of the signal frame structure. The first communication device performs, based on the configuration, the at least one of: the transmission to the second communication device, or the reception from the second communication device. The signal frame structure comprises at least one separate part for data or control information and at least one of: a preamble, at least one midamble, a postamble, or at least one gap.

No. of Pages : 45 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :03/11/2026

(21) Application No.202647131366 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : METHOD AND APPARATUS FOR HANDOVER USING ARTIFICIAL INTELLIGENCE IN WIRELESS COMMUNICATION SYSTEM

(51) International classification	:H04W 36/00, H04W 36/32, H04W 24/02, H04B 17/382, H04B 17/373
(31) Priority Document No	:10-2024-0045170
(32) Priority Date	:03/04/2024
(33) Name of priority country	:Republic of Korea
(86) International Application No Filing Date	:PCT/KR2025/004467 :03/04/2025
(87) International Publication No	:WO 2025/211813
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SAMSUNG ELECTRONICS CO., LTD.
Address of Applicant :129, Samsung-ro, Yeongtong-gu Suwon-si Gyeonggi-do 16677 Republic of Korea

(72)**Name of Inventor :**
1)JEONG, Seungbeom
2)LEE, Taeseop
3)KANG, Hyunjeong
4)BAEK, Sangkyu

(57) Abstract :
The present disclosure relates to a 5G or 6G communication system for supporting a higher data transmission rate beyond a 4G communication system such as LTE. This method performed by a terminal in a wireless communication system comprises the steps of: transmitting, to a base station for a serving cell, a first message including capability information of the terminal associated with an artificial intelligence model; receiving, from the base station, a second message including an indication of a first handover for a first target cell, and configuration information related to the artificial intelligence model; predicting the first handover by using the artificial intelligence model on the basis of the configuration information; and if the prediction is a success, performing a procedure of the first handover for the first target cell.

No. of Pages : 51 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026
(21) Application No.202647131382 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : RECOMBINANT ADENO-ASSOCIATED VIRUSES AND USES THEREOF

(51) International classification :C07K 14/005, C12N 15/86, A61K 48/00
(31) Priority Document No :63/631398
(32) Priority Date :08/04/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2025/023741
Filing Date :08/04/2025
(87) International Publication No :WO 2025/217214
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)REGENXBIO INC.
Address of Applicant :9804 Medical Center Drive Rockville, MD 20850 U.S.A.
(72)**Name of Inventor :**
1)FIRNBERG, Elad
2)MERCER, Andrew
3)TEPE, April, R.
4)YOST, Samantha
5)LIU, Ye
6)CHEN, Ting
7)TEJADA, Sigmund

(57) Abstract :
The present invention relates to recombinant adeno-associated viruses (rAAVs) having capsid proteins engineered to include amino acid sequences that confer and/or enhance desired properties. In particular, the invention provides engineered capsid proteins comprising peptide insertions from heterologous proteins inserted within or near variable region IV (VR-IV) or variable region VIII (VR-VIII) of the virus capsid, such that the insertion is surface exposed on the AAV particle. The invention also provides capsid proteins that direct rAAVs to target tissues, in particular, capsid proteins comprising peptides that are inserted into surface-exposed variable regions using a method for replacing a stop codon in the capsid gene with such peptide insert. The invention provides such methods for making the rAAV vectors into vector libraries and selecting the rAAV vectors having peptide inserts that target the rAAV to particular tissues of interest, and thus deliver therapeutics for treating disorders.

No. of Pages : 89 No. of Claims : 36

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :03/11/2026

(21) Application No.202647131450 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : UPLINK REFERENCE SIGNAL CONFIGURATION ASSOCIATED WITH MONITORING OF AN ARTIFICIAL INTELLIGENCE MACHINE LEARNING MODEL FOR NETWORK-ASSISTED POSITION ESTIMATION

(51) International classification	:H04W 64/00, H04L 5/00, H04W 24/10
(31) Priority Document No	:18/760810
(32) Priority Date	:01/07/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/026976 :30/04/2025
(87) International Publication No	:WO 2026/010668
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)QUALCOMM INCORPORATED
Address of Applicant :ATTN: International IP Administration 5775 Morehouse Drive San Diego, California 92121-1714 U.S.A.
(72)**Name of Inventor :**
1)HIRZALLAH, Mohammed Ali Mohammed
2)ZORGUI, Marwen

(57) Abstract :
Aspects of the disclosure are thereby directed to an uplink reference signal (UL-RS) configuration associated with monitoring of an artificial intelligence machine learning (AIML) model for network-assisted position estimation (e.g., Case 2a, 2b, 3a and/or 3b for AIML model positioning use cases for 3GPP). In an aspect, the UL-RS configuration associated with monitoring of the AIML model may be different than a UL-RS configuration utilized for position estimation of the UE. In further aspects, the UL-RS configuration associated with monitoring of the AIML model may be utilized even if there is no active position estimation session of the UE. Such aspects may provide various technical advantages, such as improving positioning performance associated with AIML models (e.g., by utilizing the AIML model monitoring to validate/invalidate the AIML model, switch between AIML models, update the AIML model, etc.) while not being limited to UL-RS configurations for position estimation sessions.

No. of Pages : 86 No. of Claims : 30

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026

(21) Application No.202647131461 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : AIR CONDITIONING DUCT FOR VEHICLE AND BEAM FOR VEHICLE

(51) International classification	:B60H 1/00
(31) Priority Document No	:2024-066691
(32) Priority Date	:17/04/2024
(33) Name of priority country	:Japan
(86) International Application No	:PCT/JP2025/010406
Filing Date	:18/03/2025
(87) International Publication No	:WO 2025/220389
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)TOYODA GOSEI CO., LTD.
Address of Applicant :1, Haruhinagahata, Kiyosu-shi, Aichi 4528564 Japan
(72)**Name of Inventor :**
1)TAKAI Hiroki
2)TOTANI Chiharu

(57) Abstract :
This air-conditioning duct for a vehicle comprises: an inlet (32) and a plurality of outlets (33); and a cylindrical duct (31) forming a flow path (40). The plurality of outlets (33) include a first outlet (33A) and a second outlet (33B). The flow path (40) is provided with a first partition (37). The first partition (37) divides the inlet (32) into a first opening (32d) and a second opening (32e). The first partition (37) divides the flow path (40) into a first flow path (41) which extends from the first opening (32d) to the first outlet (33A), and a second flow path (42) which extends from the second opening (32e) to the second outlet (33B).

No. of Pages : 18 No. of Claims : 5

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026
(21) Application No.202647131466 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MACHINE NEUTRAL CONTAINERIZED APPLICATIONS

(51) International classification :G06F 8/60, G06F 8/61, G06F 9/445
(31) Priority Document No :18/744509
(32) Priority Date :14/06/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2025/032727
Filing Date :06/06/2025
(87) International Publication No :WO 2025/259560
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)ORACLE INTERNATIONAL CORPORATION
Address of Applicant :500 Oracle Parkway M/S 5OP7 Redwood Shores, California 94065 U.S.A.
(72)**Name of Inventor :**
1)PHILLIPPE, Bryan
2)RUPPERT, Ryan

(57) Abstract :
The system and methods for creating, managing, and transmuting containerized applications to build machine-neutral applications that can run on different machines with different processor architectures. The present disclosure receives an input container comprising of a machine-neutral application layer, a metadata layer or one or more machine-dependent layers. An instruction set architecture (ISA) is determined and one or more modified input containers are generated based on the identified ISA. One or more machine-dependent layers are dynamically built and inserted in one or more modified input containers. The present disclosure creates a dynamic-composition metadata layer in modified input containers, wherein the dynamic-composition metadata includes execution instructions, environment variables, or machine specific attributes. The present disclosure selects and inserts the matching machine-dependent layer of one or more machine-dependent layers using dynamic-composition metadata in the modified input containers. One or more modified input containers that are ISA-agnostic are returned as output result.

No. of Pages : 47 No. of Claims : 13

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application :03/11/2026

(21) Application No.202647131484 A

(43) Publication Date : 06/11/2026

(54) Title of the invention : NOVEL COATING PROTECTING ACTIVE COMPOUNDS FOR PHARMACEUTICAL, ENZYME, NUTRACEUTICAL, FOOD OR FEED APPLICATIONS

(51) International classification	:A61K 9/28, C08L 1/28
(31) Priority Document No	:63/665317
(32) Priority Date	:28/06/2024
(33) Name of priority country	:U.S.A.
(86) International Application No	:PCT/US2025/035983
Filing Date	:30/06/2025
(87) International Publication No	:WO 2026/006853
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)KEMIN INDUSTRIES, INC.
Address of Applicant :1900 Scott Avenue Des Moines, Iowa 50317 U.S.A.
(72)**Name of Inventor :**
1)VERONA, Massimiliano Donato
2)VASANTHAKUMARI, Bindu Lakshmibai
3)LAO, Ye

(57) Abstract :
The present invention relates to a unique coating comprising a hydrophobic matrix of fatty acids and a water-soluble weak organic acid. During acidic conditions (e.g., pH=3), the weak organic acid is protonated and is almost insoluble or slowly solubilized, while at neutral to alkaline pH (e.g., pH 6 or higher) it is deprotonated and more easily solubilized, allowing for the release of the active ingredient. All of the materials in the coating are soluble in organic solvents and, preferably, alcohols. In at least one embodiment, the coating is used as an enteric coating. In at least one embodiment, the coating is evenly dispersed without the inclusion of a plasticizer, emulsifier, or emulsifying agent.

No. of Pages : 22 No. of Claims : 25

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026

(21) Application No.202647131485 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : VALVE STOPPER FOR A MULTI-CHAMBER MEDICAL INJECTION DEVICE

(51) International classification :A61M 39/24, A61M 5/19, A61M 5/31
(31) Priority Document No :63/631077
(32) Priority Date :08/04/2024
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2025/023412
Filing Date :07/04/2025
(87) International Publication No :WO 2025/217032
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)BECTON, DICKINSON AND COMPANY
Address of Applicant :1 Becton Drive Franklin Lakes, New Jersey 07417 U.S.A.
(72)**Name of Inventor :**
1)FLIPPE, Marc
2)MILLERET, Anne
3)POUGET, Gaelle
4)LEHEE, Guillaume
5)ESSONE, Melvin

(57) Abstract :
Provided herein is a valve stopper positionable within a barrel of an injection device. The valve stopper includes a membrane comprising a proximal face and a distal face and that separates a first chamber and a second chamber of the barrel. A lateral wall is joined to the membrane that defines at least one cavity and provides a circumferential sealing surface that sealingly engages an inner surface of the barrel. The membrane comprises one or more slits formed therein that extend through at least a part of a thickness of the membrane and are configured to create a fluid path through the membrane depending on the pressure exerted by a fluid onto the proximal face of the membrane, for transferring fluid only from the second chamber to the first chamber. Each slit is formed off-center in the membrane, so as to not pass through a center point of the membrane.

No. of Pages : 30 No. of Claims : 23

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026
(21) Application No.202647131496 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ARTIFICIAL INTELLIGENCE-BASED DEVICE POSITIONING WITH FEEDBACK CAPABILITIES

(51) International classification	:G01S 5/00, H04W 64/00, G01S 5/02
(31) Priority Document No	:18/746730
(32) Priority Date	:18/06/2024
(33) Name of priority country	:U.S.A.
(86) International Application No	:PCT/US2025/032270
Filing Date	:04/06/2025
(87) International Publication No	:WO 2025/264390
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)QUALCOMM INCORPORATED
Address of Applicant :ATTN: International IP Administration 5775 Morehouse Drive San Diego, California 92121-1714 U.S.A.
(72)**Name of Inventor :**
1)HIRZALLAH, Mohammed Ali Mohammed
2)YERRAMALLI, Srinivas
3)YOO, Taesang

(57) Abstract :
A method comprises sending, by a first wireless device, a first performance indicator to a network entity, the first performance indicator indicating a first expected positioning performance level of a trained machine learning (ML) positioning system to be used by the first wireless device to determine a position of the first wireless device or a second wireless device; receiving, by the first wireless device, feedback data from the network entity, the feedback data indicating an actual positioning performance level of the trained ML positioning system; and based on the feedback data indicating that the actual positioning performance level of the trained ML positioning system is different from the first expected positioning performance level, sending, by the first wireless device, a second performance indicator to the network entity, the second performance indicator indicating a second expected positioning performance level of the trained ML positioning system.

No. of Pages : 79 No. of Claims : 30

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026

(21) Application No.202647131640 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMPOSITIONS AND METHODS FOR REDUCING NAV1.7 EXPRESSION TO TREAT NEUROPATHIC PAIN

(51) International classification	:C12Q 1/6876, C12Q 1/6883, C12N 15/113, A61K 48/00, A61K 31/7088
(31) Priority Document No	:63/574843
(32) Priority Date	:04/04/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/023004 :03/04/2025
(87) International Publication No	:WO 2025/212923
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)ENCODED THERAPEUTICS, INC.
Address of Applicant :341 Oyster Point Blvd. South San Francisco, California 94080 U.S.A.
(72)**Name of Inventor :**
1)TATAVARTY, Vedakumar
2)TAI, Chao
3)CHEN, Szu-Ying
4)TAN, Steven
5)LIU, Serena
6)DHANOTA, Puja
7)RIVERA-VELAZQUEZ, Mirella
8)DIAZ DE ARCE, Alexander Jordan
9)AERAN, Rangoli
10)BOUHLAL, Yosr
11)MCLAUGHLIN, John
12)WEBER, Alexandra
13)TAGLIATELA, Stephanie
14)BELLE, Archana
15)PODA, Suresh
16)TANENHAUS, Anne
17)HOSUR, Raghavendra

(57) Abstract :
The present disclosure relates to compositions, methods and processes for the design, preparation, manufacture, use and/or formulation of modulatory polynucleotides, e.g., polynucleotides encoding small interfering RNA (siRNA) molecules which target the transcript encoding the alpha (a) subunit of voltage-gated sodium channel (Nav) 1.7 to treat chronic neuropathic pain. In some embodiments, nucleic acid sequences encoding the siRNA molecules are inserted into recombinant adeno-associated virus (AAV) vectors. Methods for using the siRNA molecules to inhibit the expression of mutated or wild-type Nav1.7 in a subject with chronic pain (e.g., chronic neuropathic pain) are also disclosed.

No. of Pages : 139 No. of Claims : 75

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026
(21) Application No.202647131654 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : RF REQUIREMENTS AND TEST METHODOLOGY FOR RECEIVER PROCESSING FRAGMENTED CARRIERS

(51) International classification :H04B 17/20
(31) Priority Document No :2404781.3
(32) Priority Date :04/04/2024
(33) Name of priority country :U.K.
(86) International Application No :PCT/IB2025/053365
Filing Date :31/03/2025
(87) International Publication No :WO 2025/210476
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)NG, Man Hung
2)VASENKARI, Petri Juhani
3)HEJSELBAEK, Johannes
4)NIELSEN, Kim
5)SÄYNÄJÄKANGAS, Tuomo Mikael

(57) Abstract :
A TE determines, as part of a testing process, reference sensitivity exceptions due to use of a single receiver chain by a UE on NC intra-band sub-blocks in DL CA, including a sub-block gap between the NC intra-band sub-blocks, as a mapping between an allowed MSD and a function of variables relating the allowed MSD at least to a power level of an interfering signal in the sub-block gap. The TE adjusts, using the mapping, wanted signals in the NC intra-band sub-blocks for testing the UE, wherein the interfering signal is in the sub-block gap. Based on received error reporting from the UE, a determination is made whether the UE meets/does not meet a criterion. A UE receives the signals and configures hardware resources, including multiple receiver chains, between bands, for reception of CCs corresponding to the bands. The UE determines error information and sends error information to the TE.

No. of Pages : 39 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026
(21) Application No.202647131655 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MOBILITY PROCEDURES FOR PRE-CONFIGURED ON-DEMAND SIB1 CELLS

(51) International classification	:H04W 48/12, H04W 48/20
(31) Priority Document No	:20245410
(32) Priority Date	:04/04/2024
(33) Name of priority country	:Finland
(86) International Application No Filing Date	:PCT/EP2025/056232 :07/03/2025
(87) International Publication No	:WO 2025/209766
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)LAURIDSEN, Mads
2)LASELVA, Daniela

(57) Abstract :
Methods, apparatuses, and systems are provided for a user equipment (UE) supporting on- demand system information block 1 (SIB1) mode operation and being served by a first cell, the methods, apparatuses, and systems supporting switching towards a second cell operating in an on-demand SIB1 mode. The UE receives from the first cell an indication of an on-demand SIB1 configuration information for requesting acquisition of SIB1 information from the second cell which triggers the UE to perform measurements related to the second cell, and e.g. may enable the UE to switch from the first to the second cell for power saving reasons or else. The cell reselection priority associated with a frequency band deployed by the second cell may be adjusted, wherein the on-demand SIB1 reselection priority is e.g. set higher than the reselection priority associated with the frequency band deployed by the first cell, e.g. to enabled higher priority performs measurements with respect to the frequency band deployed by the second cell based on the on-demand SIB1 reselection priority. The UE may determine to switch to the second cell based on the results of the measurements. Similar methods, apparatuses, and systems are provided for a cell.

No. of Pages : 35 No. of Claims : 14

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026
(21) Application No.202647131656 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : MOBILITY PROCEDURES FOR ON-DEMAND SIB1 CELLS

(51) International classification	:H04W 48/12, H04W 48/20
(31) Priority Document No	:20245412
(32) Priority Date	:04/04/2024
(33) Name of priority country	:Finland
(86) International Application No Filing Date	:PCT/EP2025/054859 :24/02/2025
(87) International Publication No	:WO 2025/209722
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)NOKIA TECHNOLOGIES OY
Address of Applicant :Karakaari 7 02610 Espoo Finland
(72)**Name of Inventor :**
1)LAURIDSEN, Mads
2)LASELVA, Daniela

(57) Abstract :
Methods, apparatuses, and systems are provided for a user equipment (UE) supporting on- demand system information block 1 (SIB1) mode operation and being served by a first cell, the methods, apparatuses, and systems supporting switching towards a second cell operating in an on-demand SIB1 mode. The UE receives from the first cell an indication of an on-demand SIB1 cell reselection priority associated with a frequency band deployed by the second cell, wherein the on-demand SIB1 reselection priority is higher than the reselection priority associated with the frequency band deployed by the first cell, performs measurements with respect to the frequency band deployed by the second cell based on the on-demand SIB1 reselection priority, and determines to switch to towards the second cell based on results of the measurements. Similar methods, apparatuses, and systems are provided for a cell.

No. of Pages : 32 No. of Claims : 56

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :04/11/2026
(21) Application No.202647131735 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : HYDROGEN OR AMMONIA PROCESS AND PLANT

(51) International classification	:C01B 3/02, C01B 3/38, C01B 3/48
(31) Priority Document No	:24169035.3
(32) Priority Date	:08/04/2024
(33) Name of priority country	:EPO
(86) International Application No	:PCT/EP2025/059330
Filing Date	:04/04/2025
(87) International Publication No	:WO 2025/214911
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)CASALE SA
Address of Applicant :Via Pocobelli 6 6900 Lugano Switzerland
(72)**Name of Inventor :**
1)GENOVA, Giovanni
2)SASSI, Fabio
3)MOREO, Pietro

(57) Abstract :
A process and a plant for the production of hydrogen or for the synthesis of ammonia, said process comprising the following steps: (a) performing a reforming process (101) of a hydrocarbon feedstock (1) to generate a raw syngas (2), said reforming process comprising at least an autothermal reforming step (104) in presence of oxygen-enriched air or pure oxygen (3) produced by an air separation unit (ASU; 103); (b) subjecting said raw syngas (2) to a post-treatment (102) providing hydrogen (H2; 4), a CO2-enriched stream (5), and a residual gas (6); said post-treatment comprising at least a water gas shift conversion step (105) of said raw syngas into a shifted syngas (7), a pressure swing absorption step (106), and a cryogenic separation step (107); wherein said pressure swing absorption step produces said hydrogen and a first tail gas (8) comprising carbon monoxide (CO), carbon dioxide (CO2), residual hydrogen (H2) and unreacted hydrocarbon feedstock from the shifted syngas (7), and said cryogenic separation step separates the CO2- enriched stream and a second tail gas (9) from said first tail gas; said post-treatment (102) comprising a further separation step (120) of a CO2- containing stream (11) and of the residual gas (6) from said second tail gas; (c) recycling said residual gas (6) as feed to said reforming process and/or as fuel to one or more fired heater(s) (10) of said process; (d) optionally feeding a portion (4.B) of said hydrogen (4) obtained in step (b) as fuel to one or more fired heater(s) of said process; (e) optionally an ammonia synthesis step (110) wherein said hydrogen (4) and a nitrogen (N2)-containing stream (12) produced by said ASU (103) are reacted in a given stoichiometric ratio and in ammonia (NH3) synthesis conditions to obtain an ammonia-containing product (13).

No. of Pages : 24 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202648128459 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMPUTE LOAD BALANCING IN A DISTRIBUTED ENVIRONMENT

(51) International classification :G06F 9/50
(31) Priority Document No :17/691,570
(32) Priority Date :10/03/2022
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2023/014773
Filing Date :08/03/2023
(87) International Publication No : NA
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :202447067090
Filed on :08/03/2023

(71)**Name of Applicant :**
1)GOOGLE LLC
Address of Applicant :1600 Amphitheatre Parkway, Mountain View, California 94043, USA U.S.A.
(72)**Name of Inventor :**
1)PEARSON, Alan
2)WEI, Yaou

(57) Abstract :
A system and method of balancing data storage among a plurality of groups of computing devices, each group comprising one or more respective computing devices. The method may involve determining a compute utilization disparity between the group having a highest level of compute utilization and the group having a lowest level of compute utilization, determining a transfer of one or more projects between the plurality of groups of computing devices that reduces the compute utilization disparity, and directing the plurality of groups of computing devices to execute the determined transfer.

No. of Pages : 32 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202648128608 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : POWER APPARATUS AND METHOD FOR CONTROLLING SAME

(51) International classification	:H01M 10/48, B60L 3/00, H02J 7/00, H02J 7/04, H02J 7/10
(31) Priority Document No	:2019-238385
(32) Priority Date	:27/12/2019
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2020/048335 :24/12/2020
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filed on	:202247042723 :24/12/2020

(71)**Name of Applicant :**
1)HONDA MOTOR CO., LTD
Address of Applicant :1-1, Minami-Aoyama 2-chome, Minato-ku, Tokyo 107-8556, Japan Japan
(72)**Name of Inventor :**
1)INO, Mitsuyasu

(57) Abstract :
A power apparatus (10) and a method for controlling the same, wherein: an ECU (14) acquires voltage values (V1 to V4, for example) from a plurality of power storage units (12); and when the voltage difference in the acquired voltage values of the plurality of power storage units (12) exceeds a voltage threshold value (Vthr), connection is prohibited between the plurality of power storage units (12) for which the voltage difference exceeds the voltage threshold value. [Figure 2]

No. of Pages : 35 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026
(21) Application No.202648129094 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : BIOPROCESSING SYSTEMS AND METHODS FOR SCALABLE MASS PRODUCTION OF MINICELLS

(51) International classification	:A01N 63/20, A01N 25/28, C12N 1/20, C12N 1/04
(31) Priority Document No	:63/124,559
(32) Priority Date	:11/12/2020
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2021/062964 :10/12/2021
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filed on	:202347036900 :29/05/2023

(71)**Name of Applicant :**
1)AGROSPHERES, INC.
Address of Applicant :1180 Seminole Trail Suite 100 Charlottesville, Virginia 22901 (US) U.S.A.
(72)**Name of Inventor :**
1)SHAKEEL, Ameer Hamza
2)FRANK, Joseph
3)ENGLAENDER, Jacob
4)ZOMORODI, Sepehr
5)POURTAHERI, Payam

(57) Abstract :
"BIOPROCESSING SYSTEMS AND METHODS FOR SCALABLE MASS PRODUCTION OF MINICELLS" The present disclosure provides controlled bioprocessing systems for enhanced minicell production with defined fermentation parameters and methods of said bioprocessing systems and methods for the production of minicells from said bioprocessing systems using a bioreactor or fermenter. FIG. 1A

No. of Pages : 76 No. of Claims : 24

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :03/11/2026
(21) Application No.202648131385 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SYSTEM, METHODS, AND PROCESSES FOR MODEL PERFORMANCE AGGREGATION

(51) International classification :G06F 11/34, G06F 11/30, G06F 17/18
(31) Priority Document No :63/294,534
(32) Priority Date :29/12/2021
(33) Name of priority country :U.S.A.
(86) International Application No :PCT/US2022/052822
Filing Date :14/12/2022
(87) International Publication No : NA
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :202447055019
Filed on :18/07/2024

(71)**Name of Applicant :**
1)CERNER INNOVATION, INC.
Address of Applicant :8779 Hillcrest Road, Kansas City, MO 64138, United States of America U.S.A.
(72)**Name of Inventor :**
1)RAMAMURTHY, Uttam
2)CHHETRI, Ashwin
3)SAXENA, Pankaj
4)V, Rahul Jain

(57) Abstract :
ABSTRACT SYSTEM, METHODS, AND PROCESSES FOR MODEL PERFORMANCE AGGREGATION Methods, systems, and computer-readable media are disclosed herein for a concurrent comparative tool for aggregating computationally generated performance reports a machine-learning data model pipeline for technological performance and/or predictive accuracy. The tool may acquire multiple performance measure reports that that quantitatively asses the performance of a model pipeline based on a configuration file that facilitates validation of the technological performance and predictive accuracy of the model. Additionally, when the conditions defined by the configuration file are met for of the performance measure reports the tool may broadcast a notification to a predetermined system. FIGURE 1

No. of Pages : 36 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/04/2025
(21) Application No.202531041638 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CHEESE GRATING AND DISPENSING DEVICE WITH INTEGRATED SLITTER TOP CAP

(51) International classification :A47J43/25
(31) Priority Document No :NA
(32) Priority Date :NA
(33) Name of priority country :NA
(86) International Application No :NA
Filing Date :NA
(87) International Publication No : NA
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)BRITANNIA INDUSTRIES LIMITED
Address of Applicant :5/1A Hungerford Street, Kolkata – 700017, West Bengal, India Kolkata West Bengal India
(72)**Name of Inventor :**
1)NEMA, Sudhir
2)BANERJEE, Nayandeep
3)KHADTARE, Pooja Ajay
4)CHOUDHARY, Rahul

(57) Abstract :
The present invention relates to kitchen tools and appliances, specifically a multifunctional grating device for cheese and similar food items such as butter, dough, chocolate, and bakery products. The grating device is configured to provide an ergonomic, efficient, and controlled method for producing finely grated or shredded food from solid blocks or rolls. The grating device comprises: an outer body (1); a grater inner cap (2); an integrated slitter top cap (3), a screw mechanism (4) for controlled dispensing of the grated material; a movable plate (5) designed to push the cheese forward. The distinguishing feature is the slitter (6) integrated in top cap (3), which cut the grated material and detaches it from the grater inner cap (2) ensuring uniform output and convenient handling. The present invention offers a practical solution for both home cooks and professional chefs, combining grating and slicing functions in a single compact utensil. Figures 2 and 3

No. of Pages : 26 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :05/05/2025
(21) Application No.202531043700 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DISTRIBUTED PANDEMIC DETECTION AND PREDICTION SYSTEM

(51) International classification	:G16H0050800000, H04W0024020000, G06N0003045000, H04L0005000000, H04L0067109700
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No Filing Date	:NA :NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GREYBLAK TECHNOLOGIES PRIVATE LIMITED
Address of Applicant :L-358 (First Floor), Baramunda HB Colony, At/Po: Baramunda, Bhubaneswar - 751003, Odisha, India. Bhubaneswar Orissa India
(72)**Name of Inventor :**
1)SAHOO, Sudhakar
2)PADHY, Chinmayananda
3)PANDA, Rashmi Rani

(57) Abstract :
The present disclosure relates to a system (100) and method for pandemic detection and prediction through a network of interconnected sensing nodes, referred to as cells (102). The cells (102) are configured to monitor and detect health indicators such as elevated body temperature and biometric identity. The cells (102) are capable of localized processing, real-time communication, and immediate feedback to individuals and nearby units. The cells (102) work individually and collaboratively to detect early signs of infection and may provide both localized and network-wide alerts, enabling proactive response in public and private environments.

No. of Pages : 28 No. of Claims : 9

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2026
(21) Application No.202634055661 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CLAMPING ELEMENT, CLAMPING SYSTEM, AND METHOD FOR MANUFACTURING THE CLAMPING ELEMENT

(51) International classification	:F16B 2/08, F16L 33/08, F16L 33/035, F16L 33/04, F16B 2/06
(31) Priority Document No	:10 2025 117 148.3
(32) Priority Date	:05/05/2025
(33) Name of priority country	:Germany
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)LAPP ENGINEERING AG
Address of Applicant :Hinterbergstrasse 15, 6330 Cham, Switzerland Switzerland
(72)**Name of Inventor :**
1)KLOTZ, Julian

(57) Abstract :
Clamping element (1) comprising: a strand clamping portion (5) having a clamping portion (11) that tapers towards a free axial end of the clamping element (1) in a direction of a longitudinal axis (3) of the clamping element (1), characterized in that the clamping portion (11) has a lateral surface (13) with strand pockets (15) distributed around the longitudinal axis (3) in the lateral surface (13); clamping element system (101) comprising: the clamping element (1) and a clamping sleeve (103); and method for manufacturing the clamping element (1). [Fig. 1]

No. of Pages : 26 No. of Claims : 10

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :01/05/2026
(21) Application No.202634055814 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : OPTICAL IMAGING LENS SYSTEM, IMAGE CAPTURING UNIT AND ELECTRONIC DEVICE

(51) International classification	:G02B27/64, G02B13/00, G02B7/02, G02B9/64, H04N23/67
(31) Priority Document No	:114116757
(32) Priority Date	:05/05/2025
(33) Name of priority country	:Taiwan
(86) International Application No	:NA
Filing Date	:NA
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)LARGAN Precision Co., Ltd.
Address of Applicant :No.11, Jingke Rd., Nantun Dist., Taichung City, Taiwan, R.O.C. Taiwan
(72)**Name of Inventor :**
1)Fu, wei-xiang
2)SHIH, YU-HAN

(57) Abstract :
ABSTRACT Title: OPTICAL IMAGING LENS SYSTEM, IMAGE CAPTURING UNIT AND ELECTRONIC DEVICE An optical imaging lens system includes, in order from an object side to an image side along an optical path: a first optical element (E1), a second optical element (E2), a third optical element (E3), a fourth optical element (E4), a fifth optical element (E5), a sixth optical element (E6) and a seventh optical element (E7). The first optical element (E1) is a reflective element. The second 10 optical element (E2) to the seventh optical element (E7) are lens elements. The first optical element (E1) with positive refractive power has an object-side surface being convex in a paraxial region thereof. The third optical element (E3) has negative refractive power. The seventh optical element (E7) has an object- side surface being convex in a paraxial region thereof. At least one of an object-15 side surface and an image-side surface of the seventh lens element has at least one inflection point (P). FIG. 1

No. of Pages : 168 No. of Claims : 26

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :07/08/2026

(21) Application No.202637095606 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : FACE MASK

(51) International classification :A61B 10/00
(31) Priority Document No :CH000258/2024
(32) Priority Date :07/03/2024
(33) Name of priority country :Switzerland
(86) International Application No :PCT/EP2025/055643
Filing Date :03/03/2025
(87) International Publication No :WO 2025/186155
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)AVELO AG
Address of Applicant :Rütistrasse 16 8952 Schlieren Switzerland
(72)**Name of Inventor :**
1)RISCH, Patricia
2)BROGER, Tobias

(57) Abstract :
Disclosed herein is a face mask (1) for sampling pathogens, the face mask (1) comprising: a mask body (2) being configured to cover at least the mouth and/or the nose of a human subject with an inner side (3) of the mask body (2) being oppositely arranged to an outer side (4) of the mask body (2); a collection sheet (5) being releasably mounted to the inner side (3) of the mask body (2), the collection sheet (5) comprising a substrate (6) and a fiber material (7), in particular a non-woven fiber material.

No. of Pages : 31 No. of Claims : 32

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/08/2026
(21) Application No.202637096006 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SENSOR FOR MEASURING AT LEAST ONE ELECTRICAL PROPERTY OF A FLUID

(51) International classification :G01N 33/22, G01N 27/08, G01N 27/22
(31) Priority Document No :102024000003163
(32) Priority Date :14/02/2024
(33) Name of priority country :Italy
(86) International Application No :PCT/IB2025/050192
Filing Date :08/01/2025
(87) International Publication No :WO 2025/172773
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)ELTEK S.P.A.
Address of Applicant :Strada Valenza, 5A I-15033 Casale Monferrato (Alessandria) Italy
(72)**Name of Inventor :**
1)RONDANO, Matteo
2)MARTINENGO, Giorgio
3)LUPARIA, Andrea

(57) Abstract :
A sensor device (1) for the measurement of at least one electrical property of a fluid comprises a device body (2) with a sensing duct (4) for the fluid, within the sensing duct (4) there being arranged a sensitive element (10) for the detection of the at least one electrical property. The sensitive element (10) comprises a first electrode (11) and a second electrode (12) which extends in part within a tubular wall (11a) of the first electrode (11), spaced therefrom. The first electrode (11) has a through-slit (14), which extends in the length direction (L) for at least a fraction of the tubular wall (11a), starting from the first longitudinal end (lib) towards the second longitudinal end (11c). The sensitive element (10) comprises a positioning element (15) of the second electrode (12), which is secured at the through-slit (14) of the tubular wall (11a) and is formed at least in part with an electrically insulating material.

No. of Pages : 37 No. of Claims : 17

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :17/08/2026

(21) Application No.202637099194 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : IL31-VLP AND MEDICAL USES THEREOF

(51) International classification	:C07K 14/005, A61K 38/00, C07K 14/245, C07K 14/54
(31) Priority Document No	:2400747.8
(32) Priority Date	:19/01/2024
(33) Name of priority country	:U.K.
(86) International Application No Filing Date	:PCT/GB2025/050078 :17/01/2025
(87) International Publication No	:WO 2025/153824
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)GLEN CLOVA SCIENTIFIC LIMITED
Address of Applicant :272 Bath Street Glasgow Lanarkshire G2 4JR U.K.
(72)**Name of Inventor :**
1)FOERSTER, John

(57) Abstract :
The present invention relates to virus-like particles (VLPs) decorated with IL31 polypeptides or functional fragments thereof (IL31-VLPs), and optionally additional functional molecules, via a high affinity and versatile protein attachment system which allows for modular, interchangeable decoration of VLPs. The present invention further relates to processes of producing the IL31-VLPs including production methods taking place within single cells, and uses of the IL31-VLPs in research, diagnosis and as medicaments such as vaccines for use in prevention and/or treatment of diseases.

No. of Pages : 150 No. of Claims : 31

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/08/2026
(21) Application No.202637103893 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMPOSITIONS AND METHODS FOR INCREASING BENEFICIAL TRYPTOPHAN METABOLITES

(51) International classification	:A61K 31/195, A23L 33/17, A23L 33/10, A23L 33/185, A23L 33/105
(31) Priority Document No	:63/550216
(32) Priority Date	:06/02/2024
(33) Name of priority country	:U.S.A.
(86) International Application No Filing Date	:PCT/US2025/014856 :06/02/2025
(87) International Publication No	:WO 2025/171175
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)PROPION, INC.
Address of Applicant :515 Spruce Street Berkeley, California 94707 U.S.A.
(72)**Name of Inventor :**
1)POEGGELER, Burkhard
2)PAPPOLLA, Miguel Angel

(57) Abstract :
The invention provides compositions, combinations, supplement formulations and methods of use for increasing tryptophan metabolism to generate beneficial metabolites. These include Indole-3-propionic acid (IPA) and indole-3-propionamide (IPAM). The invention provides increased plasma tryptophan and tryptophan metabolites that include IPA and IPAM.

No. of Pages : 39 No. of Claims : 31

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :24/10/2026
(21) Application No.202637126802 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CONTROL DEVICE, TRANSFER BAR COOLING SYSTEM, ROLLING MILL, METHOD FOR OPERATING A ROLLING MILL, AND COMPUTER PROGRAM PRODUCT

(51) International classification	:C21D 11/00, C21D 8/02, B21B 37/74, B21B 45/02, C21D 9/52
(31) Priority Document No	:10 2024 113 430.5
(32) Priority Date	:14/05/2024
(33) Name of priority country	:Germany
(86) International Application No Filing Date	:PCT/EP2025/061946 :30/04/2025
(87) International Publication No	:WO 2025/237690
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SMS GROUP GMBH
Address of Applicant :Am SMS Campus 1 41069 Mönchengladbach Germany
(72)**Name of Inventor :**
1)CRAMER, Ulrich
2)HASSSEL, Christoph
3)SPROCK, August
4)MEYER, Thomas

(57) Abstract :
The invention relates to a control device for controlling a transfer bar cooling means that in turn controls the temperature of a transfer bar, the control device being designed to control the transfer bar cooling means according to a degree of conversion of the austenite and/or ferrite phase fractions of the transfer bar.

No. of Pages : 29 No. of Claims : 20

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :24/10/2026
(21) Application No.202637126866 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMPOSITION FOR CAPACITORS COMPRISING PP, CYCLIC OLEFIN POLYMER AND PLASTOMER

(51) International classification :C08L 23/12, B32B 27/32
(31) Priority Document No :24167008.2
(32) Priority Date :27/03/2024
(33) Name of priority country :EPO
(86) International Application No :PCT/EP2025/057762
Filing Date :21/03/2025
(87) International Publication No :WO 2025/202049
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)BOREALIS GMBH
Address of Applicant :Trabrennstraße 6-8 1020 Vienna Austria
2)TOPAS ADVANCED POLYMERS GMBH
(72)**Name of Inventor :**
1)TRANCHIDA, Davide
2)GKOURMPIS, Thomas
3)SCHAFFER, Walter
4)GITSAS, Antonios
5)JAMIESON, Scott

(57) Abstract :
The present invention relates to a composition comprising 70 to 95 wt.-% of a high isotactic homopolymer of propylene, more than 2.5 to less than 30 wt.-% of a cyclic olefin polymer composition, and 0.1 to 2.5 wt.-% of a copolymer of ethylene and one or more C4 to C8 alpha olefin comonomers. The present invention is, furthermore, directed to a film comprising the polypropylene composition. Apart from that, a biaxially oriented film comprising the polypropylene composition and a capacitor are provided.

No. of Pages : 32 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :26/10/2026
(21) Application No.202637127308 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : COMMUNICATION METHOD AND RELATED DEVICE

(51) International classification :H04L 41/14
(31) Priority Document No :202410522823.4
(32) Priority Date :28/04/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/089465
Filing Date :17/04/2025
(87) International Publication No :WO 2025/228140
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)HUAWEI TECHNOLOGIES CO., LTD.
Address of Applicant :Huawei Administration Building, Bantian, Longgang District Shenzhen, Guangdong 518129 China
(72)**Name of Inventor :**
1)ZHANG, Xinran
2)ZHAO, Mingyu
3)YAN, Xueqiang
4)LI, Fangfang
5)XING, Weijun
6)WU, Shaoyun

(57) Abstract :
A communication method and a related device. In the method, when a first communication device obtains an intermediate model by processing a first AI model on the basis of first local data, the first communication device can back up the intermediate model by means of information interaction. In this way, when AI model processing is interrupted, a second communication device can provide backed-up information of the intermediate model; and since the intermediate model has learned knowledge or features corresponding to the first local data, the first communication device does not need to re-perform repeated model processing procedures on the basis of processed first wireless data, thereby improving AI model processing efficiency. In addition, the first communication device serves as an AI processing node; and the first communication device backs up the information of the intermediate model by means of the second communication device, so that the AI processing node does not need to locally store the information of the intermediate model, thereby reducing the consumption of the storage space of the AI processing node, and lowering storage requirements on the AI processing node.

No. of Pages : 83 No. of Claims : 24

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :26/10/2026
(21) Application No.202637127405 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : INFORMATION PROCESSING DEVICE, INFORMATION PROCESSING METHOD AND PROGRAM

(51) International classification	:G06Q 50/06, G06Q 10/04, H02J 3/00, H02J 3/38
(31) Priority Document No	:2024-070492
(32) Priority Date	:24/04/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/015629 :22/04/2025
(87) International Publication No	:WO 2025/225624
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SUSTECH INC.
Address of Applicant :3-1-14 Shiba, Minato-ku, Tokyo 1050014 Japan
(72)**Name of Inventor :**
1)TANNO Yusuke
2)OHASHI Akifumi

(57) Abstract :
The objective of the present invention is to optimize the timing of power consumption/power generation for an entire building by forecasting the amount of electricity generated by means of renewable energy and performing optimal control of storage batteries, for example. A server 1 comprises: a power generation forecasting unit 71 that forecasts the amount of power generated by solar power generating equipment SGS and outputs the forecast power generation amount; a demand forecasting unit 72 that forecasts the amount of power consumed in a building T1 and outputs the forecast power consumption amount; an optimal solution determining unit 53 that determines a power supply/demand gap on the basis of the forecast values; a storage battery control unit 84 that controls a storage battery TS; and a power control unit 54 that controls the amount of power generated, the amount of power consumed in the building, and a charge/discharge amount of the storage battery on the basis of the determination result. This makes it possible to balance the power supply and demand of the entire building efficiently, make effective use of surplus power, suppress power peaks, respond to demand, and respond to sudden power demands.

No. of Pages : 30 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :27/10/2026

(21) Application No.202637127951 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : ENVIRONMENT DETECTION METHODS AND RELATED APPARATUS

(51) International classification :G05B 19/042
(31) Priority Document No :202410396147.0
(32) Priority Date :30/03/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/085467
Filing Date :27/03/2025
(87) International Publication No :WO 2025/209316
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)YINWANG INTELLIGENT TECHNOLOGIES CO., LTD.
Address of Applicant :Room 101, Building A1, No.1, Jingyue Road Jiulongshan Community, Fucheng Street, Longhua District Shenzhen, Guangdong, 518110 China
(72)**Name of Inventor :**
1)WANG, Mihu
2)WEI, Aijia
3)LIU, Junjie
4)PENG, Ningjun
5)XU, Mao

(57) Abstract :
Environment detection methods and a related apparatus, which are applied to the technical field of vehicles. In a method, a detection unit having lower always-on power consumption is used for detection, and, when the detection unit determines that a condition is met, a computing unit having higher power consumption during operation is woken up, so that more accurate detection is performed on the basis of the computing unit, thus ensuring the detection accuracy of a safety guard function, and simultaneously reducing the power consumption.

No. of Pages : 56 No. of Claims : 15

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :28/10/2026
(21) Application No.202637128489 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : CHANNEL SWITCHING METHOD AND COMMUNICATION APPARATUS

(51) International classification :H04W 36/00
(31) Priority Document No :202410545117.1
(32) Priority Date :30/04/2024
(33) Name of priority country :China
(86) International Application No :PCT/CN2025/091972
Filing Date :29/04/2025
(87) International Publication No :WO 2025/228363
(61) Patent of Addition to Application Number :NA
Filing Date :NA
(62) Divisional to Application Number :NA
Filing Date :NA

(71)**Name of Applicant :**
1)HUAWEI TECHNOLOGIES CO., LTD.
Address of Applicant :Huawei Administration Building, Bantian, Longgang District Shenzhen, Guangdong 518129 China
(72)**Name of Inventor :**
1)YANG, Mao
2)LI, Bo
3)LI, Yunbo

(57) Abstract :
A channel switching method and a communication apparatus, relating to the technical field of communications. In the method, when a device in a first BSS detects a PPDU from a second BSS, the device in the first BSS switches from a primary channel to a secondary channel before the end moment of transmission of the PPDU, and switches from the secondary channel to the primary channel within the remaining duration after the transmission of the PPDU ends. In this way, the time of the device in the first BSS camping on the secondary channel can be prolonged, thereby further supporting improving the utilization rate of channel resources of the secondary channel.

No. of Pages : 65 No. of Claims : 18

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :29/10/2026

(21) Application No.202637129024 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : DEVICES AND METHODS FOR IMPROVED CHANNEL SOUNDING IN A WLAN

(51) International classification	:H04B 7/0417, H04B 7/06, H04W 84/12
(31) Priority Document No	:NA
(32) Priority Date	:NA
(33) Name of priority country	:NA
(86) International Application No	:PCT/EP2024/066934
Filing Date	:18/06/2024
(87) International Publication No	:WO 2025/261594
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:NA
Filing Date	:NA

(71)**Name of Applicant :**
1)HUAWEI TECHNOLOGIES CO., LTD.
Address of Applicant :Huawei Administration Building Bantian Longgang District Shenzhen, Guangdong 518129 China
(72)**Name of Inventor :**
1)TSODIK, Genadiy
2)SHILO, Shimon
3)KLEIN, Arik
4)REDLICH, Oded
5)KEREN, Rani

(57) Abstract :
An access point, AP, (110a) is disclosed for communication with one or more non-AP stations (120a,b) associated with the AP (110a) in a wireless local area network, WLAN, (100). The AP (110a) is configured to send a Null Data Physical Protocol Data Unit, NDP, announcement, NDPA, frame to the one or more non-AP stations (120a,b) and to send a Sounding NDP to the one or more non-AP stations (120a,b) using a plurality of transmission antennas (114a) of the AP (110a). The Sounding NDP comprises a plurality of subsets, including at least a first subset and a second subset, and the NDPA frame is indicative of the plurality of subsets used in the Sounding NDP.

No. of Pages : 28 No. of Claims : 27

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :30/10/2026

(21) Application No.202637129774 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : SOLDER PASTE AND METHOD FOR PRODUCING JOINED BODY

(51) International classification	:B23K 35/26, B23K 35/14, B23K 35/22, C22C 13/00
(31) Priority Document No	:2024-085077
(32) Priority Date	:24/05/2024
(33) Name of priority country	:Japan
(86) International Application No Filing Date	:PCT/JP2025/016038 :25/04/2025
(87) International Publication No	:WO 2025/243793
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filing Date	:NA :NA

(71)**Name of Applicant :**
1)SENJU METAL INDUSTRY CO., LTD.
Address of Applicant :23, Senju-hashido-cho, Adachi-ku, Tokyo 1208555 Japan
(72)**Name of Inventor :**
1)SUZUKI Shigeto
2)OKA Naomasa
3)KOGA Shunsuke
4)MATSUFUJI Takahiro
5)TAKAGI Tomoko

(57) Abstract :
A solder paste according to the present invention contains a first solder alloy powder, a second solder alloy powder, and flux, and is characterized in that the first solder alloy powder contains Sn, Ag, and In, and has an Ag content of 3.9 mass% or more, and the second solder alloy powder is a powder of an alloy containing Sn, Ag, and Cu. According to the solder paste, the meltability of the paste is enhanced, and high speed shear strength and destruction mode of a solder joint part can be optimized.

No. of Pages : 33 No. of Claims : 7

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/08/2026
(21) Application No.202638096013 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : APPARATUSES FOR ENCODING AND DECODING A SEQUENCE OF INTEGER VALUES, METHODS FOR ENCODING AND DECODING A SEQUENCE OF INTEGER VALUES AND COMPUTER PROGRAM FOR IMPLEMENTING THESE METHODS

(51) International classification	:H03M 7/40, H03M 7/30
(31) Priority Document No	:20181776.4
(32) Priority Date	:23/06/2020
(33) Name of priority country	:EPO
(86) International Application No	:PCT/EP2021/067217
Filing Date	:23/06/2021
(87) International Publication No	: NA
(61) Patent of Addition to Application Number	:NA
Filing Date	:NA
(62) Divisional to Application Number	:202237074616
Filed on	:22/12/2022

(71)**Name of Applicant :**
1)FRAUNHOFER-GESELLSCHAFT ZUR FÖRDERUNG DER ANGEWANDTEN FORSCHUNG E.V.
Address of Applicant :Hansastraße 27c 80686 München Germany Germany
(72)**Name of Inventor :**
1)HAASE, Paul
2)MÜLLER, Karsten
3)KIRCHHOFFER, Heiner
4)MARPE, Detlev
5)SCHWARZ, Heiko
6)WIEGAND, Thomas

(57) Abstract :
The invention describes an encoding scheme for encoding a sequence of integer values, particularly by first using encoding a value at a predetermined position and then consecutively calculating and encoding differences between neighboring values. A respective decoding scheme is also provided. These encoding and decoding schemes provide more efficient encoding concept.

No. of Pages : 43 No. of Claims : 16

(12) PATENT APPLICATION PUBLICATION
(19) INDIA
(22) Date of filing of Application :08/08/2026
(21) Application No.202638096014 A
(43) Publication Date : 06/11/2026

(54) Title of the invention : APPARATUSES FOR ENCODING AND DECODING A SEQUENCE OF INTEGER VALUES, METHODS FOR ENCODING AND DECODING A SEQUENCE OF INTEGER VALUES AND COMPUTER PROGRAM FOR IMPLEMENTING THESE METHODS

(51) International classification	:H03M 7/40, H03M 7/30
(31) Priority Document No	:20181776.4
(32) Priority Date	:23/06/2020
(33) Name of priority country	:EPO
(86) International Application No Filing Date	:PCT/EP2021/067217 :23/06/2021
(87) International Publication No	: NA
(61) Patent of Addition to Application Number Filing Date	:NA :NA
(62) Divisional to Application Number Filed on	:202237074616 :22/12/2022

(71)**Name of Applicant :**
1)FRAUNHOFER-GESELLSCHAFT ZUR FÖRDERUNG DER ANGEWANDTEN FORSCHUNG E.V.
Address of Applicant :Hansastraße 27c 80686 München Germany Germany
(72)**Name of Inventor :**
1)HAASE, Paul
2)MÜLLER, Karsten
3)KIRCHHOFFER, Heiner
4)MARPE, Detlev
5)SCHWARZ, Heiko
6)WIEGAND, Thomas

(57) Abstract :
The invention describes an encoding scheme for encoding a sequence of integer values, particularly by first using encoding a value at a predetermined position and then consecutively calculating and encoding differences between neighboring values. A respective decoding scheme is also provided. These encoding and decoding schemes provide more efficient encoding concept.

No. of Pages : 43 No. of Claims : 14

CONTINUED TO PART- 3