


Write a command for this scenario ?

Enable dhcp on R1 for this two department

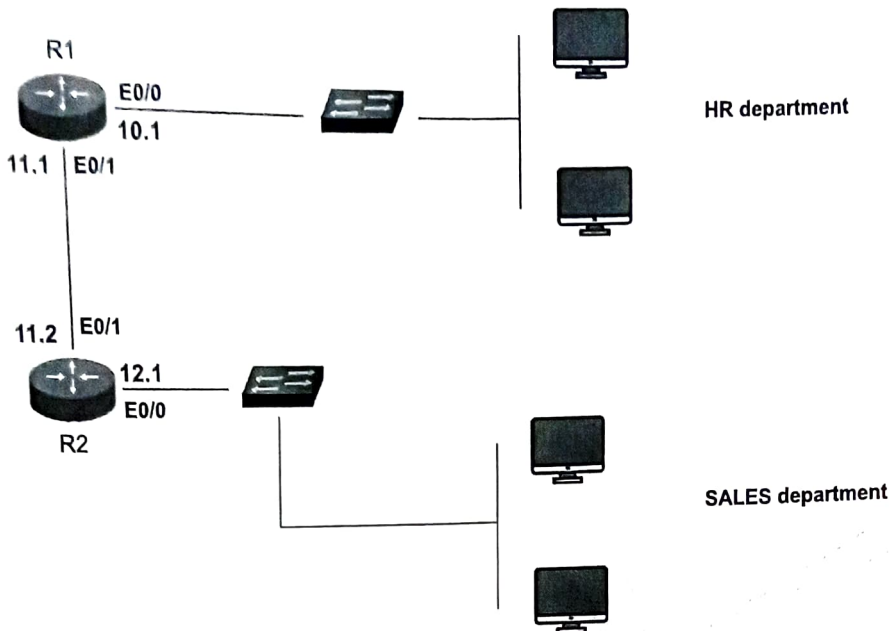

Command line interface

Router1> enable

Router1# configure terminal

Router1# interface Ethernet 0/0

Router1(config-if)# ip add 10.0.0.1 255.0.0.0

Router1(config-if)# no shutdown

Router1(config-if)# exit

Router1(config)# interface Ethernet 0/1

Router1(config-if)# ip add 11.0.0.1 255.0.0.0

Router1(config-if)# no shutdown

Router1(config-if)# exit

Router1(config)# ip route 12.0.0.0 255.0.0.0 11.0.0.2

Router1(config)# exit

Router 2

Router2> enable

Router2# configure terminal

Router2(config)# interface Ethernet 0/0

Router2(config-if)# ip add 12.0.0.1 255.0.0.0

Router2(config-if)# no shutdown

Router2(config-if)# exit

Router2(config)# interface Ethernet 0/1

Router2(config-if)# ip add 11.0.0.2 255.0.0.0

Router2(config-if)# no shutdown

Router2(config-if)# exit

Router2(config)# ip route 10.0.0.0 255.0.0.0

Router2(config)# exit

Router2(config)# interface Ethernet 0/0

Router2(config-if)# ip helper-address

Exit

11.0.0.1

```
Router1(Config)# ip dhcp pool HR Dept
Router1(dhcp-config)# network 10.0.0.0 255.0.0.0
Router1(dhcp-config)# default-router 10.0.0.1
Router1(dhcp-config)# dns-server 8.8.8.8
Router1(dhcp-config)# exit
```

```
Router1(Config)# ip dhcp excluded-address 10.0.0.1 10.0.0.50
Router1(Config)# exit.
```

Router1# Configure terminal

```
Router1(Config)# ip dhcp pool SALES Dept
Router1(dhcp-config)# network 12.0.0.0 255.0.0.0
Router1(dhcp-config)# default-router 12.0.0.1
Router1(dhcp-config)# dns-server 8.8.4.4
Router1(dhcp-config)# exit
```

```
Router1(Config)# ip dhcp excluded-address 12.0.0.1 12.0.0.100
Router1(Config)# exit
```

```
Router1(Config)# do show ip dhcp binding
exit
```

```
Router1# wr
```