


## ORDERING DATA

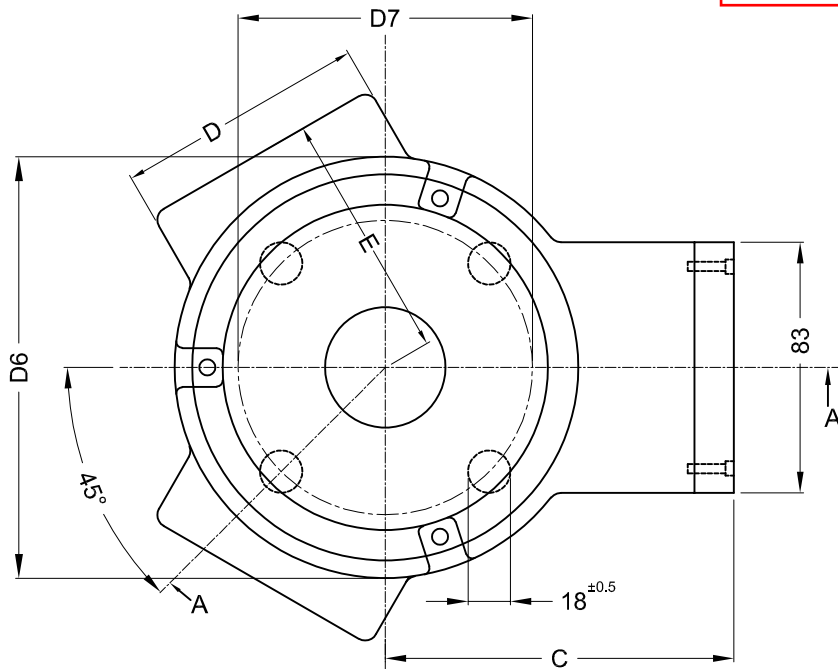


PORT OPENING

MODEL NO							CONNECTOR				
3	0	6	x	x	1	4	M20 x 1.5				
3	0	X	X	X	0	9	X	1	1	1	0
SIZE		PRESSURE SET IN KPA			COVER TYPE		CONTACT TYPE	PROTECTION CLASS C4			
					RUBBER (NBR)						

## PRESSURE SET

BAR	KPA
0.25	25
0.30	30
0.35	35
0.40	40
0.42	42
0.45	45
0.50	50
0.55	55
0.70	70

MODEL NO ON THE NAME PLATE WILL HAVE ONLY FIRST 7 DIGIT

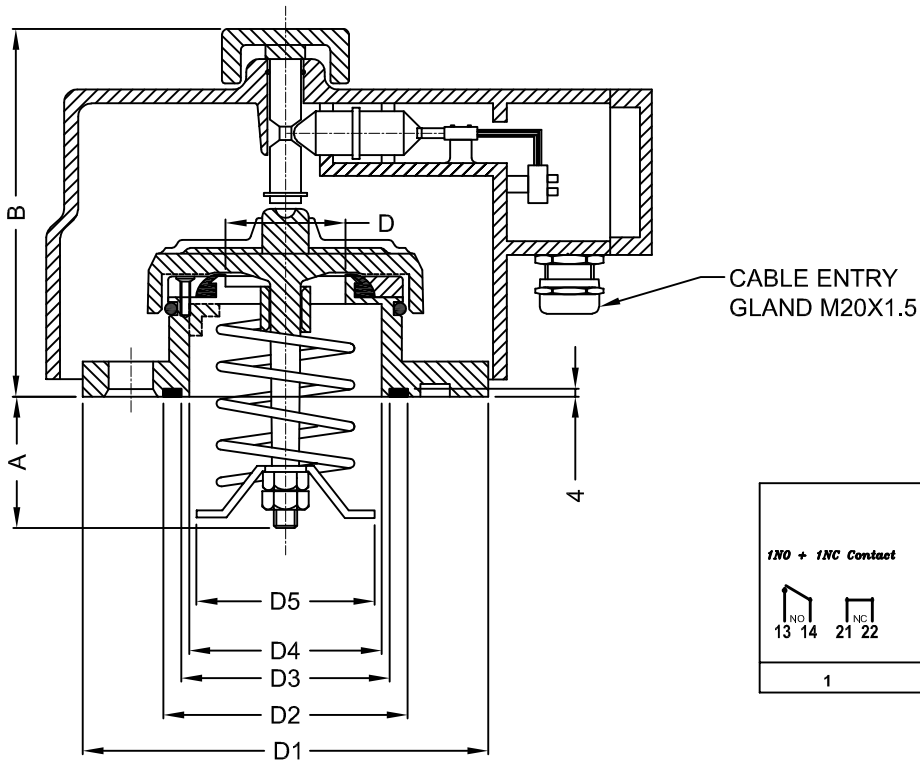

## CONTACT TYPE:-

ID	CONNECTION
1	1NO-1NC
2	2NO
3	2NO-2NC

## WIRING DIAGRAM :

1NO + 1NC Contact	2NO Contact	2NO + 2NC Contact
1	2	3

SIZE ID.	MODEL	DIMENSIONS												
		D MAX	D1	D2	D3	D4	D5 MAX	D6	D7	A MAX.	B MAX.	C MAX.	D	E
6	T50	50	165	99	85	81	62	175	125 <sup>±0.5</sup>	60	143.5	150	100	103.5
7	T80	80	200	131	117	112	103	212	160 <sup>±0.5</sup>	60	173	160	118	128

FINISH : RAL 7001 POWDER COATED

CE Certified

## VIAT INSTRUMENTS PVT LTD. INDIA

CLIENT :

FOR TEST SPECIFICATIONS CALL FOR TEST STANDARD OF THIS PRODUCT

DRN. P.K.B

APPD. A.GUPTA


DATE 24.10.19

SCALE N.T.S.

TITLE :PRESSURE RELIEF DEVICE

MODEL: T50 & T80 WITH INTEGRATED SWITCH  
BOTTOM CABLE ENTRY

ALL PREVIOUS DRAWINGS OF 306 SERIES HAVE BEEN REPLACED BY RELEASE 2



DRG. NO. :306\_7.4

Revision Level	0	SH. 1
RELEASE	2	OF 1

NO. DATE DESCRIPTION APPD.

## REVISIONS

Form No. : VIAT-QS:04:03:01 Rev. 0

DIMENSIONS ARE IN MILLIMETER(IN) AND FOR REFERENCE ONLY