


## PARTS LIST :


PART NO.	DESCRIPTION	MATL.
01.	BODY	ALUMINIUM ALLOY
02.	SHUTTER	ALUMINIUM ALLOY
03.	PROTECTIVE SHROUD	ALUMINIUM
04.	NUT	BRASS/SS
05.	SPRING	SPRING STEEL
06.	TIE ROD	STAINLESS STEEL
07.	SWITCH GLAND	BRASS
08.	MOUNTING RUBBER RING&ALL RUBBER COMP.	NBR
09.	VISUAL INDICATOR	ALUMINIUM (RED)

## CONTACT TYPE :


1NO + 1NC Contact



2NO Contact



2NO + 2NC Contact

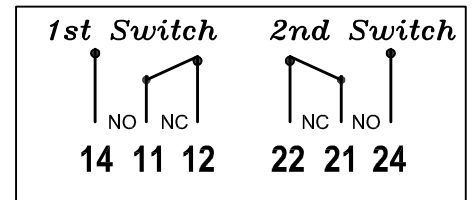

This Product is CE certified.


Type	Size	Model No	CONTACT	Cover
T50	50	306XX09	1NO + 1NC	YES
T50	50	306XX09-2	2NO + 2NC	YES
T50	50	306XX09-2NO	2NO	YES
T80	80	307XX09	1NO + 1NC	YES
T80	80	307XX09-2	2NO + 2NC	YES
T80	80	307XX09-2NO	2NO	YES

XX—Replace by operating pressure in KPA  
Example Type T50 PRD with switch & AL cover and operating pressure 50 KPA will be model no. 3065009

## GENERAL INFORMATION:

FINISH : RAL 7001 POWDER COATED

SWITCH RATING - 10 Amps , 240 V AC  
DEGREE OF PROTECTION - IP 65

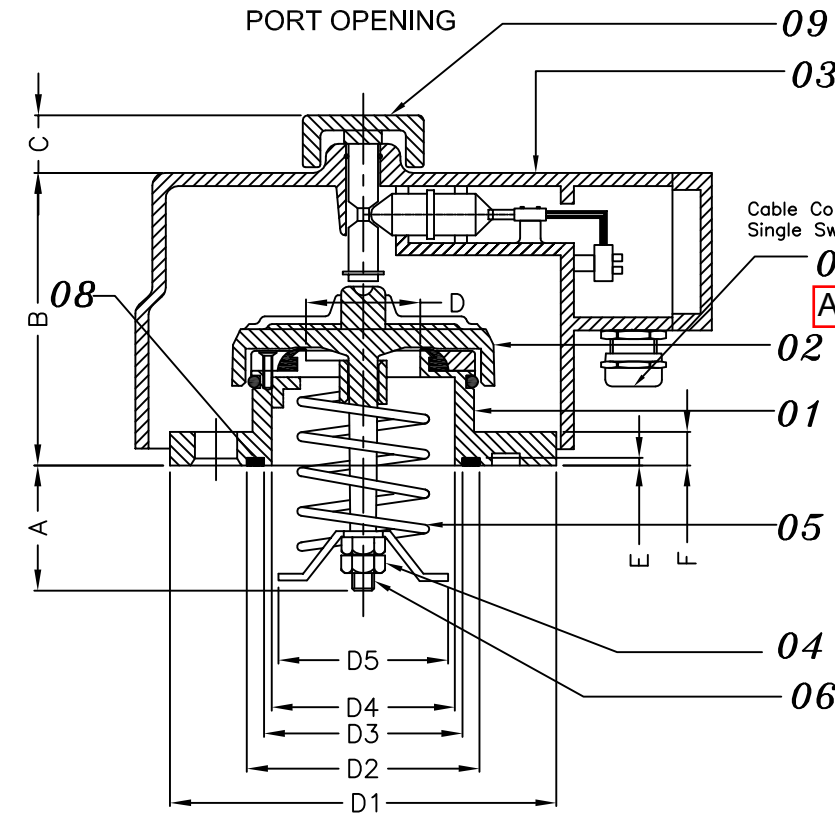

\* D5 is also mounting hole ID on Trf. tank top.

TYPE	DIMENSIONS																
	D	D1	D2	D3	D4	D5 MAX	D6	D7	D8	A* MAX.	B	C	E	F	G MAX.	H	J
T50	50	165	99	85	81	61	175	125	18	60	130.5	13	4	14	150	100	97.5
T80	80	200	131	117	112	102	212	160	18	60	160	13	4	16	160	117	130


## VIAT INSTRUMENTS PVT LTD. INDIA

CLIENT :

FOR TEST SPECIFICATIONS CALL FOR TEST STANDARD OF THIS PRODUCT

DRN.	R.SAHA
APPD.	A.GUPTA
DATE	13.01.11
SCALE	N.T.S.

TITLE : **PRESSURE RELIEF DEVICE**  
**TYPE T50 & T80**  
**WITH INTEGRATED SWITCH**



DRG. NO. : 306\_7.21

REVISION LEVEL 13

SH. 1  
OF 1

REVISIONS

Form No. : VIAT-QS-04:03:01 Rev. 0

DIMENSIONS ARE IN MILLIMETER(IN) AND FOR REFERENCE ONLY

NO.	DATE	DESCRIPTION	APPD.
R13	17.03.13	IP 55 TO IP 65	A.G
R12	08.11.12	IP 65 TO IP 55	A.G
R11	07.06.12	T80 MODEL ADDED	A.G