

VadaTech

Gigabit Ethernet Managed Switch Setup

September 17, 2009

Version 2.2

Copyright

© 2009 VadaTech Incorporated

All rights reserved

VadaTech and the globe image are trademarks of VadaTech Incorporated.

All other product or service names mentioned in this document are the property of their respective owners.

Notice

While reasonable efforts have been made to assure the accuracy of this document, VadaTech, Inc. assumes no liability resulting from any omissions in this document or from the use of the information obtained herein. VadaTech reserves the right to revise this document and to make changes periodically and the content hereof without obligation of VadaTech to notify any person of such revision or changes.

Electronic versions of this material may be read online, downloaded for personal use, or referenced in another document as a URL to the VadaTech Incorporated Web site. The text itself may not be published commercially in print or electronic form, edited, translated, or otherwise altered without the permission of VadaTech, Inc.

It is possible that this publication may contain reference to or information about VadaTech products (machines and programs), programming, or services that are not available in your country. Such references or information must not be construed to mean that VadaTech intends to announce such products, programming, or services in your country.

Trademarks

The VadaTech, Inc name and logo are registered trademarks of VadaTech Incorporated in the U.S.A. All other product or service names mentioned in this document are the property of their respective owners.

© 2009, VadaTech Incorporated. Printed in the U.S.A., All Rights Reserved.

Revision History

Doc Rev	Description of Change	Revision Date
1.0	Document Created	11/11/2008
1.1	Updated for version 1.9	02/16/2009
1.2	Format changes	03/18/2009
2.0	Update to include VT850, UTC003 and AMC216, AMC217, AMC218, and AMC219	05/26/2009
2.1	Update to include UTC002 and ATC114	08/12/2009
2.2	Correct document id	09/17/2009

Table of Contents

1	Overview	7
1.1	Applicable Products	7
1.2	Document References	7
2	Initial Setup.....	8
2.1	Logging in the First Time	8
2.2	Initial Setup	8
3	Troubleshooting.....	11
3.1	Connecting.....	11
3.1.1	For UTC001, UTC002, UTC003 and VT850.....	11
3.1.2	For AMC216 and AMC217	11
3.1.3	For AMC218 and AMC219.....	11
3.1.4	For ATC114	11
3.1.5	PortStat.....	12
3.1.5.1	port	13
3.1.5.2	ena/link	13
3.1.5.3	speed/duplex.....	13
3.1.5.4	link scan	14
3.1.5.5	auto neg?	14
3.1.5.6	STP state	14
3.1.5.7	pause	14
3.1.6	exit	14
3.1.7	shell	14
3.1.7.1	showlfs.....	15
3.1.7.2	exit.....	15

Figures

Figure 1: Gigabit Ethernet Switch Status..... 9

Figure 2: Gigabit Ethernet Switch IP address configuration..... 10



Tables

Table 1: Gigabit Ethernet Port Descriptions for MCH 12

Table 2: Gigabit Ethernet Port Descriptions for AMC 12

Table 3: Gigabit Ethernet Port Descriptions for Carriers..... 13



1 Overview

The Gigabit Ethernet Managed switch interface is used to control the managed switch features present in the Gigabit Ethernet managed switch.

1.1 Applicable Products

- UTC001
- UTC002
- UTC003
- VT850
- AMC216
- AMC217
- AMC218
- AMC219
- ATC114

1.2 Document References

- [VadaTech MCH Getting Started Guide](#)

2 Initial Setup

2.1 Logging in the First Time

The switch is configured from the factory to a default IP address of 192.168.40.230.

The web interface of the switch may be accessed through any switch port on the device. The UTC001, UTC002, UTC003 and VT850 have GbE ports as well as a connection to each AMC slot that can be used to connect to the switch network. The AMC216, AMC217, AMC218, and AMC219 have backplane connections and front mounted ports that connect to the switch network. The ATC114 has backplane connections, connections to a rear transition module and dual connections to each AMC slot.

The switch can be accessed with a standard web browser at <http://192.168.40.230/> with user name 'admin' and password 'admin'.

2.2 Initial Setup

Once logged in, the user can start the managed switch configuration and the current status. It is recommended that the default IP address be changed to allow multiple managed switches to be installed on a single network. For example, redundant MCH operation would have two switches on the same network and require them to have unique IP addresses.

To change the IP address of the switch, navigate to the System menu on the left panel, then Status. The right pane will show the system status of the switch. Next, click on the current IP address as shown in Figure 1.

VT Gigabit Ethernet Managed Switch Setup

Vadatech Switch Config - Windows Internet Explorer

http://10.1.12.10/

Vadatech Switch Config
http://10.1.12.10/

Vadatech Inc
THE POWER OF VISION

VT Switch Config

- System
 - Status
 - Password
 - Firmware
 - Restart / Reset
- Port
- Statistics
- VLAN
- Trunking
- Mirror
- QoS
- Rate
- L2 Management
- Spanning Tree
- 802.1x
- IGMP Snooping
- Cable Diagnostic
- Auto DoS
- Auto VoIP
- Logging
- SNMP
- RMON-Lite

System

Device Name	VTWSS
Firmware Version	WSS: vt-wss-1.9 SDK: sdk-xgs-robo-5.5.3 Upgrade
Build Date	Wed Mar 4 16:41:52 2009
MAC Address	00-13-3a-00-01-aa
DHCP Client	Disabled
IP Address	192.168.1.110
Subnet Mask	255.255.255.0
Gateway	192.168.1.1
L2 Table Aging	Disabled

Backup settings Restore settings

Done Internet 100%

Figure 1: Gigabit Ethernet Switch Status

Enter the new IP address, Network Submask and Gateway address in the following screen and click Apply.

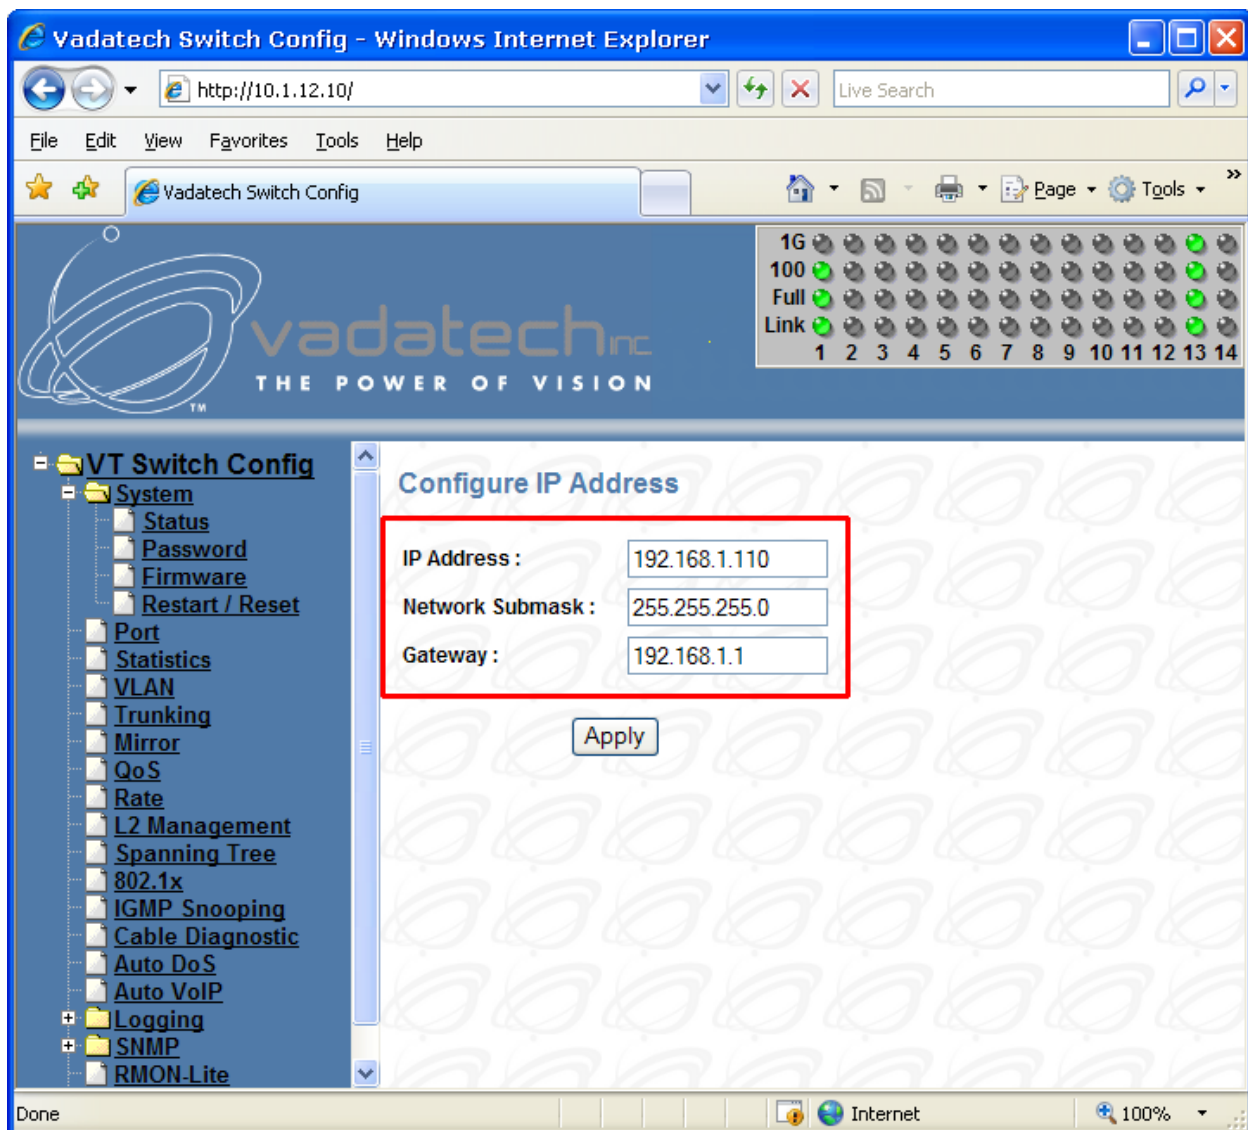


Figure 2: Gigabit Ethernet Switch IP address configuration

3 Troubleshooting

For access to the switch when there is a problem connecting to the web interface, a command line interface can be used to help diagnose the problem.

3.1 Connecting

3.1.1 For UTC001, UTC002, UTC003 and VT850

First connect to the MCH console. See VadaTech MCH Getting Started Guide Section 3 for more information.

To connect to the Gigabit Ethernet switch command interface:

```
# term -b115200 /dev/ttyS1
```

3.1.2 For AMC216 and AMC217

The serial port is on a 6 pin header on the AMC. The TX, RX and Ground pins are labeled on the AMC. The serial protocol is RS-232, 115200 baud, N81.

3.1.3 For AMC218 and AMC219

The serial port is a female micro-USB connector on the front panel. To connect this serial port to a standard DB9 connector use part number CBL-DB9MUSB1. The serial protocol is RS-232, 115200 baud, N81.

3.1.4 For ATC114

The serial port is on a 6 pin header on the ATC114. The TX, RX and Ground pins are labeled on the ATC114. The switch block SW6, switch 3 should be in the off position to direct the switch output to the serial port. The serial protocol is RS-232, 115200 baud, N81.

3.1.5 PortStat

The PortStat command lists the state of all ports in the Gigabit Ethernet switch. It may be abbreviated as 'ps'.

Port	UTC001	UTC002	UTC003
ge0	Switch management CPU	Switch management CPU	Switch management CPU
ge1	-	MCH GbE0 Front Panel	MCH GbE Front Panel
ge2	-	MCH Management Controller	-
ge3	MCH Daughtercard	MCH Daughtercard 1	MCH Daughtercard
ge4	MCH Management Controller	MCH Daughtercard 2	MCH Management Controller
ge5	MCH GbE Front Panel	MCH GbE1 Front Panel	MCH GbE Front Panel
ge6	MCH Update Channel	MCH Update Channel	MCH Update Channel
ge7	To AMC 12	To AMC 12	To AMC 12
ge8	To AMC 11	To AMC 11	To AMC 11
ge9	To AMC 10	To AMC 10	To AMC 10
ge10	To AMC 9	To AMC 9	To AMC 9
ge11	To AMC 8	To AMC 8	To AMC 8
ge12	To AMC 7	To AMC 7	To AMC 7
ge13	To AMC 6	To AMC 6	To AMC 6
ge14	To AMC 5	To AMC 5	To AMC 5
ge15	To AMC 4	To AMC 4	To AMC 4
ge16	To AMC 3	To AMC 3	To AMC 3
ge17	To AMC 2	To AMC 2	To AMC 2
ge18	To AMC 1	To AMC 1	To AMC 1

Table 1: Gigabit Ethernet Port Descriptions for MCH

Port	AMC216/217	AMC218	AMC219
ge0	Switch management CPU	Switch management CPU	Switch management CPU
ge1	-	-	-
ge2	-	-	-
ge3	Front Panel Port 1	Front Panel Port 1	Front Panel Port 1
ge4	Front Panel Port 2	Front Panel Port 2	Front Panel Port 2
ge5	Front Panel Port 3	Front Panel Port 3	Front Panel Port 3
ge6	Front Panel Port 4	Front Panel Port 4	Front Panel Port 4
ge7	Front Panel Port 5	Front Panel Port 5	Front Panel Port 5
ge8	Front Panel Port 6	Front Panel Port 6	Front Panel Port 6
ge9	Front Panel Port 7	-	Front Panel Port 7
ge10	Front Panel Port 8	-	Front Panel Port 8
ge11	-	-	Front Panel Port 9
ge12	-	-	Front Panel Port 10
ge13	-	-	Front Panel Port 11
ge14	-	-	Front Panel Port 12
ge15	-	-	-
ge16	-	-	-
ge17	AMC Port 0	AMC Port 0	AMC Port 0
ge18	AMC Port 1	AMC Port 1	AMC Port 1

Table 2: Gigabit Ethernet Port Descriptions for AMC

Port	VT850	ATC114
ge0	Switch management CPU	Switch management CPU
ge1	Chassis GbE Front Panel	-
ge2	MCH Management Controller	-
ge3	AMC 1 Port 0	Base Channel 0
ge4	AMC 1 Port 1	Base Channel 1
ge5	AMC 2 Port 0	Fabric Channel 0
ge6	AMC 2 Port 1	Fabric Channel 1
ge7	AMC 3 Port 0	Fabric Channel 2
ge8	AMC 3 Port 1	Fabric Channel 3
ge9	AMC 4 Port 0	Zone 3-0
ge10	AMC 4 Port 1	Zone 3-1
ge11	AMC 5 Port 0	Zone 3-2
ge12	AMC 5 Port 1	Slot A1 Port 0
ge13	AMC 6 Port 0	Slot A1 Port 1
ge14	AMC 6 Port 1	Slot B1 Port 0
ge15	AMC 7 Port 0	Slot B1 Port 1
ge16	AMC 7 Port 1	Slot A2 Port 0
ge17	AMC 8 Port 0	Slot A2 Port 1
ge18	AMC 8 Port 1	Slot B2 Port 0
ge19	AMC 9 Port 0	Slot B2 Port 1
ge20	AMC 9 Port 1	Slot A3 Port 0
ge21	AMC 10 Port 0	Slot A3 Port 1
ge22	AMC 10 Port 1	Slot B3 Port 0
ge23	AMC 11 Port 0	Slot B3 Port 1
ge24	AMC 11 Port 1	Slot B4 Port 0
ge25	AMC 12 Port 0	Slot B4 Port 1
ge26	AMC 12 Port 1	-

Table 3: Gigabit Ethernet Port Descriptions for Carriers

3.1.5.1 port

The port column gives the name of the port. Refer to Table 1, Table 2 and Table 3 for the description of which port name corresponds to where it is connected.

3.1.5.2 ena/link

The ena/link column shows which ports are enabled and have Ethernet link.

3.1.5.3 speed/duplex

The speed/duplex column lists the speed the link is running at and the duplex setting. The possible values are 1G, 100 and 10 for the speed for a link running at 1 gigabit, 100 megabit or 10 megabit, respectively. The duplex can be either FD or HD for full duplex or half duplex, respectively.

3.1.5.4 link scan

The link scan column shows if the link state is scanned periodically by software or automatically by the hardware.

3.1.5.5 auto neg?

The 'auto neg?' column shows if the speed of the link is determined by auto negotiation or set statically.

3.1.5.6 STP state

The STP state column shows if the port is part of a spanning tree network. The possible values listed are Disable, Forward or Block.

- Disabled state is for ports that are either not part of the spanning tree negotiation or are not currently linked with another device.
- Forward state is for ports that are part of a spanning tree and are actively turned on to forward packets to other devices.
- Blocked state is when the port is part of a spanning tree and packets are being discarded from this port to prevent cycles in the network graph.

3.1.5.7 pause

The pause column shows if the port supports pause frames to allow flow control through the network.

3.1.6 exit

From the command interface prompt, the exit command may be used to reboot the Gigabit Ethernet switch software.

3.1.7 shell

The shell command enters the operating system shell where the management IP address can be viewed.

3.1.7.1 showlfs

The showlfs command in the operating system shell will display the configured IP address.

3.1.7.2 exit

The exit command will terminate the operating system shell and return to the command interface.