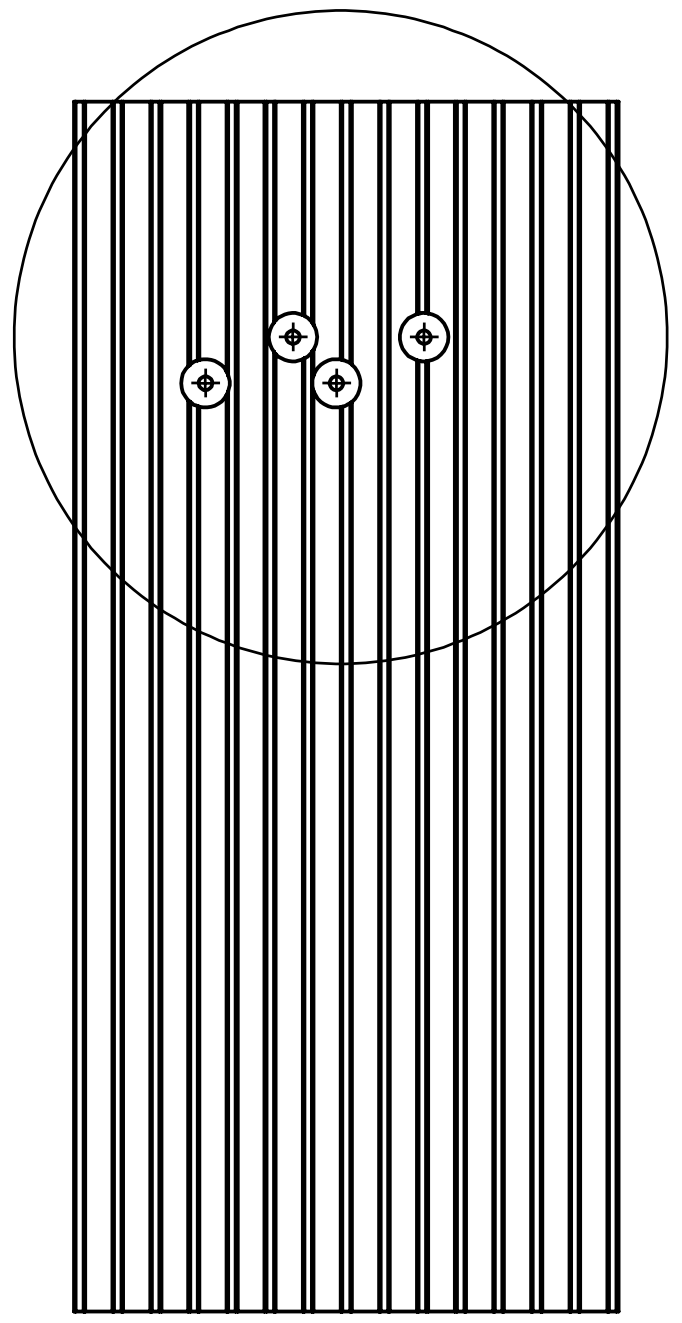

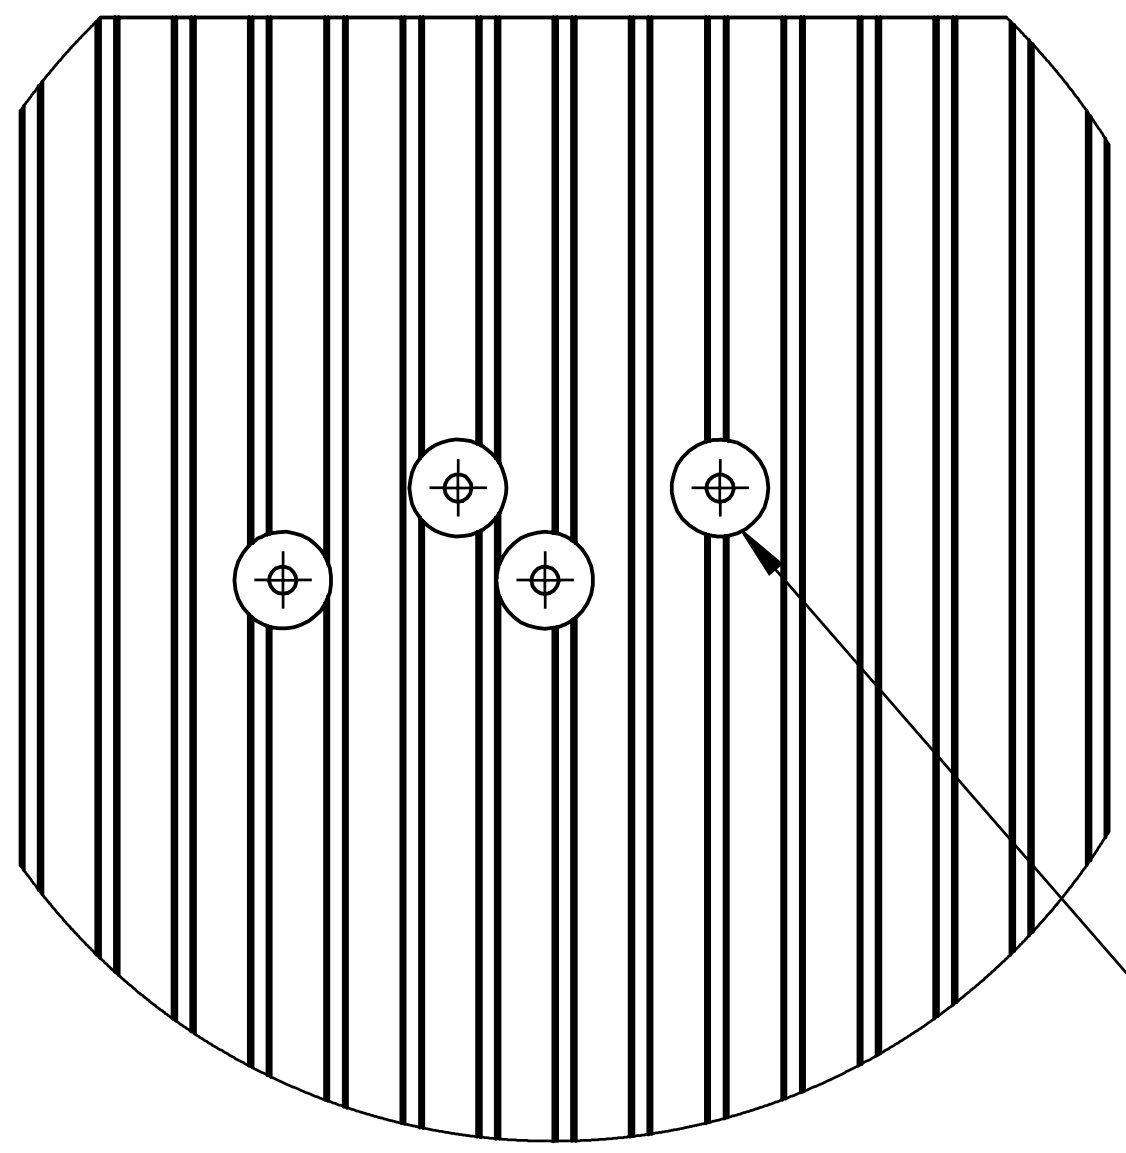

DETAIL A
SCALE 2 : 5

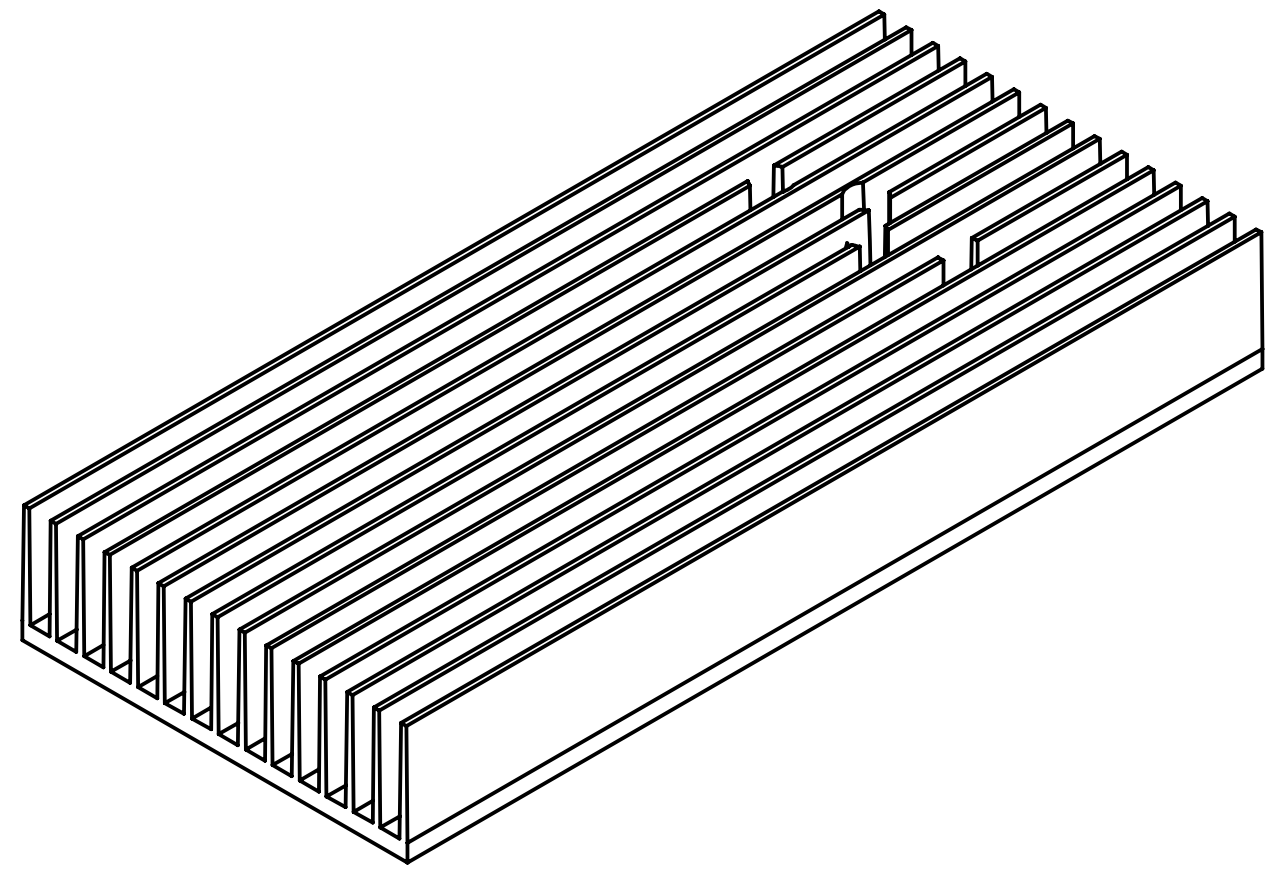

1). Min of 16mm diameter area machined flat around these 4 holes on the fin side is required. More fin area than shown can be cleared to aid machining process. This is for a sealing washer + screwhead.

2). Thickness of base after surface milling is not critical but there should be at least 6mm of clean threads, drilling all the way through the base is acceptable.

3). Fin arrangement may not be accurate to the 266AS extrusion, it is just for visual refernce.

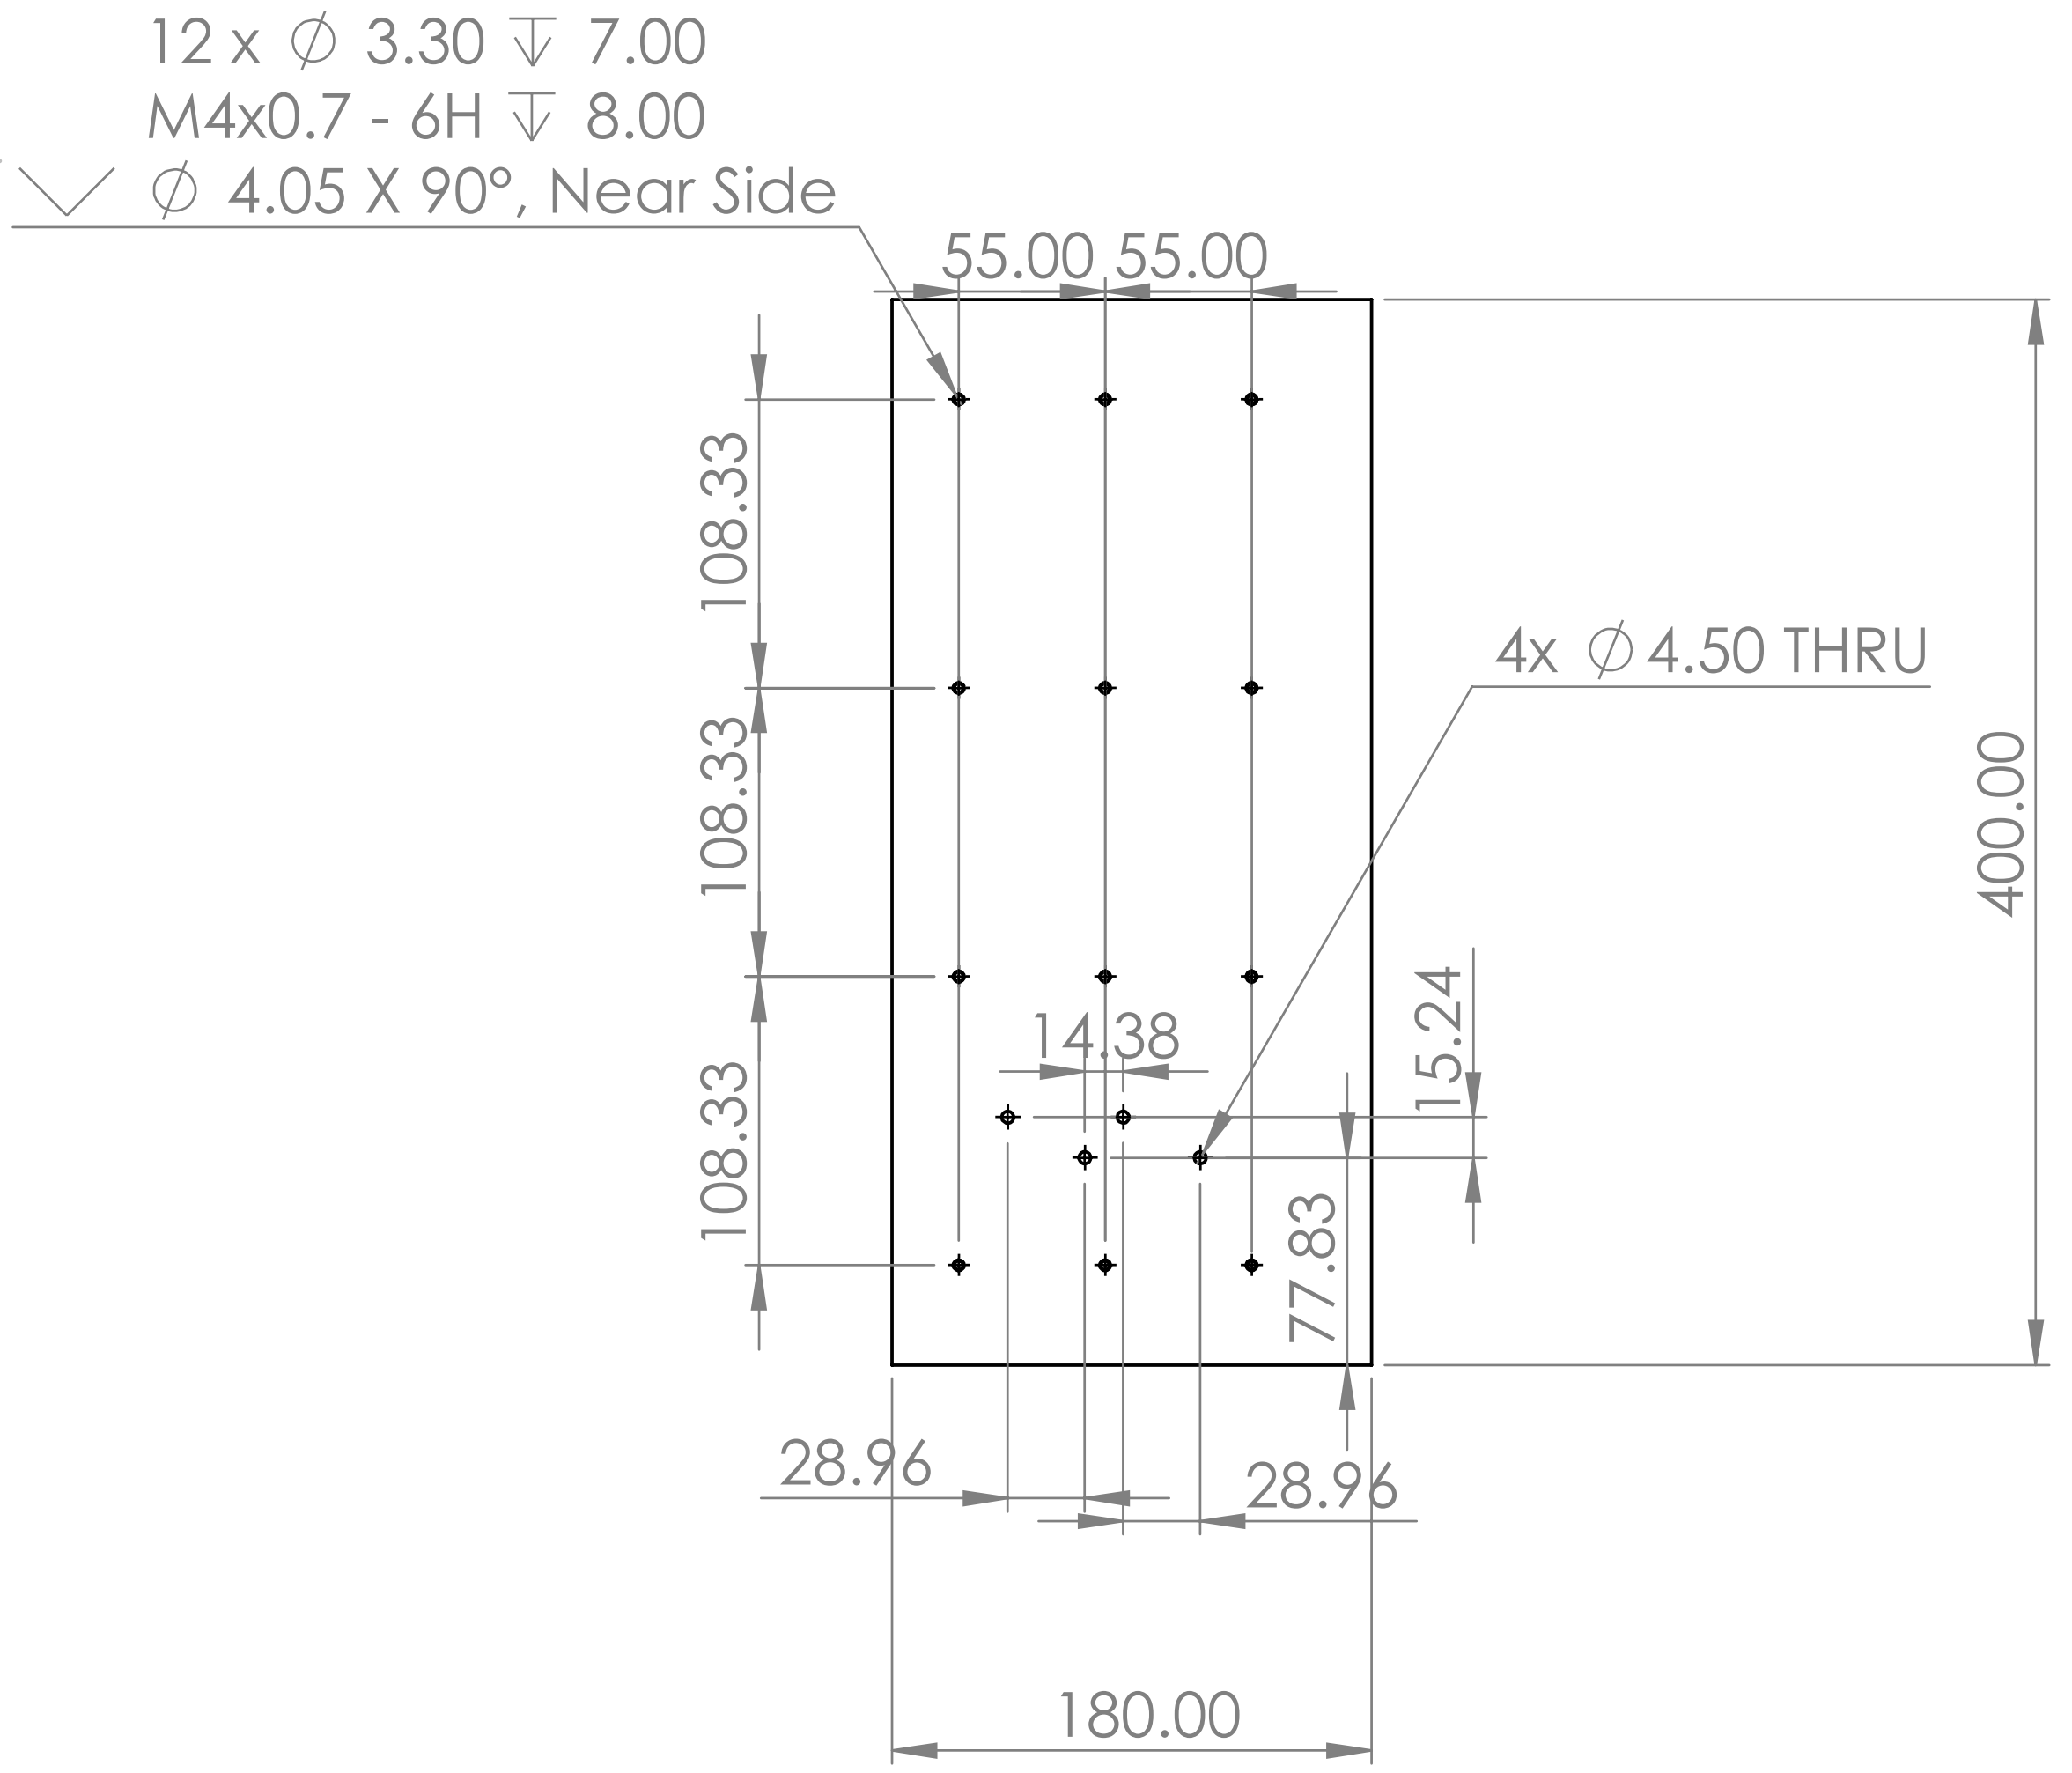

Summary of Operations:

- Drill & tap 12x M4 holes on base
- Drill 4x 4.5mm clearance holes
- Face the bottom surface
- Machine away fins around 4 clearance holes on other side, provide flat surface in that area.
- Chamfer holes & deburr edges
- Apply Clear Anodization

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: +/- 0.125 mm on machined surfaces	FINISH: Clear Anodized	DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
			NC State University	
NAME / SIGNATURE / DATE			TITLE: Machine Operations for 266AS Heatsink	
DRAWN				
CHK'D				
APPV'D				
MFG				
Q.A	MATERIAL:		DWG NO. (PSA-0469-Rev B) Heatsink	A3
	WEIGHT:		SCALE:1:5	SHEET 1 OF 1