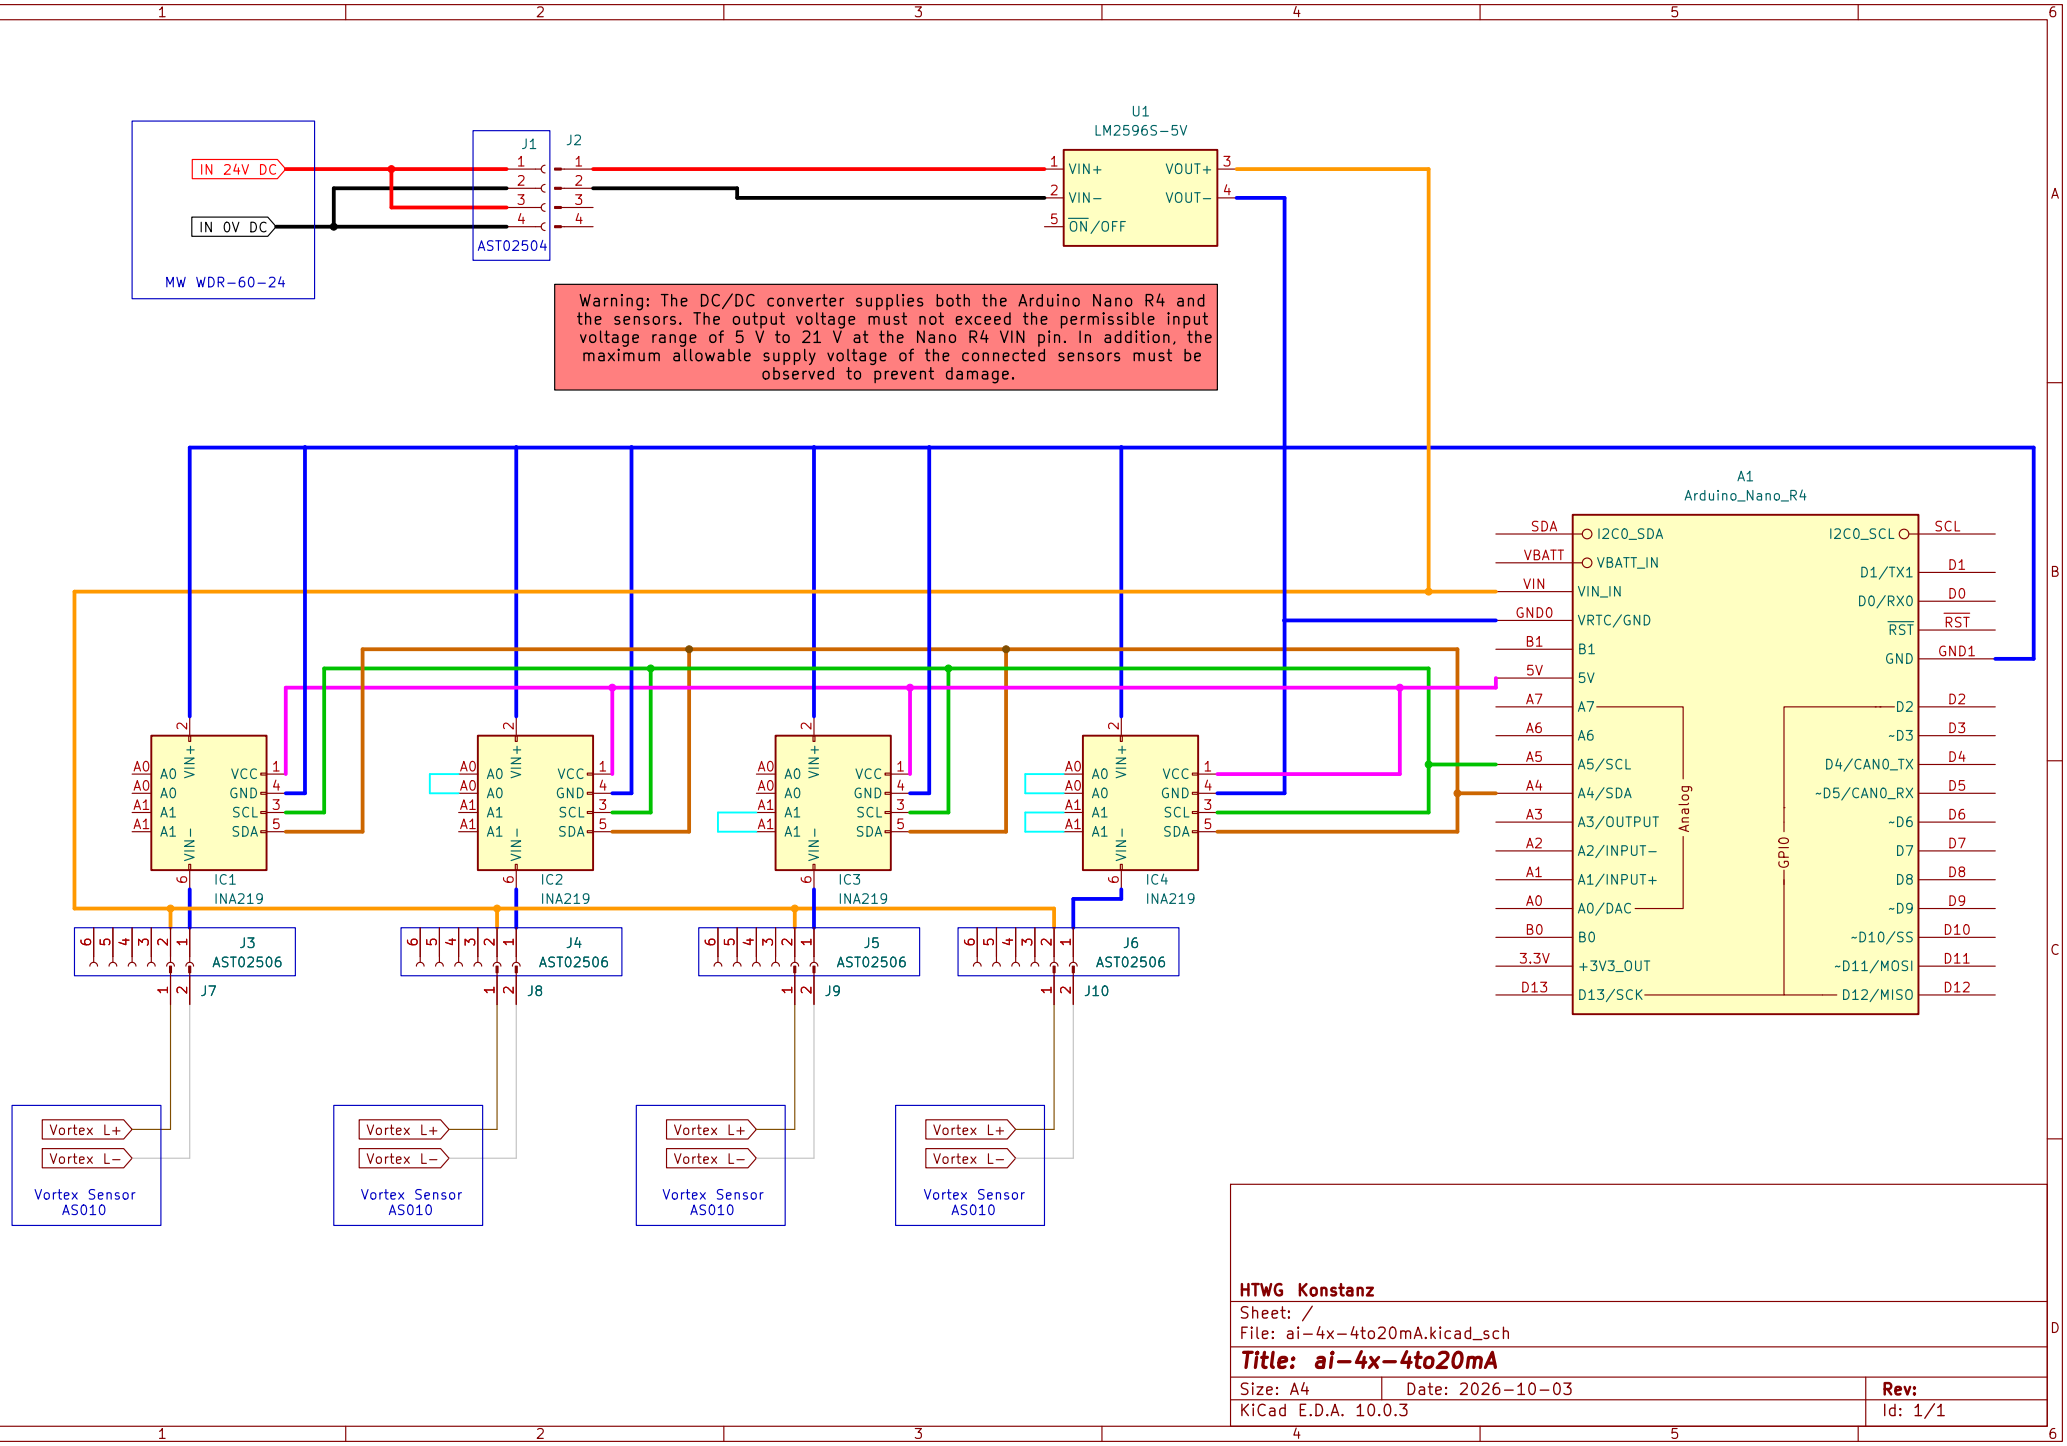

IN 24V DC
IN 0V DC
MW WDR-60-24
J1
J2
AST02504
U1
LM2596S-5V
VIN+
VIN-
ON/OFF
VOUT+
VOUT-
Warning: The DC/DC converter supplies both the Arduino Nano R4 and the sensors. The output voltage must not exceed the permissible input voltage range of 5 V to 21 V at the Nano R4 VIN pin. In addition, the maximum allowable supply voltage of the connected sensors must be observed to prevent damage.
A1
Arduino_Nano_R4
IC1
IC2
IC3
IC4
INA219
J3
J4
J5
J6
J7
J8
J9
J10
AST02506
Vortex L+
Vortex L-
Vortex Sensor
AS010
HTWG Konstanz
Sheet: /
File: ai-4x-4to20mA.kicad_sch
Title: ai-4x-4to20mA
Size: A4
Date: 2026-10-03
Rev:
KiCad E.D.A. 10.0.3
Id: 1/1