
Connector to isolator main board Differential ADC driver - gain = -1 dB Input buffer Supply regulation and filtering 5 V supply for AVDD +5 V supply for diff amp - only 20 mA ADM7154 (3.3 V) - powers LVPECL receiver 3.3 V supply for DVDD DĞND

AK5572 ADC



Clock receiver - LVPECL to CMOS (AD9515)

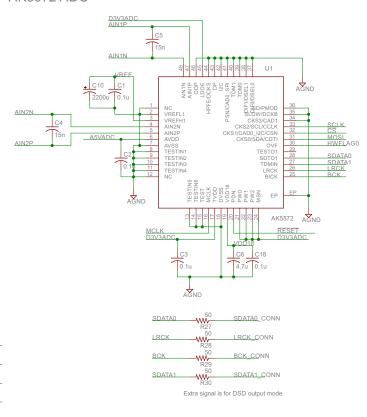