
AMICITIA TRADING

Equipment Proposal Specification

Semi-Automatic FCT Machine

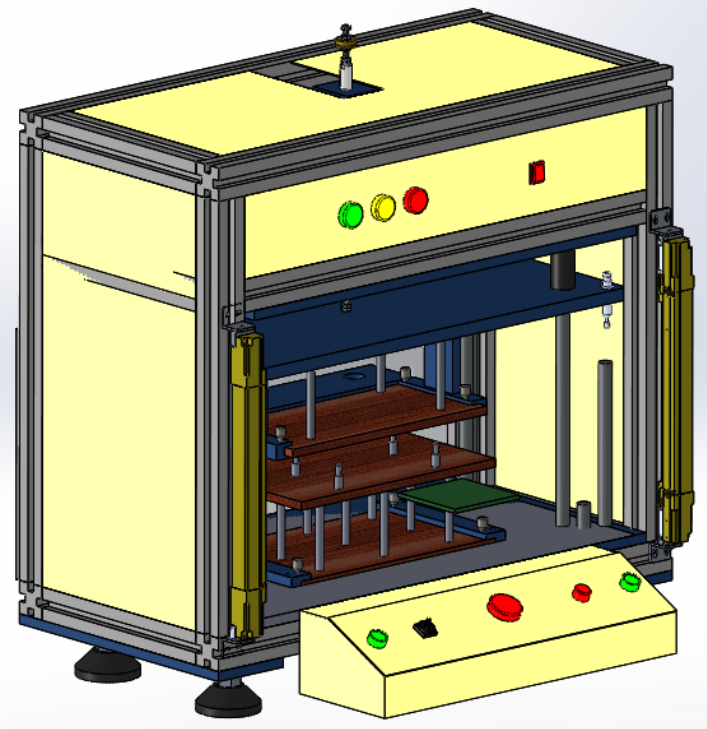

Customer: PRICON MICROELECTRONICS INC.
Date: October 23, 2018
Revision: 0

Confidential Document. Unauthorized to reprint, copying, or redistribution of this document shall be punishable to any applicable law governing this document. Disclaimer: Logos, images, and trademarks used on this document is for representation purpose only. Amicitia Trading, Copyright 2018.

I. Scope of Work:

a. AMICITIA Trading will Design and Build Semi- Auto FCT Machine with agreed machine specification in approved by Pricon Microelectronics Inc.
b. Cycle time target is 5 secs (auto cycle).


c. Program interface of machine to existing tester.

d. Program sequence reconfiguration.


e. Lead time delivery is 6 to 8 weeks upon receipt of PO.

II. Machine Name and Dimensions:

a. Machine Name: Semi-Automatic FCT Machine
b. Quantity: 1 Set
c. Dimensions (LxWxH): 700mm x 500mm x 750mm

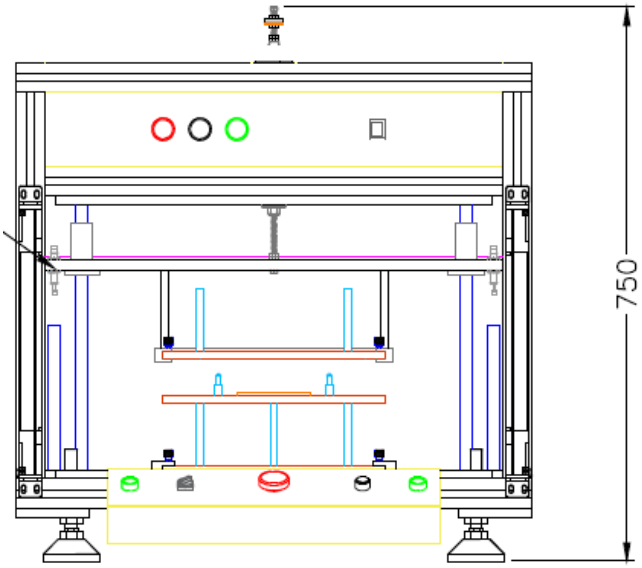

Front View

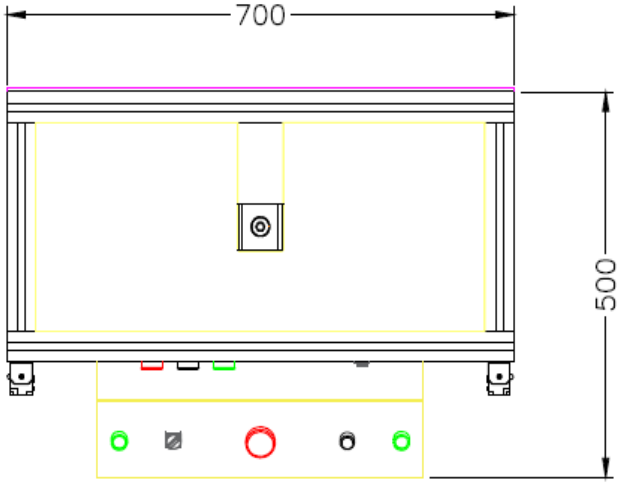


Top View


Confidential Document. Unauthorized to reprint, copying, or redistribution of this document shall be punishable to any applicable law governing this document. Disclaimer: Logos, images, and trademarks used on this document is for representation purpose only.
Amicitia Trading, Copyright 2018.

III. General Features:

a. Table Top Machine.
b. Semi-Automatic Feature.
c. Two Hand Push Button to operate.
d. Aluminum Profile Framing.
e. S45C, Stainless, Aluminum mechanisms and fabricated parts.
f. B.I. Sheet Powdered Coated machine covers and indoor, Beige color.
g. Detachable covers for easy maintenance.
h. With adjustable footings for equipment levelling.
i. Top Fixture Holder is pneumatic driven with press height adjustment guided by linear shaft and linear bushing.
j. Bottom Fixture Holder is fixed mounted on base.
k. Curtain Sensor for safety.

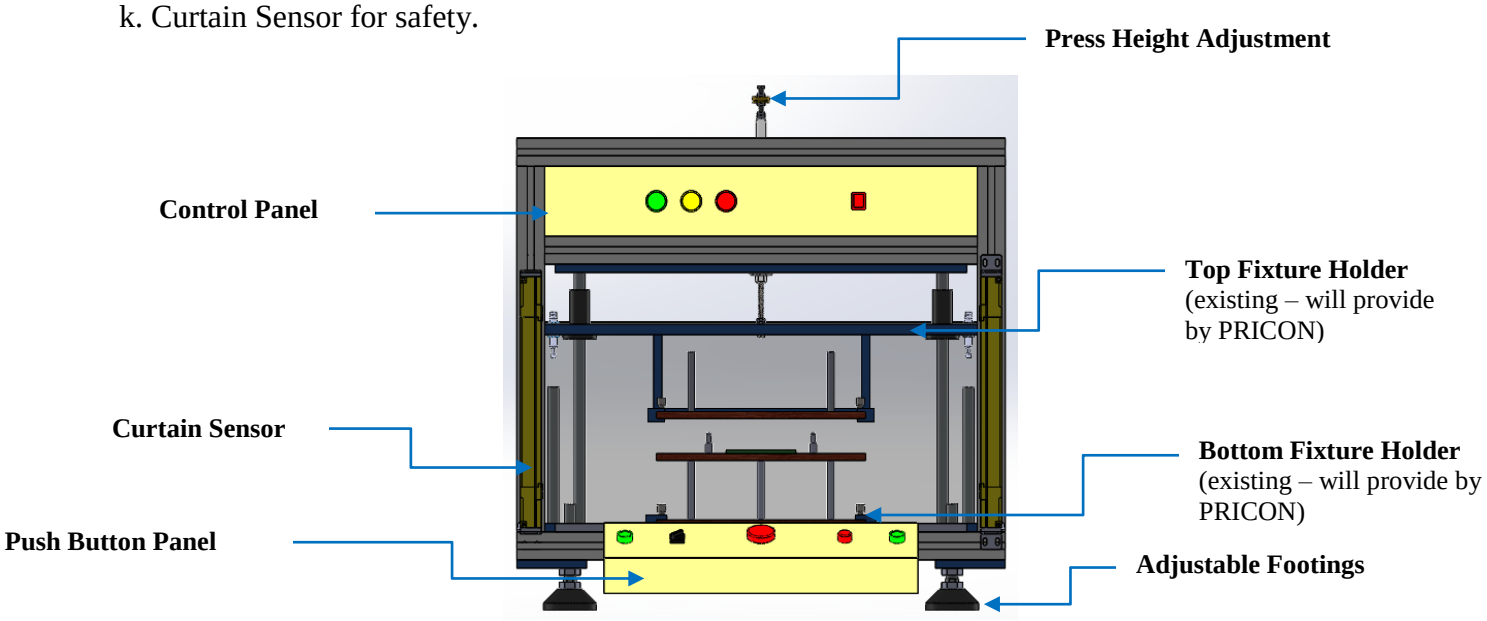


Equipment Front View

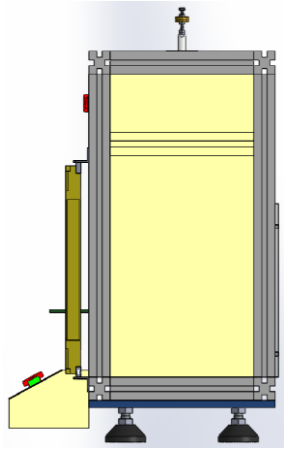

Equipment Side View

Confidential Document. Unauthorized to reprint, copying, or redistribution of this document shall be punishable to any applicable law governing this document. Disclaimer: Logos, images, and trademarks used on this document is for representation purpose only.
Amicitia Trading, Copyright 2018.

IV. Test Fixture Assembly (Top and Bottom):

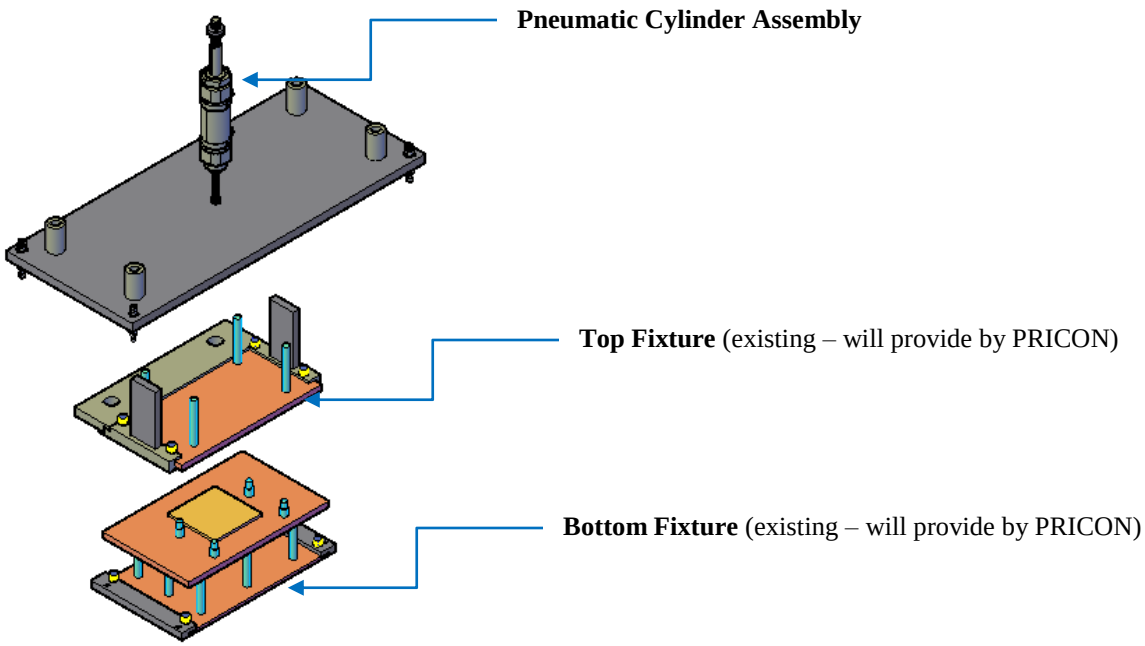

V. Operation:

a. Equipment is integrated with the existing Test Apparatus.

b. Manual setup and locking of Top and Bottom Test Fixtures.

c. Manual press height adjustment and locking.

d. Manual product loading and unloading to NG Bin

e. Two hand push button switch to start operation.


f. Equipment has curtain sensor. Process will interrupt if the curtain sensor detects something.

g. Equipment has light indicators for machine status instead of tower light.


h. Equipment has selector switch for auto/manual mode.

i. Pre-configured parameters are available *(patched on the equipment's program)* which can be dictated by the process/equipment engineering to the vendor.

Confidential Document. Unauthorized to reprint, copying, or redistribution of this document shall be punishable to any applicable law governing this document. Disclaimer: Logos, images, and trademarks used on this document is for representation purpose only.
Amicitia Trading, Copyright 2018.

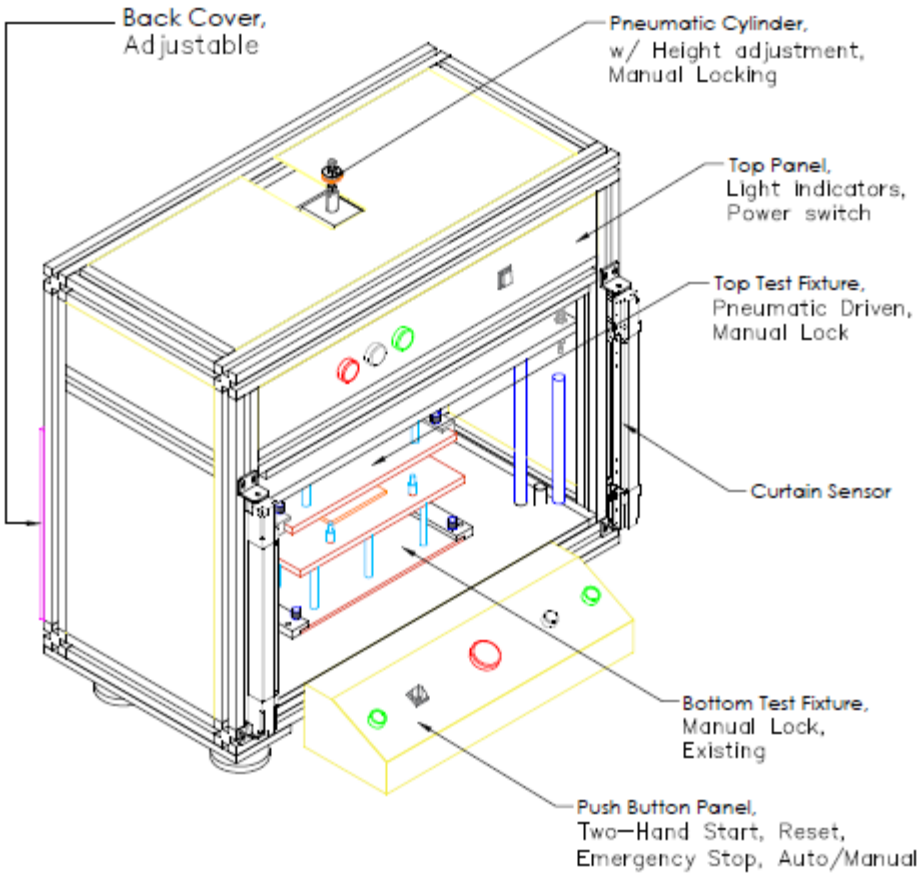

VI. Process Flow

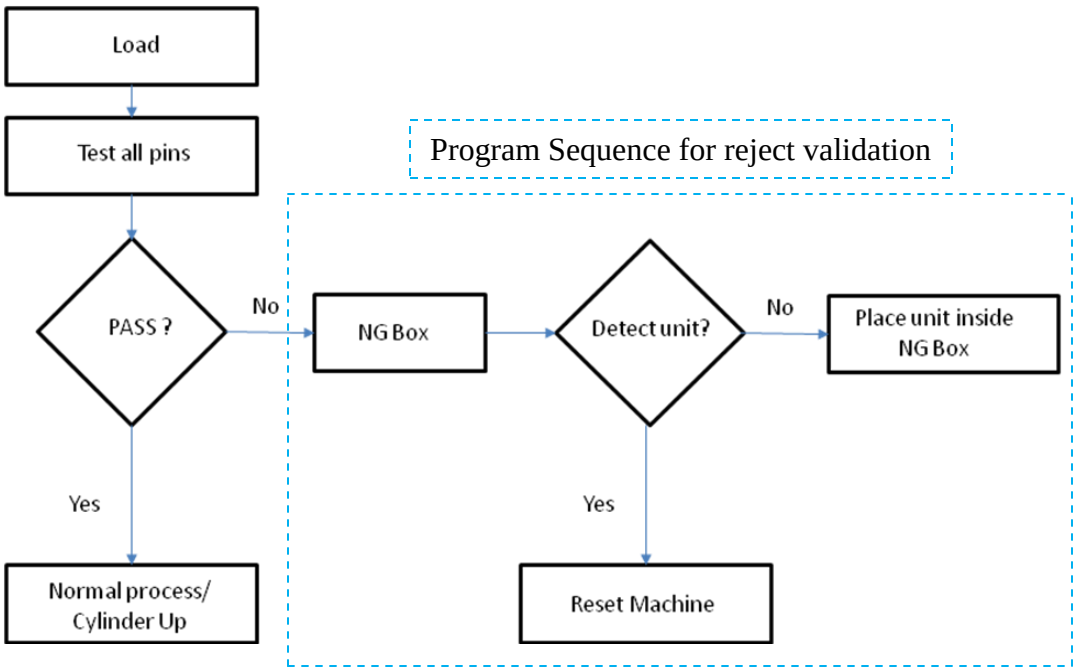


Confidential Document. Unauthorized to reprint, copying, or redistribution of this document shall be punishable to any applicable law governing this document. Disclaimer: Logos, images, and trademarks used on this document is for representation purpose only.
Amicitia Trading, Copyright 2018.


VII. Cycle Time:

Activity	Equiv Time
1. Operator load the unit	1 sec
2. Push the start button	1 sec
3. Test cycle will start	2 sec
4. Unloading of unit	1sec


1) Operator load the unit.

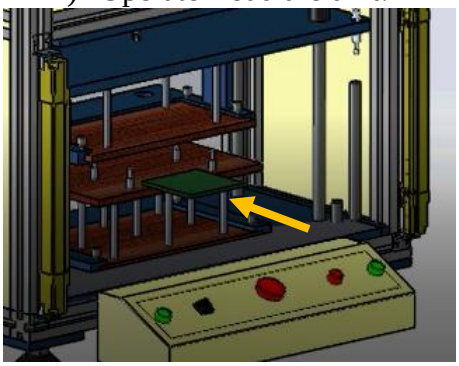


2) Push the start button.

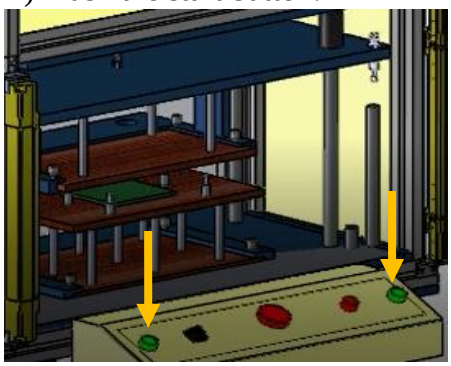

3) Test cycle will start.

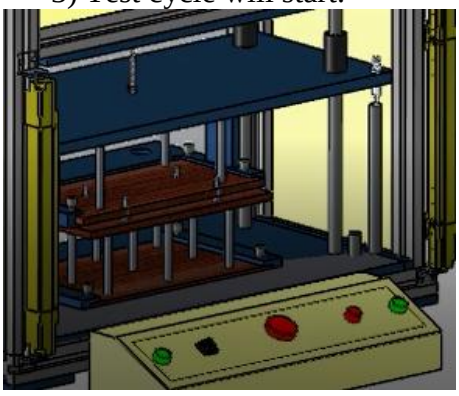

4) Unloading of unit.

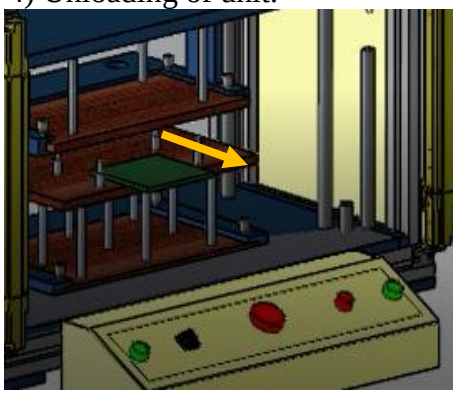

VIII. Technical Specifications:

a. Supply Voltage -220 VAC, single phase 60 Hz
b. Control Voltage -24 VDC (embedded on the equipment)
c. Air Utility –0.5Mpa
d. Pneumatic Cylinder -Electrical solenoid actuator, 5/3 way, 24 VDC
e. Electrical panel IP rating -IP51
f. Control –PLC (Omron)
g. Safety Feature: Curtain Sensor, Emergency Stop
h. Cycle time -User dependent (factory set: 5 seconds per product)
i. Ventilation -natural air cooled

Confidential Document. Unauthorized to reprint, copying, or redistribution of this document shall be punishable to any applicable law governing this document. Disclaimer: Logos, images, and trademarks used on this document is for representation purpose only. Amicitia Trading, Copyright 2018.

j. Machine operation -Semi-automatic
k. Circuit protection –YES
l. Main Body Frame: Aluminum Profile 40 x 40
m. Covers: B.I. Sheet powder coated (color: Indoor Beige)
n. Linear Shafts, Linear Bushings, Shock Absorbers are Misumi.
o. Pneumatic parts are SMC.



PLC - OMRON CP1E-N30DT1-D

IX. Others:

a. Buy off and qualification will be done internally by AMICITIA, result will be sent to PRICON prior actual delivery. Final buy off and qualification will be assisted by AMICITIA.
b. Any design changes initiated by PRICON, will be evaluated and assess its effect on the stated delivery commitment. Likewise, part of re-assessment is to determine if it will have a major impact on the published price of the original design. PRICON must assume that any changes on the design might possibly alter the delivery time and cost of the project.
c. Equipment manual will be provided by AMICITIA.
d. Spare parts list will be provided by AMICITIA.
e. PRICON will supply sample product for the buy off and initial testing during equipment build and assembly.
f. (6) months technical service warranty.

Prepared by:	Checked by:	Approved by:
G. Capunong / R. De Dios	L. Antonio	J. Sablon

Confidential Document. Unauthorized to reprint, copying, or redistribution of this document shall be punishable to any applicable law governing this document. Disclaimer: Logos, images, and trademarks used on this document is for representation purpose only.
Amicitia Trading, Copyright 2018.