


Implement the topology in the cisco packet tracer.

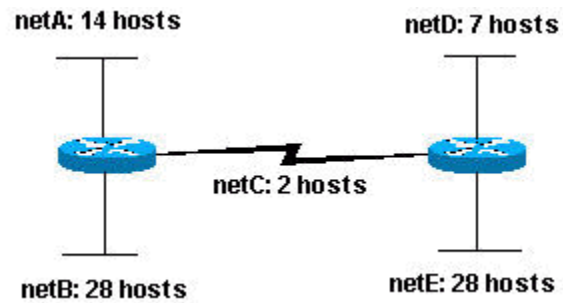

In place of

A: 7 hosts

B : 12 hosts

C : 14 hosts

D : 9 hosts

Assign subnet and ip addresses to the hosts and network devices.

- 1) Using flam
- 2) Using vlsm