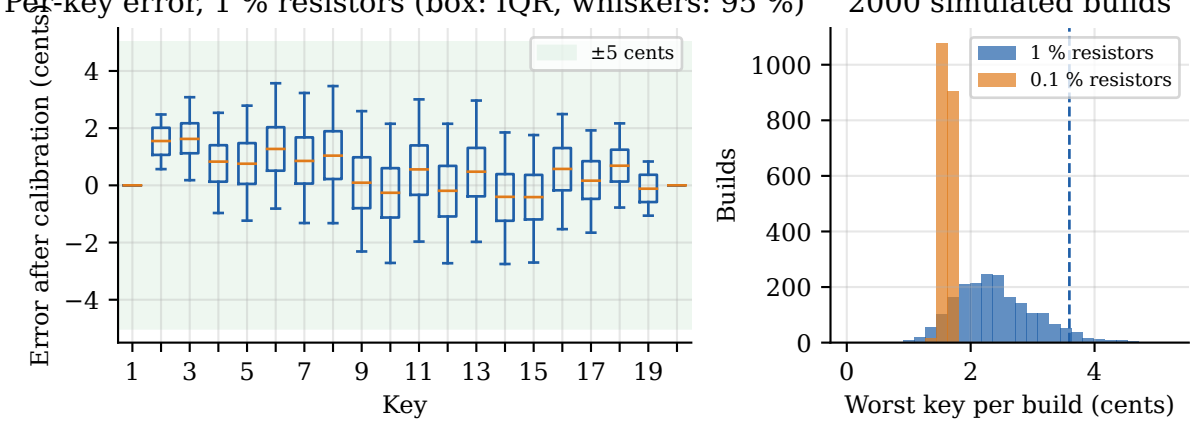
Per-key error, 1 % resistors (box: IQR, whiskers: 95 %)
2000 simulated builds
Error after calibration (cents)
±5 cents
4
2
0
−2
−4
1
3
5
7
9
11
13
15
17
19
Key
Builds
1000
800
600
400
200
0
1 % resistors
0.1 % resistors
0
2
4
Worst key per build (cents)