
Otter joint test: printing

One plate, about 28 minutes. Before the otter is built around this joint.

1 Print it flat, as it comes

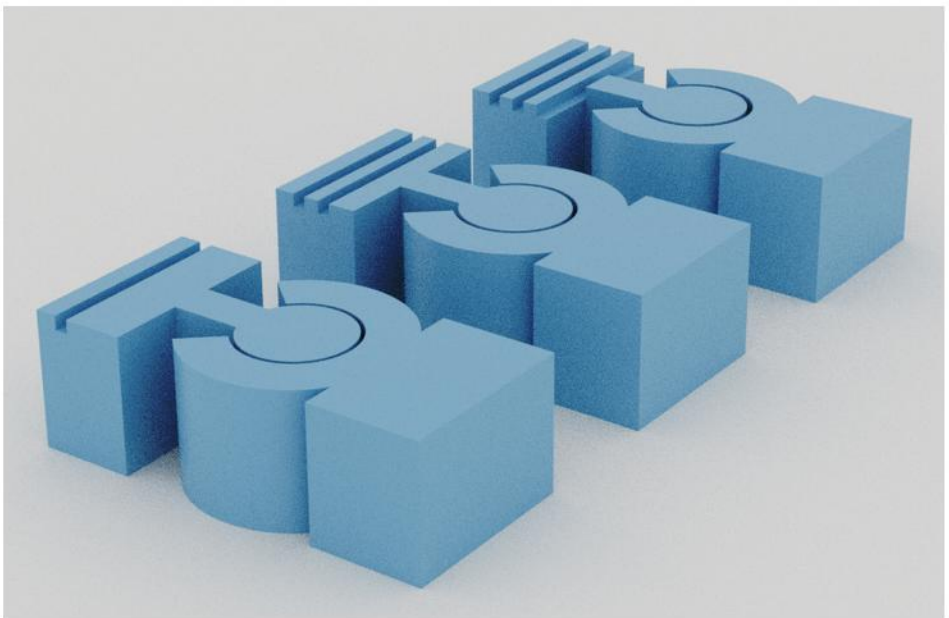


- **otter_joint_test.3mf, any one colour. 0.2 mm layers, supports off.**
- Three joints, each a pin in a C-shaped ring. They print already joined.
- The notches on the left block say which gap: 1 = 0.30 mm, 2 = 0.35, 3 = 0.45.
- About 28 min and 8.4 g in Bambu Studio.

Design-review renders of the real parts, not photos. The colour is only for the pictures.

Otter joint test: what to check

Design-review renders of the real parts, not photos.

1 Free each joint

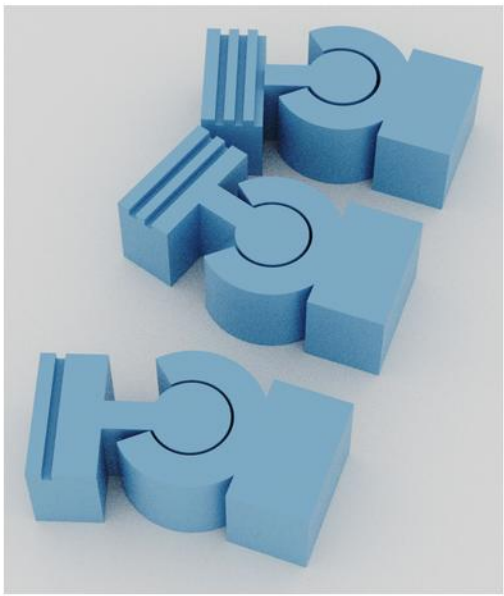

- **Hold both blocks and wiggle gently side to side, a few times.**
- Each should swing about 20 degrees each way, then stop firmly.

2 Try to pull it apart

- **Pull the blocks straight apart, then try to lift one off the other.**
- Neither should come apart. Don't force it past a firm tug.

Good

- Swings freely, no grinding.
- Stops at the same angle both ways.
- Won't pull apart or lift off.

Tell me

- which gap (1, 2 or 3 notches) feels best,
- any that stayed stuck, or are loose and floppy,
- and any that came apart.

Design-review renders of the real parts, not photos. The colour is only for the pictures.