Hex Wall: hang test

A strip of tile with the real rail, and two hook modules.

1 What's in the print




- **The tile strip (white here): a dovetail rail, and a screw hole below it.**
- **Two hook modules (purple). The notches on the side say how loose the slot is:**
- 1 notch = 0.2 mm (snug), 2 notches = 0.3 (easier).
- The window through each module is the slot: you'll see the rail through it.

2 Put the tile up


- Screw it to the wall through its hole, rail upright, the hole at the bottom. Or hold it against a wall for the first tries.

3 Slide a module down onto the rail

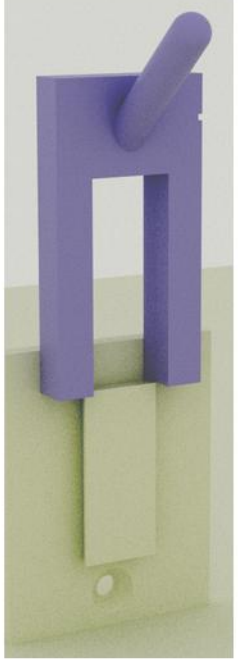

- Hook facing out, the slot's open end at the bottom. Line it up over the rail and let it slide down.

4 It hangs on the rail's top end

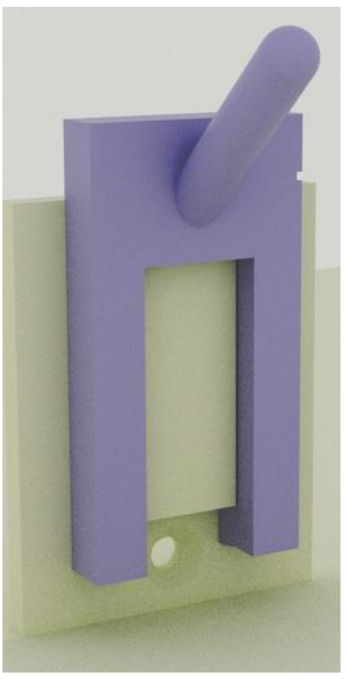


- Its back sits flat on the tile. Its weight holds it down; the dovetail holds it to the wall.

Design-review renders of the real parts, not photos. Colours are only to tell the parts apart.

Hex Wall: test it

Try both modules.

1 For each module

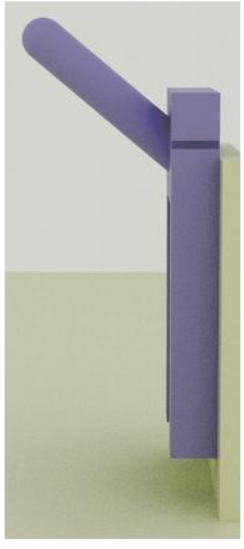

- **Slide it on: smooth, or does it catch?**
- Pull it straight out from the wall: it must not come off.
- Lift it up: it comes off.
- Hang a bag or keys on the hook.

Good

- Slides on easily, sits flat.
- Pulling straight out does nothing.
- Holds a bag without moving.

Tell me

- which slid on better (1 or 2 notches), and which rattled less;
- if either catches or jams;
- if either came off when pulled out.

Design-review renders of the real parts, not photos. Colours are only to tell the parts apart.