
Otter capped joint test


Your number 1 joint, with a cap on top that hides it.

1 Print it flat, as it comes

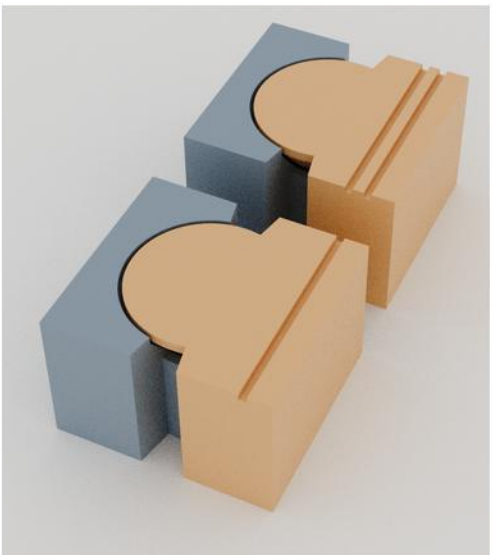

- **otter_capped_joint_test.3mf, any one colour. 0.2 mm layers, supports off.**
- Two joints, each two blocks already joined. About 40 min and 14.6 g.
- The joint inside is your 0.30 mm one. Only the gap under the cap differs:
- 1 notch on the block = 0.30 mm under the cap, 2 notches = 0.40 mm.

2 What's inside (cut through the middle)

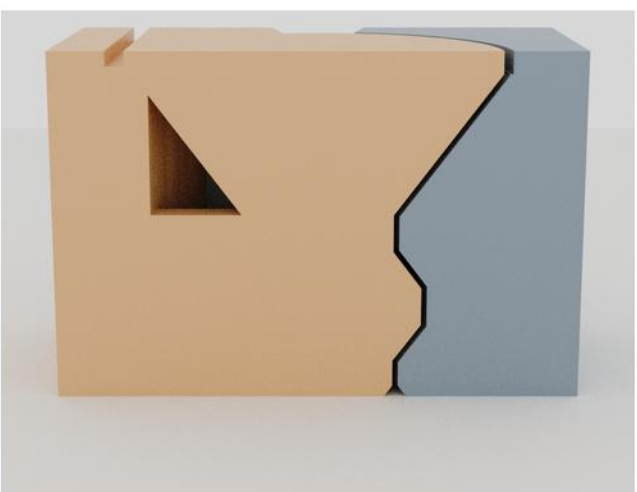


- **The pin goes up into a round cap. The cap sits in a cone-shaped dip in the other block.**
- From the top you see only a thin circle. The otter's joints will look like this.

Design-review renders of the real parts, not photos. The colours are only for the pictures.

Otter capped joint test: what to check

Design-review renders of the real parts, not photos.

3 Free it, then swing it

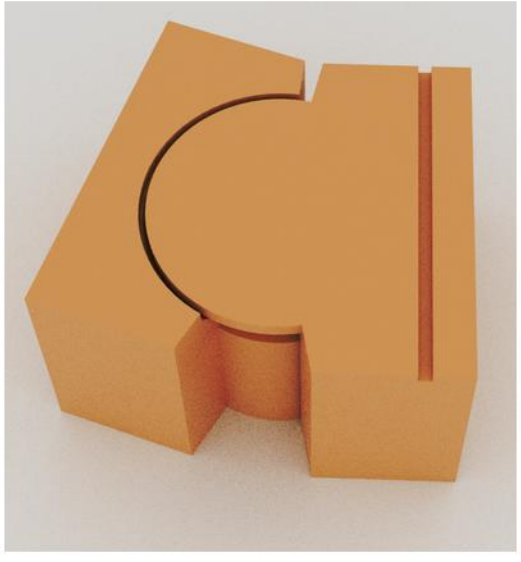

- **Hold both blocks and wiggle gently side to side, a few times.**
- It should swing about 20 degrees each way, then stop firmly.
- Then try to pull the blocks apart, and to lift one off the other.

Good

- Swings as freely as your number 1 joint did.
- The cap turns with no scraping.
- Won't pull apart or lift off.

Tell me

- which one (1 or 2 notches) feels better,
- if either stayed stuck at the cap, or scrapes,
- and how the top looks: does the circle seam show much?

Design-review renders of the real parts, not photos. The colours are only for the pictures.