
Iris box: blade test

One real blade, its pivot and a piece of the twist ring, at full size.

1 Print both test pieces

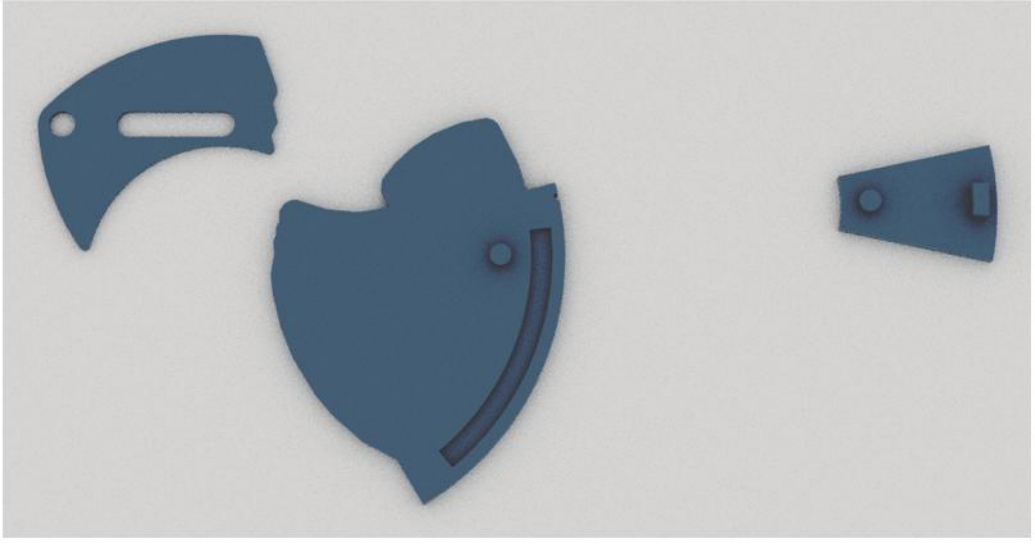

- **iris_coupon_1.3mf (one notch on the base's edge) and iris_coupon_2.3mf (two notches).**
- Flat as they come, no supports. About 30 min and 8.6 g each.
- Each is three parts: the base, the blade, and the ring piece (pin and tongue facing up).
- They differ only in the gap round the pins and in the groove: 0.40 mm and 0.55 mm.

2 Put it together



- **Blade over the base's pin, through the round hole, either side up.**
- Turn the ring piece over: its tongue goes in the base's curved groove,
- and its pin drops into the blade's long slot. Nothing is glued.

Design-review renders of the real parts, not photos.

Iris box: blade test, sliding it

Design-review renders of the real parts, not photos.

3 Slide the ring piece along the groove



- **From one end of the groove to the other, with one finger, pressing lightly down.**
- The blade swings about 49° from tucked against the rim to across the middle.
- Each end of the groove stops it. Try it slowly, then quickly, a dozen times.

Good

- The blade swings the whole way without catching or tipping up.
- It doesn't rattle loose, and it doesn't need pushing hard.

Tell me, for each test piece

- smooth, a little stiff, or sticks (and where in the swing);
- loose or wobbly; if the pin left the slot or the tongue the groove;
- which of the two you'd rather have six of in a box.

Design-review renders of the real parts, not photos.