


Edificio 7

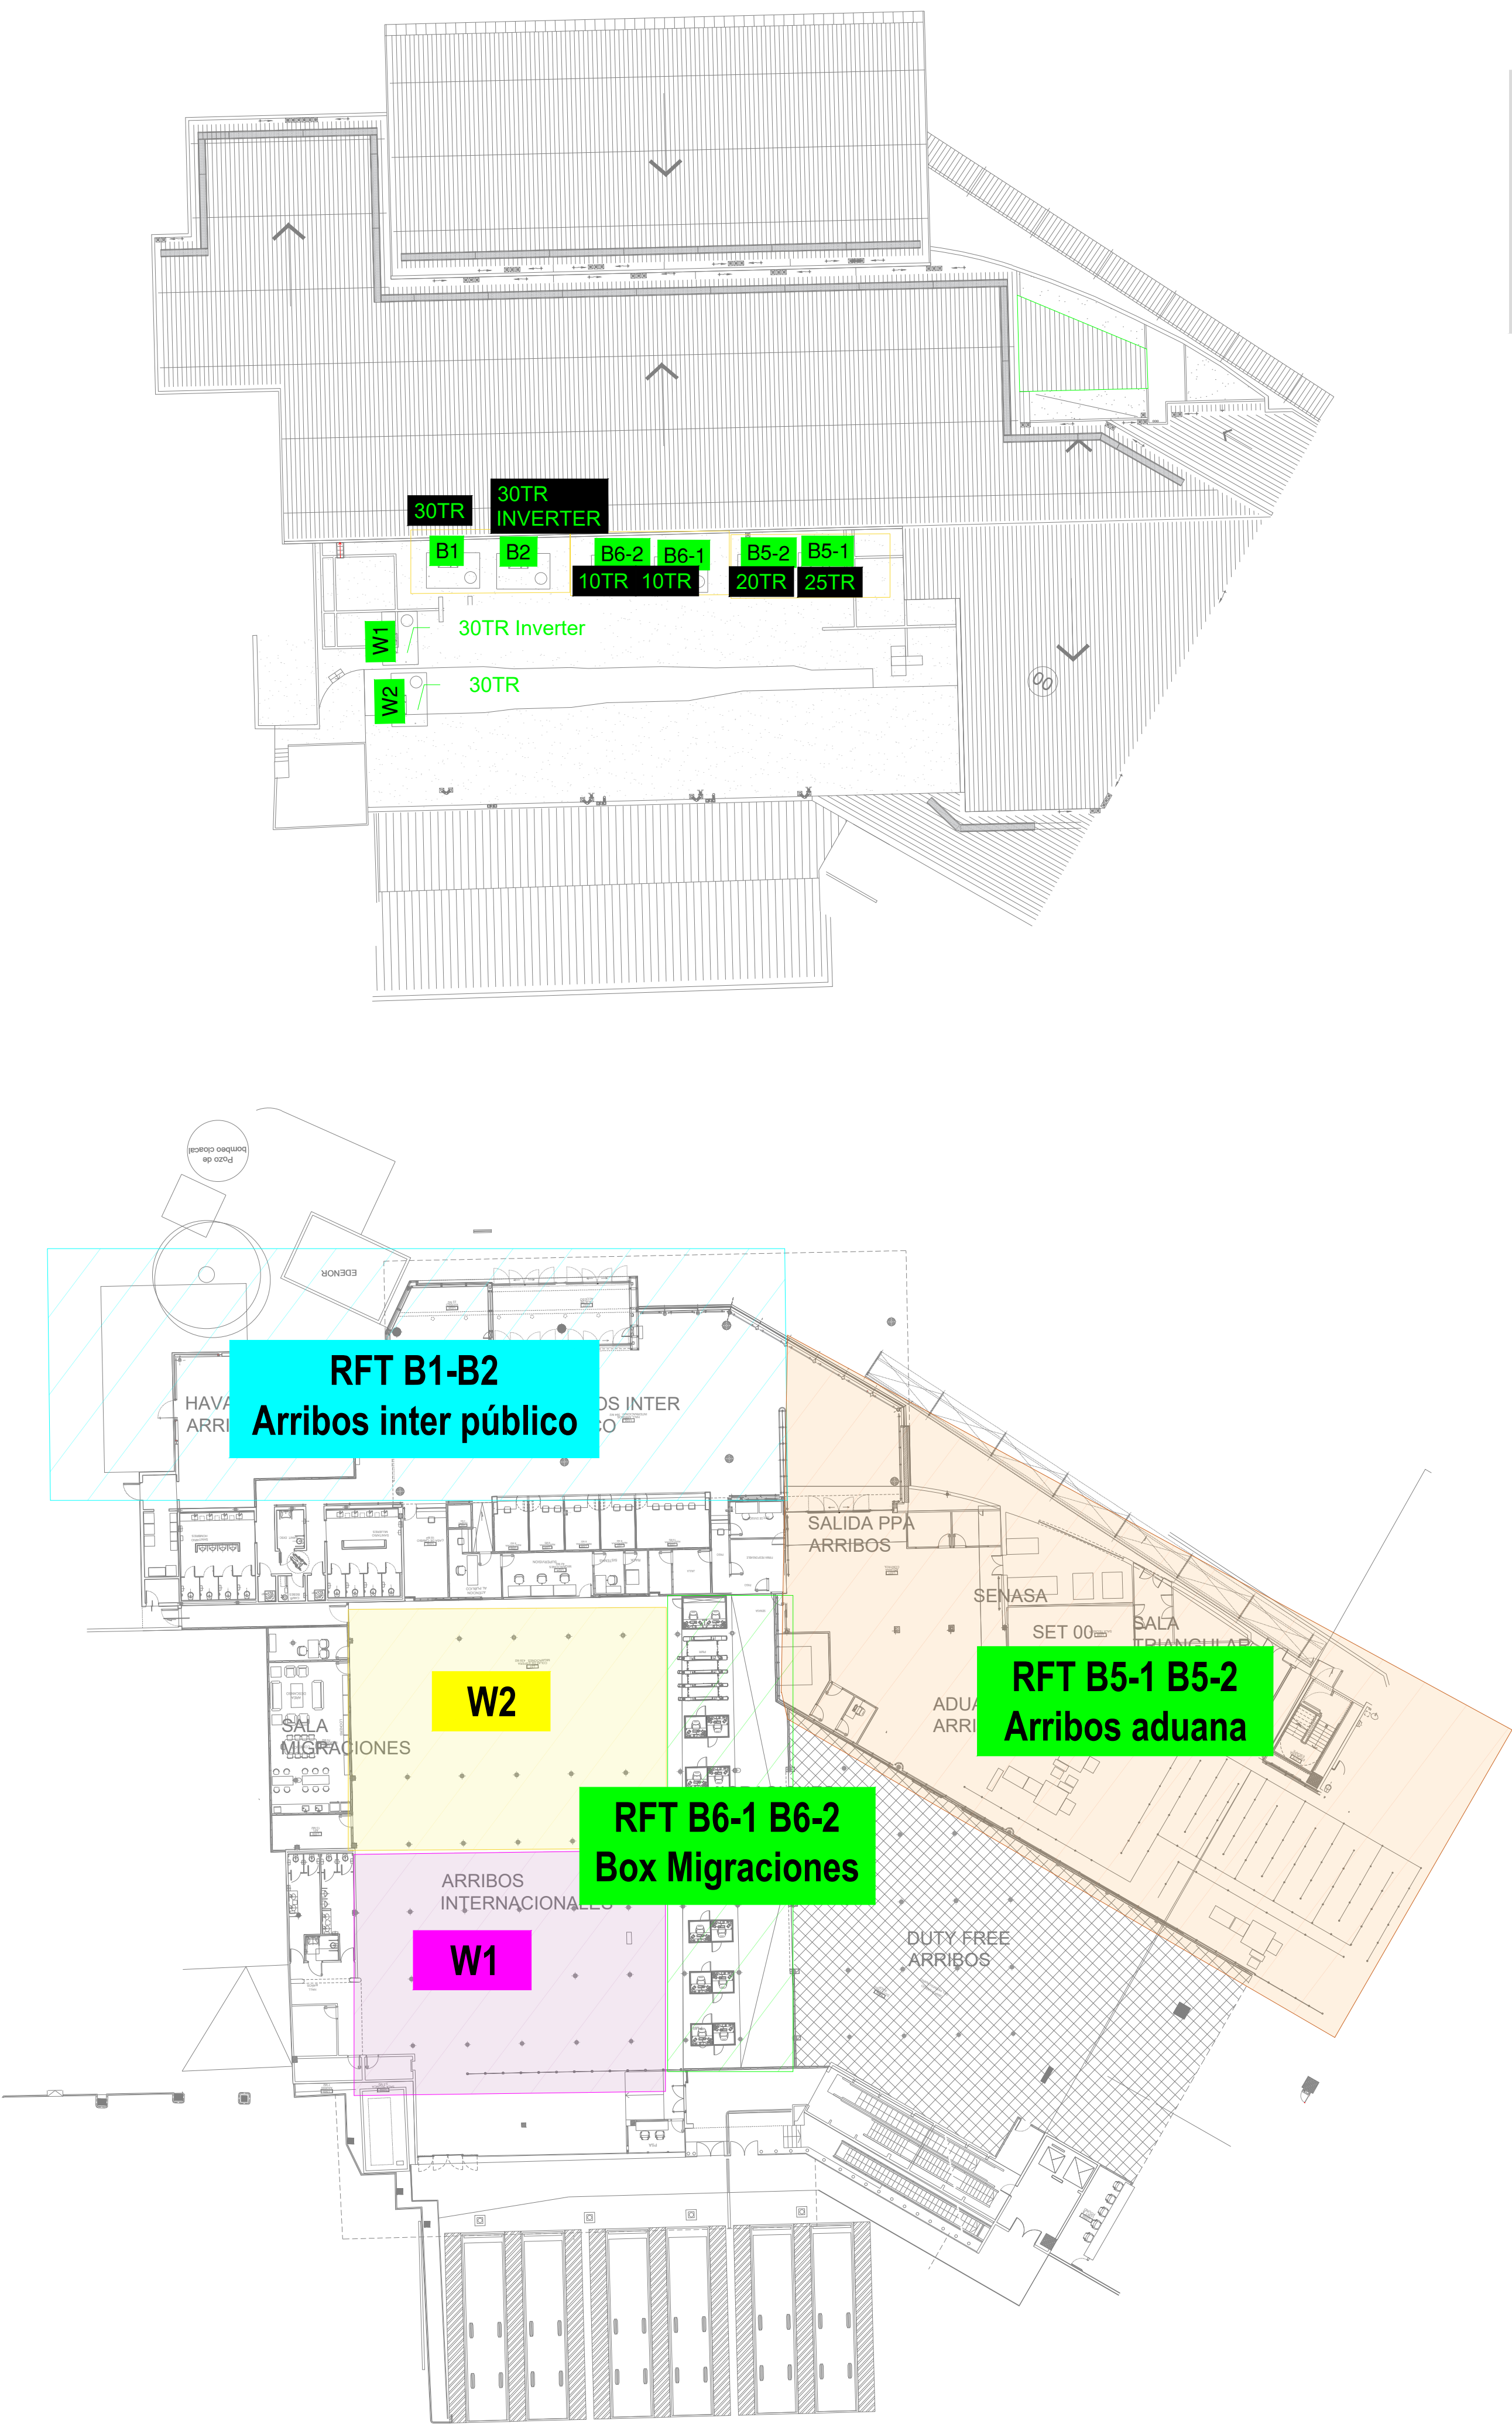

Planilla Técnica Consolidada: Unidades Rooftop BGH Eco Smart

Modelo / Nro. de Serie	Tecnología	Capacidad (TR / Kcal)	Consumo Máx (kW)	Corriente (A)	Conductor (mm²)	Térmica (A)
BSRC-100HWDN1-R(A) 540V8132401A6230100004	Inverter	10 TR (30.100 Kcal/h)	12,3 kW	~20-22 A	6 mm²	25A / 32A
BSRC-100HWN1-R 540U2668201A2070100014	On/Off	10 TR (30.260 Kcal/h)	16,0 kW	~28-32 A	10 mm²	40A
BSRC-200HWN1-R 540V8132602A6060100003	On/Off	20 TR (60.522 Kcal/h)	32,5 kW	~52-58 A	16 mm²	63A / 80A
BSRC-250HWN1-R 540S17997054B060100002	On/Off	25 TR (75.653 Kcal/h)	38,5 kW	~62-68 A	25 mm²	80A
BSRC-300HWDN1-R(A) 540V8132402A6230100022	Inverter	30 TR (86.000 Kcal/h)	35,8 kW	~58-62 A	25 mm²	80A
BSRC-300HWN1-R 540U2668201A2070100010	On/Off	30 TR (84.420 Kcal/h)	49,5 kW	~85-90 A	35-50 mm²	100A / 125A
BSRC-300HWN1-R 540U2668201A2070100007	On/Off	30 TR (84.420 Kcal/h)	49,5 kW	~85-90 A	35-50 mm²	100A / 125A
BSRC-300HWN1-R 540U2668201A2070100011	On/Off	30 TR (84.420 Kcal/h)	49,5 kW	~85-90 A	35-50 mm²	100A / 125A

Resumen de Carga de Refrigerante (R410A) por Unidad:

Para los técnicos que realicen la puesta en marcha o mantenimiento:

- 10 TR Inverter: 6,7 kg (Circuito único).
- 10 TR On/Off: 5,8 kg total (2,9 kg + 2,9 kg).
- 20 TR: 13,8 kg total (6,9 kg + 6,9 kg).
- 25 TR: 17,4 kg total (8,7 kg + 8,7 kg).
- 30 TR Inverter: 19,0 kg total (9,5 kg + 9,5 kg).
- 30 TR On/Off: 20,0 kg total (10,0 kg + 10,0 kg).