


CO1-AT3

IMPLEMENT AN INTER VLAN THAT THERE IS TWO VLAN ,VLAN 10 SHOULD BE DONE USING RING TOPOLOGY AND VLAN 20 SHOULD BE DONE USING BUS TOPOLOGY.

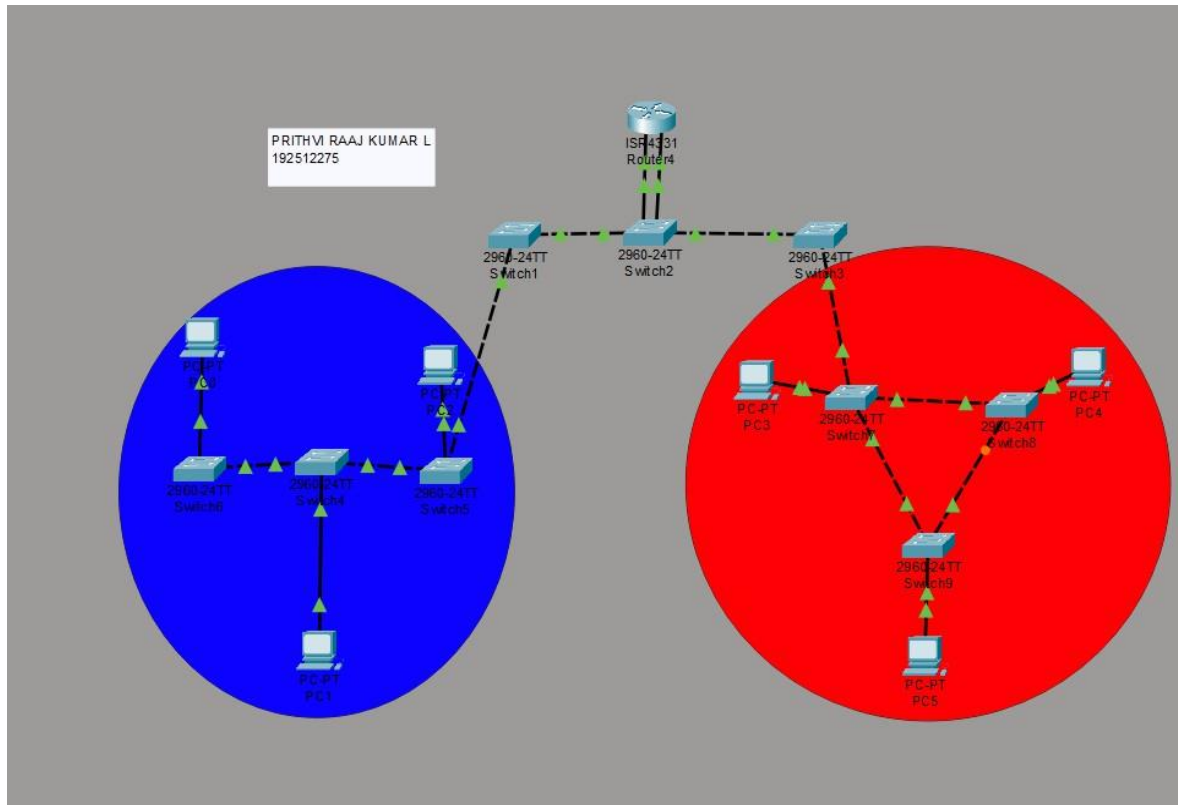

```
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>IPCONFIG /ALL

FastEthernet0 Connection:(default port)

    Connection-specific DNS Suffix...: 
    Physical Address...: 000D.BDB2.5A53
    Link-local IPv6 Address...: FE80::20D:BDFF:FEB2:5A53
    IPv6 Address...: 
    IPv4 Address...: 198.168.10.1
    Subnet Mask...: 255.255.255.0
    Default Gateway...: 
    DHCP Servers...: 0.0.0.0
    DHCPv6 IAID...: 
    DHCPv6 Client DUID...: 00-01-00-01-29-A7-A2-74-00-0D-BD-B2-5A-53
    DNS Servers...: 
    0.0.0.0

Bluetooth Connection:

    Connection-specific DNS Suffix...: 
    Physical Address...: 00D0.BA23.D3BE
    Link-local IPv6 Address...: 
    IPv6 Address...: 
    IPv4 Address...: 0.0.0.0
    Subnet Mask...: 0.0.0.0
    Default Gateway...: 
    DHCP Servers...: 0.0.0.0
    DHCPv6 IAID...: 
    DHCPv6 Client DUID...: 00-01-00-01-29-A7-A2-74-00-0D-BD-B2-5A-53
    DNS Servers...: 
    0.0.0.0

C:\>PING 198.168.20.3
```