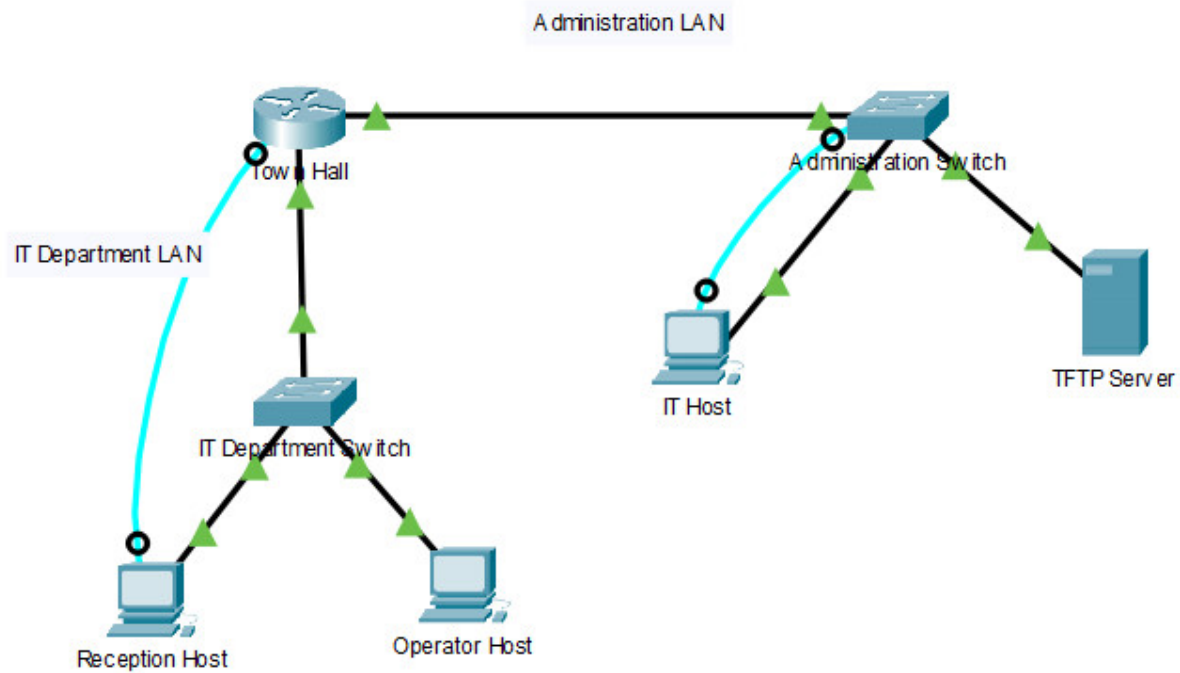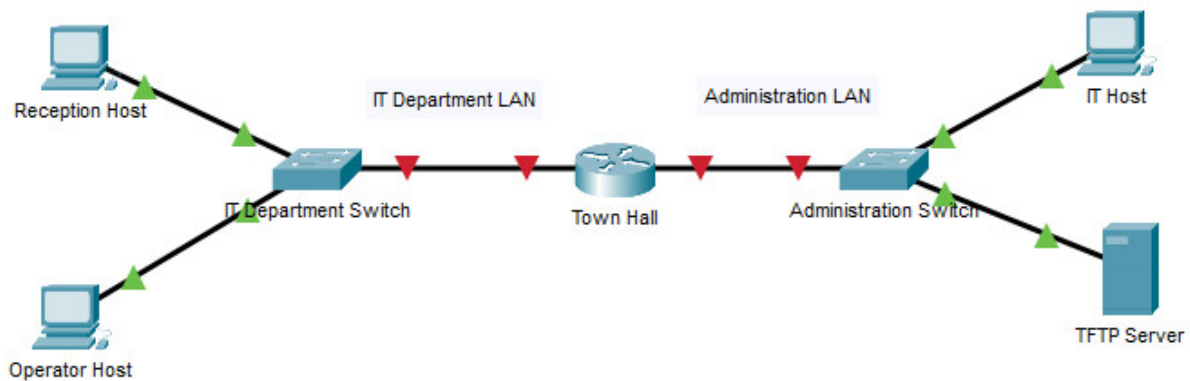# CCNA1 v7.0 ITN Practice PT Skills Assessment (PTSA) Answers

Cisco Certificate Network Associate (Algonquin College)

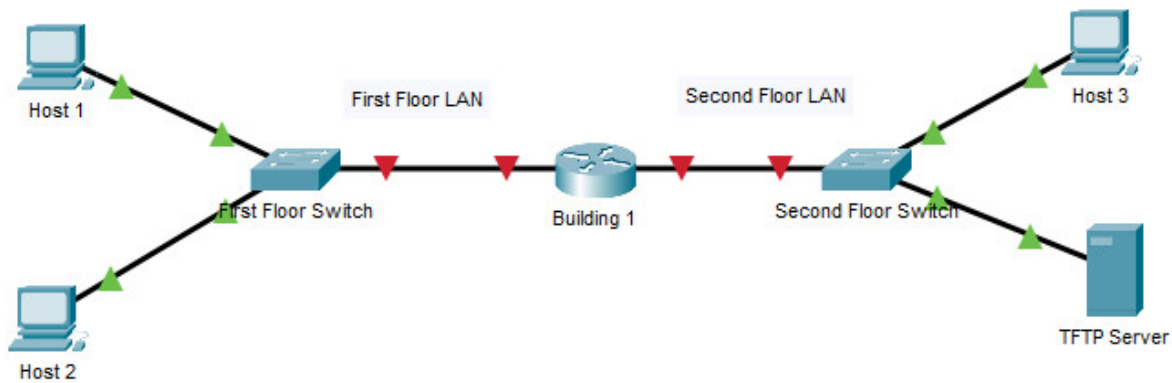# CCNAv7 – Introduction to Networks (Last Updated: January 2021)

(Same)

CCNA1 v7.0: ITN Practice PT Skills Assessment (PTSA) – TYPE 2

Type 2 (just different names devices)

ITN Practice Skills Assessment – Packet Tracer Answers

A few things to keep in mind while completing this activity:
1. Do not use the browser Back button or close or reload any exam windows during the exam.
2. Do not close Packet Tracer when you are done. It will close automatically.
3. Click the Submit Assessment button in the browser window to submit your work.

Introduction

In this assessment, you will configure devices in an IPv4/IPv6 network. For the sake of time, you will not be asked to perform all configurations on all network devices as you may be required to do in a real network or other assessment. Instead, you will use the skills and knowledge that you have learned in the labs in this course to configure the Town Hall router. In addition, you will address the hosts on two LANs with IPv4 and IPv6 addresses and activate and address the management interface of the Administration Switch.

You will receive one of several topologies.

You are not required to configure the IT Department Switch, and you will not be able to access it in this practice skills assessment activity.

All IOS device configurations should be completed from a direct terminal connection to the device console. In addition, many values that are required to complete the configurations have not been given to you. In those cases, create the values that you need to complete the requirements. For values that have been supplied to you, they must be entered exactly as they appear in order for you to get full credit for your configuration.

You will practice and be assessed on the following skills:
- Configuration of initial IOS device settings
- Design and calculation of IPv4 addressing
- Configuration of IOS device interfaces including IPv4 and IPv6 addressing when appropriate
- Addressing of network hosts with IPv4 and IPv6 addresses
- Enhancing device security, including configuration of the secure transport protocol for remote device configuration
- Configuration of a switch management interface

Requirements by device:

Town Hall router (or Building 1 router):
- Configuration of initial router settings
- Interface configuration and IPv4 and IPv6 addressing

- Device security enhancement, or device hardening
- Secure transport for remote configuration connections as covered in the labs and Packet Tracers in the course.

Administration Switch (or Second Floor Switch):
– Enabling basic remote management by Telnet
– PC and Server hosts:
- IPv4 full addressing
- IPv6 addressing

Addressing Table

Device	Interface	IPv4 Address	Subnet Mask	IPv4 Default Gateway
		IP v6 Address		**IPv6 Default Gateway**
Town Hall (or Building 1)	G0/0	192.168.1.126	255.255.255.224	N/A
		2001:DB8:ACAD:A::1/64		N/A
	G0/1	192.168.1.158	255.255.255.240	N/A
		2001:DB8:ACAD:B::1/64		N/A
	Link Local	FE80::1		N/A
Administration Switch (or Second Floor Switch)	Vlan 1	192.168.1.157	255.255.255.240	192.168.1.158
		N/A	N/A	N/A
Reception Host (or Host 1)	NIC	192.168.1.97	255.255.255.224	192.168.1.126
		2001:DB8:ACAD:A::FF/64		FE80::1
Operator Host (or Host 2)	NIC	192.168.1.98	255.255.255.224	192.168.1.126
		2001:DB8:ACAD:A::15/64		FE80::1
IT Host (or Host 3)	NIC	192.168.1.145	255.255.255.240	192.168.1.158
		2001:DB8:ACAD:B::FF/64		FE80::1
Server	NIC	192.168.1.146	255.255.255.240	192.168.1.158
		2001:DB8:ACAD:B::15/64		FE80::1

Instructions

Step 1: Determine the IP Addressing Scheme.

Design an IPv4 addressing scheme and complete the Addressing Table based on the following requirements. Use the table to help you organize your work.

Subnet Number	Hosts Available	Network Address	Beginning Address	Ending Address	Mask	Assignment
1	30	192.168.1.0	192.168.1.1	192.168.1.30	255.255.255.224	
2	30	192.168.1.32	192.168.1.33	192.168.1.62	255.255.255.224	
3	30	192.168.1.64	192.168.1.65	192.168.1.94	255.255.255.224	
4	30	192.168.1.96	192.168.1.97	192.168.1.126	255.255.255.224	IT Department LAN Subnet
5	14	192.168.1.128	192.168.1.129	192.168.1.142	255.255.255.240	
6	14	192.168.1.144	192.168.1.145	192.168.1.158	255.255.255.240	Administration LAN Subnet

- a. Subnet the 192.168.1.0/24 network to provide 30 host addresses per subnet while wasting the fewest addresses.
- b. Assign the fourth subnet to the IT Department LAN. (or First Floor LAN)
- c. Assign the last network host address (the highest) in this subnet to the G0/0 interface on Town Hall (or Building 1).
- d. Starting with the fifth subnet, subnet the network again so that the new subnets will provide 14 host addresses per subnet while wasting the fewest addresses.
- e. Assign the second of these new 14-host subnets to the Administration LAN (or Second Floor LAN).
- f. Assign the last network host address (the highest) in the Administration LAN (**or Second Floor LAN**) subnet to the G0/1 interface of the Town Hall router (**or Building 1 router**).
- g. Assign the second to the last address (the second highest) in this subnet to the VLAN 1 interface of the Administration Switch. (**or Second Floor Switch**)
- h. Configure addresses on the hosts using any of the remaining addresses in their respective subnets.

Step 2: Configure Host Addressing

a. Use the IPv4 addressing from Step 1 and the IPv6 addressing values provided in the Addressing Table to configure all host PCs with the correct addressing.
b. Use the router interface link-local address as the IPv6 default gateways on the hosts.
c. Complete the configuration of the server using the IPv4 addressing values from Step 1 and the values in the addressing table

Step 3: Configure the Town Hall (or Building 1) Router.

a. Configure the Town Hall router with all initial configurations that you have learned in the course so far:

- Configure the router hostname: **Middle** or **Building-1** or **Town-Hall**
- Protect device configurations from unauthorized access with the encrypted privileged exec password.
- Secure all access lines into the router using methods covered in the course and labs.
- Require newly-entered passwords to have a minimum length of 10 characters.
- Prevent all passwords from being viewed in clear text in device configuration files.
- Configure the router to only accept in-band management connections over the protocol that is more secure than Telnet, as was done in the labs and PT activities. Use the value **1024** for encryption key strength.
- Configure local user authentication for in-band management connections. Create a user with the name **netadmin** and a secret password of **Cisco_CCNA7**.

b. Configure the two Gigabit Ethernet interfaces using the IPv4 addressing values that you calculated and the IPv6 values provided in the addressing table.

- ▪ Reconfigure the link local addresses to the value shown in the table.
- ▪ Document the interfaces in the configuration file.

Step 4: Configure the Administration Switch (or Second Floor Switch).

Configure Administration Switch (or Second Floor Switch) for remote management over Telnet.
- ▪ a. Configure VLAN 1 as the SVI.
- ▪ b. Configure IPv4 addressing according to your work in Step 1.
- ▪ c. Be sure that the switch is able to accept connections from hosts on other networks.

Answers – Passed 100% Score (for both types)
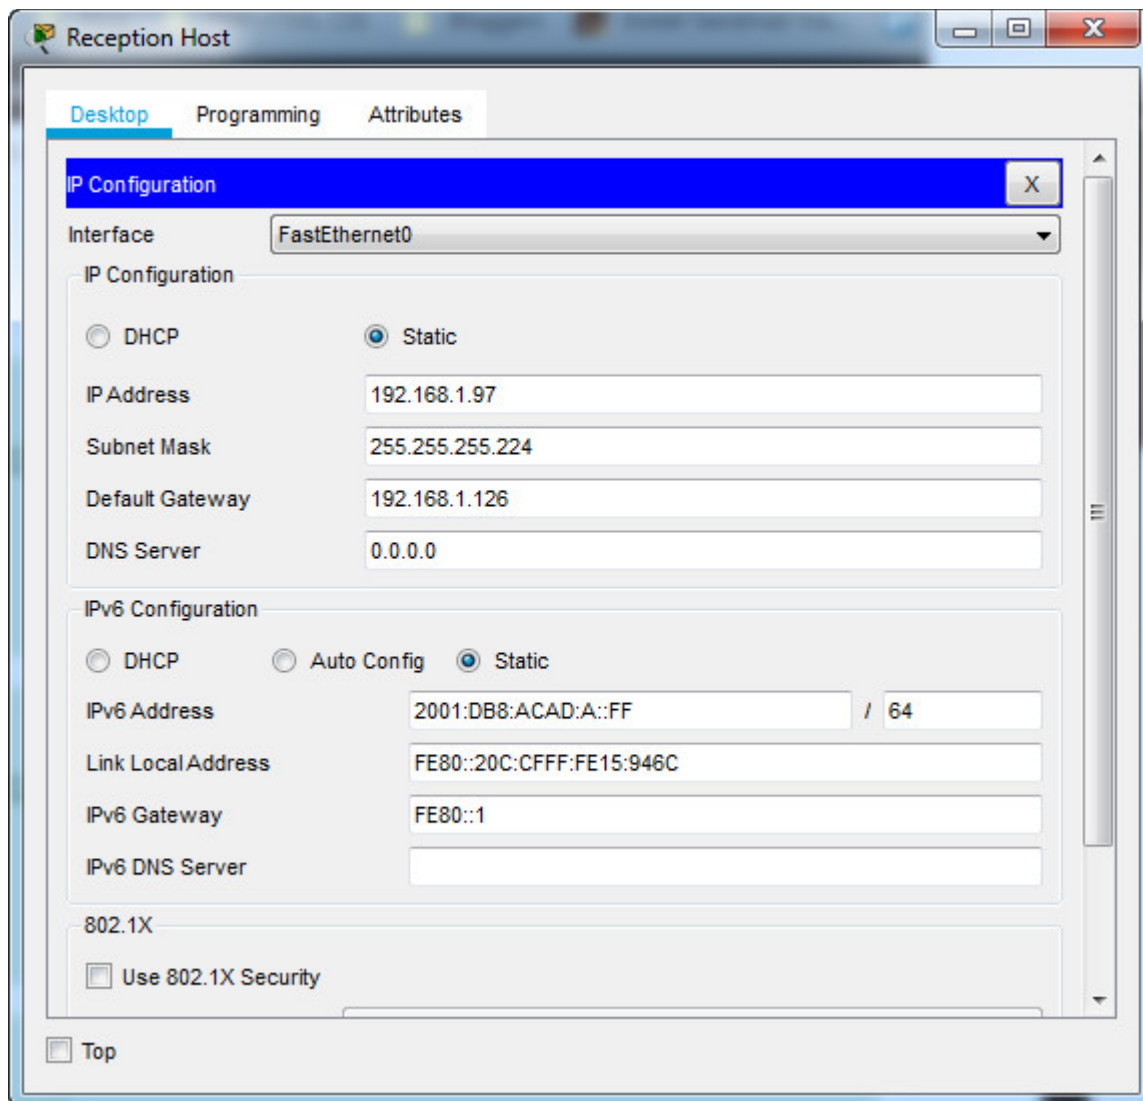
Reception Host (or Host 1):

IPv4 Address: **192.168.1.97**
IPv4 Subnet mask: **255.255.255.224**
IPv4 Default gateway: **192.168.1.126**

IPv6 Address: **2001:DB8:ACAD:A::FF/64**
IPv6 Default gateway: **FE80::1**

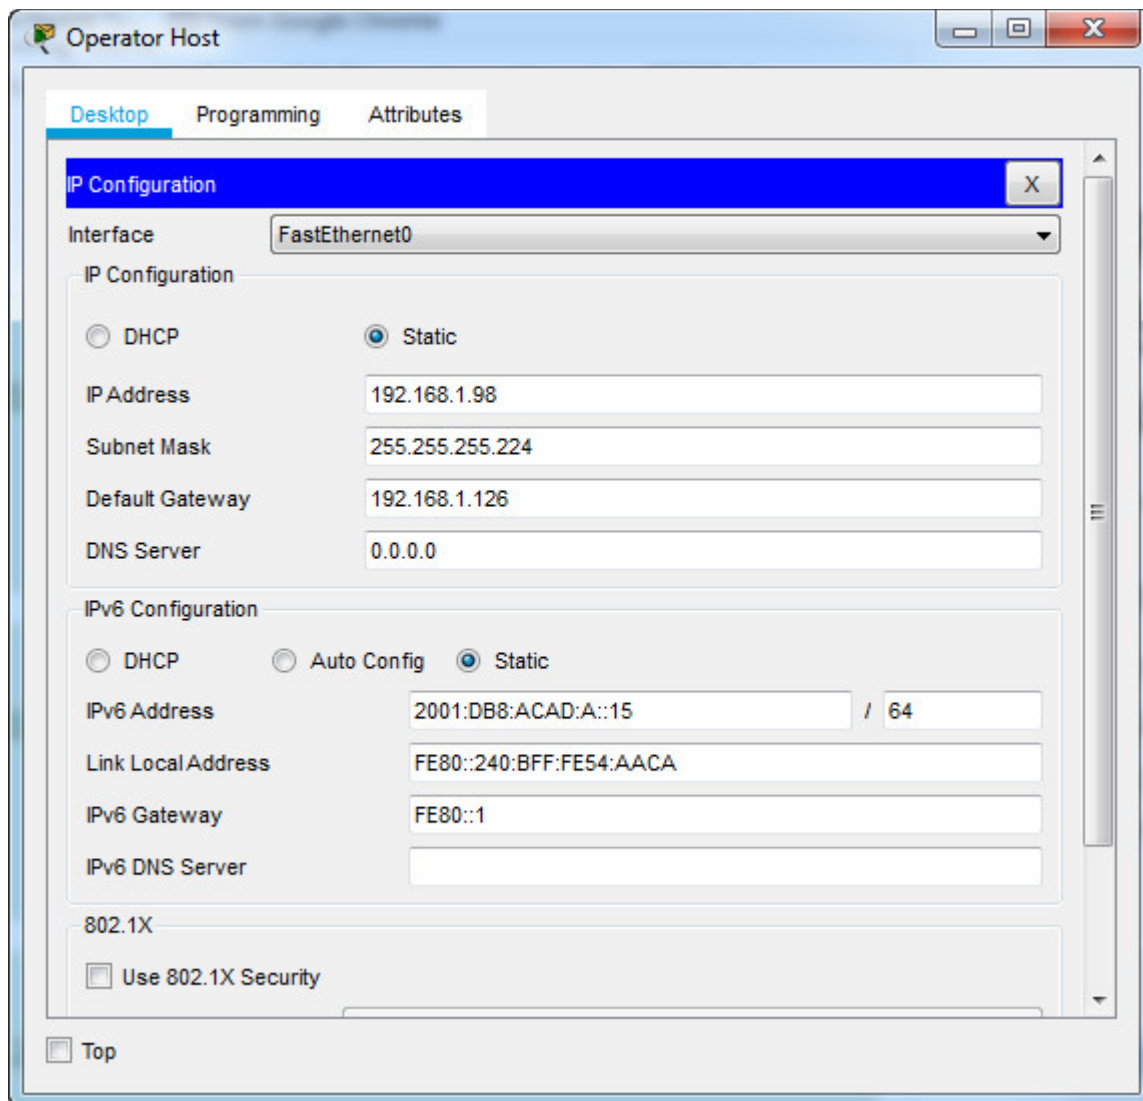Reception Host IP Configuration

Operator Host (or Host 2)

IPv4 Address: **192.168.1.98**
IPv4 Subnet mask: **255.255.255.224**
IPv4 Default gateway: **192.168.1.126**

IPv6 Address: **2001:DB8:ACAD:A::15/64**
IPv6 Default gateway: **FE80::1**

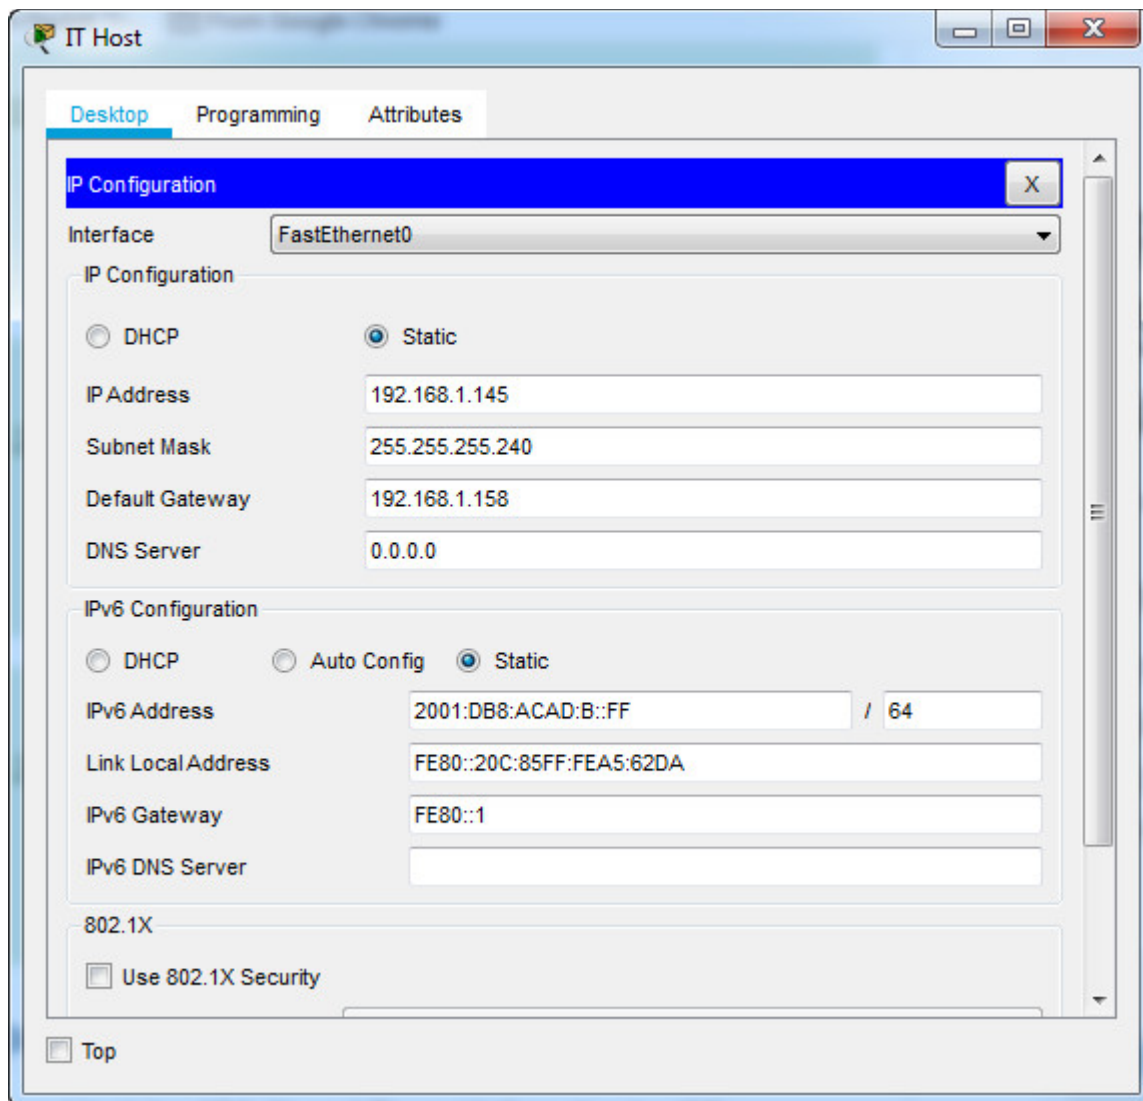Operator Host IP Configuration

IT Host (or Host 3)

IPv4 Address: **192.168.1.145**
IPv4 Subnet mask: **255.255.255.240**
IPv4 Default gateway: **192.168.1.158**

IPv6 Address: **2001:DB8:ACAD:B::FF/64**
IPv6 Default gateway: **FE80::1**
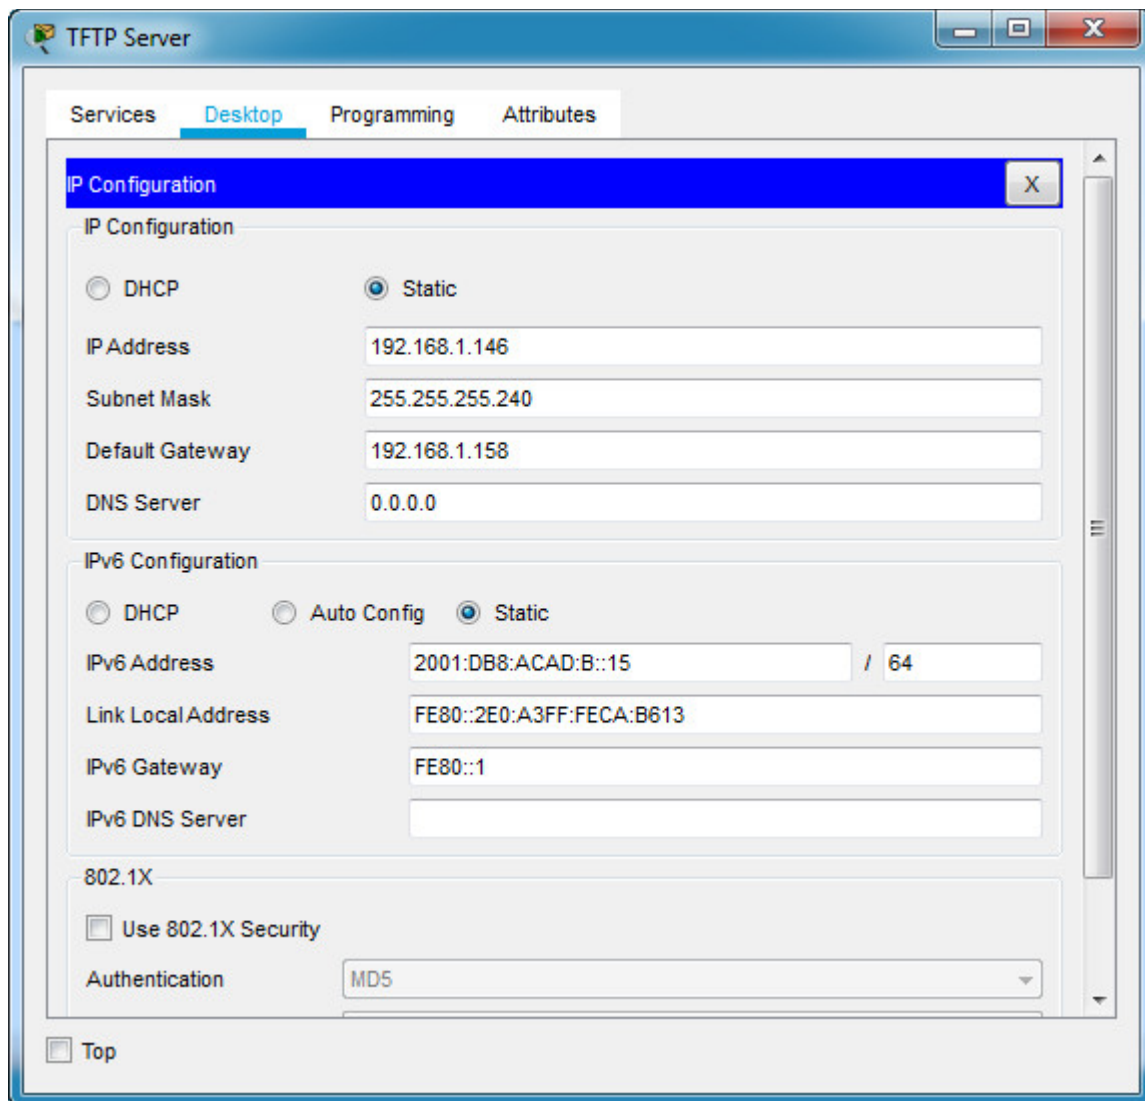
IT Host IP Configuration

Server

IPv4 Address: **192.168.1.146**
IPv4 Subnet mask: **255.255.255.240**
IPv4 Default gateway: **192.168.1.158**

IPv6 Address: **2001:DB8:ACAD:B::15/64**
IPv6 Default gateway: **FE80::1**

Server IP Configuration

Town Hall router (or Building 1/Town-Hall Router)

Use **line console** to connect **Reception Host** (or Host 1) and **Town Hall** router (or Building 1).
On **Reception Host** (or Host 1), go to "**Desktop Tab**" –> choice "**Terminal**"
Note: Please change the hostname router: Middle / Building-1 / Town-Hall

```
en

conf terminal

hostname Middle (or Building-1) (or Town-Hall)
enable secret class12345
service password-encryption
```

```
banner motd $This is Router$
security passwords min-length 10
login block-for 120 attempts 2 within 30
no ip domain-lookup
ip domain-name ITExamAnswers.net
crypto key generate rsa
1024

line console 0
password cisco12345
login
logging synchronous
exec-timeout 60
exit

line vty 0 4
password cisco12345
transport input ssh
login local
logging synchronous
exec-timeout 60
exit

line aux 0
password cisco12345
login
logging synchronous
exec-timeout 60
exit

ip ssh version 2
ip ssh time-out 120
username netadmin privilege 15 secret Cisco_CCNA7

interface g0/0
ip address 192.168.1.126 255.255.255.224
description First Floor LAN
ipv6 address 2001:DB8:ACAD:A::1/64
ipv6 address fe80::1 link-local
no shutdown
exit
```

```
interface g0/1
ip address 192.168.1.158 255.255.255.240
description Second Floor LAN
ipv6 address 2001:DB8:ACAD:B::1/64
ipv6 address fe80::1 link-local
no shutdown
exit
ipv6 unicast-routing
exit
write
```

Administration Switch (or Second Floor Switch)

Use **line console** to connect **IT Host** (or Host 3) and **Administration Switch** (or Second Floor Switch). On **IT Host** (or Host 3), go to "**Desktop Tab**" –> choice "**Terminal**"

```
enable

conf terminal

enable secret class12345

service password-encryption

banner motd $Second Floor Switch$

no ip domain-lookup


line console 0

password cisco12345

login

logging synchronous

exec-timeout 60

exit
```

```
line vty 0 15

password cisco12345

login

logging synchronous

exec-timeout 60

exit


interface vlan 1

ip address 192.168.1.157 255.255.255.240

no shutdown


ip default-gateway 192.168.1.158

exit

write
```