


OVP PROTECTION POINT IS FROM 16.5V TO 17.2V

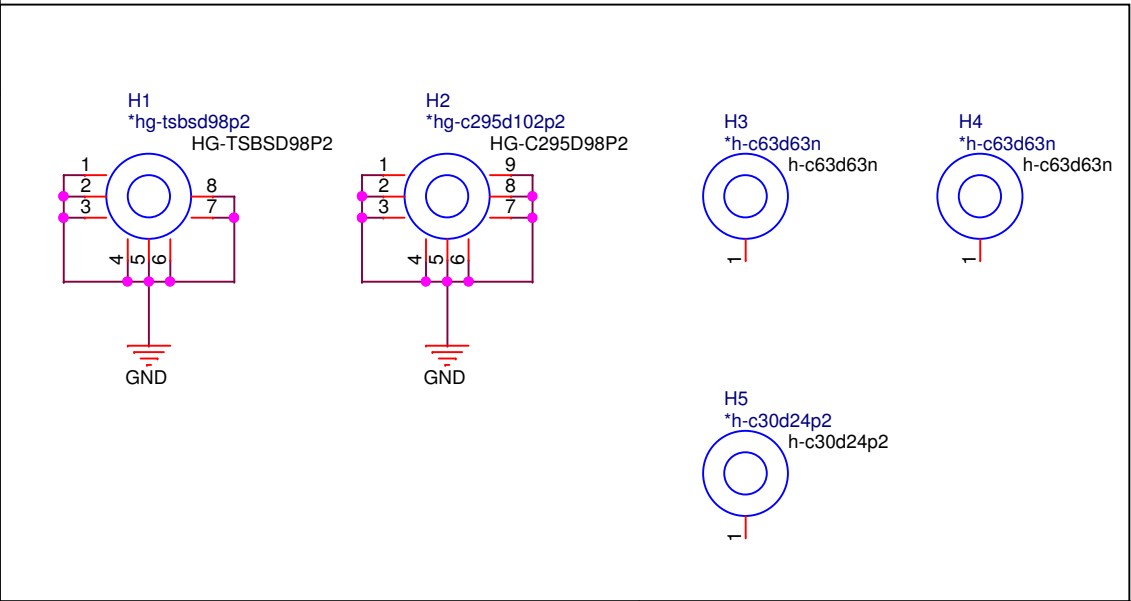

OVP\_GND is routed as copper pour on surface around TPS2592. D2 Pin 2 is placed on copper pour. D2 Pin 1 vias down to GND layer.