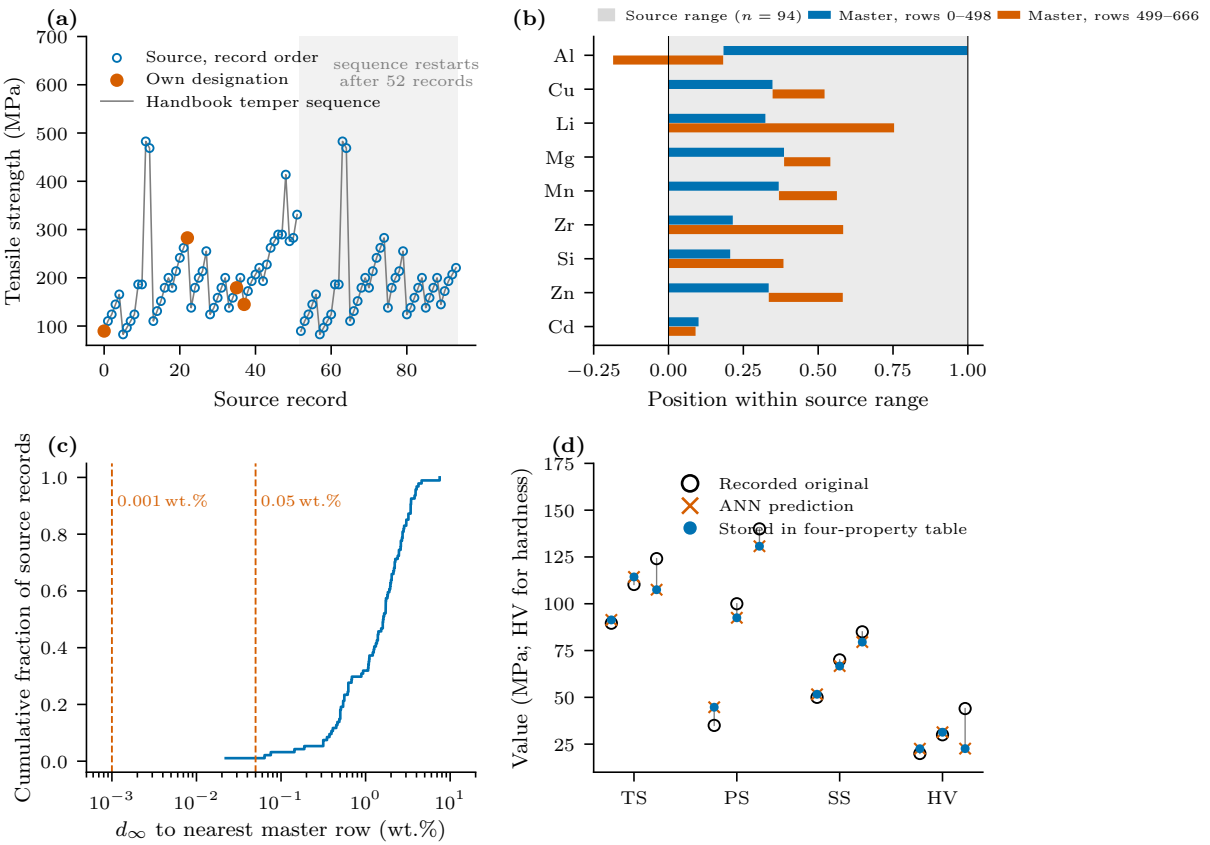

(a)
Source, record order
Own designation
Handbook temper sequence
sequence restarts
after 52 records
Tensile strength (MPa)
Source record
(b)
Source range (n = 94)
Master, rows 0–498
Master, rows 499–666
Al
Cu
Li
Mg
Mn
Zr
Si
Zn
Cd
Position within source range
(c)
0.001 wt.%
0.05 wt.%
Cumulative fraction of source records
d∞ to nearest master row (wt.%)
(d)
Recorded original
ANN prediction
Stored in four-property table
Value (MPa; HV for hardness)
TS
PS
SS
HV