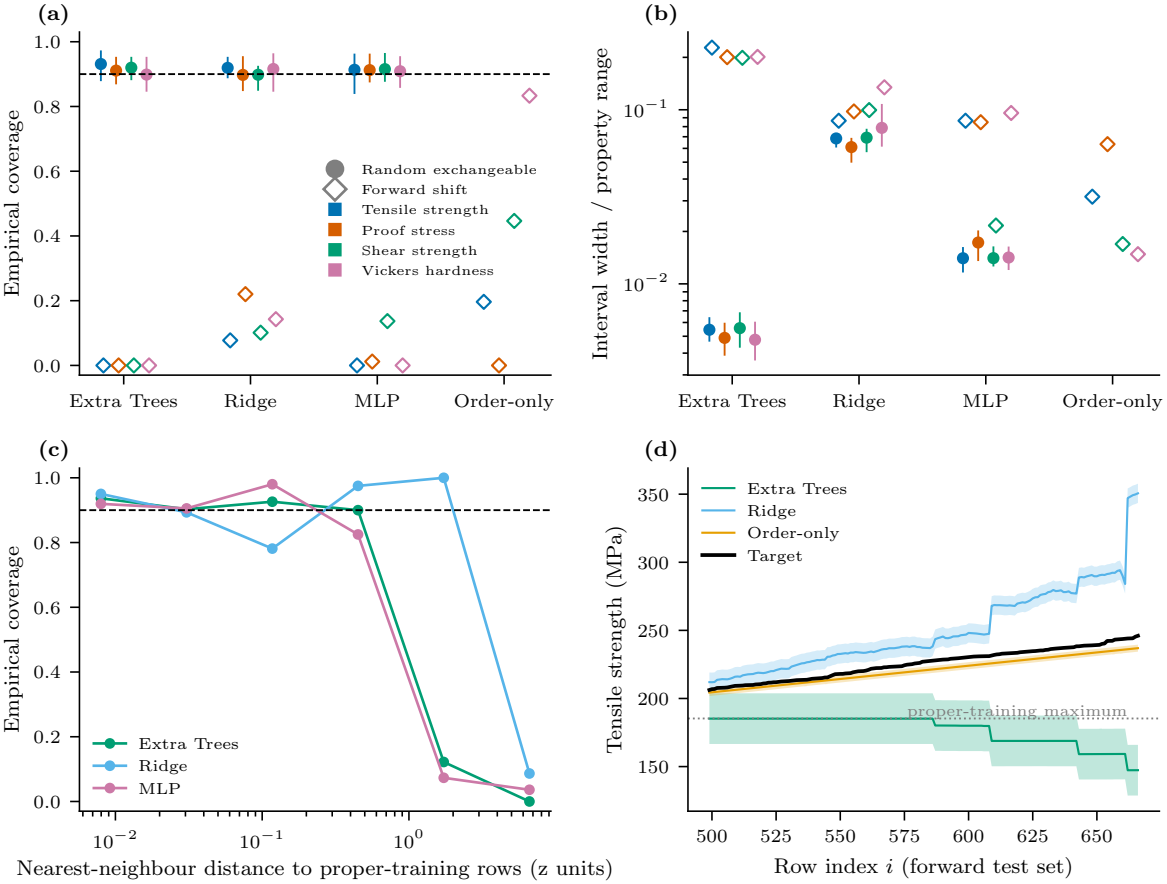

(a)
Empirical coverage
1.0
0.8
0.6
0.4
0.2
0.0
Random exchangeable
Forward shift
Tensile strength
Proof stress
Shear strength
Vickers hardness
Extra Trees
Ridge
MLP
Order-only
(b)
Interval width / property range
10^{-1}
10^{-2}
Extra Trees
Ridge
MLP
Order-only
(c)
Empirical coverage
1.0
0.8
0.6
0.4
0.2
0.0
Extra Trees
Ridge
MLP
10^{-2}
10^{-1}
10^{0}
Nearest-neighbour distance to proper-training rows (z units)
(d)
Tensile strength (MPa)
350
300
250
200
150
Extra Trees
Ridge
Order-only
Target
proper-training maximum
500
525
550
575
600
625
650
Row index i (forward test set)