

ENHANCEMENT OF LOW LIGHT IMAGES VIA ILLUMINATION MAP ESTIMATION
USING VARIATIONAL OPTIMIZATION BASED RETINEX MODELS

Dissertation Submitted to the
NORTH MAHARASHTRA UNIVERSITY, JALGAON

For the Degree of
Master of Engineering
in
Computer Science and Engineering

By
PRIYANKA B. WAGHMODE
(ME(Computer)/2018-19/03)

Under the Guidance of
PROF. NILESH VANI
Department of Computer Engineering



Godavari Foundation's
GODAVARI COLLEGE OF ENGINEERING, JALGAON

Maharashtra State, India

2018-19

ENHANCEMENT OF LOW LIGHT IMAGES VIA ILLUMINATION MAP ESTIMATION
USING VARIATIONAL OPTIMIZATION BASED RETINEX MODELS

Submitted By

PRIYANKA B. WAGHMODE

In the partial fulfilment for the award of

Master of Engineering
(Computer Science and Engineering)

Guided By

PROF. NILESH VANI

Department of Computer Engineering

Godavari Foundation's

GODAVARI COLLEGE OF ENGINEERING, JALGAON

Maharashtra State, India

2018-19

Godavari Foundation's

Godavari College of Engineering, Jalgaon

DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

Certificate

This is to certify that the dissertation entitled "**Enhancement of Low Light Images Via Illumination Map Estimation Using Variational Optimization based Retinex Models**", which is being submitted herewith for the award of 'Master of Engineering' in 'Computer Science and Engineering' of North Maharashtra University, Jalgaon. This is the result of the work carried out by **Priyanka B. Waghmode** under my supervision and guidance. The work in this dissertation has not formed earlier for the basis of the award of any degree or diploma or other similar title of this for any examining body or university.

Prof. Nilesh Vani
Guide

Prof. Rahul Gaikwad
ME Coordinator

Prof. Pramod Gosavi
Head of Department

Dr. V. G. Arajpure
Principal

Date:

Godavari Foundation's

Godavari College of Engineering, Jalgaon

DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

Certificate

This is to certify that the dissertation entitled "**Enhancement of Low Light Images Via Illumination Map Estimation Using Variational Optimization based Retinex Models**", which is being submitted herewith for the award of 'Master of Engineering' in 'Computer Science and Engineering' of North Maharashtra University, Jalgaon. This is the result of the work carried out by **Priyanka B. Waghmode** under my supervision and guidance. The work in this dissertation has not formed earlier for the basis of the award of any degree or diploma or other similar title of this for any examining body or university.

Prof. Nilesh Vani
Guide

Prof. Rahul Gaikwad
ME Coordinator

Prof. Pramod Gosavi
Head of Department

Dr. V. G. Arajpure
Principal

Date:

Declaration

I hereby declare that I have formed, completed and written the dissertation entitled " Enhancement of Low Light Images Via Illumination Map Estimation Using Variational Optimization based Retinex Models". It has not previously submitted for the basis of the award of any degree or diploma or other similar title of this for any other examining body or University.

Place:

Date:

Priyanka B. Waghmode

Student ME(Computer)

Dissertation Approval Sheet

Priyanka B. Waghmode has done the appropriate work related to the "Enhancement of Low Light Images Via Illumination Map Estimation Using Variational Optimization based Retinex Models" in the partial fulfilment for the award of Master of Engineering in Computer Engineering of North Maharashtra University, Jalgaon(M.S.) and approved for the degree of Master of Engineering

Place:

Date:

Guide: Prof. Nilesh Vani

External Examiner

Place:

Department of Computer Engineering

Godavari College of Engineering, Jalgaon(M.S.)

Acknowledgement

I would like to acknowledge my indebtedness and render my warmest thanks to my guide **prof. Nilesh Vani**, who made this work possible. His friendly guidance and expert advice have been invaluable throughout all stages of the work. I would also wish to express my gratitude to my Head of Department **Prof. Pramod Gosavi** for extended discussions and valuable suggestions which have contributed greatly to the improvement of the thesis. The thesis has also benefited from comments and suggestions made by **Prof. Rahul Gaikwad** who have read through the manuscript. I take this opportunity to thank them. My special thanks are extended to my **Principal Prof. (Dr) V. G. Arajpure**, for the drawing on the cover.

Special thanks are due to my husband, **Mr. Harish Gadade**, for his continuous support and understanding, but also for more concrete things like commenting on earlier versions of the thesis, helping with the figures and the final preparation of the manuscript. I want to thank my friend **Tasneem** and my sisters **Rituja** and **Snehal**, for constant encouragement. I would like to thank the Computer Department of my college for providing excellent working conditions. Also I thank all those who have supported me directly or indirectly

Priyanka B. Waghmode

Student Computer science and Engg.

Godavari College of Engineering, Jalgaon(M.S.)

Abstracts

Image Enhancement is one of the important requirements in Digital Image Processing which is very important in making an image useful for various applications which can be seen in the areas of Video Surveillance, Digital photography, Medicine, Geographic Information System, Industrial Inspection , Law Enforcement and many more Digital Image Applications. Image Enhancement is used to improve the quality of poor images. The focus of this dissertation is an attempt to improve the quality of digital images using various Retinex Model like Single Scale Retinex Model, Multi-Scale Retinex Model, Multi-Scale Retinex Model with color Restoration. Also this dissertation focused on Power Law Transformation, Histogram Equalization and Adaptive Histogram Equalization. In this dissertation i have applied various Retinex Model, Power Law Transformation, Histogram Equalization and Adaptive Histogram Equalization on color images with different color space.

Keyword: Retinex Algorithm, SSR, MSR, MSRCR, Histogram, Image Enhancement.

Contents

1	Introduction	1
1.1	Introduction	1
1.2	Problem Definition	3
1.2.1	Objective	3
1.2.2	Contribution	3
1.3	Scope	4
1.4	Outline	4
2	Related Work	5
2.1	Digital Image Processing	6
2.1.1	Light and visible spectrum	6
2.1.2	Digital image	8
2.1.3	Classification of digital image	10
2.1.4	Color spaces	10
2.1.5	Digital Image processing	16
2.1.6	Image Enhancement	19
2.1.7	Frequency Domain Technique	22

2.1.8	Comparison between Spatial Domain Technique And Frequency Domain Technique	23
2.1.9	Retinex in Image Enhancement	24
3	Proposed Work	27
3.1	Introduction	27
3.2	Retinex in Image Processing	28
3.2.1	Single Scale Retinex (SSR)	30
3.2.2	Multiscale Retinex (MSR)	31
3.2.3	Multiscale retinex with Color Restoration algorithm (MSRCR) .	32
3.3	Power Law Transformation	35
3.4	Histogram Equalization	36
3.4.1	Equalization on Color Image	38
3.5	Adaptive Histogram Equalization(AHE) method	40
3.5.1	Contrast Limited Adaptive Histogram Equalization (CLAHE) .	42
4	Implementation and Design	44
4.1	Retinex theory and its typical algorithms	45
4.1.1	Single Scale Retinex(SSR)	45
4.2	Design	47
4.2.1	Flow Chart	47
4.2.2	Activity Diagram	47
4.2.3	Deployment Diagram	48
4.2.4	Component Diagram	48

5	Result and Discussion	49
5.1	Retinex Model	49
5.2	Power Law Transformation	54
5.3	Histogram Equalization	56
5.4	Adaptive Histogram Equalization	57
6	Conclusion	61
	Bibliography	62

List of Figures

2.1	Color spectrum seen by passing White light through a prism	7
2.2	Wavelengths comprising the visible range of the electromagnetic spectrum	7
2.3	Primary and secondary colors of light	8
2.4	Primary and secondary colors of pigments	9
2.5	Digital Image of "Lenna" with different number of pixels	10
2.6	a) Vector and b) bitmap images	11
2.7	a) Greyscale images y b) Grey levels of greyscale images	12
2.8	Schematic of the RGB color cube. Points along the main diagonal have gray values, from black at the origin to white at point (1,1,1)	13
2.9	RGB 24-bits color cube	13
2.10	Cone of HSV model	15
2.11	a) Original picture. b) Component brightness of original picture	15
2.12	Spatial Domain	17
2.13	Basic transformations	18
2.14	Image enhancement techniques	22
3.1	Result of Retinex Model	35

3.2	Plot of power law transformation for various γ with input gray level along X axis and output gray level along Y axis.	36
3.3	Seed Image and its histogram	37
3.4	Block diagram showing the implementation of Method 1	39
3.5	Bilinear interpolation to eliminate region boundaries[From Zuiderveld, 1994].	42
3.6	Principle of contrast limiting as used in CLAHE. (a) Histogram of a contextual region containing many background pixels. (b) Calculated cumulative histogram. (c) Clipped histogram with excess pixels redistributed throughout the histogram. (d) Cumulative clipped histogram with maximum slope set to the clip limit [From Zuiderveld, 1994]. . . .	43
4.1	Flow chart for Image Enhancement	47
4.2	Activity Diagram for Image Enhancement	47
4.3	Deployment Diagram for Image Enhancement	48
4.4	Component Diagram for Image Enhancement	48
5.1	a) Input Image b)Enhanced Image using SSR	50
5.2	a) Input Image b)Enhanced Image using MSR	50
5.3	a) Input Image b)Enhanced Image using MSRCR	51
5.4	a) Input Image b)Enhanced Image using SSR	51
5.5	a) Input Image b)Enhanced Image using MSR	52
5.6	a) Input Image of Palace b)Enhanced Image of Palace using MSRCR . .	52
5.7	a) Input Image of Robot b)Enhanced Image of Robot using SSR	53
5.8	a) Input Image of Robot b)Enhanced Image of Robot using MSR	53

5.9	a) Input Image of Robot b)Enhanced Image of Robot using MSRCR . . .	54
5.10	a) Input Image b)Enhanced Image using Power Law Transformation . . .	55
5.11	a) Input Image of Palace b)Enhanced Image of palace using Power Law Transformation	55
5.12	a) Input Image of Robot b)Enhanced Image of Robot using Power Law Transformation	56
5.13	a) Input Image b)Enhanced Image using Histogram Equalization	56
5.14	a) Input Image of Palace b)Enhanced Image of palace using Histogram Equalization	57
5.15	a) Input Image of Robot b)Enhanced Image of Robot using Histogram Equalization	58
5.16	a) Input Image b)Enhanced Image using Adaptive Histogram Equalization	58
5.17	a) Input Image of Palace b)Enhanced Image of palace using Adaptive Histogram Equalization	59
5.18	a) Input Image of Robot b)Enhanced Image of Robot using Adaptive Histogram Equalization	59

List of Tables

2.1	Features of spatial domain and frequency domain techniques.	24
5.1	Comparison for Lamp Image.	60
5.2	Comparison for Palace Image.	60
5.3	Comparison for Lamp Image.	60

Chapter 1

Introduction

When one captures images in low-light conditions, the images often suffer from low visibility. Besides degrading the visual aesthetics of images, this poor quality may also significantly degenerate the performance of many computer vision and multimedia algorithms that are primarily designed for high-quality inputs. In this paper, we propose a simple yet effective lowlight image enhancement (LIME) method. More concretely, the illumination of each pixel is first estimated individually by finding the maximum value in R, G, and B channels. Furthermore, we refine the initial illumination map by imposing a structure prior on it, as the final illumination map. Having the wellconstructed illumination map, the enhancement can be achieved accordingly. Experiments on a number of challenging low-light images are present to reveal the efficacy of our LIME and show its superiority over several state-of-the-arts in terms of enhancement quality and efficiency.

1.1 Introduction

high-visibility images reflect clear details of target scenes, which are critical to many visionbased techniques, such as object detection and tracking. But, images captured in low-light conditions are often of low visibility. The visual quality of images captured under low-light conditions, for one thing, is barely satisfactory. For another thing, it very likely hurts the performance of algorithms that are primarily designed for high-visibility inputs. Directly amplifying the low-light image is probably the most intuitive

and simplest way to recall the visibility of dark regions. But, this operation gives birth to another problem, say relatively bright regions might be saturated and thus loss corresponding details. Histogram equalization (HE) strategies [3]–[5] can avoid the above problem by somehow forcing the output image to fall in the range $[0, 1]$. Further, variational methods aim to improve the HE performance by imposing different regularization terms on the histogram. For instance, contextual and variational contrast enhancement (CVC) [6] tries to find a histogram mapping that pays attention on large gray-level differences, while the work [7] achieves improvement by seeking a layered difference representation of 2D histograms (LDR). However, in nature, they focus on contrast enhancement instead of exploiting real illumination causes, having the risk of over- and underenhancement. Another solution is Gamma correction that is a nonlinear operation on images. The main drawback is that the nonlinear operation of Gamma correction is carried out on each pixel individually without considering the relationship of a certain pixel with its neighbors, and thus may make enhanced results vulnerable and visually inconsistent with real scenes.

In Retinex theory, the dominant assumption is that the (color) image can be decomposed into two factors, say reflectance and illumination. Early attempts based on Retinex, such as single-scale Retinex (SSR) [9] and multi-scale Retinex (MSR), treat the reflectance as the final enhanced result, which often looks unnatural and frequently appears to be over-enhanced. The method proposed in [11] tries to enhance contrast while preserving naturalness of illumination. Although it prevents results from over-enhancement, in our experiments, it performs less impressive than our method in terms of both efficiency and visual quality. Fu et al. proposed a method to adjust the illumination by fusing multiple derivations of the initially estimated illumination map (MF) [12]. The performance of MF is mostly promising. But, due to the blindness of illumination structure, MF may lose the realism of regions with rich textures. The most recent work of [13] proposed a weighted variational model for simultaneous reflectance and illumination estimation (SRIE). With the estimated reflectance and illumination, the target image can be enhanced by manipulating the illumination. As noticed in [14], inverted low-light images look like haze images, as shown in Fig. 2. Based on this observation, the authors of [14] alternatively resorted to dehaze the inverted low-light images. After dehazing, the obtained unrealistic images are inverted again as the final enhanced results.

1.2 Problem Definition

Our system will enhance the input image by applying retinex algorithms like Single-Scale Retinex (SSR), Multi-Scale Retinex (MSR) and Multi-Scale Retinex with color Restoration (MSRCR) and power law transformation, Histogram equalization and Adaptive Histogram Equalization. Thus, the Problem definition can be proposed as follows: To implement the Algorithms: Retinex algorithm, power law transformation, Histogram equalization and Adaptive Histogram Equalization.

1.2.1 Objective

- To implement different Retinex Algorithms.
- To implement Power Law Transformation.
- To implement Histogram Equalization.
- To implement Adaptive Histogram Equalization

1.2.2 Contribution

Our method belongs to the Retinex-based category, which intends to enhance a low-light image by estimating its illumination map. It is worth noting that, different from the traditional Retinex-based methods like that decompose an image into the reflectance and the illumination components, our method only estimates one factor, say the illumination, which shrinks the solution space and reduces the computational cost to reach the desired result. The illumination map is first constructed by finding the maximum intensity of each pixel in R, G and B channels. Then, we exploit the structure of the illumination to refine the illumination map. Also we have implemented and compare power law transformation, Histogram equalization and Adaptive Histogram equalization.

1.3 Scope

The Retinex Image Enhancement Algorithm is an automatic image enhancement method that enhances a digital image in terms of dynamic range compression, colour independence from the spectral distribution of the scene illuminate, and colour/ lightness rendition. Also implement and compare power law transformation,Histogram equalization and Adaptive Histogram Equalization with retinex algorithm. So, the scope of this project is to implement the Retinex and power law transformation,Histogram equalization and Adaptive Histogram Equalization based image Enhancement Algorithms, which involves the implementation of following three models of retinex algorithms and other:

- Multi-Scale Retinex algorithm with color Restoration (MSRCR)
- Multi-Scale Retinex algorithm with Chromaticity Preservation (MSRCP)
- Automated Multi-Scale Retinex algorithm with Color Restoration (AMSRCR)
- Power Law Transformation
- Histogram Equalization
- Adaptive Histogram Equalization

1.4 Outline

This project report is organized into six chapters: Chapter 1 introduces the project; chapter 2 describes related work. Chapter 3 presents the proposed technology that will be used. Chapter 4 presents implementation, design and analysis of the system analysis.chapter 5 presents the results and discussion and last chapter 6 is the Conclusion.

Chapter 2

Related Work

Low-light image enhancement methods have been widely developed to obtain high-contrast images in the field of consumer imaging devices. Recently, the performance of low-light image enhancement has become an important quality measure of recent consumer imaging devices. Although recent consumer imaging devices increase the size of the aperture to acquire a brighter image, the low sensitivity of an imaging sensor under low-light condition results in the low signal-to-noise ratio (SNR). As a result, the low-light enhanced image cannot avoid the unnatural artifacts such as noise amplification and color distortion. An image is an array, or a matrix, of square pixels (picture elements) arranged in columns and rows. An Image is a 2D function $f(x, y)$, where x and y are spatial coordinates and amplitude of f at any pair of coordinates (x, y) is called the intensity or gray level of the image.

To enhance the contrast of a low-light image, histogram-based methods adjust pixel values using the cumulative distribution function (CDF) of the input image. Chen et al. redistributed the intensity bins of multiply divided sub-histograms [1]. However, since the histogram of a low-light image is extremely narrow, the resulting image shows noise amplification and the saturation in the bright region. To solve this problem, Gu et al. proposed a variational contrast enhancement framework by minimizing the constraint terms on the histograms using l_2 -norm. They automatically selected the regularization parameter according to the assessed score of the image quality measure.

2.1 Digital Image Processing

In terms of low-light video enhancement, Ko et al. proposed a temporal flicker-free low-light video enhancement method [5]. This method enhanced input low-light video by accumulating the similar patches in the specified searching region among temporally adjacent frames. However, the resulting image shows the blocking artifact since the mean brightness value may vary indifferent patches because of gamma correction. Kim et al. enhanced the low-light video using the clipped histogram stretching on each color channel and performed the spatio-temporal noise reduction under the non-local means filter framework at the high-computational cost [6]. Image processing is a method to perform some operations on an image, in order to get an enhanced image or to extract some useful information from it. It is a type of signal processing in which input is an image and output may be image or characteristics/features associated with that image. Nowadays, image processing is among rapidly growing technologies. Image processing basically includes the following three steps:

- Importing the image via image acquisition tools;
- Analysing and manipulating the image;
- Output in which result can be altered image or report that is based on image analysis.

2.1.1 Light and visible spectrum

If a beam of white light passes through a glass prism, the human can see that the beam of light is broken and the six colors of the spectrum appear: red, orange, yellow, green, blue and violet (Figure 2.1). This is known as refraction and was discovered by Sir Isaac Newton in 1666. In this way, you can understand that white light, existing everywhere, is composed of a spectrum of colors and collided with a body, it absorbs any of these components and reflects others. The reflected colors are what our eyes can perceive [12].

Basically, the colors that human perceive depend on the nature of the light reflected from the object. So the visible range by human eyes can be seen (Figure 2.2)

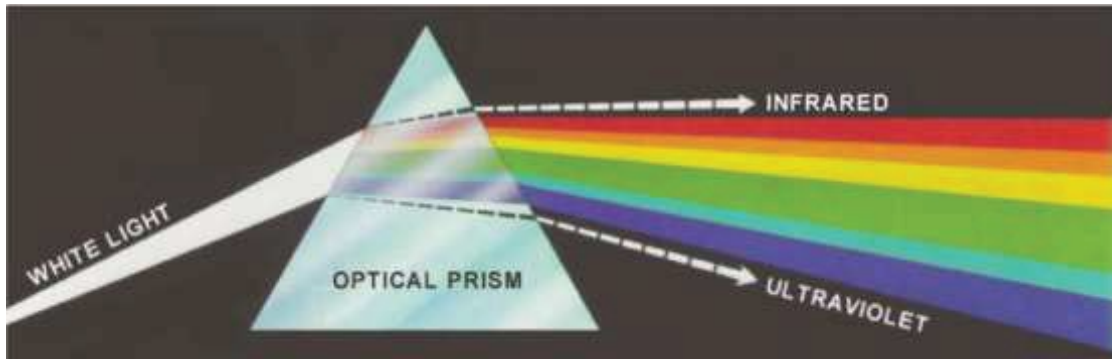


Figure 2.1: Color spectrum seen by passing White light through a prism

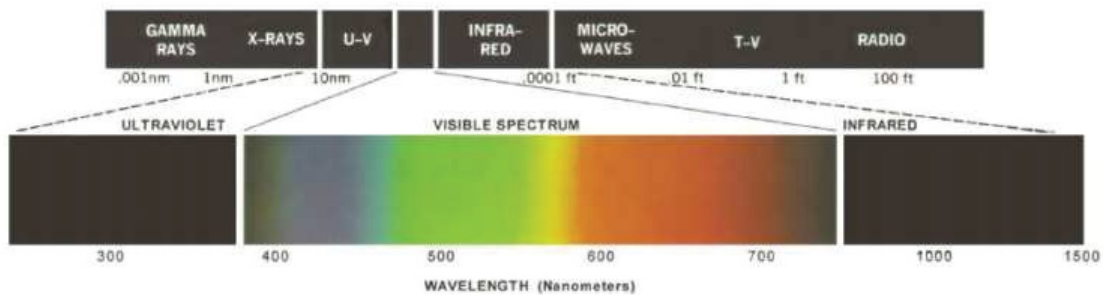


Figure 2.2: Wavelengths comprising the visible range of the electromagnetic spectrum

as a little part within the electromagnetic spectrum and include wavelengths from 380 nm to 780 nm. The human eye perceives light from each of these wavelengths as a different color[12].

Primary color is a color that cannot be obtained by mixing any other one. This is an idealized model, based on the biological response of the receptor cells of the human eye (cones) in the presence of certain frequencies of light and noise, and is dependent on the subjective perception of the human brain. Mixing two primary colors gives rise to a secondary color [12]. The theories of traditional and modern color disagree on which are the primary colors. The modern color theory distinguishes between light and pigment colors (Figure 2.3, Figure 2.4) [13].

- Light primary colors (RGB model): Red, green and blue.
- Primary pigment colors (CMY Model): Cyan, magenta and yellow.
- Traditional primary colors (RYB Model): Red, yellow and blue. This model is the precursor CMY model. It is considered obsolete by science and industry.

It is called secondary when a color is obtained by mixing two primary colors

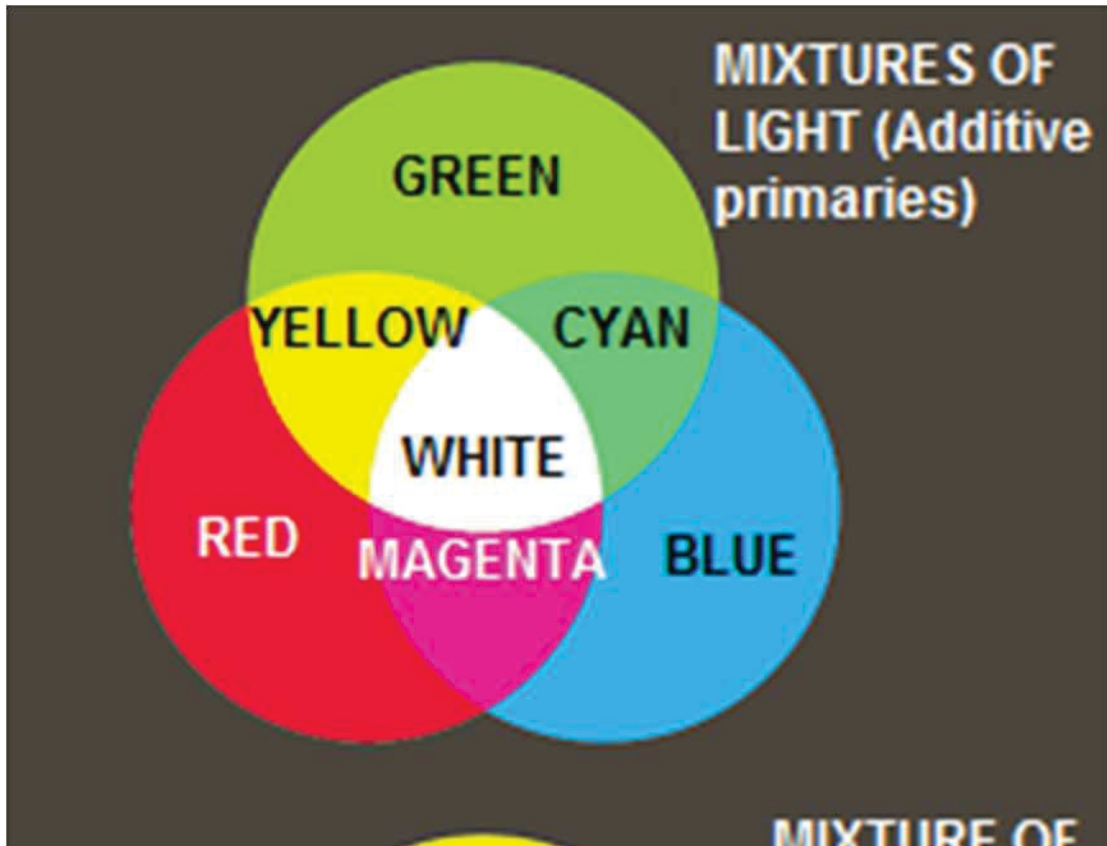


Figure 2.3: Primary and secondary colors of light

and which in turn is complementary color of a third primary color, which is not involved in its preparation[12; 13].

- Secondary colors light (RGB model) and Cyan, magenta yellow
- Secondary colors pigment (CMY Model): Orange, green and violet.

2.1.2 Digital image

The term image refers to a two dimensional function of light intensity $f(x, y)$ where x and y denote the spatial coordinates and the value of f at any point (x, y) is proportional to the intensity of the image at that point [13]. A digital image can be written as a matrix whose row and column indices identify a point in the image and whose value coincides with the level of light intensity at that point. Each element of the array corresponds to an element in the image and is called pixel[12]

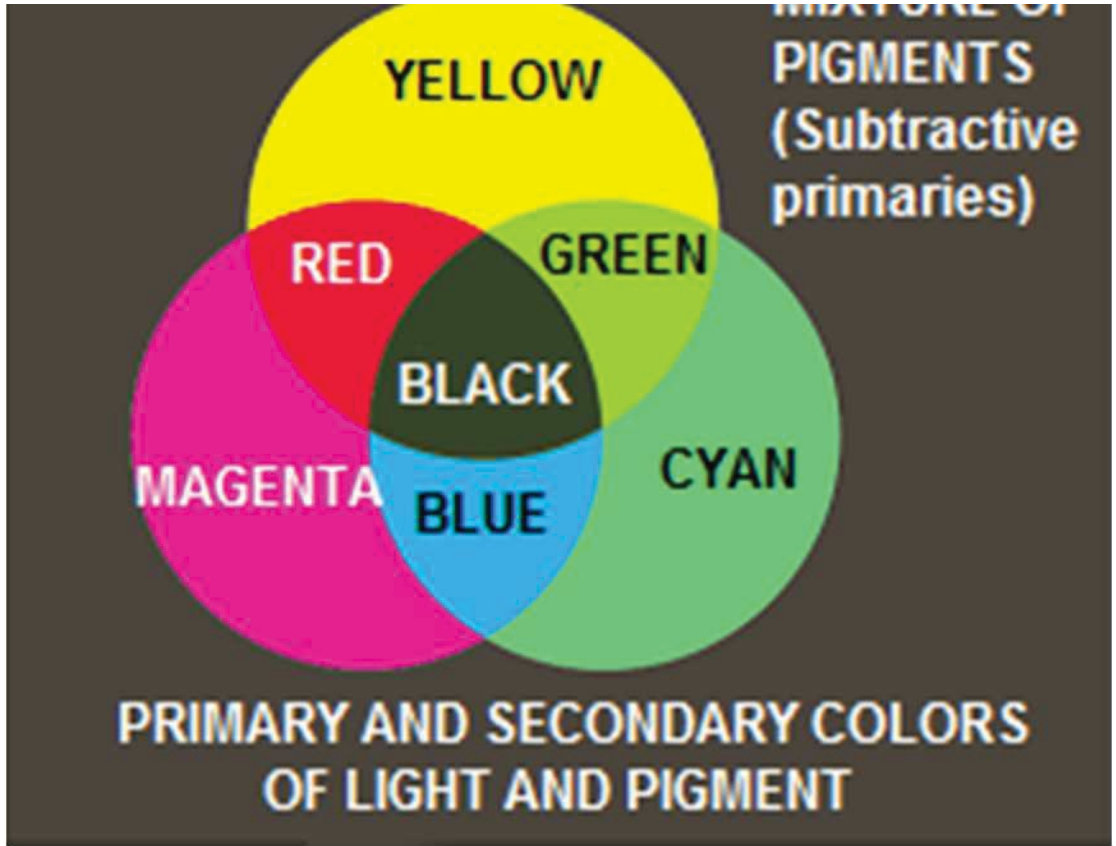


Figure 2.4: Primary and secondary colors of pigments

$$f(x, y) = \begin{bmatrix} f(0,0) & f(0,1) & \dots & f(0, N-1) \\ f(1,0) & f(1,1) & \dots & f(1, N-1) \\ \vdots & \vdots & \ddots & \vdots \\ f(M-1,0) & f(M-1,1) & \dots & f(M-1, N-1) \end{bmatrix} \quad (2.1)$$

The notation of coordinates widely accepted by most of the books is shown in equation ((2.1)) where the image has M rows and N columns determining the origin at the point $f(0,0)$.

Figure 2.5 shows four version of the same picture where the difference is the number of pixels in each of them. This means that the pixel is only one division unit without a particular actual size. Only when the image resolution is given, a particular size to the pixel is assigned[15].



Figure 2.5: Digital Image of "Lenna" with different number of pixels

2.1.3 Classification of digital image

There are many kind of classification of digital image. A Basic classification should be: bitmap and vector images. Vector images are obtained based on lines, each responding to a mathematical equation. An image of this type is formed by controlled strokes coordinates. Vector graphics have the disadvantage that they do not have the level of detail of bitmaps. The advantage is that you can reduce and enlarge without losing quality since the lines are redrawn when resizing [12]. Bitmap images were described in point 2.1.2. These kinds of images are used in this project. Figure 2.6 shows differences between bitmap and vector images

2.1.4 Color spaces

Color spaces are a defined range of colors that in combination with physical device, it allows representations of color in analog and digital way. A color model is an abstract mathematical model describing the way colors can be represented as tuples of numbers [14].

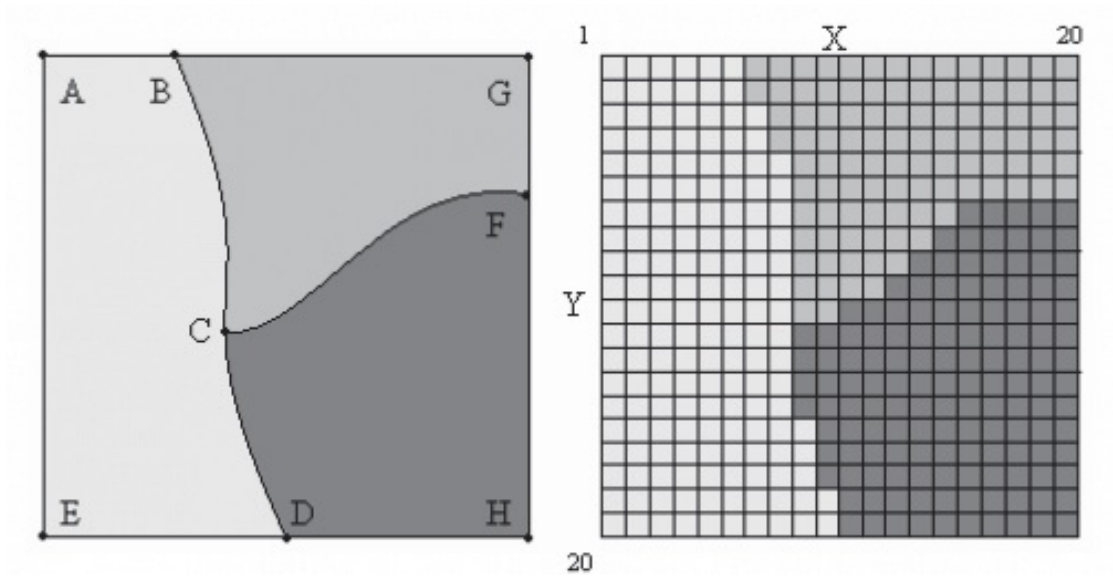


Figure 2.6: a) Vector and b) bitmap images

There are many types of model color but only the first 3 are important in this project.

- Grayscale
- RGB
- HSV
- Others: YCbCr, HLS, CMY, etc.

Grayscale

An intensity scale is also known as monochrome or grayscale level and to a digital image is an $M \times N$ array of values where each pixel is a single sample containing the information of the image intensity[15]. In a grayscale image (figure 2.7) each pixel has a brightness value between 0 (black) to 1 (white). Commonly, this mode uses up to 256 shades of gray (8 bits per sampled pixel). Another way of representation is as percentage. The 3 characteristics that can define a color are hue (color), value (lightness or darkening) and saturation (color purity) [15]. Thus the conversion of a color image to a grayscale image is not performed in a unique way, however in its most common approach[14], it is to retain information on the brightness and discard the values of hue and saturation. Assuming the colors red, green and blue are signs of light, the



Figure 2.7: a) Greyscale images y b) Grey levels of greyscale images

approximation of an image in grayscale from a color image is given by equation (2.2) where 0 is the value of less intensity, referring to the color black and 1 is the value of greater brightness or white [15].

$$GRAY = (0.30 \cdot R) + (0.59 \cdot G) + (0.11 \cdot B) \quad (2.2)$$

RGB model

An RGB image is defined as an array of $3 \times M \times N$ pixels where each pixel corresponds to the red, green and blue components of a color image. The main purpose of the RGB model is the sensing, representation and display of images in electronic devices such as televisions, computers, cell phones, etc [14].

The RGB model can be viewed as a stack of 3 scale image intensities to be displayed on a color monitor (which has 3 color inputs, red, green and blue). Colors red, green and blue are known as primary colors, and the combination of these different intensities in colors produces human visible spectrum. Figures 2.9 show a 3D representation of the RGB model [15].

Generally the intensity of each of the components is measured on a scale from 0 to 255 (1 byte per component)

This model is the most used to display digital images on a screen in the current

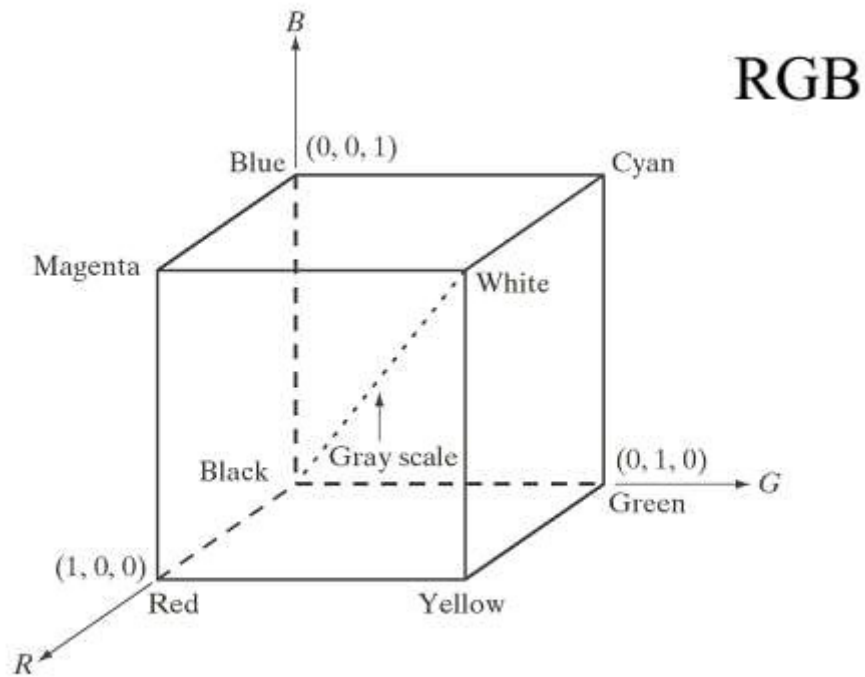


Figure 2.8: Schematic of the RGB color cube. Points along the main diagonal have gray values, from black at the origin to white at point $(1,1,1)$

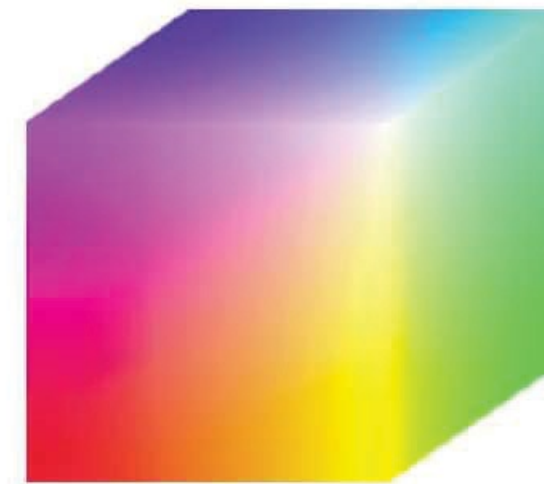


Figure 2.9: RGB 24-bits color cube

formats so it is very important in the image processing[15]

HSV model

The HSV model is based on the human perception of color and describes, according to CIE [quote]:

- Hue: The "attribute of a visual sensation according to which an area appears to be similar to one of the perceived colors: red, yellow, green, and blue, or to a combination of two of them".
- Saturation: Colorfulness of an area judged in proportion to its brightness.

The HSV color model is based in the RGB model, but it is a cylindrical coordinate model. It uses the following three components [9]

- H (hue) is usually represented in a circumference, so the degree says the color of that pixel, but it is also used in a percentage way for some applications.
- S (saturation), the representation of this component is the distance from the cylinder axe.
- V (value, also called B, brightness), this is the component used in the transform. Usually, it is represented from 0 to 1 (also in Matlab). If the value is 0, it means that the pixel is black, regardless of the other two components (for this reason, the HSV model can also be interpreted and represented like a cone) (figure 2.10) [15].

The transformation from RGB to HSV is given by:

$$V = MAX \tag{2.3}$$

Hence, the formula indicates that for a pixel, the Value or Brightness is the maximum value of any of the RGB components. For example, if R is 0.7, G is 0.5 and B is 0.1 (normalized), the value for this pixel is 0.7.

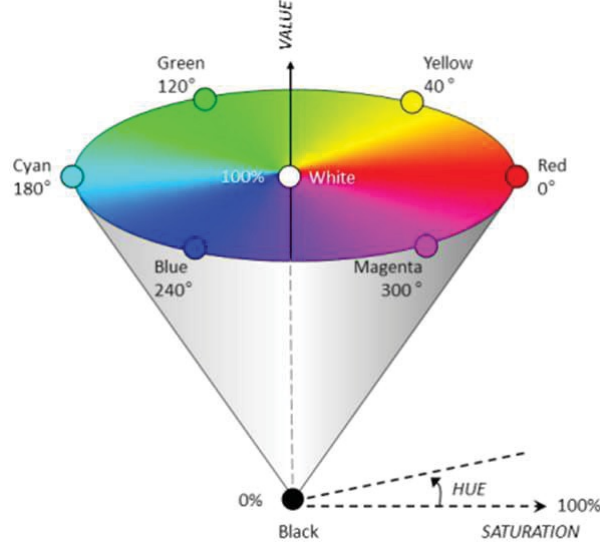


Figure 2.10: Cone of HSV model

$$H = \begin{cases} \text{Undefined} & \text{if } \text{MAX} = \text{MIN} \\ 60^\circ \times \frac{G-B}{\text{MAX}-\text{MIN}} + 0^\circ, & \text{if } \text{MAX} = \text{R and } G \geq B \\ 60^\circ \times \frac{G-B}{\text{MAX}-\text{MIN}} + 360^\circ, & \text{if } \text{MAX} = \text{R and } G < B \\ 60^\circ \times \frac{B-R}{\text{MAX}-\text{MIN}} + 120^\circ, & \text{if } \text{MAX} = \text{G} \\ 60^\circ \times \frac{R-G}{\text{MAX}-\text{MIN}} + 120^\circ, & \text{if } \text{MAX} = \text{B} \end{cases}$$

$$S = \begin{cases} 0, & \text{if } \text{MAX} = 0 \\ 1 - \frac{\text{MIN}}{\text{MAX}}, & \text{Otherwise} \end{cases}$$



Figure 2.11: a) Original picture. b) Component brightness of original picture

2.1.5 Digital Image processing

The digital image processing is the set of techniques applied to digital images in order to improve quality or facilitate the search for information [12].

The field that handles the processing of digital images is the digital image processing. Most processing techniques act treating the image as a two dimensions signal and then applying standard signal processing techniques of one dimension. Among the most common processing operations are[13]:

Intensity Transformation

Exists for the spatial domain techniques that operate directly on the image pixels. The processes discussed in this report are denoted by the expression

$$g(x, y) = T[f(x, y)] \quad (2.4)$$

where the function $f(x,y)$ is the input image, $g(x,y)$ is the output image (processed image) and T is an operator on f , which is an operator defined in a specific neighborhood (x,y) on a point (x,y) .

Knowing that the main space to define neighborhoods about some point (x,y) approach is to use a square or rectangular region centered at (x,y) as shown below in the following scheme.

The way to do this is to move starting pixel by pixel, that is, starting from the upper left corner as it moves, different neighborhoods are included. The operator T is applied to each location (x,y) thus g output can be obtained at that location. Only the pixels in the neighborhood are used to calculate the value of $g(x,y)$.

Intensity transformation functions; the simplest form of the transformation T is when the neighborhood size is 1×1 (one pixel). In this case, the value of $g(x,y)$ depends only on the intensity at that point f , and T becomes a transformation function intensities or gray Levels [13]. As depend only on the intensity values, and not explicitly on (x,y) , these functions are usually written in simplified form as;

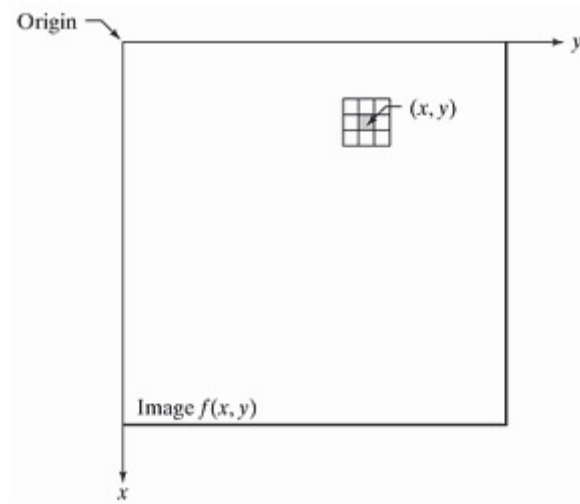


Figure 2.12: Spatial Domain

$$s = T(r)$$

Where r denotes the intensity of f and s the intensity of g , both on a corresponding point (x, y) of the image [4].

Some of these techniques are;

- Linear
 - Negative; Invert the order of the intensity values.

$$T(r) = L - 1 - r$$

- Brightness; change of the average intensity of the image

$$T(r) = r \pm B$$

(B is real number)

- Contrast; change of the dynamic range of the image.

$$T(r) = r \cdot B$$

(B is real number)

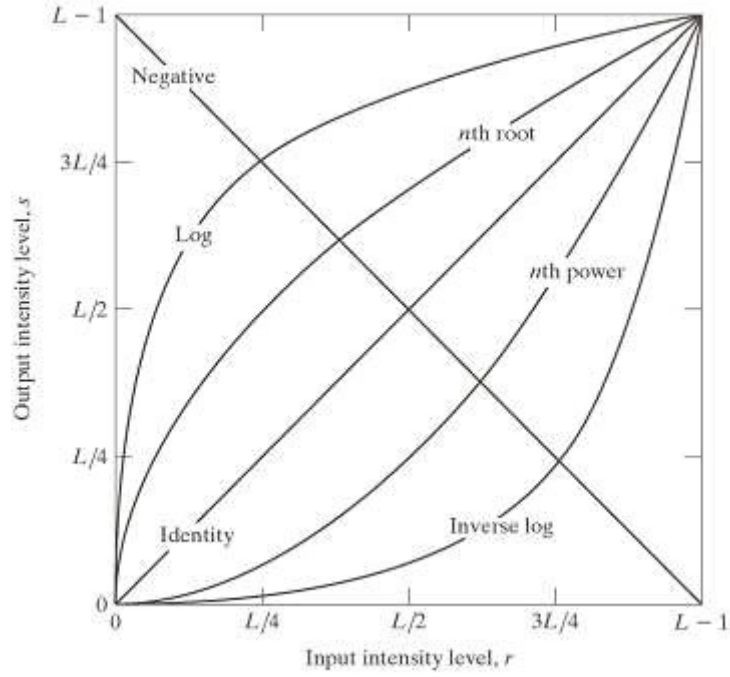


Figure 2.13: Basic transformations

- Nonlinear;
 - Log; It is used to display low levels of intensity with greater dynamic range.

$$T(r) = c \log(1 + r)$$

- Log power-law; It is similar to the log transformation. The advantage is the variety of transformations to modify the value of n

$$T(r) = c r^n$$

- Histogram equalization;

- Thresholding;
 - change a gray scale image in binary image (black and white) through a threshold

$$T(r) = \begin{cases} 0, & \text{if } r < T \\ 255, & \text{if } r > T \end{cases}$$

Geometric transformation;

Geometric transformation modify the spatial relationship between pixels. In terms of digital image processing a geometric transformation consists of two basic operations [15]:

- A spatial transformation that defines the relocation of the pixels in the image plane.
- Interpolation of gray levels, which are related to mapping the intensity values of the pixels in the transformed image.

Transformations into frequency domain

- Fourier Transformation
- Filter

for this project,intensity transformation is used.

2.1.6 Image Enhancement

The main definition of enhancing is to make something greater in value, desirability or attractiveness. The term of enhancement implies a process to improve the visual quality of the image [16]. Image Enhancement transforms images to provide better representation of the subtle details. The principal objective of enhancement is to process an image so that the result is more suitable than the original image for a specific application[1]. Image enhancement processes consist of a collection of techniques that seek to improve the visual appearance of an image or to convert the image to a form better suited for analysis by a human or a machine. In an image enhancement system, there is no conscious effort to improve the fidelity of a reproduced image with regard to some ideal form of the image, as is done in image restoration [1].

Actually, there is some evidence to indicate that often a distorted image, for example, an image with amplitude overshoot and undershoot about its object edges, is

more subjectively pleasing than a perfectly reproduced original[18]. Enhancement of an image is necessary to improve appearance or to highlight some aspect of the image is converted from one into another acquired, scanned, transmitted, copied or printed many types of noise can be present in the image. Image enhancement has come to specifically mean a process of smothering irregularities or noise that has somehow corrupted the image. The term “image enhancement” has been widely used in the past to describe any operation that improves image quality by some criteria. However, in the recent years the meaning of the term has evolved to denote image-preserving noise smoothing[1].

This primarily serves to distinguish it from similar-sounding terms, such as image restoration and image reconstruction, which also taking specific meaning[21]. Image enhancement has played and will continue to play an important role into different fields such as medical, industrial, military and scientific applications. In addition to these applications, image enhancement is increasingly being used in consumer electronics[16]. Internet Web users, for instance, not only rely on built-in image processing protocols such as JPEG (Joint Photographic Expert Group) and interpolation, but they also have become image processing users equipped with powerful yet inexpensive software such as Photoshop. Users not only retrieve digital images from the Web but they are now able to acquire their own by use of digital cameras or through digitization services. Image enhancement is an indispensable tool for researchers in a wide variety of fields [22]:

- In forensics, image enhancement is used for identification, evidence gathering and surveillance. Images obtained from fingerprint detection, security videos analysis and crime scene investigations are enhanced to help in identification of culprits and protection of victims.
- In atmospheric sciences IE is used to reduce the effects of haze, fog, mist and turbulent weather for meteorological observations. It helps in detecting shape and structure of remote objects in environment sensing. Satellite images undergo image restoration and enhancement to remove noise.
- Astrophotography faces challenges due to light and noise pollution that can be minimized by IE. For real time sharpening and contrast enhancement several cameras have in-built IE functions. Moreover, numerous softwares allow editing such images to provide better and bright results.

- In oceanography the study of images reveals interesting features of water flow, remains concentration, geomorphology and bathymetric patterns to name a few. These features are more clearly observable in images that are digitally enhanced to overcome the problem of moving targets, deficiency of light and obscure surroundings.
- IE techniques when applied to pictures and videos help the visually impaired in reading small print, using computers and television and face recognition. Several studies have been conducted that highlight the need and value of using IE for the visually impaired.
- The technique of image enhancement is often employed by virtual restoration of historic paintings and artifacts in order to reduce stains and crevices. Color contrast enhancement, sharpening and brightening are just some of the techniques used to make the images bright. IE is a powerful tool for restorers who can inform decisions by viewing the results of restoring a painting beforehand. It is evenly useful in discerning text from worn-out historic documents.
- In the field of e-learning, IE is used to clarify the contents of chalkboard as viewed on streamed video; it improves the content readability and helps students to focus on the text. Similarly, collaboration through the whiteboard is facilitated by enhancing the shared data and diminishing artifacts like shadows and blemishes.
- Medical imaging uses IE techniques for reducing noise and sharpening details to improve the visual representation of the image. Since minute details play a critical role in diagnosis and treatment of disease, it is essential to highlight important features while displaying medical images. This makes IE a necessary aiding tool for viewing anatomic areas in MRI, ultrasound and x-rays to name a few.
- Numerous other fields including law enforcement, microbiology, biomedicine, bacteriology, climatology, meteorology, etc., benefit from various IE techniques. These benefits are not limited to professional studies and businesses but extend to the common users who employ IE to cosmetically enhance and correct their images.

The following image (figure 2.14) explains the different types of image enhancement techniques.

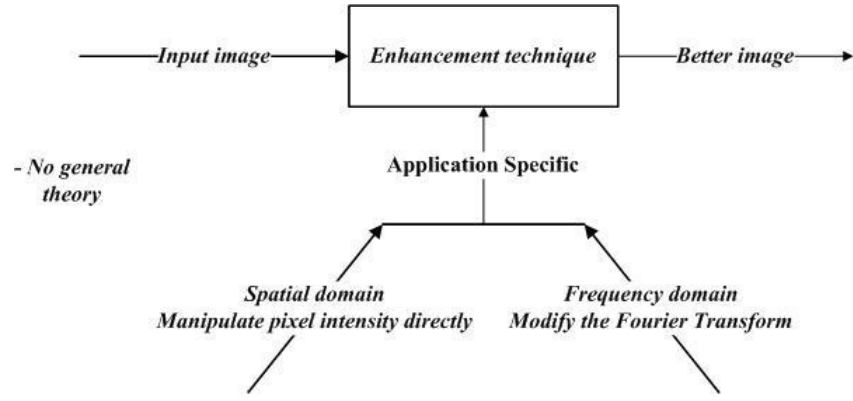


Figure 2.14: Image enhancement techniques

In this project, spatial domain is considered.

2.1.7 Frequency Domain Technique

Frequency domain method operates on the Fourier transform of an image. Image enhancement in the frequency domain is straightforward. We simply compute the Fourier transform of the image to be enhanced, multiply the result by a filter and take the inverse transform to produce the enhanced image. In frequency domain methods, the image is first transferred in to frequency domain[16]. It means that, the Fourier Transform of the image is computed first. All the enhancement operations are performed on the Fourier transform of the image and then the Inverse Fourier transform is performed to get the resultant image[25]. These enhancement operations are performed in order to modify the image brightness, contrast or the distribution of the grey levels. As a consequence the pixel value of the output image will be modified according to the transformation function applied on the input values [15]. The convolution theorem is the foundation of frequency domain techniques[18]. Consider the following spatial domain operation:

$$g(x, y) = h(x, y) * f(x, y) \quad (2.5)$$

The following frequency domain relationship given by the convolution theorem

$$G(u, v) = H(u, v)F(U, v) \quad (2.6)$$

Where g , f and h having Fourier transform G , H and F respectively. H is known as the transfer function of the process. Many image enhancement problems can be viewed in the form of the above equation. The main aim is to select a transfer function that changes the image in such a way that certain features of an image are enhanced[16]. Examples: edge detection, noise removal.

There are mainly three types of filters

- Low pass filter
- High pass filter
- Band pass filter

In Low-pass filtering, sharp transitions and edges in the gray levels of an image contribute significantly to the high frequency content of its Fourier Transform. By attenuating a specified range of high-frequency components in the frequency domain, blurring is achieved. Through Low-pass filtering this task is performed[16].

By High-pass filtering, Image sharpening can be achieved in the frequency domain. Low-frequency components will be attenuated by high pass filter without disturbing high frequency information[16].

Band-pass filtering is a method in which the reflectance and illumination components can be filtered independently. The illumination component of an image is generally classified by slow spatial variation on the other hand the reflectance component of an image tends to vary abruptly. These characteristics lead to associating the low frequencies of the Fourier transform of the natural log of an image with illumination and high frequencies with reflectance thus it is filtered individually[25].

2.1.8 Comparison between Spatial Domain Technique And Frequency Domain Technique

- Spatial domain is manipulation of pixels of an image. It is the technique for changing the representation of an image and used in many fields such as sharpening and smoothing images. Whereas Frequency domain is the manipulation

of Fourier transforms to enhance an image and perform purely with convolution theorem and it is used in changing the position of an image.

- The advantage of spatial domain technique is that it is simple to understand and the complexity of these techniques is very low which helps in real time implementation. Whereas Frequency domain technique having advantages which include low computation complexity, easy to view, manipulation of image's frequency composition and the special transformed domain property is easily applicable.

The disadvantages of spatial domain technique is that it does not provides adequate robustness and perceivably. Whereas the disadvantage of Frequency Domain is that it cannot enhance properly every part of an image simultaneously and the automation of image enhancement is also very difficult. Table 2.1 shows the areas where Spatial Domain technique and Frequency domain technique are applied.

Table 2.1: Features of spatial domain and frequency domain techniques.

Techniques	Feature
Spatial Domain technique	It is used to alter The gray level value Of individual pixels and hence the overall contrast of the entire image. It is not possible to selectively enhance edges or other required information effectively.
Frequency domain technique	It is used to Easily enhance edges And other subtle information because they are high frequency content and frequency domain operates on frequency content of an image. In this technique, all parts of an image are not enhanced in uniform manner

2.1.9 Retinex in Image Enhancement

The retinex theory is first proposed by Land to model the imaging process of the human visual system. This theory assumes that the scene in human's eyes is the product of reflectance and illumination[19]. Most retinex based enhancement algorithms use different ways to estimate the illumination and remove it to obtain the reflectance as the enhanced image. The details and textures can be enhanced by illumination removal[20]. While the enhanced results look over-enhanced and unnatural since the result does not

meet with human vision system. It is well-known that human eye perception is a combined effect of reflectance and illumination[24]. It is unreasonable to remove the illumination and only regard the reflectance as an improved result. Other retinex based algorithms firstly use logarithmic transformation to transform product into sum to reduce the computational cost, and then employ a variational model for enhancement[16]. Note that the logarithmic transformation stretches low values and compresses high values, increasing the contrast of low intensities and decreasing the contrast of high intensities. The resulting reflectance is usually smoothed and loses some details which can be manageable. In many papers, some novel retinex based image enhancement approach using illumination adjustment is proposed in which some new variational model is established that is different from conventional models, where the model does not need the logarithmic transformation and is more appropriate for the decomposition because reflectance is constrained in image domain. So a fast alternating direction optimization method was adopted to solve the proposed old model, where the reflectance and illumination can be computed and decomposed[20]. Then a simple and effective post-processing method of the decomposed illumination is used to make an adjustment for image enhancement. The enhanced image is obtained by combining the reflectance and the adjusted illumination. The naturalness of enhanced images can be preserved while details enhanced. Meanwhile, reflectance and illumination can be obtained as a by-product of the enhanced Image and this method has good clarity on naturalness preservation and detail enhancement due to the illumination adjustment and precise computed reflectance. Hence their common principle is to assign a new value to each pixel in an image based on spatial comparisons of light intensities. So with increase in better performance of retinex algorithm it is developed into many forms according to its application in grey images, colour images and mostly in real time image processing in field of medical images and texture feature parameters[16].

The Retinex image enhancement algorithm is an image enhancement method that enhances an image with dynamic range compression. It also provides colour constancy. It gives a computational human vision model[?]. It deals separates two parameters. At first the illumination information is estimated and then the reflectance is obtained from using division. It is based on the image formation model which is given 2.7 by

$$I(x, y) = L(x, y)r(x, y) \quad (2.7)$$

Where I is the input image, L is illumination and r is reflectance. The image is first converted into the logarithmic domain in which multiplications and divisions are converted to additions and subtractions that makes the calculation simple. The sensitivity of human vision reaches a logarithmic curve. Retinex is based on the centre/surround algorithm. The given centre pixel value is compared with the surrounding average pixel values to get the new pixel value. The input value of the centre surround functions is obtained by its centre input value and its neighbourhood [18]. An array of photoreceptor responses is there for each image location. This is given as input to the retinex algorithm which has the receptor class for each location in the image. The algorithm calculates a series of paths. For a single receptor class, it estimates the lightness values as a spatial array. For computing each path, a starting pixel (x_1) is first selected. Then a neighbouring pixel (x_2) is randomly selected. The difference of the logarithms of the sensor responses at the two positions is then calculated. The position of pixel x_2 is obtained by adding the previous step with the accumulator register which is given by:

$$A(x_2) = A(x_2) + \log_{10}(x_2) - \log_{10}(x_1) \quad (2.8)$$

Where $A(x_2)$ is the accumulator registers for pixel (x_2).

Counter register $N(x_2)$ for position x_2 is incremented. All registers and counters are set to zero when the calculation starts.

The accumulation of position (x_i) on the path is calculated by:

$$A(x_i) = A(x_i) + \log_{10}(x_1) \quad (2.9)$$

Chapter 3

Proposed Work

Image enhancement improves the quality of images for human viewing. There are often serious discrepancies existing between images and the direct observation of the real scenes. Human perception has natures of dynamic range compression and color rendition on the scenes[2]. It can compute the details across a large range of spectral and lightness variations, thus it is color constant. Single-scale Retinex (SSR) was defined as an implementation of center/surround Retinex[2]. Superposition of weighted different scale SSR balances both dynamic range compression and tonal rendition, which is Multiscale Retinex (MSR)[32]. For color images, spatial averages of the three color bands are far from equal, thus the output appears grey. To address this issue, a weight factor for different channels is introduced which is Multiscale Retinex with color restoration (MSRCR) [33]. In this paper, SSR, MSR and MSRCR systems for image enhancement are implemented and their performances are compared using MATLAB as the software tool.

3.1 Introduction

The human visual system is better than machines when processing images. Observed images of a real scene are processed based on brightness variations. The images captured by machines are easily affected by environmental lighting condition, which tends to reduce its dynamic range. On the contrary, the human visual system can automatically compensate the image information by psychological mechanism of color con-

stancy. Color constancy, an approximation process of human perception system, makes the perceived color of a scene or objects remain relatively constant even with varying illumination conditions[20]. Land proposed a concept of the Retinex, formed from "retina" and "cortex", suggesting that both the eye and the brain are involved, to explain the color constancy processing of human visual systems[2]. Although single-scale retinex (SSR) algorithm[31] could support different dynamic-range compressions, the multi-scale retinex (MSR) can better approximate human visual processing by transforming recorded images into a rendering which is much closer to the human perception of the original scene. MSR is good for gray images[32]. But it could be a problem for the color images because it does not consider the relative intensity of color bands. This can be seen from MSR output which is the relative reflectance's in the spatial domain[18]. Considering the images out of gray world, whose average intensity for the three color bands are far from equal, the output pixel values of MSR for three channels will be more close, which makes it look more gray. The solution to this problem is MSRCR that introduces weights for three color channels depending on the relative intensity of the three channels in the original images[2].

3.2 Retinex in Image Processing

Land described that the fundamental challenge of color vision shifted to the ability to predict lightness; that is, the spatial interactions found in post-receptor neural processes. In 1967 Land and McCann proposed a computational model for calculating lightness from the array of all scene radiances. The model compared each pixel with every other pixel in an image. The goal was to calculate the sensation of image segments that equaled what observers saw. In the past 50 years, there have been many implementations and variations of this process. They are called Retinex algorithms. It is curious that Land reserved the use of the term "Retinex" to describe three independent lightness channels[31]. Today's usage of the word includes a much wider range of computer algorithms that build calculated appearances out of arrays of radiances. To calculate lightnesses in complex scenes, one must: Capture scene radiances, Convert scene radiances to cone and rod quanta catches, Calculate lightness using all pixels in the scene, Compare calculated lightness with observer matches. The Land and McCann model used: Edge ratios, Gradient threshold (found to be unnecessary in later studies), Multi-

plication of edge ratios (made long-distance interactions), Reset to maxima (scaled the output) (introduced dependence on scene content, e.g., simultaneous contrast) Average of many spatial comparisons. The first computer implementation of the model used an array of 20 by 24 pixels. McCann, McKee, and Taylor showed that long-, middle-, and short-wave computed lightnesses predicted observer matches of color Mondrian's in color constancy experiments[2].

Since the late 1960s, computer imaging has shown remarkable advances. Digital images have replaced film in most of photography. Computer graphics has made image synthesis ubiquitous. Retinex image processing has grown with the advances in digital imaging . In the early 1980s Frankle and McCann introduced a multi-resolution algorithm that allowed efficient comparison of all pixels in the image. Jobson and Kotera with their colleagues have studied the NASA Retinex. Rizzi and colleagues have developed the Milan Retinex. Sobol extended that Retinex algorithm was used in the design of commercial cameras. Other algorithms have used Retinex spatial processing in color gamut-mapping applications[13].

The important feature of real complex scenes is that the illumination is rarely uniform. Shadows and multiple reflections increase the dynamic range of light coming to our eyes and to cameras. The application of Retinex algorithms to high dynamic range (HDR) scenes has become a major topic of research and engineering applications. The limits of HDR scene capture and reproduction are controlled by optics, namely, optical veiling glare. Camera glare limits the range of light on the sensor, just as intraocular glare limits the range of light on the retina. The scene content controls the range of light in images. Vision's post-receptor neural processes compensate for veiling glare. That explains humans' high dynamic range of appearances from low-dynamic-range retinal images. The spatial mechanisms modeled by Retinex algorithms play a major role in compensating for glare and generating our range of color and lightness sensations.

Over the years many variations of spatial processing mimicking human vision have been called Retinex algorithms[2].

The different types of retinex algorithms are:

- Single Scale Retinex algorithm (SSR)

- Multiscale Retinex algorithm (MSR)
- Multiscale retinex with Color Restoration algorithm (MSRCR)

3.2.1 Single Scale Retinex (SSR)

The basics of SSR include a logarithmic photoreceptor function that approximates the vision system based on a center/surround function[31]. The SSR is given by:

$$R_i(x, y) = \log_i - \log[F(x, y)I_i(x, y)] \quad (3.1)$$

where $I_i(x, y)$ is image distribution in the i th color band, $F(x, y)$ is the normalized surround function such that:

$$\iint F(x, y) dx dy = 1 \quad (3.2)$$

The purpose of the logarithmic manipulation is to transform a ratio at the pixel level to a mean value for a larger region[31]. The general form of the center/surround retinex is similar to the Difference-of-Gaussian (DOG) function widely used in natural vision science to model both the receptive fields of individual neurons and perceptual processes[31]. The only extensions required are i) to greatly enlarge and weaken the surround Gaussian (as determined by its space and amplitude constants) and ii) to include a logarithmic function to make subtractive inhibition into a shunting inhibition (i.e., arithmetic division). The surround space function computes the average of the surrounding pixel values and assigns it to the center pixel. Land [2] proposed an inverse square spatial surround function[31]:

$$F(x, y) = K * \exp\left(-\frac{r^2}{c^2}\right) \quad (3.3)$$

Moore suggested the exponential formula with absolute parameter:

$$F(x, y) = \exp\left(-\frac{r}{c}\right) \quad (3.4)$$

Hurlbert [8] suggested:

$$F(x, y) = K * \exp\left(-\frac{r^2}{c^2}\right) \quad (3.5)$$

For a given space constant, the inverse-square surround function accounted for a greater response from the neighboring pixels than the exponential and Gaussian functions. The spatial response of the exponential surround function was larger than that of the Gaussian function at distant pixels. Therefore, the inverse-square surround function was more commonly used in global dynamic range compression and the Gaussian surround function was generally used in regional dynamic range compression[31]. The exponential and Gaussian surround functions were able to produce good dynamic range compression over neighboring pixels. The selection of space constant is related with visual angle in the direct observation[31]. But the value cannot be theoretically modeled and determined. Basically there is a trade-off between dynamic compression, (for example, details in the shadow) and color rendition. SSR is incapable of simultaneously providing sufficient dynamic range compression and tonal rendition. It also introduces halos around the objects[31].

3.2.2 Multiscale Retinex (MSR)

In order to preserve both the dynamic range compression and color rendition, Multiscale retinex[32], which is a combination of weighted different scales of SSR [31], is a good solution:

$$R_{MSR_i} = \sum_{n=1}^N w_n R_{n_i} \quad (3.6)$$

where N is the number of the scales, R_{n_i} is the i th component of the n th scale, w_n is the weight of the n th scale. For MSR[32], the number of scales needed, scale values and weight values are important. Experiments showed that three scales are enough for most of the images and the weights can be equal[32]. Generally fixed scales of 15, 80 and 250 can be used, or scales of fixed portion of image size can be used. The weights can be adjusted to weigh more on dynamic range compression or color rendition [32]. The MSR based images have significant dynamic range compression in

the boundary between the light parts and dark parts and reasonable color rendition in the whole image scale[32].

MSR combined various SSR[31] weightings, selecting the number of scales used for the application and evaluating the number of scales that can be merged. Important issues to be concerned were the number of scales and scaling values in the surround function, and the weights in the MSR. The best weights had to be chosen in order to obtain suitable dynamic-range compression at the boundary between light and dark parts of the image, and to maximize the brightness rendition [32] over the entire image. MSR worked by compensating for lighting variations to approximate the human perception of a real scene. There were two methods to achieve this:

- compare the psychophysical mechanisms between the human visual perceptions of a real scene and a captured image.
- compare the captured image with the measured reflectance values of the real scene.

Thus the method involved combining specific features of MSR[32] with processes of SSR[31], in which the center/surround operation was a Gaussian function[32]. The logarithm was then applied after surround function processing (i.e., two-dimensional spatial convolution). Next, appropriate gain and offset values were determined according to the retinex output and the characteristics of the histogram. These values were constant for all the images. This procedure yielded the MSR function. However, it is difficult to predict whether the color of the reproduction will be accurate; and it has issues of color sensitivity [32].

3.2.3 Multiscale retinex with Color Restoration algorithm (MSRCR)

To address the drawback of MSR with regard to color restoration, we introduced weights for three color channels depending on the relative intensity of the three channels in the original images[33]. The relative intensity of three channels is given by:

$$I_i(x, y) = \frac{I_i(x, y)}{\sum_{j=1}^s I_i(x, y)} \quad (3.7)$$

I_i is the i^{th} band of the input image and S is the total number of color bands. The color restoration msrccr is given by:

$$C_i(x, y) = f[I_i(x, y)] \quad (3.8)$$

The best overall color restoration function is given by:

$$C_i(x, y) = \beta \log[\alpha I_i(x, y)] \quad (3.9)$$

where β is the gain constant and α controls the strength of non-linearity. The general form of the MSRCR can be summarized by the following equationmsrccr:

$$I_i(x, y) = \frac{d_{max}}{r_{max} - r_{min}} * (I_i(x, y) - r_{min}) \quad (3.10)$$

where $i = 1, \dots, N$, w_i is the weight of the scale, I_i is the i th band of the input image, and N is the number of bands in the input image. The surround function M_s is defined bymsrccr:

$$M_s(x, y) = \text{Exp}[\sigma_s^2 / (x^2 + y^2)] \quad (3.11)$$

where σ_s is the standard deviation of the S^{th} surround function, and

$$\iint \text{Exp}[\sigma_s^2 / (x^2 + y^2)] dx dy = 1 \quad (3.12)$$

$$F_i(x, y) = G_f \log \text{big} \left[\frac{I_i(x, y)}{\sum_{n=1}^N I_n(x, y)} - O_f \right] \quad (3.13)$$

The G_f and O_f are color restoration factors defined as gain and offset respectively. The final gain and offset values are needed to scale the output of the log domain operations to the (R, G, B) color space, and G_f and O_f control the degree to which the color restoration function $F(x, y)$ affects the overall color of the output image. These

constants, the number of scales, S , and the widths of the surround functions γ_s , are image independent in the sense that we apply the same (canonical) set of constants to every image that we process.

Some of the images processing related issues in MSRCR are:

- Negative Offset:

This is an attempt to increase the dynamic range (i.e. visual contrast) provided by the device but is often photometrically incorrect and results in false zeroes. The effect of the MSRCR is to produce a harsher-than-normal contrast. A simple correction, i.e. application of a positive offset to the original image can mitigate this effect.

- Automatic Gain and Offset [15]:

A negative offset is typically applied to map the minimum value to black and then a gain is applied to map the resultant maximum value to white. Care is taken to ensure that actual white exists in the scene. The MSRCR is very resilient to such adjustments. Since the difference between the MSRCR outputs in the original and the auto/gain case is insignificant, the result is not shown here.

- Positive Offset:

Typically brightness in an image is increased by applying a positive offset, which often manifests itself as an overall haziness in the input image. Though the application of the MSRCR reduces this haziness, there is still a sense of haziness overall. Further alleviation of this effect can be achieved by reducing the final offset value; O_r from its canonical value. In this paper, color problems were focused utilizing MSRCR as an image processing technique to solve the problems of the accuracy of the color of the reproduction. The main practical consequence of MSRCR is that it is not appropriate for applications which are sensitive to color. The results of MSRCR prove that it is efficient to avoid graying out effects. It maintains good color rendition and color constancy.

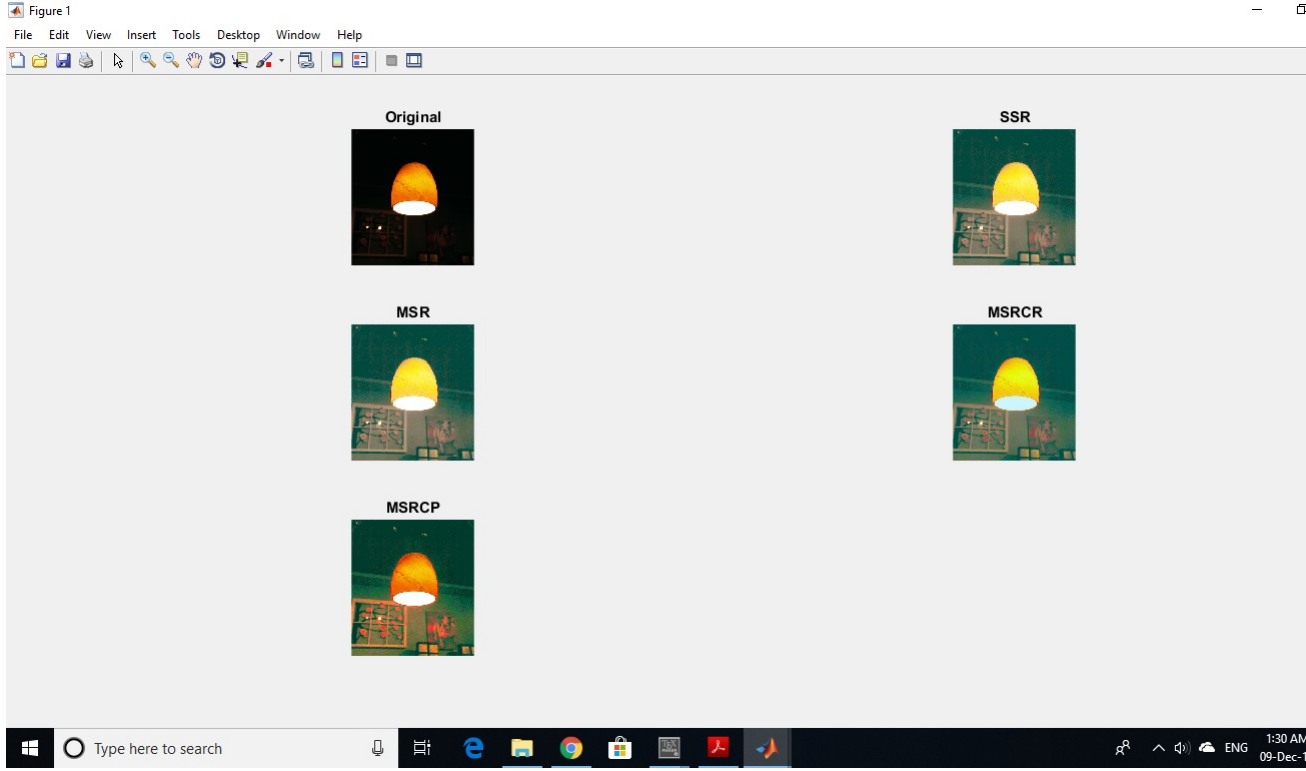


Figure 3.1: Result of Retinex Model

3.3 Power Law Transformation

Image enhancement can be carried out in the spatial or the Fourier domains and one of the important parameters to be looked at in this context is contrast enhancement[?]. In the spatial domain, the methods used may be further classified into: gray level transformations, histogram processing, etc. As mentioned above, histogram equalization suffers from the fact that it may sometimes decrease the contrast[?]. Histogram specification or matching can be tailor-made to suit the images but requires lot of user input. Similarly, power law transformations or piece-wise linear transformation functions also require lot of user input[?]. In the former case one has to choose the exponent appearing in the transformation function, while in the latter case one has to choose the slopes and ranges of the straight lines which form the transformation function[?].

The power-law transformation is usually defined as

$$s = cr^\gamma \quad (3.14)$$

where s and r are the gray levels of the pixels in the output and the input images, respectively and c is a constant. These power law transformation functions are shown

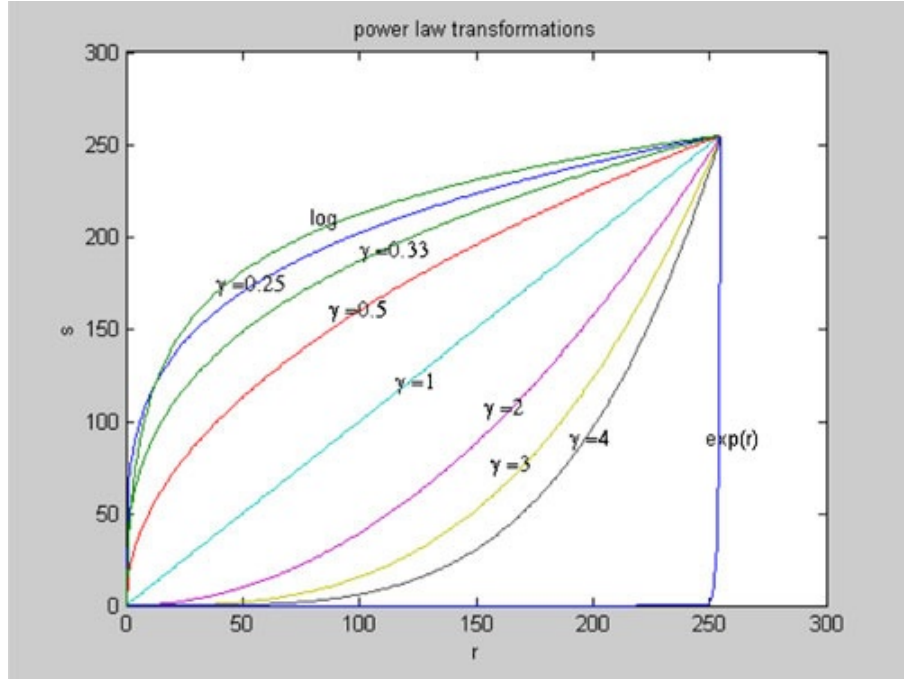


Figure 3.2: Plot of power law transformation for various γ with input gray level along X axis and output gray level along Y axis.

graphically in the diagram (figure 3.2). Figure 3.2 shows the plot of power law transformation with the input gray level r along the x axis and the output gray level s on the y axis for various values of γ . We will now consider that these transformations are applied on a low contrast image. We assume that the background and foreground peaks have almost merged together in such a low contrast image. Let r_{max} be the dominant peak in the histogram[5]. If r_{max} has a large value (in the range 150–255), then it is seen from the above graph that contrast stretching occurs by choosing $\gamma > 1$ whereas for dark images (r_{max} lies in the range 0–100), we see that choosing $\gamma < 1$ leads to contrast stretching. We can of course, automate this procedure for choosing the appropriate exponent, by finding out the peak value in the histogram. However, we can further generalize this procedure so that the most appropriate value of the exponent is chosen[?].

3.4 Histogram Equalization

An image histogram is a type of histogram that acts as a graphical representation of the tonal distribution in a digital image[4]. It plots the number of pixels for each tonal value. A histogram is a representation of a frequency distribution[5]. The histogram of

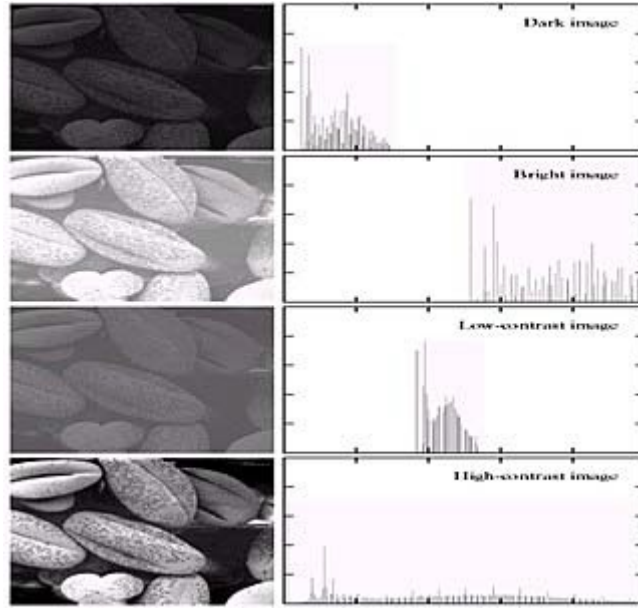


Figure 3.3: Seed Image and its histogram

a digital image with G total possible intensity levels in the $[0, G - 1]$ is defined as the discrete function:

$$p(\gamma_k) = \frac{n_k}{n} \quad (3.15)$$

Where γ_k is the intensity level in the original raw image n_k is the number of pixels in the image whose intensity level is n is the total no of pixels[5].

Histogram equalization is used to enhance the contrast of the image, it spreads the intensity values over full range. Histogram equalization technique can't be used for images suffering from non-uniform illumination in their backgrounds as this process only adds extra pixels to the light regions of the image and removes extra pixels from dark regions of the image resulting in a high dynamic range in the output image[4]. The goal of histogram equalization is to spread out the contrast of a given image evenly throughout the entire available dynamic range[5].

In histogram equalization technique, it is the probability density function (pdf) that is being manipulated. To make it simple, what histogram equalization technique does is that, it changes the pdf of a given image into that of a uniform probability density function that spreads out from the lowest pixel value (0 in this case) to the highest pixel value ($L - 1$). This can be achieved quite easily if the pdf is a continuous

function[4]. However, since we are dealing with a digital image, the pdf will be a discrete function. Lets suppose we have an image x , and let the dynamic range for the intensity γ_k varies from 0 (black) to $L1$ (white). This pdf can be approximated using the probability based on the histogram $p(\gamma_k)$ as follow:

$$pdf(x) = p(\gamma_k) = \frac{\text{total pixels with intensity } \gamma_k}{\text{total pixels I image } x} \quad (3.16)$$

From this pdf, we can then obtain the cumulative density function (cdf) as follows:

$$cdf(x) = \sum_{k=0}^{L-1} p(\gamma_k) \quad (3.17)$$

Where $p(\gamma_k)$ is the probability for pixel of intensity. The output of a pixel from the histogram equalization operation is then equal to the cdf of the image or mathematically[5] :

$$p(s_k) = \sum_{k=0}^{L-1} p(\gamma_k) \quad (3.18)$$

To get the value of the pixel, $p(s_k)$ needs to be multiplied by $L1$ and then round it to the nearest integer

3.4.1 Equalization on Color Image

- **Equalize R, G, B components independently (method1)**

This scheme is one of the mostly used methods for color image processing. Each channels of RGB space are processed using Histogram Equalization independently[2].After the Equalize the R,G,B components we concate all the three components and get the better image compare to input image.

- **Equalize tha V Component from HSV Color Space (method 2)**

In order to process color image in RGB color space using this scheme, image first must be transformed to hue, saturation and luminance (HSV) color space.Here

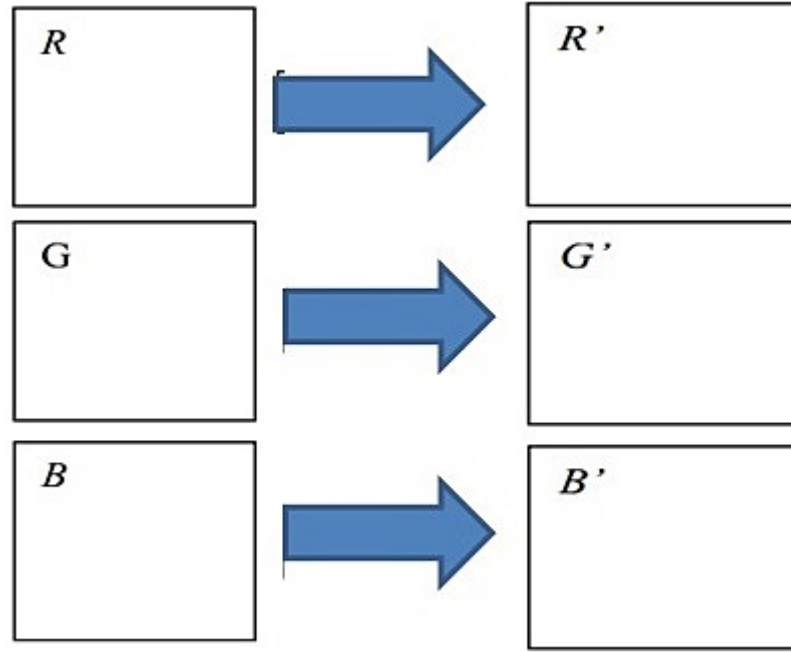


Figure 3.4: Block diagram showing the implementation of Method 1

Brightness is a synonym of intensity. Hue represents the impression related to the dominant wavelength of the color stimulus. Saturation shows the relative color purity (amount of white light in the color). Hue and Saturation taken together are called the chromaticity coordinates (polar system). In this method we apply the Histogram Equalization on V component on HSV color space. After the Equalize the V we combine the V with H and S. Then we get the better image compare to input image.

$$HSV \rightarrow H, S, V$$

$$V \rightarrow V(\text{equalize})$$

$$HSV(\text{equalize}) \rightarrow H, S, V(\text{equalize})$$

- **Equalize the Y Component from YIQ Color Space(method 3)**

In order to process color image in RGB color space using this scheme, the image first must be transformed to YIQ color space[4][5].

Here

The Y component represents the luma information, and is the only component used by black-and-white television receivers.

I stands for in-phase

Q stands for quadrature

I and Q represent the chrominance information.

In this method we apply the Histogram Equalization on Y component on YIQ color space .After the Equalize the Y we combine the Y with I and Q .Then we get the better image compare to input image.

$$YIQ \rightarrow YIQ$$

$$Y \rightarrow Y(equalize)$$

$$YIQ(equalize) \rightarrow Y, I, Q(equalize)$$

3.5 Adaptive Histogram Equalization(AHE) method

This is an extension to traditional Histogram Equalization technique. It enhances the contrast of images by transforming the values in the intensity image I [16]. Unlike HISTEQ, it operates on small data regions (tiles), rather than the entire image. Each tile's contrast is enhanced, so that the histogram[4] of the output region approximately matches the specified histogram. The neighboring tiles are then combined using bi-linear interpolation in order to eliminate artificially induced boundaries. The contrast, especially in homogeneous areas, can be limited in order to avoid amplifying the noise which might be present in the image[5].

- Algorithm Steps:

1. Obtain all the inputs: Image, Number of regions in row and column directions, Number of bins for the histograms used in building image transform function (dynamic range), Clip limit for contrast limiting (normalized from 0 to 1)
2. Pre-process the inputs: Determine real clip limit from the normalized value if necessary, pad the image before splitting it into regions
3. Process each contextual region (tile) thus producing gray level mappings: Extract a single image region, make a histogram for this region using the specified number of bins, clip the histogram using clip limit, create a mapping (transformation function) for this region.

4. Interpolate gray level mappings in order to assemble final CLAHE image:
Extract cluster of four neighbouring mapping functions, process image region partly overlapping each of the mapping tiles, extract a single pixel, apply four mappings to that pixel, and interpolate between the results to obtain the output pixel; repeat over the entire image.

In low contrast images, the features of interest may occupy only a relatively narrow range of gray scale, with the majority of gray levels occupied by “uninteresting areas” such as background and noise. These “uninteresting areas” may also generate large counts of pixels and hence, large peaks in the histogram[5]. In this case, the global histogram equalization amplifies the image noise and increases visual graininess or patchiness. The global histogram equalization technique does not adapt to local contrast requirements, and minor contrast differences can be entirely missed when the number of pixels falling in a particular gray range is small[5].

Adaptive Histogram Equalization (AHE) is a modified histogram equalization procedure that optimizes contrast enhancement based on local image data. The basic idea behind the scheme is to divide the image into a grid of rectangular contextual regions, and to apply a standard histogram equalization in each. The optimal number of contextual regions and the size of the regions depend on the type of input image, and the most commonly used region size is 8x8 (pixels)[5]. In addition, a bi-linear interpolation scheme is used to avoid discontinuity issues at the region boundaries[5].

Figure 3.5 illustrates the application of the interpolation scheme at the boundaries. Gray level assignment at the sample positions indicated by the white dot are derived from gray-value distributions in the surrounding contextual regions[5]. The points A, B, C, and D are the centers of the surrounding contextual regions; region-specific gray level mappings ($g_A(s)$, $g_B(s)$, $g_C(s)$ and $g_D(s)$) are based on the histogram equalization of the pixels contained. Thus, assuming that the original pixel intensity at the sample point is s , its new gray value s' is calculated by bilinear interpolation of the gray-level mappings that were calculated for each of the surrounding contextual regions:

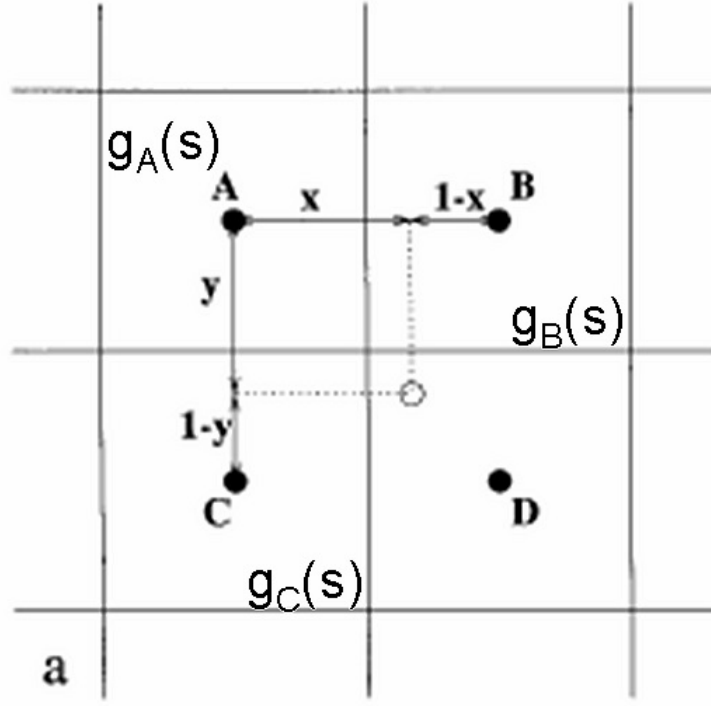


Figure 3.5: Bilinear interpolation to eliminate region boundaries[From Zuiderveld, 1994].

$$s' = (1 - y)((1 - x)g_A(s) + xg_B(s)) + y(((1 - x)g_C(s) + xg_D(s))) \quad (3.19)$$

where x and y are normalized distances with respect to the point A. This gray level interpolation is repeated over the entire image

AHE is able to overcome the limitations of the standard equalization method as discussed earlier, and achieves a better presentation of information present in the image. However, AHE is unable to distinguish between noise and features in the local contextual regions. Hence, background noise is amplified in “flat” or “featureless” regions of the image, which is a major drawback of the method[5].

3.5.1 Contrast Limited Adaptive Histogram Equalization (CLAHE)

The noise problem associated with AHE can be reduced by limiting contrast enhancement specifically in homogeneous areas. These areas can be characterized by a high peak in the histogram associated with the contextual regions since many pixels fall in-

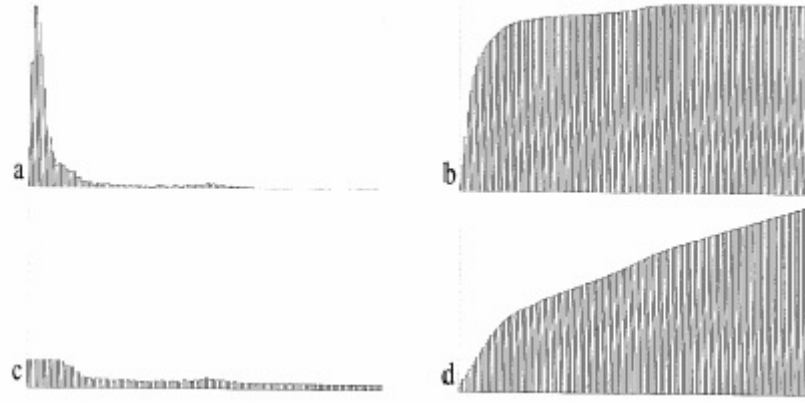


Figure 3.6: Principle of contrast limiting as used in CLAHE. (a) Histogram of a contextual region containing many background pixels. (b) Calculated cumulative histogram. (c) Clipped histogram with excess pixels redistributed throughout the histogram. (d) Cumulative clipped histogram with maximum slope set to the clip limit [From Zuiderveld, 1994].

side the same gray level range. The Contrast Limited Adaptive Histogram Equalization (CLAHE) limits the slope associated with the gray level assignment scheme to prevent saturation, as illustrated in Figure 3.6. This process is accomplished by allowing only a maximum number of pixels in each of the bins associated with the local histograms. After “clipping” the histogram, the clipped pixels are equally redistributed over the whole histogram to keep the total histogram count identical[5].

The clip limit is defined as a multiple of the average histogram contents and is actually a contrast factor. Setting a very high clip limit basically limits the clipping and the process becomes a standard AHE technique[4]. A clip or contrast factor of one prohibits any contrast enhancement, preserving the original image. The main advantages of the CLAHE transform are its modest computational requirements, ease of use and excellent results on most images. The CLAHE image has less amplified noise and avoids the brightness saturation in the standard histogram equalization[4].

CLAHE does have its limitations. Since the method is aimed at optimizing contrast, there no direct 1-to-1 relationship between the gray values of the original image and the CLAHE processed result[5]. Pixels of the same gray level in the original image may be mapped to different gray levels in the output image, because of the equalization process and bilinear interpolation. Consequently, CLAHE images are not suited for quantitative measurements that rely on physical meaning of image intensity.

Chapter 4

Implementation and Design

The uneven illumination, particularly high dynamic lighting environment, causes many problems. For example, the images acquired by digital cameras, camcorders, or other terminals tend to be too bright or dark in certain areas, the target is difficult to be identified and some other issues.

To solve the problems for the quality of image acquisition caused by uneven illumination, a series of methods had been put forward successively, including histogram equalization, image enhancement in gradient field, homomorphic filter and the Retinex theory. Among these methods, the Retinex has become a research hotspot recently as it could achieve a good balance in dynamic range compression, edge enhancement and color constancy. There are three classical algorithms based on the Retinex theory[2], they are SSR (Single Scale Retinex), MSR (Single Scale Retinex) and MSRCR (Multi-Scale Retinex with Color Restoration)[2]. However, SSR could only choose one dimension, it was difficult to simultaneously ensure the dynamic range compression and color fidelity[2]. Although MSR can ensure the dynamic range compression and color fidelity, it could not achieve the high color fidelity, as it simply weighted the different scales linearly. While MSRCR could achieve color fidelity much further, it was not conducive to real-time applications, because a lot of parameters needed to be set. Furthermore, the above three algorithms may produce halo and color distortion in high contrast regions, since the illuminant image was obtained by Gaussian low-filter. In order to overcome such problems as halo and color distortion for the traditional Retinex, many improved algorithms have been proposed. For example,

the halo was reduced through bilateral filter to obtain the illuminant image, but due to being ignorant of the correlations between each channel of the color image, it could not decrease the color distortion. However, it was not conducive to real-time application, as a lot of parameters needed to be set[?].

4.1 Retinex theory and its typical algorithms

Retinex (abbreviation of Retina and Cortex) theory is a model been used to explain how the human visual system perceive color and brightness of objects. It is also the interpretation of color constancy indicating the color of the same objects is constant, though they are under different lighting. Briefly, the basic principle of Retinex theory [2] is that the original image can be divided into illuminant and reflected image, and the enhancement can be achieved through reducing the effects of illuminant image on the reflected. As shown as in formula (4.1)

$$S(x, y) = R(x, y) * L(x, y) \quad (4.1)$$

Where $L(x, y)$ represents incident light or illuminant image deciding the dynamic range achieved by image pixels $R(x, y)$ represents reflective properties or reflected light deciding the interior properties of image $S(x, y)$ represents the original image. And the visual effects can be improved, mainly by obtaining the reflective properties or reflected image [2].

4.1.1 Single Scale Retinex(SSR)

The SSR algorithm based on center/surround Retinex approved by Edwin Land is firstly improved and realized by Jobson and his colleagues[2]. And the illuminant image is also obtained by Gaussian low filter as in formula (5.1)[31].

$$R_{SSR}(x, y) = \log S(x, y) - \log(S(x, y) \otimes F(x, y)) \quad (4.2)$$

Where the symbol \otimes represents convolution operation. $F(x, y)$ is Gaussian surrounding function in the following formula[2]

$$F(x, y) = \gamma \exp\left(-\frac{(x^2 + y^2)}{\sigma^2}\right) \quad (4.3)$$

$$\iint F(x, y) dx dy = 1 \quad (4.4)$$

Where γ is a normalization constant, σ is the scale of surrounding function, and the smaller σ is, the more contrast is enhanced, but the more distinct the halo phenomenon becomes. Conversely, the larger σ is, although the less contrast is enhanced, the more effectively the halo is suppressed. Large numbers of experiments indicate that, if σ is between 80 and 100, the balance can be maintained[2].

4.2 Design

4.2.1 Flow Chart

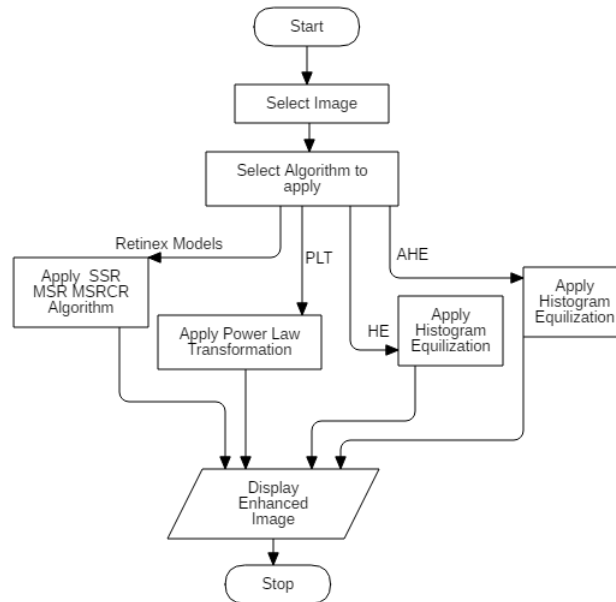


Figure 4.1: Flow chart for Image Enhancement

4.2.2 Activity Diagram

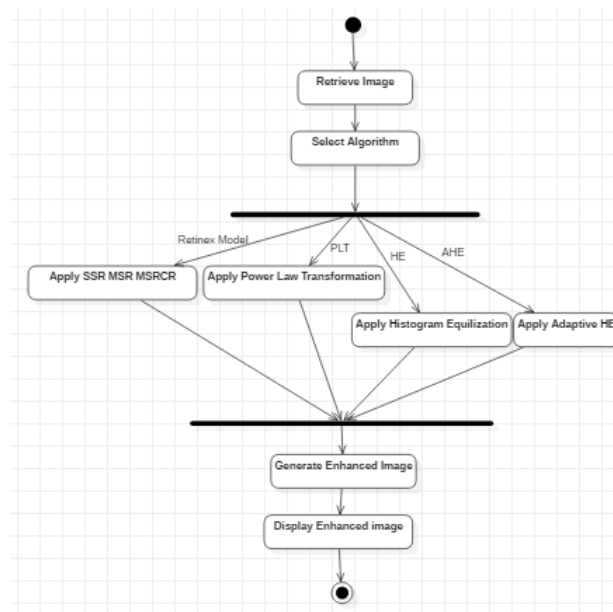


Figure 4.2: Activity Diagram for Image Enhancement

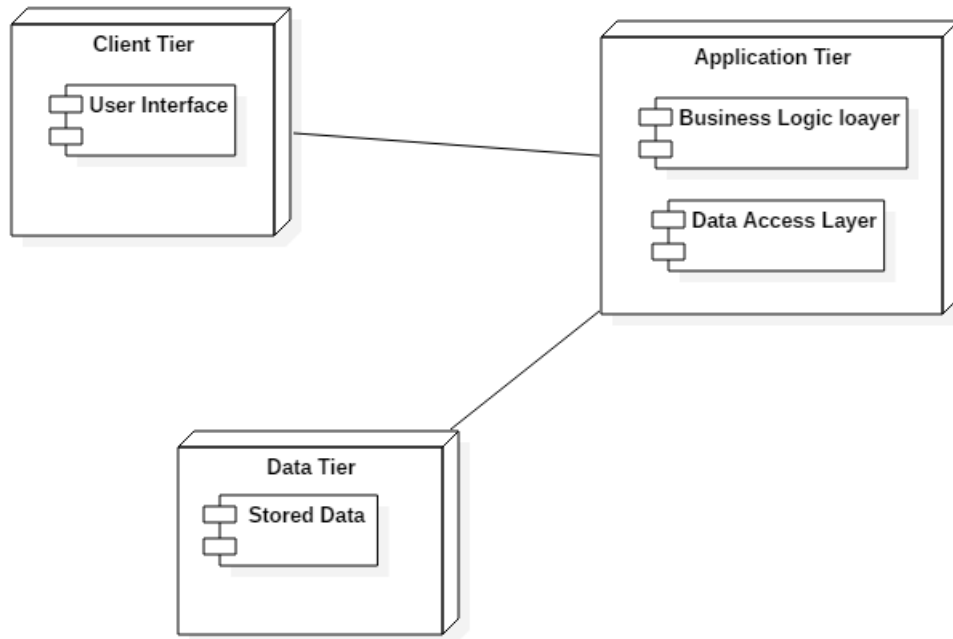


Figure 4.3: Deployment Diagram for Image Enhancement

4.2.3 Deployment Diagram

4.2.4 Component Diagram

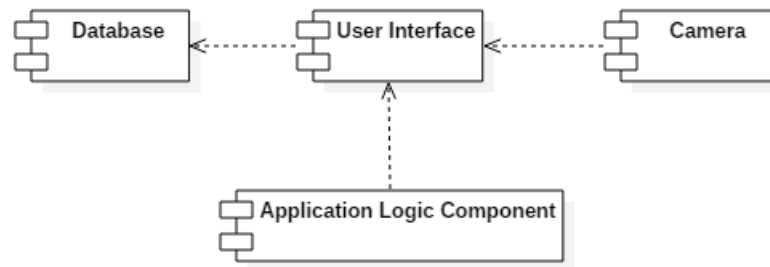


Figure 4.4: Component Diagram for Image Enhancement

Chapter 5

Result and Discussion

In this project, many low light images tested but only three images result kept in this report along with original images and enhanced images using different Retinex model, Power Law Transformation[10], Histogram Equalization[4] and Adaptive Histogram Equalization[5]. Also compared all these results with respect to Absolute Mean Difference(AMD),Root Mean Square [?] and Entropy[?]

5.1 Retinex Model

The main focus of this work is to enhance the low light images and this project is implemented in MATLAB tool. Figure 5.1 shows the original low light image of lamp and enhanced image using Single-Scale Retinex(SSR) model[2]. It is clear enhancement in Figure 5.1(b). The background objects of in figure 5.1(b) are more clear than original image. The Absolute Mean Difference(AMD),Root Mean Square and Entropy for Single Scale Retinex(SSR) Model of enhanced image of lamp is 69.8401, 15.7384 and 4.9043 respectively

Figure 5.2 shows the original low light image of lamp and enhanced image using Multi-Scale Retinex(MSR) model. It is clear enhancement in Figure 5.2(b). The background objects of in figure 5.2(b) are more clear than original image. The Absolute Mean Difference(AMD),Root Mean Square and Entropy for Multi-Scale Retinex(MSR) model of enhanced image of lamp is 69.9617, 15.7384 and 5.0033 respectively

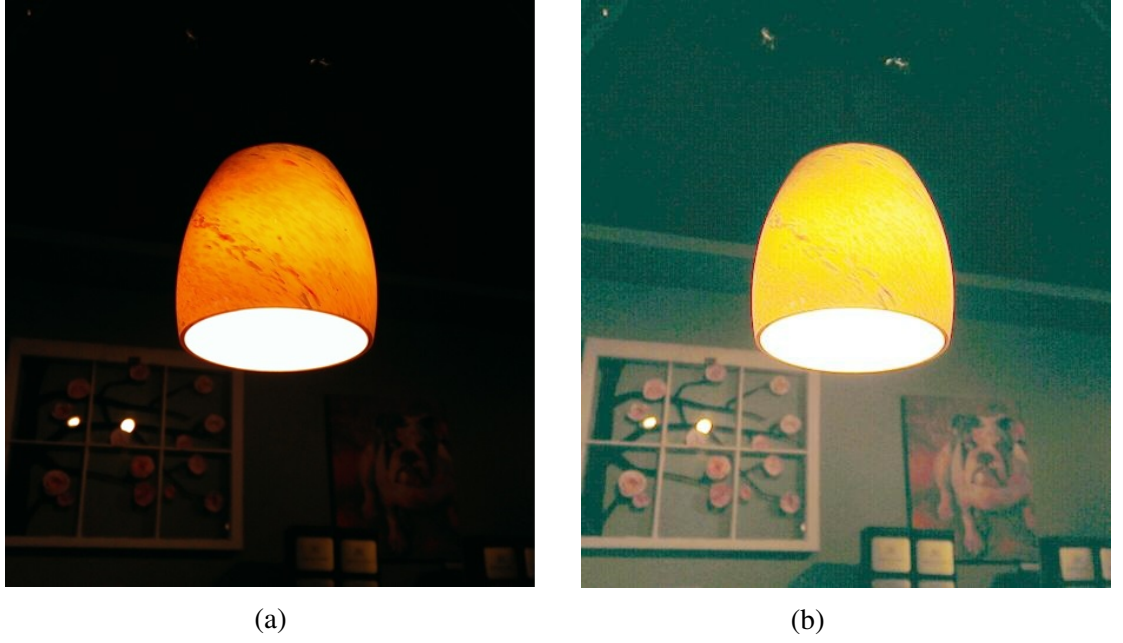


Figure 5.1: a) Input Image b)Enhanced Image using SSR

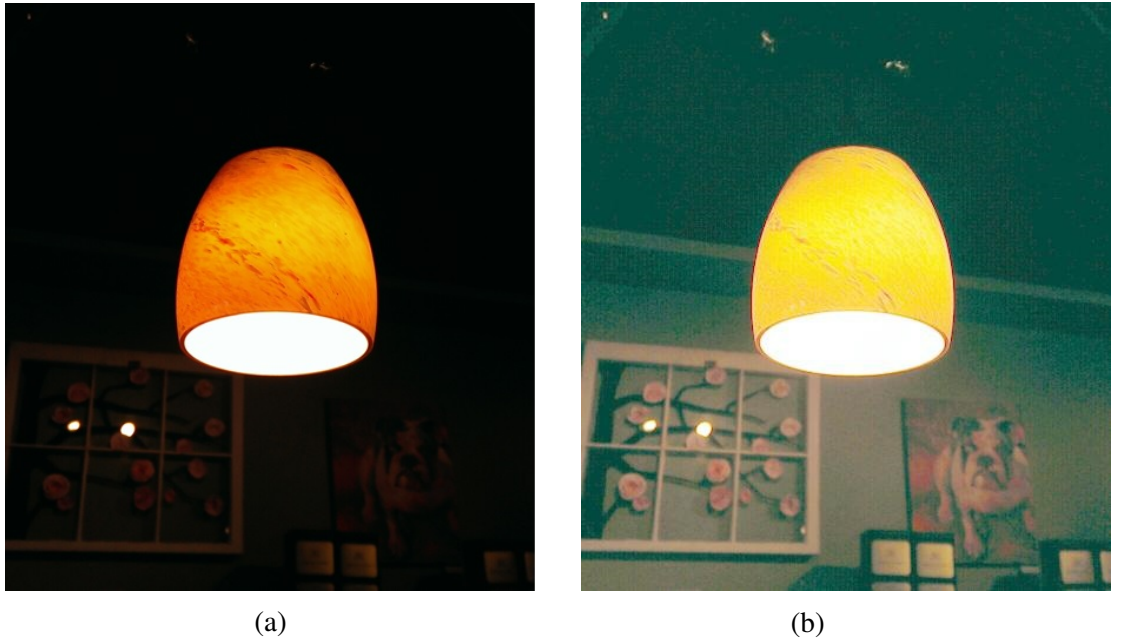


Figure 5.2: a) Input Image b)Enhanced Image using MSR

Figure 5.3 shows the original low light image of lamp and enhanced image using Multi-Scale Retinex with Color Restoration(MSRCR) . It is clear enhancement in Figure 5.3(b). The background objects of in figure 5.3(b) are more clear than original image. The Absolute Mean Difference(AMD),Root Mean Square and Entropy for Multi-Scale Retinex with Color Restoration((MSRCR) model of enhanced image of lamp is 67.0909, 15.7330 and 6.3657 respectively

Now consider second input image of palace. This image is also taken in low



Figure 5.3: a) Input Image b) Enhanced Image using MSRCR

light and will test it for different Retinex Models. Figure 5.4 shows the original low light image of palace and enhanced image using Single-Scale Retinex(SSR) model. In the original image (figure 5.4 (a)) the palace, the valley, edges of rock, small bushy plants and lamps are not clear but these are very clear in the enhanced image(Figur 5.4 (b)). The Absolute Mean Difference(AMD), Root Mean Square and Entropy for Single Scale Retinex(SSR) Model of enhanced image of palace is 103.9633, 15.9031 and 6.8944 respectively

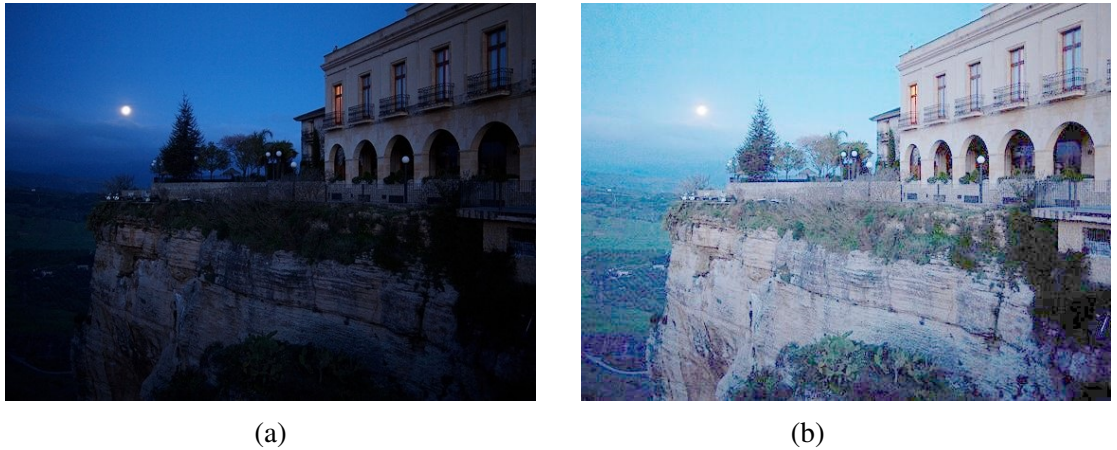


Figure 5.4: a) Input Image b) Enhanced Image using SSR

Figure 5.5 shows the original low light image of palace and enhanced image using Multi-Scale Retinex(MSR) model. In the original image (figure 5.5 (a)) the palace, the valley, edges of rock, small bushy plants and lamps are not clear but these are very clear in the enhanced image(Figure 5.5 (b)). The Absolute Mean Dif-

ference(AMD),Root Mean Square and Entropy for Multi Scale Retinex(MSR) Model of enhanced image of palace is 104.7167, 15.9115 and 7.1499 respectively

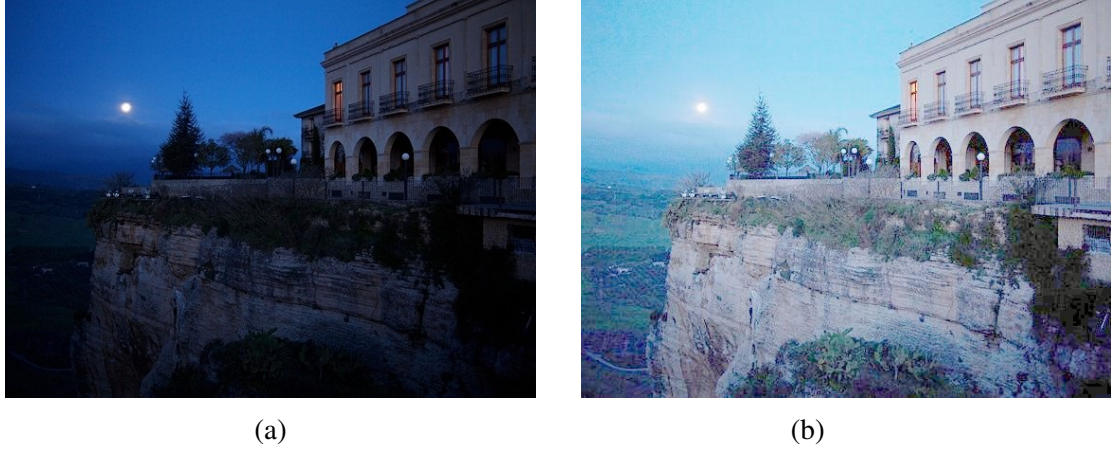


Figure 5.5: a) Input Image b)Enhanced Image using MSR

Figure 5.6 shows the original low light image of palace and enhanced image using Multi-Scale Retinex with COlor Restoration(MSRCR) model. In the original image (figure 5.6 (a)) the palace,the valley, edges of rock,small bushy plants and lamps are not clear but these are very clear in the enhanced image(Figure 5.6 (b)). The Absolute Mean Difference(AMD),Root Mean Square and Entropy for Multi Scale Retinex with Color Restoration(MSRCR) Model of enhanced image of palace is 92.2710, 15.9138 and 7.7566 respectively



Figure 5.6: a) Input Image of Palace b)Enhanced Image of Palace using MSRCR

Now consider third input image of robot. This image is also taken in low light and will test it for different Retinex Models. Figure 5.7 shows the original low light image of robot and enhanced image using Single-Scale Retinex(SSR) model. In the original image of robot (figure 5.7 (a)) the robot,laptop, laptop keypad and background strips are not clear but these are very clear in the enhanced image(Figur 5.7

(b)). The Absolute Mean Difference(AMD),Root Mean Square and Entropy for Single Scale Retinex(SSR) Model of enhanced image of robot are 76.3404, 15.9245 and 6.8248 respectively

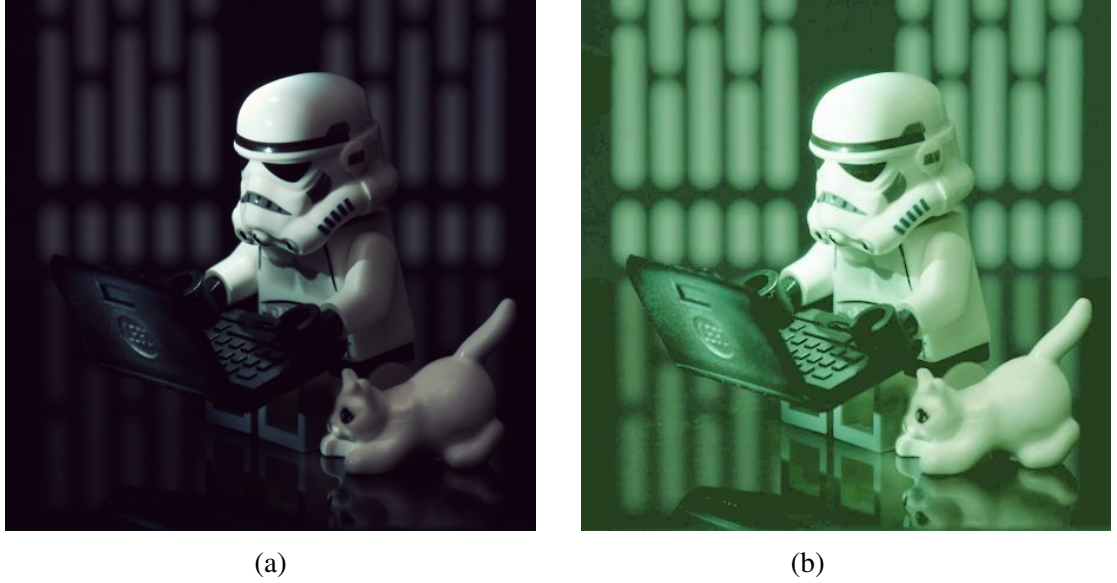


Figure 5.7: a) Input Image of Robot b)Enhanced Image of Robot using SSR

Figure 5.8 shows the original low light image of robot and enhanced image using Multi-Scale Retinex(MSR) model. In the original image of robot (figure 5.8 (a)) the robot,laptop, laptop keypad and background strips are not clear but these are very clear in the enhanced image(Figur 5.8 (b)). The Absolute Mean Difference(AMD),Root Mean Square and Entropy for Multi Scale Retinex(MSR) Model of enhanced image of robot are 76.3157, 15.9242 and 6.9686 respectively

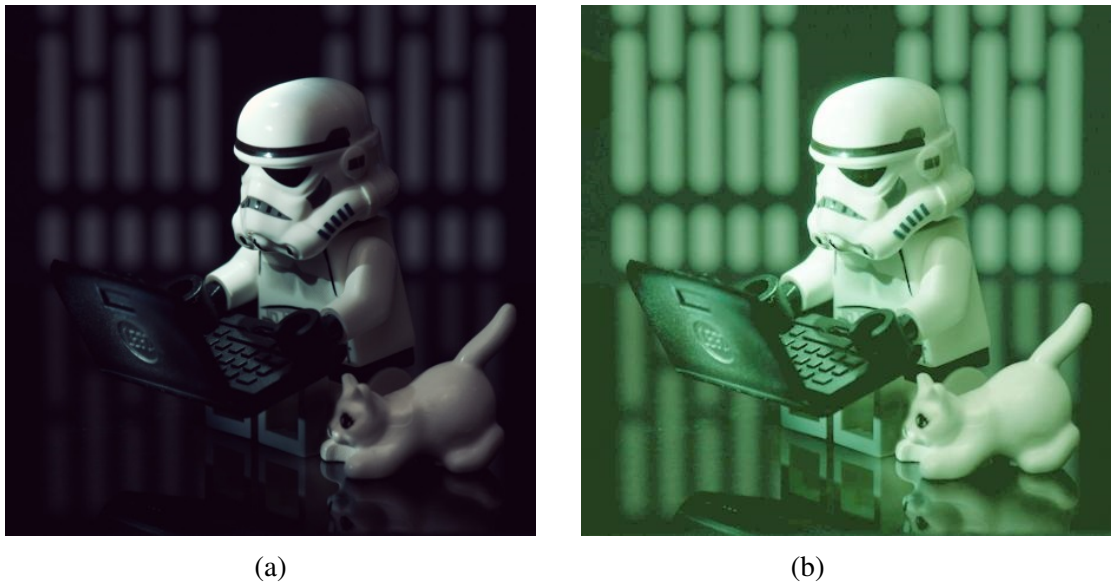


Figure 5.8: a) Input Image of Robot b)Enhanced Image of Robot using MSR

Figure 5.9 shows the original low light image of robot and enhanced image using Multi-Scale Retinex with Color Restoration(MSRCR) model. In the original image of robot (figure 5.9 (a)) the robot,laptop, laptop keypad and background strips are not clear but these are very clear in the enhanced image(Figur 5.9 (b)). The Absolute Mean Difference(AMD),Root Mean Square and Entropy for Multi Scale Retinex with Color Restoration(MSRCR) Model of enhanced image of robot are 74.7684, 15.9179 and 7.0533 respectively

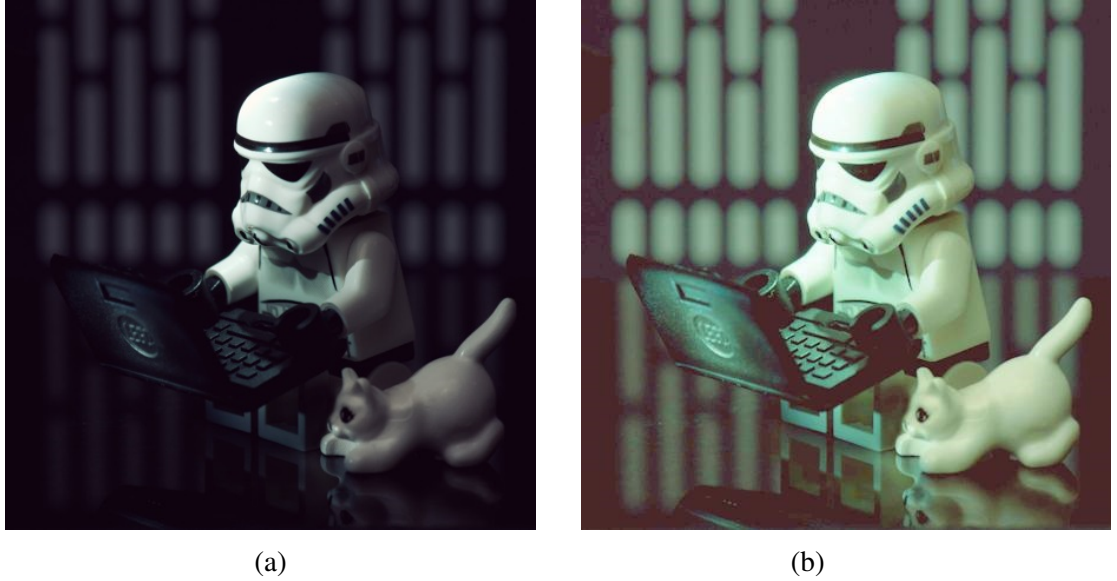


Figure 5.9: a) Input Image of Robot b)Enhanced Image of Robot using MSRRCR

5.2 Power Law Transformation

Now test above three images like bulb, palace and robot for Power Law Transformation. Figure 5.10 shows the original low light image of lamp and enhanced image using Power Law Transformation . It is clear enhancement in Figure 5.10(b). The background objects of in figure 5.10(b) are more clear than original image. The Absolute Mean Difference(AMD),Root Mean Square and Entropy for Power Law Transformation of enhanced image of lamp is 0.1068, 0.1233 and 5.2476 respectively

Figure 5.11 shows the original low light image of palace and enhanced image using Power Law Transformation. In the original image of palace (figure 5.11 (a)) the palace,the valley, edges of rock,small bushy plants and lamps are not clear but these are very clear in the enhanced image(Figure 5.11 (b)). The Absolute Mean



Figure 5.10: a) Input Image b)Enhanced Image using Power Law Transformation

Difference(AMD),Root Mean Square and Entropy for Power Law Transformation of enhanced image of palace is 0.1857, 0.1957 and 7.2592 respectively

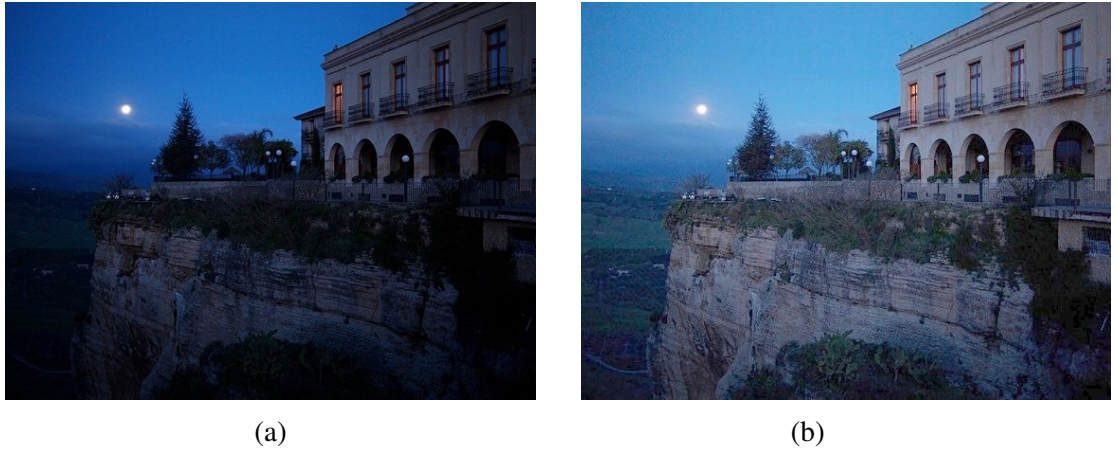


Figure 5.11: a) Input Image of Palace b)Enhanced Image of palace using Power Law Transformation

Now consider third input image of robot. This image is also taken in low light and will test it for Power Law Transformation Figure 5.12 shows the original low light image of robot and enhanced image using Power Law Transformation. In the original image of robot (figure 5.12 (a)) the robot, laptop, laptop keypad and background strips are not clear but these are very clear in the enhanced image(Figur 5.12 (b)). The Absolute Mean Difference(AMD),Root Mean Square and Entropy for Power Law Transformation of enhanced image of robot are 0.1953, 0.2010 and 6.2899 respectively



(a)



(b)

Figure 5.12: a) Input Image of Robot b)Enhanced Image of Robot using Power Law Transformation

5.3 Histogram Equalization

Now test above same three images like bulb, palace and robot for Power Law Transformation. Figure 5.13 shows the original low light image of lamp and enhanced image using Histogram Equalization. It is clear enhancement in Figure 5.13(b). The background objects of in figure 5.13(b) are more clear than original image. The Absolute Mean Difference(AMD),Root Mean Square and Entropy for Histogram Equalization of enhanced image of lamp is 104.7539, 15.7363 and 4.6140 respectively



(a)



(b)

Figure 5.13: a) Input Image b)Enhanced Image using Histogram Equalization

Figure 5.14 shows the original low light image of palace and enhanced image using Histogram Equalization. In the original image of palace (figure 5.14 (a)) the palace, the valley, edges of rock, small bushy plants and lamps are not clear but these are very clear in the enhanced image (Figure 5.14 (b)). The Absolute Mean Difference (AMD), Root Mean Square and Entropy for Histogram Equalization of enhanced image of palace are 89.3506, 15.6912 and 5.9325 respectively


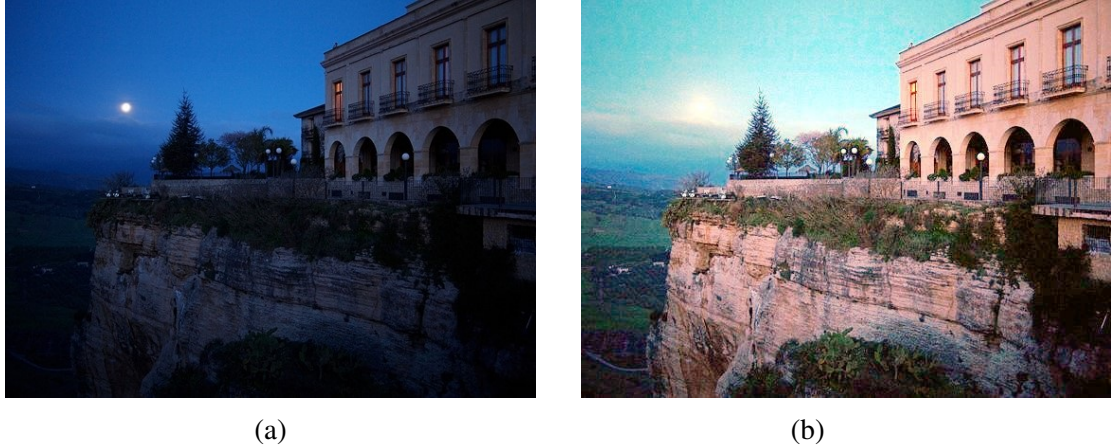


Figure 5.14: a) Input Image of Palace b) Enhanced Image of palace using Histogram Equalization


Now consider third input image of robot. This image is also taken in low light and will test it for Histogram Equalization Figure 5.15 shows the original low light image of robot and enhanced image using Histogram Equalization. In the original image of robot (figure 5.15 (a)) the robot, laptop, laptop keypad and background strips are not clear but these are very clear in the enhanced image (Figure 5.15 (b)). The Absolute Mean Difference (AMD), Root Mean Square and Entropy for Histogram Equalization of enhanced image of robot are 93.1594, 15.1385 and 5.5086 respectively

5.4 Adaptive Histogram Equalization

Now test same above three images like bulb, palace and robot for Power Law Transformation. Figure 5.16 shows the original low light image of lamp and enhanced image using Adaptive Histogram Equalization. It is clear enhancement in Figure 5.16(b). The background objects of in figure 5.16(b) are more clear than original image. The Absolute Mean Difference (AMD), Root Mean Square and Entropy for Adaptive Histogram Equalization of enhanced image of lamp is 12.9948, 10.1784 and 5.6053 respectively

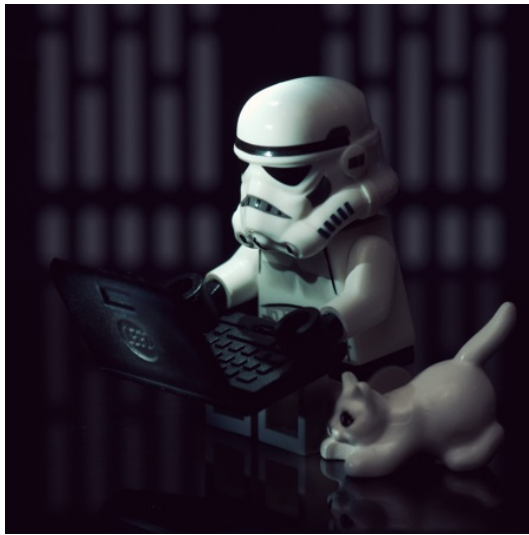

(a)

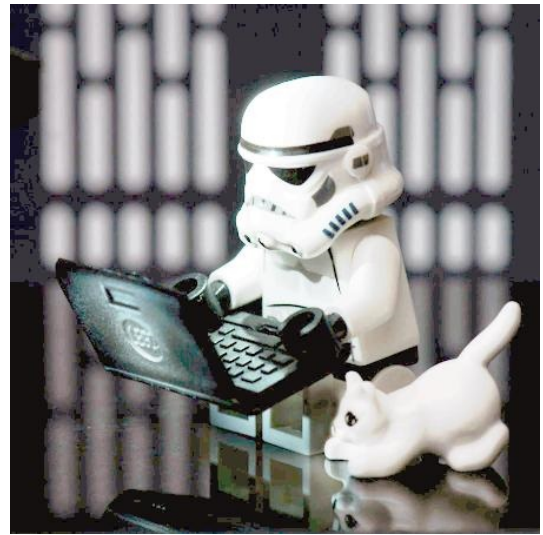

(b)

Figure 5.15: a) Input Image of Robot b)Enhanced Image of Robot using Histogram Equalization



(a)



(b)

Figure 5.16: a) Input Image b)Enhanced Image using Adaptive Histogram Equalization

Figure 5.17 shows the original low light image of palace and enhanced image using Adaptive Histogram Equalization. In the original image of palace (figure 5.17 (a)) the palace, the valley, edges of rock, small bushy plants and lamps are not clear but these are very clear in the enhanced image (Figure 5.17 (b)). The Absolute Mean Difference (AMD), Root Mean Square and Entropy for Adaptive Histogram Equalization of enhanced image of palace are 40.3042, 14.5370 and 7.4680 respectively

Now consider third input image of robot. This image is also taken in low light and will test it for Adaptive Histogram Equalization Figure 5.18 shows the original




(a)



(b)

Figure 5.17: a) Input Image of Palace b)Enhanced Image of palace using Adaptive Histogram Equalization

low light image of robot and enhanced image using Adaptive Histogram Equalization. In the original image of robot (figure ?? (a)) the robot, laptop, laptop keypad and background strips are not clear but these are very clear in the enhanced image(Figure ?? (b)). The Absolute Mean Difference(AMD),Root Mean Square and Entropy for Adaptive Histogram Equalization of enhanced image of robot are 30.0744, 12.6623 and 7.2511 respectively

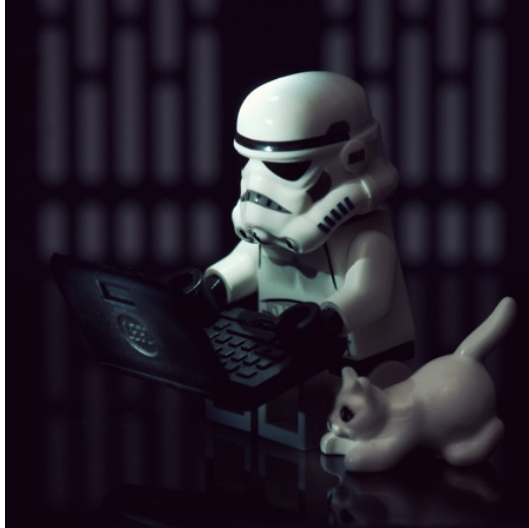

(a)



(b)

Figure 5.18: a) Input Image of Robot b)Enhanced Image of Robot using Adaptive Histogram Equalization

Now compare these three images using different Retinex Models, Power Law Transformation, Histogram Equalization and Adaptive Histogram Equalization shown in table 5.1,5.2 and 5.3 .

Table 5.1: Comparison for Lamp Image.

Technique	Lamp		
	AMD	RMSE	Entropy
SSR	69.840	15.7384	4.9043
MSR	69.9617	15.7384	5.0033
MSRCR	67.0909	15.7330	6.3657
PLT	0.1068	0.1233	5.2476
HE	104.7539	15.7363	4.6140
AHE	12.9948	10.1784	5.6053

Table 5.2: Comparison for Palace Image.

Technique	Lamp		
	AMD	RMSE	Entropy
SSR	69.840	15.7384	4.9043
MSR	69.9617	15.7384	5.0033
MSRCR	67.0909	15.7330	6.3657
PLT	0.1068	0.1233	5.2476
HE	104.7539	15.7363	4.6140
AHE	12.9948	10.1784	5.6053

Table 5.3: Comparison for Lamp Image.

Technique	Lamp		
	AMD	RMSE	Entropy
SSR	69.840	15.7384	4.9043
MSR	69.9617	15.7384	5.0033
MSRCR	67.0909	15.7330	6.3657
PLT	0.1068	0.1233	5.2476
HE	104.7539	15.7363	4.6140
AHE	12.9948	10.1784	5.6053

Chapter 6

Conclusion

In this thesis, methods that we applied balances the requirements of both appearance enhancement and being faithful to the original appearance of an image has been proposed and applied to the enhancement of full color images. Results have shown the effectiveness of our algorithm in improving the contrast and colorfulness of the original images. In this thesis, It is shown that we can get better image from different Retinex Algorithms,Power Law Transformation, Histogram Equalization and Adaptive Histogram Equalization specification on color images gives us better results.

The Retinex Image Enhancement Algorithm is an automatic image enhancement method that enhances a digital image in terms of dynamic range compression, colour independence from the spectral distribution of the scene illuminate, and colour/lightness rendition. The digital image enhanced by the Retinex Image Enhancement Algorithm is much closer to the scene perceived by the human visual system, under all kinds and levels of lighting variations, than the digital image enhanced by any [1] other method [2].

Bibliography

- [1] Xiaojie Guo, Yu Li, and Haibin Ling, "LIME: Low-Light Image Enhancement via Illumination Map Estimation" IEEE TRANSACTIONS ON IMAGE PROCESSING, VOL. 26, NO. 2, FEBRUARY 2017, pp 982-993.
- [2] Ankitha A Reddy, Poorvaja R Jois, J Deekshitha, Namratha S, Rajeshwari Hegde "COMPARISON OF IMAGE ENHANCEMENT TECHNIQUES USING RETINEX MODELS" International Journal of Advanced Computer Engineering and Communication Technology (IJACECT), ISSN (Print): 2278-5140, Volume-2, Issue – 3, 2013, pp 7-12
- [3] "<http://www.robots.ox.ac.uk/teo/thesis/Thesis/deCampos3DHandTrackingApp.pdf>"
- [4] Sos S. Aghaian, Blair Silver, and Karen A. Panetta, "Transform Coefficient Histogram- Based Image Enhancement Algorithms Using Contrast Entropy" IEEE TRANSACTIONS ON IMAGE PROCESSING, VOL. 16, NO. 3, MARCH 2007 pp 741-758
- [5] Sayali Nimkar, Sucheta Shrivastava and Sanal Varghese "CONTRAST ENHANCEMENT AND BRIGHTNESS PRESERVATION USING MULTIDECOMPOSITION HISTOGRAM EQUALIZATION" Signal Image Processing : An International Journal (SIPIJ) Vol.4, No.3, June 2013 pp 83-93
amd1 Chirag S. Panchal, Abhay B. Upadhyay, "Depth Estimation Analysis Using Sum of Absolute Difference Algorithm" International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering (An ISO 3297: 2007 Certified Organization) Vol. 3, Issue 1, January 2014, ISSN (Print) : 2320 – 3765 ISSN (Online): 2278 – 8875 pp 6761-6767
- [6] Hiroaki Niitsuma, Tsutomu Maruyama, "Sum of Absolute Difference Implementations for image processing on FPGAs", 2010 International Conference on Field

- Programmable Logic and Applications, 978-0-7695-4179-2/10, 2010 IEEE, DOI 10.1109/FPL.2010.40
- [7] D. V. Manjunatha, Pradeep Kumar and R. Karthik, "FPGA IMPLEMENTATION OF SUM OF ABSOLUTE DIFFERENCE (SAD) FOR VIDEO APPLICATIONS", ARPN Journal of Engineering and Applied Sciences, VOL. 12, NO. 24, DECEMBER 2017, ISSN 1819-6608, pp 7192-7197
- [8] Liyun Zhuang and Yepeng Guan, "Research Article-Adaptive Image Enhancement Using Entropy-Based Subhistogram Equalization", Hindawi, Computational Intelligence and Neuroscience, Volume 2018, Article ID 3837275, 13 pages, <https://doi.org/10.1155/2018/3837275>
- [9] Gilson A. Giraldi, Paulo S.S. Rodrigues, "Principle of Maximum Entropy for Histogram Transformation and Image Enhancement", National Laboratory for Scientific Computing Petropolis, RJ, Brazil and Computer Science and Electrical Engineering Departments of the FEI Technologic University São Bernardo do Campo, SP, Brazil
- [10] Anita G. Khandizod, R.R. Deshmukh, "Comparative Analysis of Image Enhancement Technique for Hyperspectral Palmprint Images", International Journal of Computer Applications (0975 – 8887) Volume 121 – No.23, July 2015, pp 30-35.
- [11] Krishan Kant Lavania, Shivali, Rajiv Kumar, "Image Enhancement using Filtering Techniques", Krishan Kant Lavania et al. / International Journal on Computer Science and Engineering (IJCSE), Vol. 4 No. 01 January 2012, ISSN : 0975-3397, pp 14-20.
- [12] R.C. GONZÁLEZ, R. E. W. Digital Image Processing. Pearson Prentice Hall.:Pearson Prentice Hall, 2008. Texto básico y completo, con muchos ejemplos., 2008.
- [13] W.O. SAXTON, T.J. PITT and M. HORNER, "DIGITAL IMAGE PROCESSING: THE SEMPER SYSTEM ", Ultramicroscopy 4 (1979) 343-354 © North-Holland Publishing Company

- [14] Qieshi Zhang, Sei-ichiro Kamata, "A NOVEL COLOR SPACE BASED ON RGB COLOR BARYCENTER", 978-1-4799-9988-0/16/ ©2016 IEEE, ICASSP 2016 pp 1601-1605
- [15] Oleksii Sidorov, Gjovik, Norway, "Novel Approach to Uniformization of a Color Space via Generic Deep Learning-Based Transformation", 978-1-5386-5645-7/18/ ©2018 IEEE.
- [16] H. Cheng and X. Shi, "A simple and effective histogram equalization approach to image enhancement," *Digit. Signal Process.*, vol. 14, no. 2, pp. 158–170, 2004
- [17] H. Cheng and X. Shi, "A simple and effective histogram equalization approach to image enhancement," *Digit. Signal Process.*, vol. 14, no. 2, pp. 158–170, 2004
- [18] C. Lee, C. Lee, and C.-S. Kim, "Contrast enhancement based on layered difference representation of 2D histograms," *IEEE Trans. Image Process.*, vol. 22, no. 12, pp. 5372–5384, Dec. 2013.
- [19] S. Wang, J. Zheng, H.-M. Hu, and B. Li, "Naturalness preserved enhancement algorithm for non-uniform illumination images," *IEEE Trans. Image Process.*, vol. 22, no. 9, pp. 3538–3578, Sep. 2013
- [20] X. Fu, D. Zeng, Y. Huang, X. Zhang, and X. Ding, "A weighted variational model for simultaneous reflectance and illumination estimation," in *Proc. CVPR*, 2016, pp. 2782–2790.
- [21] L. Li, R. Wang, W. Wang, and W. Gao, "A low-light image enhancement method for both denoising and contrast enlarging," in *Proc. ICIP*, 2015, pp. 3730–3734.
- [22] J. T. Barron and J. Malik, "Color constancy, intrinsic images, and shape estimation," in *Proc. ECCV*, 2012, pp. 57–70.
- [23] B. Funt and L. Shi, "The rehabilitation of MaxRGB," in *Proc. Color Imag. Conf.*, 2010, pp. 256–259.
- [24] H. R. Z. Joze, M. S. Drew, G. D. Finlayson, and P. A. T. Rey, "The role of bright pixels in illumination estimation," in *Proc. Eur. Conf. Colour Graph., Imag. Vis.*, 2012, pp. 41–46.

- [25] Y. Li, F. Guo, R. Tan, and M. Brown, "A contrast enhancement framework with JPEG artifacts suppression," in Proc. ECCV, 2014, pp. 174–188.
- [26] J. Vazquez-Corral, M. Vanrell, R. Baldrich, and F. Tous, "Color constancy by category correlation," IEEE Trans. Image Process., vol. 21, no. 4, pp. 1997–2007, Apr. 2012.
- [27] Anita G. Khandizod, R.R. Deshmukh, "Comparative Analysis of Image Enhancement Technique for Hyperspectral Palmprint Images", International Journal of Computer Applications (0975 – 8887) Volume 121 – No.23, July 2015, pp 30-35
- [28] T.Romen Singh, O.Imocha Singh , Kh. Manglem Singh , Tejmani Sinam and Th. Rupachandra Singh, "Image Enhancement by Adaptive Power-Law Transformations", Bahria University Journal of Information Communication Technology Vol. 3, Issue 1, December 2010, pp 29-37
- [29] Raman Maini and Himanshu Aggarwal, "A Comprehensive Review of Image Enhancement Techniques", JOURNAL OF COMPUTING, VOLUME 2, ISSUE 3, MARCH 2010, ISSN 2151-9617, pp 8-13.
- [30] Roopali D Pai, Prof. Srinivas Halvi, Prof. Basavaraj Hiremath, "Medical Color Image Enhancement using Wavelet Transform and Contrast Stretching Technique", International Journal of Scientific and Research Publications, Volume 5, Issue 7, July 2015 1 ISSN 2250-3153, pp 1-7.
- [31] Doo Hyun Choi, Ick Hoon Jang, Mi Hye Kim, and Nam Chul Kim, "COLOR IMAGE ENHANCEMENT USING SINGLE-SCALE RETINEX BASED ON AN IMPROVED IMAGE FORMATION MODEL" 16th European Signal Processing Conference (EUSIPCO 2008), Lausanne, Switzerland, August 25-29, 2008, copyright by EURASIP
- [32] Daniel J. Jobson, Zia-ur Rahman, and Glenn A. Woodell "A Multiscale Retinex for Bridging the Gap Between Color Images and the Human Observation of Scenes" IEEE TRANSACTIONS ON IMAGE PROCESSING, VOL. 6, NO. 7, JULY 1997, pp 965-976.

- [33] Zia-ur Rahman, Daniel J. Jobson and Glenn A. Woodell, "MULTI-SCALE RETINEX FOR COLOR IMAGE ENHANCEMENT" , 0-7803-3258-X/96/1996 IEEE, pp 1003-1006.

- [34] Hanumantharaju M. C, Ravishankar .M, Rameshbabu D. R, Ramachandran .S, "Color Image Enhancement using Multiscale Retinex with Modified Color Restoration Technique" 2011 Second International Conference on Emerging Applications of Information Technology