

DIFFERENTIAL PRESSURE REGULATING VALVE AND PRE-REGULATION VALVE

CALEFFI Hydronic Solutions

Heating


Engineered components for modern systems



FUNCTIONS AND FEATURES

- The 140 series differential pressure regulating valve keeps constant, at the set value, the difference in pressure existing between two points of a hydraulic circuit.
- The 140 series differential pressure regulating valve is available with two adjustable setting ranges: 50–300 and 250–600 mbar. The differential pressure value set can be read directly on the control knob.
- The 142 series pre-regulating valve allows fine balancing of the thermal medium flow rate that supplies the system's terminals.
- The 142 series valve is equipped with a variable orifice flow rate measuring system.
- The 140 series differential pressure regulating valve and the 142 series pre-regulation valve are equipped with a setting lock function and can be closed while keeping the setting value intact.
- The valves are supplied with pre-formed shell insulation to guarantee perfect thermal insulation.

PRODUCT RANGE - 140 - 142 SERIES

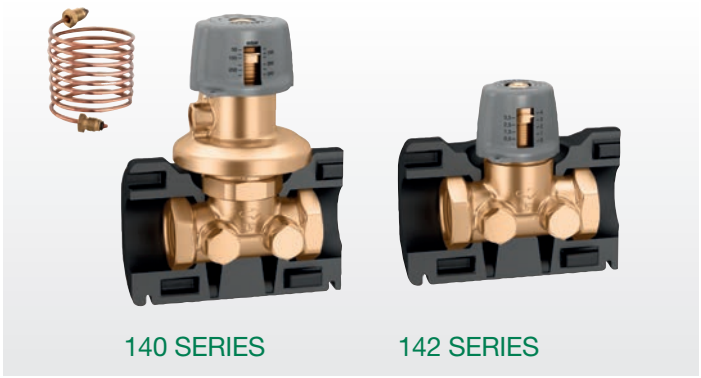

140 SERIES 142 SERIES

CODE	SIZES	SETTING (mbar)
140340	1/2"	50–300
140440	1/2"	250–600
140350	3/4"	50–300
140450	3/4"	250–600
140360	1"	50–300
140460	1"	250–600
140370	1 1/4"	50–300
140470	1 1/4"	250–600
140380	1 1/2"	50–300
140480	1 1/2"	250–600


CODE	SIZES
142140	1/2"
142150	3/4"
142160	1"
142170	1 1/4"
142180	1 1/2"

PERFORMANCE	
MAX. WORKING PRESSURE	16 bar (DN 15, DN 20 and DN 25)
	10 bar (DN 32 and DN 40)
WORKING TEMPERATURE RANGE	-10–120°C
MAX PERCENTAGE OF GLYCOL	50%


TECHNICAL SPECIFICATIONS	
VALVE BODY	dezincification resistant alloy CR
INSULATION	material: EPP density: 45 kg/m^3


OPERATING PRINCIPLE

The differential pressure regulating valve keeps constant, at the set value, the difference in pressure existing between two points of a hydraulic circuit.
The device is inserted in the circuit return pipe and is connected with a capillary tube to the valve on the flow pipe, which can be used to regulate the overall flow rate.
It is used in variable flow rate systems, with two-way thermostatic or motorized valves, to limit the increase in differential pressure due to their total or partial closure.

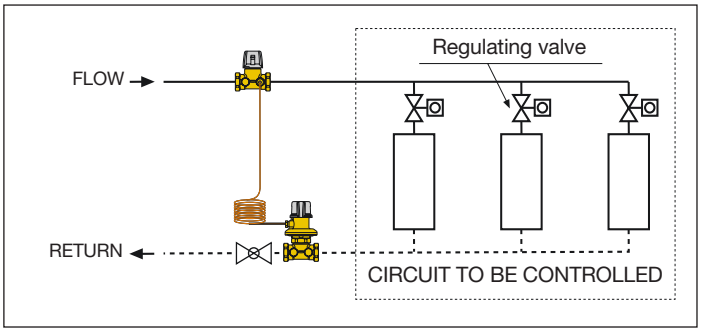

APPLICATION DIAGRAMS

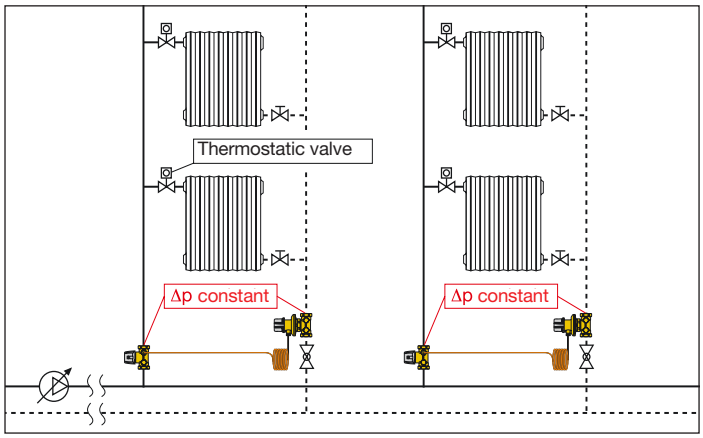

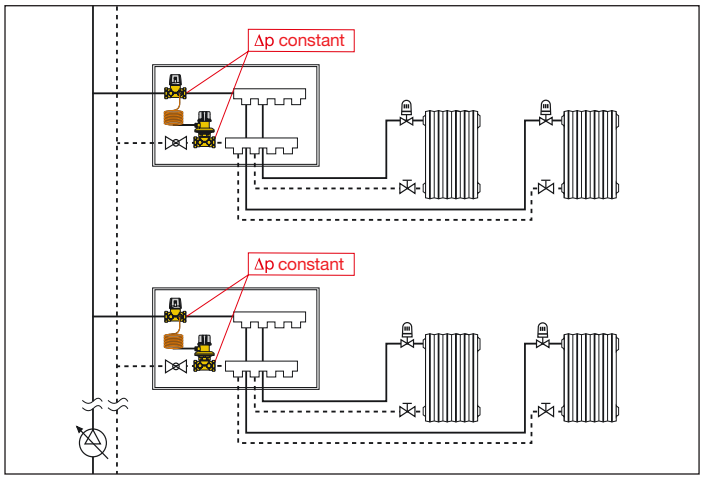

ELECTRONIC MEASURING STATION OF DIFFERENTIAL PRESSURE AND FLOW RATE



CODE	
130006	complete with remote control unit
130005	without remote control unit, with Android® application

REFERENCE DOCUMENTS:

140 series - Technical brochure 01250

CALEFFI Hydronic Solutions

0351414GB

WE RESERVE THE RIGHT TO CHANGE OUR PRODUCTS AND THEIR RELEVANT TECHNICAL DATA, CONTAINED IN THIS PUBLICATION, AT ANY TIME AND WITHOUT PRIOR NOTICE.

Caleffi S.p.A. S.R. 229 n. 25 · 28010 Fontaneto d'Agogna (NO) · Italy
Tel. +39 0322 8491 · Fax +39 0322 863723
info@caleffi.com · www.caleffi.com · © Copyright 2014 Caleffi