


ED Dual seal

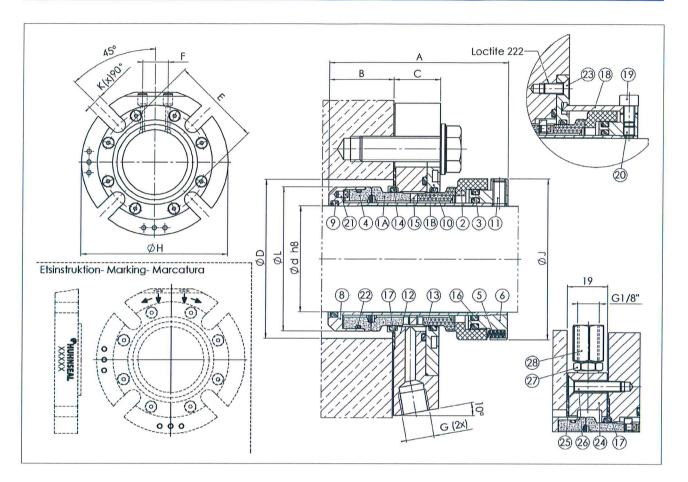


Item	Qty.	Description					
1A	1	INBOARD STATOR					
1B	1	OUTBOARD STATOR					
2	1	OUTBOARD ROTOR					
3	3 1 O-RING						
4	4	SEAL FACE					
5	6/9/12	COMPRESSION RING					
6	1	STOP RING					
7							
8	1	SHAFT SLEEVE					
9	1	O-RING					
10	1	COVER					
11	3	SOCKET SET SCREW, CUP POINT					
12	1	INBOARD FLANGE					
13	1	O-RING					
14	2	O-RING					
15	1	DRIVE RING					
16	1	O-RING					
17	1	GASKET					
18	3	MOUNTING SPACER					
19	3	SOCKET HEAD CAP SCREW					
20	3	SOCKET SET SCREW, DOG POINT					
21	6	DRIVE PIN					
22	1	O-RING					
23	4/8	SOCKET FLAT HEAD SCREW					
24	(1)	FLUSHING FLANGE					
25	(1)	GASKET					
26	(4)	SOCKET FLAT HEAD SCREW					
27	(1)	HEXAGON NIPPEL					
28	(1)	SOCKET					

d	Α	В	С	Dmin	Dmax	E	F	G	H	J	K	L
25	84	30,0	22	44	54	62	19	G 1/8"	105	51	14	43
28	84	30,0	22	47	57	65	19	G 1/8"	105	54	14	46
30	84	30,0	22	49	59	67	19	G 1/8"	105	56	14	48
32	84	30,0	22	51	61	70	19	G 1/8"	110	58	14	50
33	84	30,0	22	52	62	70	19	G 1/8"	110	59	14	51
35	84	30,0	22	54	64	72	19	G 1/8"	112	61	14	53
38	84	30,0	22	57	67	75	20	G 1/8"	122	64	14	56
40	84	30,0	22	59	69	77	21	G 1/8"	122	66	14	58
43	84	30,0	22	62	72	80	22	G 1/8"	132	69	14	61
45	84	30,0	22	64	74	82	24	G 1/8"	138	71	14	63
48	84	30,0	22	67	77	85	24	G 1/8"	138	74	14	66
50	84	30,0	22	69	79	87	24	G 1/4"	148	76	14	68
55	84	30,0	22	74	84	92	26	G 1/4"	148	81	18	73
60	84	30,0	22	79	92	102	28	G 1/4"	157	86	18	78
65	84	30,0	22	84	99	109	30	G 1/4"	163	91	18	83
70	84	30,0	22	89	108	118	32	G 1/4"	178	96	18	88
75	100	35,5	25	101	118	129	35	G 1/4"	190	110	18	100
80	100	35,5	25	106	124	135	37	G 1/4"	194	115	18	105
85	100	35,5	25	111	128	139	39	G 1/4"	198	120	22	110
90	100	35,5	25	116	135	145	41	G 1/4"	204	125	22	115
95	100	35,5	25	121	138	148	43	G 1/4"	208	130	22	120
00	100	35,5	25	126	144	154	45	G 1/4"	218	135	22	125

2010-09-16



ES Single seal

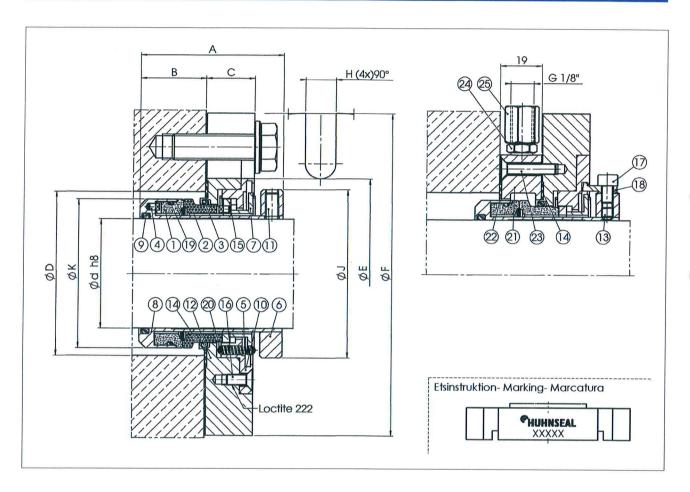

Item	Qty.	Description						
1	1	SEAL FACE						
2	1	INBOARD STATOR						
3	1	O-RING						
4	4	DRIVE PIN						
5	8/12/16/24/32	TENSION SPRING						
6	1	STOP RING						
7	1	SPRING RING						
8	1	SHAFT SLEEVE						
9	1	O-RING						
10	1	COVER						
11	3	SOCKET FLAT HEAD SCREW, CUP POINT						
12	1	FLANGE						
13	3	SOCKET SET SCREW, DOG POINT						
14	1	GASKET						
15	1	DRIVE DISC						
16 1		SOCKET FLAT HEAD SCREW						
17	3	SOCKET FLAT HEAD SCREW						
18	3	MOUNTING SPACER						
19	1	O-RING						
20	2	SPRING HOLDER						
21	(1)	FLUSHING FLANGE						
22	(1)	GASKET						
23	(4)	SOCKET FLAT HEAD SCREW						
24	(1)	HEXAGON NIPPEL						
25	(1)	SOCKET						

d	A	В	C	Dmin	Dmax	E	F	Н	J	K
25	66	30,0	22	44	54	62	105	14	52	43
28	66	30,0	22	47	57	65	105	14	55	46
30	66	30,0	22	49	59	67	105	14	57	48
32	66	30,0	22	51	61	70	110	14	59	50
33	66	30,0	22	52	62	70	110	14	60	51
35	66	30,0	22	54	64	72	112	14	62	53
38	66	30,0	22	57	67	75	122	14	65	56
40	66	30,0	22	59	69	77	122	14	67	58
43	66	30,0	22	62	72	80	132	14	70	61
45	66	30,0	22	64	74	82	138	14	72	63
48	66	30,0	22	67	77	85	138	14	75	66
50	66	30,0	22	69	79	87	148	14	77	68
55	66	30,0	22	74	84	93	148	18	82	73
60	66	30,0	22	79	92	102	157	18	87	78
65	66	30,0	22	84	99	109	163	18	92	83
70	66	30,0	22	89	108	118	178	18	97	88
75	75	35,5	25	101	118	129	190	18	108	100
80	75	35,5	25	106	124	135	194	18	113	105
85	75	35,5	25	111	128	139	198	22	118	110
90	75	35,5	25	116	135	145	204	22	123	115
95	75	35,5	25	121	138	148	208	22	128	120
00	75	35,5	25	126	144	154	218	22	133	125

2010-09-16