



## Wafer and Lug style resilient seated butterfly valves with cartridge seat design.

### Features and Benefits

- Suitable for high pressure and full vacuum service due to the use of a cartridge seat design.
- Triple function cartridge seat isolates the body and stem from the media, provides positive drop-tight shut-off of line media at full rated pressure and provides a flange seal, eliminating the need for flange gaskets.
- Full rated unidirectional dead-end service is achieved by utilizing a unique patented lip in the lug body.
- Strong disc-to-stem connection and elimination of exposed pins or bolts is achieved through the use of a rectangular drive.
- Ability to install the valve with the disc in the closed position eliminates the risk of damage to the valve during installation.
- Maximum flow and rangeability is achieved with the use of a streamlined disc.
- Blowout-proof stems are standard.
- Longer seat life with low operating torques is ensured by utilizing upper and lower stem bearings.
- Need for costly brackets is eliminated due to the ability to direct mount actuation onto the valve top-plate.



### General Application

Ideally suited for many applications within the heating ventilation and air conditioning, water treatment and irrigation markets.


### Technical Data

|                  |   |
|------------------|---|
| Size Range:      | 2" to 36" wafer and lug styles                                      |
| Pressure Rating: | 2" to 12" – 250 psi<br>14" to 24" – 200 psi<br>30" to 36" – 150 psi |
|                  | Teflon® seat or elastomer covered disc<br>2" to 12" – 150 psi       |
| Dead-End Rating: | Full rated in preferred direction of flow                           |
| Flange Standard: | ASME Class 125/150  |

Designed to comply with MSS-SP-67 and API 609 (may be shell tested to spec on request).

Grinnell is either a trademark or registered trademark of Tyco International Services AG or its affiliates in the United States and/or other countries. All other brand names, product names, or trademarks belong to their respective holders.

### Specifications

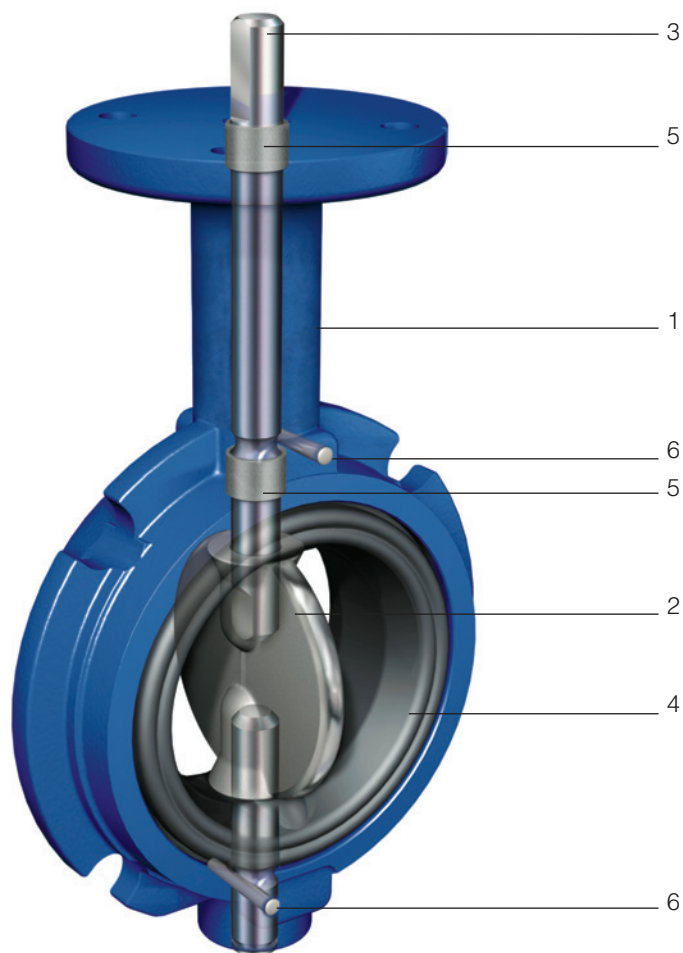




### Materials

| Part                   | Standard Material                                | Material Specifications      |
|------------------------|--|------------------------------|
| 1 Body                 | Cast Iron <sup>1</sup>                           | ASTM A126 Class B            |
|                        | Ductile Iron (2" to 12")                         | ASTM A395 Grade 60/40/18     |
|                        | Ductile Iron <sup>2</sup> (14" to 24" Lug style) | ASTM A536 Grade 65/45/12     |
|                        | 316 Stainless Steel <sup>3</sup>                 | ASTM A351 CF8M               |
| 2 Disc                 | Ductile Iron/Nickel Plated                       | ASTM A536 Grade 65/45/12     |
|                        | Aluminum Bronze                                  | ASTM B148 C95400             |
|                        | 316 Stainless Steel                              | ASTM A351 CF8M               |
|                        | EPDM Coated (3" to 12")                          |                              |
| 3 Stem                 | 416 Stainless Steel (standard)                   | ASTM A582 UNS S41600 Cond. A |
|                        | 316 Stainless Steel (optional) <sup>4</sup>      | ASTM A276 UNS S31600 Cond. A |
| 4 Cartridge Seat       | EPDM Food Grade (-20°F – 250°F)                  |                              |
|                        | NBR (0°F – 180°F)                                |                              |
|                        | Viton® (0°F – 300°F)                             |                              |
|                        | Teflon® (-20°F – 250°F) (2" to 12")              |                              |
| 5 Bearing <sup>5</sup> | Teflon® Gar-Fil® (2" to 24")                     |                              |
| 6 Pin                  | Carbon Steel                                     |                              |




### Notes:

1. 14" to 36" wafer bodies and 30" to 36" lug bodies are available in Cast Iron only.
2. 14" to 24" lug style available in Ductile Iron body only.
3. Offered in 2" to 6" only. These bodies come standard with a vented shaft and food grade seats.
4. 316 Stainless Steel Stem available in 2" to 12" only.
5. Valves with 316 SS bodies are provided with two additional bearings in the lower stem journal.

## Top Plate Dimensions

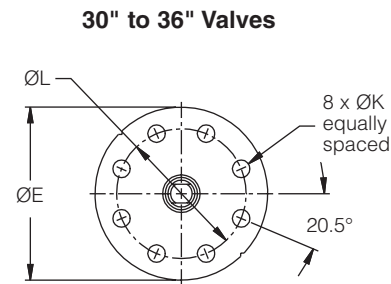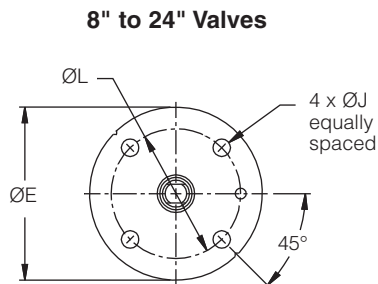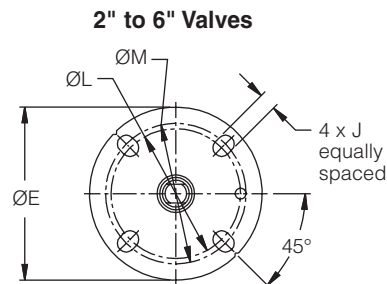

## Valve Dimensions

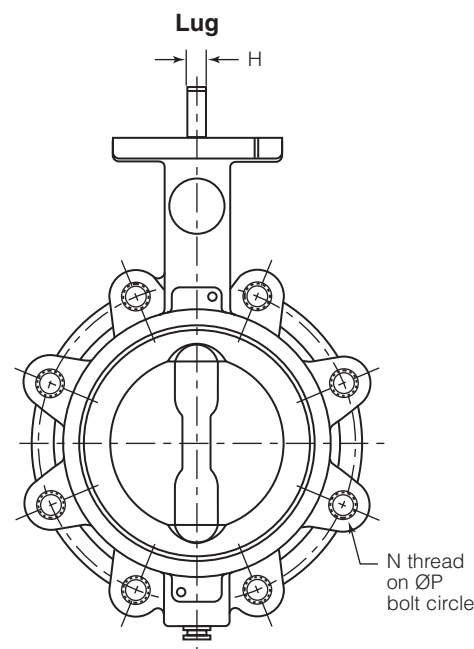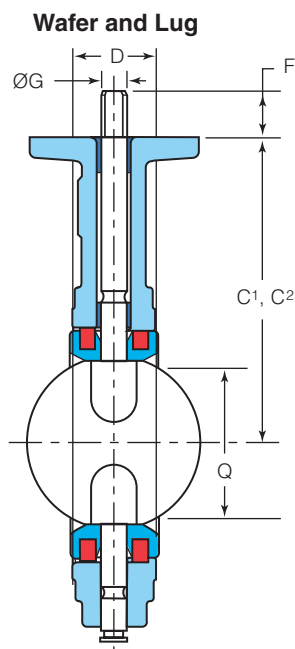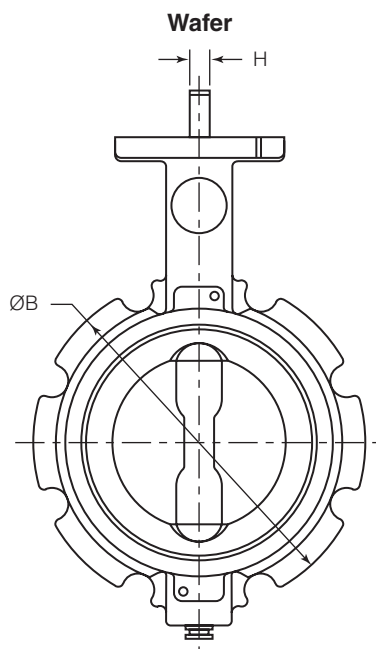

### Dimensions (inches)

| Size | B     | C <sup>1</sup> | C <sup>2</sup> | D    | E     | F    | G    | H    | J     | L     | M    | N        | P     | Q*    | Key         | Adapt. Code |
|------|-------|----------------|----------------|------|-------|------|------|------|-------|-------|------|----------|-------|-------|-------------|-------------|
| 2    | 5.09  | 5.75           | 4.69           | 1.63 | 4.00  | 1.25 | 0.56 | 0.38 | 0.406 | 3.00  | 3.25 | 5/8 - 11 | 4.75  | 1.41  | —           | BAB         |
| 2½   | 5.81  | 6.25           | —              | 1.75 | 4.00  | 1.25 | 0.56 | 0.38 | 0.406 | 3.00  | 3.25 | 5/8 - 11 | 5.50  | 1.82  | —           | BAB         |
| 3    | 6.25  | 6.50           | 4.87           | 1.75 | 4.00  | 1.25 | 0.56 | 0.38 | 0.406 | 3.00  | 3.25 | 5/8 - 11 | 6.00  | 2.62  | —           | BAB         |
| 4    | 7.81  | 7.25           | 6.00           | 2.00 | 4.00  | 1.25 | 0.63 | 0.43 | 0.406 | 3.00  | 3.25 | 5/8 - 11 | 7.50  | 3.62  | —           | BAC         |
| 5    | 8.75  | 7.75           | —              | 2.13 | 4.00  | 1.25 | 0.75 | 0.50 | 0.406 | 3.00  | 3.25 | ¾ - 10   | 8.50  | 4.67  | —           | BAD         |
| 6    | 9.75  | 8.38           | 6.50           | 2.14 | 4.00  | 1.25 | 0.75 | 0.50 | 0.406 | 3.00  | 3.25 | ¾ - 10   | 9.50  | 5.68  | —           | BAD         |
| 8    | 12.00 | 9.62           | —              | 2.35 | 6.00  | 1.25 | 0.87 | 0.63 | 0.562 | 5.00  | —    | ¾ - 10   | 11.75 | 7.54  | —           | CAE         |
| 10   | 14.50 | 11.00          | —              | 2.63 | 6.00  | 2.00 | 1.12 | —    | 0.562 | 5.00  | —    | 7/8 - 9  | 14.25 | 9.65  | 1/4 x 1/4   | CAF         |
| 12   | 17.50 | 12.50          | —              | 3.00 | 6.00  | 2.00 | 1.37 | —    | 0.562 | 5.00  | —    | 7/8 - 9  | 17.00 | 11.49 | 5/16 x 5/16 | CAG         |
| 14   | 19.50 | 13.25          | —              | 3.06 | 6.00  | 3.00 | 1.37 | —    | 0.531 | 5.00  | —    | 1 - 8    | 18.75 | 12.97 | 5/16 x 5/16 | CAG         |
| 16   | 22.06 | 14.75          | —              | 4.01 | 6.00  | 3.00 | 1.63 | —    | 0.531 | 5.00  | —    | 1 - 8    | 21.25 | 14.85 | 3/8 x 3/8   | CAH         |
| 18   | 23.44 | 15.75          | —              | 4.48 | 6.75  | 3.00 | 1.63 | —    | 0.531 | 5.00  | —    | 1½ - 7   | 22.75 | 16.76 | 3/8 x 3/8   | CAH         |
| 20   | 25.68 | 16.25          | —              | 4.99 | 6.75  | 4.25 | 1.88 | —    | 0.812 | 6.50  | —    | 1½ - 7   | 25.00 | 18.72 | 1/2 x 3/8   | DAJ         |
| 24   | 30.06 | 19.12          | —              | 6.00 | 8.00  | 4.25 | 1.88 | —    | 0.812 | 6.50  | —    | 1¾ - 7   | 29.50 | 22.59 | 1/2 x 3/8   | DAJ         |
| 30   | 38.75 | 24.75          | —              | 6.51 | 9.25  | 5.38 | 3.00 | —    | 0.687 | 7.50  | —    | 1¾ - 7   | 36.00 | 28.60 | ¾ x 1/2     | —           |
| 36   | 45.75 | 28.38          | —              | 7.88 | 11.75 | 5.38 | 3.62 | —    | 0.687 | 10.25 | —    | 1½ - 6   | 42.75 | 34.48 | 7/8 x 5/8   | —           |

C<sup>1</sup> Dimensions apply to Cast Iron and Ductile Iron bodies ONLY.

C<sup>2</sup> Dimensions apply to Stainless Steel bodies ONLY.

Q\* Dimension is the minimum allowable pipe or flange inside diameter at the centered body face to protect the disc sealing edge against damage when opening the valve.

## Valve Sizing

Rate of flow through a valve depends upon the pressure drop. The most common method of presenting this information is by  $C_v$ . The  $C_v$  is the valve coefficient of flow and represents the

flow of water in gallons per minute (GPM) with a 1 psi pressure drop through the valve. The higher the  $C_v$ , the greater the flow and the better the control characteristics. Throttling

characteristics are shown in the same manner with  $C_v$ 's at the various disc openings. Tabulated below are the  $C_v$ 's for the Series 8000 Butterfly Valve.

**$C_v$  Chart (Water @ 70°F, Specific Gravity = 1.00)**

| Valve Size | Disc position (Degrees Open) |       |       |        |        |        |        |        |
|------------|------------------------------|-------|-------|--------|--------|--------|--------|--------|
|            | 25°                          | 30°   | 40°   | 50°    | 60°    | 70°    | 80°    | 90°    |
| 2"         | 3                            | 7     | 19    | 36     | 63     | 84     | 115    | 120    |
| 2½"        | 4                            | 10    | 24    | 47     | 78     | 113    | 182    | 194    |
| 3"         | 14                           | 21    | 45    | 84     | 133    | 203    | 382    | 430    |
| 4"         | 30                           | 52    | 100   | 165    | 270    | 420    | 703    | 830    |
| 5"         | 85                           | 130   | 210   | 345    | 525    | 825    | 1,350  | 1,500  |
| 6"         | 165                          | 225   | 360   | 570    | 820    | 1,260  | 1,875  | 1,980  |
| 8"         | 210                          | 300   | 480   | 780    | 1,320  | 2,280  | 3,780  | 3,870  |
| 10"        | 405                          | 575   | 850   | 1,200  | 1,900  | 3,300  | 6,100  | 6,450  |
| 12"        | 550                          | 750   | 1,200 | 1,875  | 2,850  | 5,025  | 9,300  | 9,800  |
| 14"        | 650                          | 825   | 1,500 | 2,300  | 3,500  | 6,200  | 9,700  | 10,500 |
| 16"        | 800                          | 1,000 | 1,850 | 2,900  | 4,600  | 7,500  | 10,600 | 13,500 |
| 18"        | 1,100                        | 1,400 | 2,450 | 3,800  | 5,000  | 9,700  | 13,850 | 18,000 |
| 20"        | 1,400                        | 1,650 | 3,050 | 4,800  | 7,400  | 12,500 | 17,750 | 23,000 |
| 24"        | 2,000                        | 2,400 | 4,200 | 6,600  | 10,500 | 17,000 | 23,000 | 31,000 |
| 30"        | 2,900                        | 3,500 | 6,200 | 9,700  | 15,000 | 25,000 | 35,000 | 46,000 |
| 36"        | 4,300                        | 5,200 | 9,200 | 14,000 | 22,000 | 37,000 | 51,000 | 68,000 |

## Torque Data

Torque is the rotary effort required to operate a valve. This turning force in a butterfly valve is determined by three factors – the friction of the disc and seat due to interference for sealing, bearing friction, and fluid dynamic torque.

### Breakaway torque at 70°F

Breakaway torque is the total of the torques resulting from bearing friction and disc/seat interference friction at a given pressure differential. Listed below are torques to open and close the valve at pressures shown in wet services (normal conditions).

Note: These values are valid for water and lubricating fluids only at 70°F. Since torques are greatly increased for dry and nonlubricating fluids and temperature variations, contact your Grinnell representative for accurate values in these applications.

**Breakaway Torque in Inch Pounds for Wet Service Applications/Standard Disc**

| Line Pressure | Size |     |     |     |     |       |       |       |        |       |        |        |        |        |        |        |
|---------------|------|-----|-----|-----|-----|-------|-------|-------|--------|-------|--------|--------|--------|--------|--------|--------|
|               | 2    | 2½  | 3   | 4   | 5   | 6     | 8     | 10    | 12     | 14    | 16     | 18     | 20     | 24     | 30     | 36     |
| 50            | 85   | 126 | 180 | 355 | 562 | 918   | 1,440 | 2,466 | 3,510  | 5,200 | 6,900  | 9,000  | 11,000 | 16,000 | 18,700 | 27,500 |
| 100           | 108  | 153 | 207 | 414 | 652 | 1,035 | 1,692 | 3,010 | 4,140  | 6,000 | 8,000  | 10,500 | 14,000 | 21,000 | 22,000 | 32,500 |
| 150           | 126  | 175 | 256 | 472 | 715 | 1,152 | 1,922 | 3,550 | 5,616  | 7,500 | 9,500  | 12,000 | 15,200 | 28,000 | 27,700 | 37,000 |
| 200           | 144  | 198 | 297 | 531 | 787 | 1,269 | 2,205 | 4,095 | 7,686  | 8,550 | 10,750 | 13,500 | 17,600 | 33,700 | –      | –      |
| 250           | 162  | 221 | 339 | 590 | 869 | 1,386 | 2,476 | 4,660 | 10,556 | –     | –      | –      | –      | –      | –      | –      |

## Materials Description

### Seats

**Food Grade EPDM** – Rated for temperatures -20°F to 250°F. Service conditions are equivalent to those recommended for regular EPDM including applications where Food Grade is required.

**NBR** – Rated for temperatures 0°F to 180°F. NBR is also commonly identified as BUNA-N, Nitrile, or Hycar®. It is an excellent general purpose elastomer suitable for use with air, water as well as most petroleum oils and greases, automotive gasolines (except those which have additives), alcohols and glycols, L-P gases, propane and butane, fuel oils and many other fluids. It also exhibits good abrasion resistance, and excellent resistance to compression set.

**Viton®** – Rated for temperatures 0°F to 300°F. Viton® is a DuPont Dow Elastomers trademark. Fluorel® is Dyneon's trademark for the equivalent fluorocarbon elastomer. This material offers higher temperature resistance and outstanding chemical resistance. It is resistant to hydrocarbon products and mineral acids, both dilute and concentrated solutions. However, it is never to be used in steam applications and is relatively poor in water service.

**Teflon®** – Rated for temperatures -20°F to 250°F. The Teflon® liner overlays silicone which is bonded to a rigid phenolic ring on the outside seat perimeter. Teflon® extends over the seat faces and outside flange seal diameter, completely covering the EPDM layer of the seat which provides the resilience for sealing valve stems and the closed disc.

### Special Valve Seats

**EPDM** – Rated for temperatures -20°F to 250°F. EPDM is an abbreviation of a compound called Ethylene Propylene Diene Monomer. It is also commonly called EPT, Nordel, and EPR. EPDM is used extensively in the HVAC (Heating, Ventilation, Air Conditioning) industry due to its resistance to polar compounds such as water, phosphate esters, ketones, alcohols, and glycols. The EPDM material is also applicable for handling concentrated sulfuric acid, 20% sodium hypochlorite (bleach), chlorinated water for swimming pools, and other alkaline solutions. EPDM is not resistant to hydrocarbon solvents and oils, chlorinated hydrocarbons, turpentine, or any other petroleum based oils.

**White Neoprene** – Rated for temperatures 0°F to 180°F. Neoprene has excellent resistance to alcohols, glycols, dilute mineral acids, concentrated caustics, and aqueous salt solutions. White Neoprene is generally used in sanitary applications and although it is slightly inferior to BUNA-N in oil resistance, it is markedly better than most elastomers in these applications.

**Black Neoprene** – Rated for temperatures 0°F to 180°F. Neoprene offers excellent physical properties where resistance to alcohols, glycols, dilute mineral acids, concentrated caustics, aqueous salt solutions, and mild abrasion resistance is required. The black grade provides better abrasion and oil resistance than the white grade Neoprene, and although it is slightly inferior to BUNA-N in oil resistance, it provides excellent service in water/oil, air/oil services.

**Hypalon** – Rated for temperatures 0°F to 225°F. Hypalon® is the DuPont Dow Elastomers trademark for chlorosulfonated polyethylene. Hypalon is resistant to most chemicals and greases and is particularly unaffected by aqueous salt solutions, alcohols, weak and concentrated alkalies, and concentrated sulfuric acid. It is not recommended for gasoline, jet fuels, ketones, or chlorinated solvents. Hypalon has excellent abrasion resistance and is unaffected by prolonged immersion in water.

### Disc Coatings

**PVDF Coated Disc** – Rated for temperatures -20°F to 275°F. Polyvinylidene fluoride (also known as Kynar®) is a strong, tough fluoroplastic material that is particularly suited to corrosion resistant applications in severe environments. The coating has a high degree of mechanical strength, and is chemically resistant to most acids and bases over a broad temperature range. (min. thickness 20 mils).

**EPDM Coated Disc** – Rated for temperatures -20°F to 250°F. EPDM coated disc provides excellent wear and abrasion characteristics for use in highly abrasive environments. The EPDM elastomer also provides the disc with chemical resistance for handling certain acids, esters, ketones and all types of water service where normal metal discs cannot be used due to chemical and/or abrasive conditions. The EPDM coated discs are not recommended for use in hydrocarbon solvents and oils, chlorinated hydrocarbons, turpentine, or any other petroleum based oils. Other rubber materials available upon request.

### Notes:

- A. Phenolic reinforced seats standard on 2" to 24"
- B. Letter identification of phenolic reinforced liners on I.D. of liner is:  
 NB = NBR  
 EM = Food-Grade EPDM  
 CF = White Neoprene  
 EP = EPDM  
 FK = Viton®  
 CR = Black Neoprene  
 CS = Hypalon®

## Grinnell Series 8000

Resilient Seated Butterfly Valves, 2" to 36"

### Valve Weights

#### Wafer Body (lbs)

| Valve Size: | 2  | 2.5 | 3  | 4  | 5  | 6  | 8  | 10 | 12  | 14  | 16  | 18  | 20  | 24  | 30  | 36   |
|-------------|----|-----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|------|
| Bare Stem   | 5  | 6   | 7  | 17 | 19 | 29 | 36 | 58 | 87  | 140 | 177 | 222 | 347 | 465 | 820 | 1540 |
| Lever OP    | 10 | 11  | 12 | 22 | 24 | 34 | 41 | 63 | 92  | –   | –   | –   | –   | –   | –   | –    |
| Gear OP     | 14 | 15  | 19 | 24 | 30 | 32 | 62 | 84 | 130 | 164 | 201 | 246 | 371 | 535 | 890 | 1610 |

#### Lug Body (lbs)

| Valve Size: | 2  | 2.5 | 3  | 4  | 5  | 6  | 8  | 10  | 12  | 14  | 16  | 18  | 20  | 24  | 30   | 36   |
|-------------|----|-----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|------|------|
| Bare Stem   | 8  | 10  | 11 | 15 | 27 | 31 | 44 | 64  | 120 | 156 | 226 | 266 | 412 | 495 | 940  | 1830 |
| Lever OP    | 13 | 15  | 16 | 20 | 32 | 36 | 49 | 69  | 125 | –   | –   | –   | –   | –   | –    | –    |
| Gear OP     | 17 | 19  | 20 | 27 | 40 | 44 | 79 | 115 | 163 | 180 | 250 | 290 | 436 | 565 | 1010 | 1900 |

#### Material Specifications – ASTM References

| Part        | Material                      | Specs                      |
|-------------|-------------------------------|----------------------------|
| <b>Body</b> | Cast Iron                     | ASTM A126 Class B          |
|             | Ductile Iron (2" to 12")      | ASTM A395 Grade 60/40/18   |
|             | Ductile Iron (14" to 24" Lug) | ASTM A536 Grade 65/45/12   |
|             | Stainless Steel               | ASTM A351 Grade CF8M       |
| <b>Disc</b> | Ductile Iron                  | ASTM A536 Grade 65/45/12   |
|             | Stainless Steel               | ASTM A351 Grade CF8M       |
|             | Aluminum Bronze               | ASTM B148 UNS C95400       |
| <b>Stem</b> | 416 Stainless Steel           | ASTM A582 Type 416         |
|             | 316 Stainless Steel           | ASTM A276 Type 316 Cond. A |

## How to Order

## Size 2" to 24"

| 080 W C - 8 9 0 2 - 6G - R |            |                                  |          |                            |                                |  |                           |                                     |
|----------------------------|------------|----------------------------------|----------|----------------------------|--------------------------------|--|---------------------------|-------------------------------------|
| Valve Size <sup>8</sup>    | Body Style | Body Material                    | Series   | Seat Material              | Disc Material                  | Operator                                       | Stem                      | Special Configuration               |
| 020                        | W- Wafer   | C - Cast Iron <sup>1</sup>       | 8 - 8000 | 0 - Teflon <sup>®4,5</sup> | 0 - Ductile Iron/Nickel Plated | 0 - None                                       | 6G - 416 SS w/TFE bushing | R - Undercut Disc - 50 psi          |
| 025                        | L - Lug    | D - Ductile Iron <sup>2</sup>    |          | 1 - NBR (std)              |                                | 1 - 10 Pos. L/Lock                             |                           | DA - Dry Assembly                   |
| 030                        |            | S - Stainless Steel <sup>3</sup> |          | 2 - EPDM                   |                                | 2 - Gear Operator                              | 7G - 316 SS w/TFE bushing | X - Other                           |
| 040                        |            | X - Special                      |          | 4 - White Neoprene         | 3 - PVDF Coated Ductile Iron   | 3 - Double Acting Pneumatic <sup>6</sup>       |                           | <i>Leave blank if none required</i> |
| 050                        |            |                                  |          | 5 - Viton <sup>®</sup>     | 4 - EPDM Coated Ductile Iron   | 4 - Electric <sup>6</sup>                      | X - Special               |                                     |
| 060                        |            |                                  |          | 6 - Black Neoprene         | 7 - 316 SS                     | 5 - Spring Return Pneumatic <sup>6</sup>       |                           |                                     |
| 070                        |            |                                  |          | 7 - Hypalon <sup>®</sup>   | 8 - Bronze (Al-Brz)            | 6 - Square Nut (w/gear operator) <sup>6</sup>  |                           |                                     |
| 100                        |            |                                  |          | 8 - Natural Rubber         | X - Special                    | 7 - Chain Wheel (w/gear operator) <sup>7</sup> |                           |                                     |
| 120                        |            |                                  |          | 9 - Food grade EPDM (std)  |                                | X - Special                                    |                           |                                     |
| 140                        |            |                                  |          | X - Special                |                                |  |                           |                                     |
| 160                        |            |                                  |          |                            |                                |  |                           |                                     |
| 180                        |            |                                  |          |                            |                                |  |                           |                                     |
| 200                        |            |                                  |          |                            |                                |  |                           |                                     |
| 240                        |            |                                  |          |                            |                                |  |                           |                                     |

## Notes:

1. 14" to 36" Wafer bodies and 30" to 36" Lug bodies are available in Cast Iron only
2. 14" to 24" Lug style available in Ductile Iron Body only.
3. Stainless steel bodies offered in 2" to 6" only.
4. Teflon<sup>®</sup> liner can only be used with 316 SS and PVDF coated disc.
5. Teflon<sup>®</sup> or equivalent will be supplied over EPDM.
6. Operator designations 3, 4, 5 and 6 must have actuator name, model and details provided.
7. Chain to be provided by purchaser.
8. Contact your local sales representative for part numbers for 30" and 36".
9. Stem bushing material has been changed to TFE as standard offering. 2" to 12" valves with a 316 SS disc will come as a standard with the 316 SS stem. All other trims will have a 416 SS stem as standard. All 14" and above valves will have 416 SS stem regardless of the disc.

## Grinnell Series 8000

Resilient Seated Butterfly Valves, 2" to 36"



**Grinnell®**  
**FLOW CONTROL**

Phone: (877) 791-3208

Fax: (281) 240-6932

[www.grinnellvalves.com](http://www.grinnellvalves.com)

Grinnell Flow Control (GFC) provides the information herein in good faith but makes no representation as to its comprehensiveness or accuracy. This data sheet is intended only as a guide to GFC products and services. Individuals using this data sheet must exercise their independent judgment in evaluating product selection and determining product appropriateness for their particular purpose and system requirements. GFC MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE INFORMATION SET FORTH HEREIN OR THE PRODUCT(S) TO WHICH THE INFORMATION REFERS. ACCORDINGLY, GFC WILL NOT BE RESPONSIBLE FOR DAMAGES (OF ANY KIND OR NATURE, INCLUDING INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES) RESULTING FROM THE USE OF OR RELIANCE UPON THIS INFORMATION. Patents and Patents Pending in the U.S. and foreign countries. Grinnell reserves the right to change product designs and specifications without notice.