


APV Fluid Handling America W+ Performance Curves

W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE 2.5" INLET - 2" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.9"
Performance data refer to water at 68°F
Permissible tolerance $\pm 5\%$

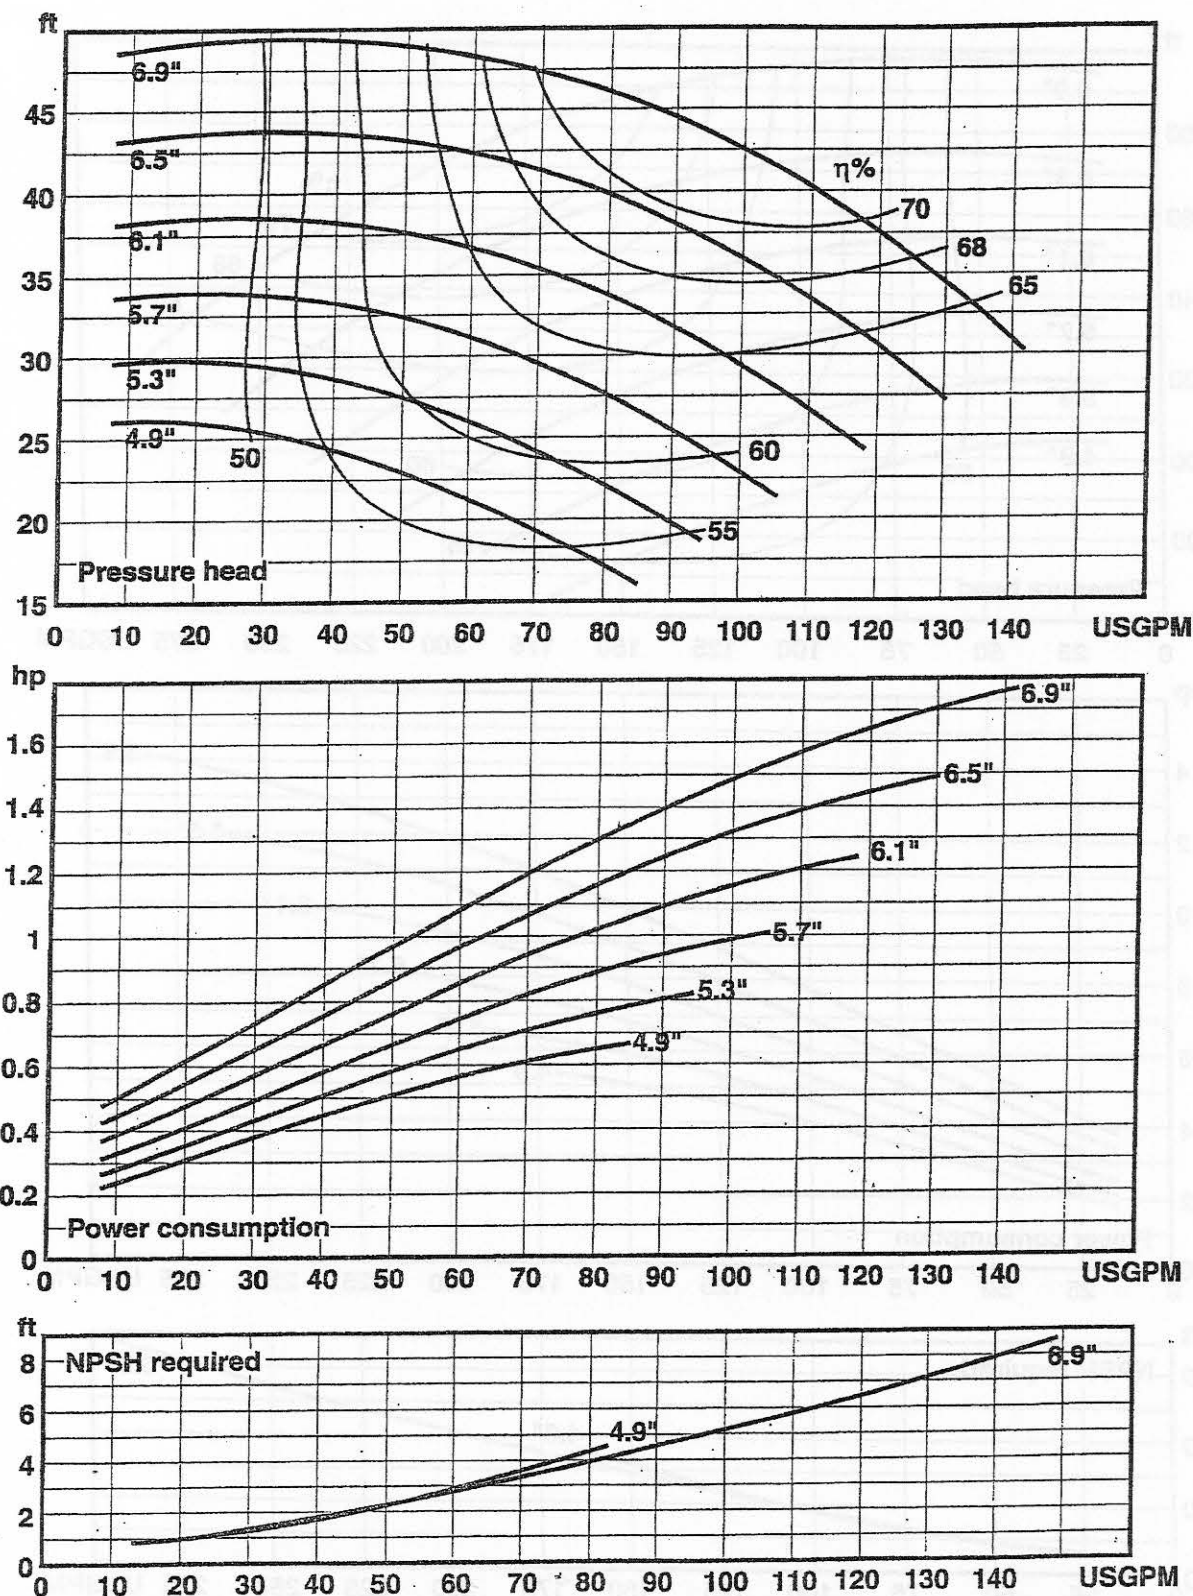




APV Fluid Handling America W+ Performance Curves

W+SERIES
A-1-201.230
PAGE 2 of 3
EFFECTIVE 1-1-97

W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE 2.5" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____




Impeller dia: Max: 6.9"
Performance data refer to water at 68°F
Permissible tolerance $\pm 5\%$

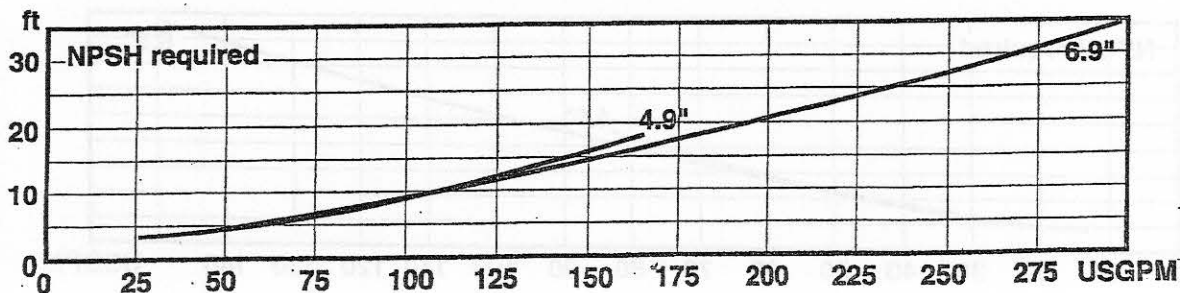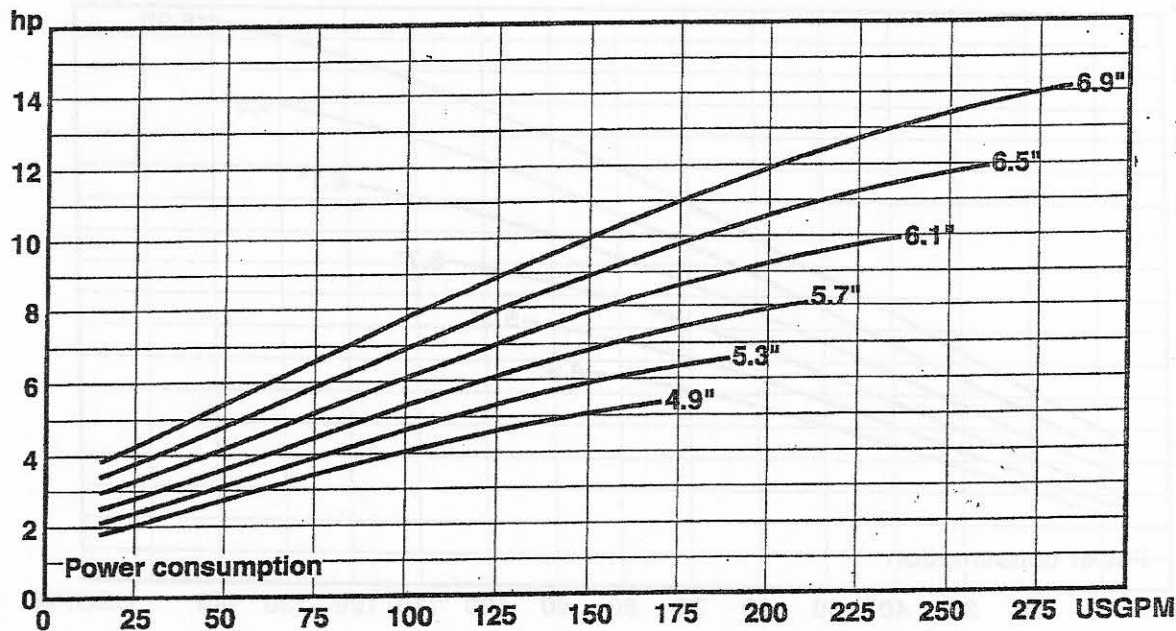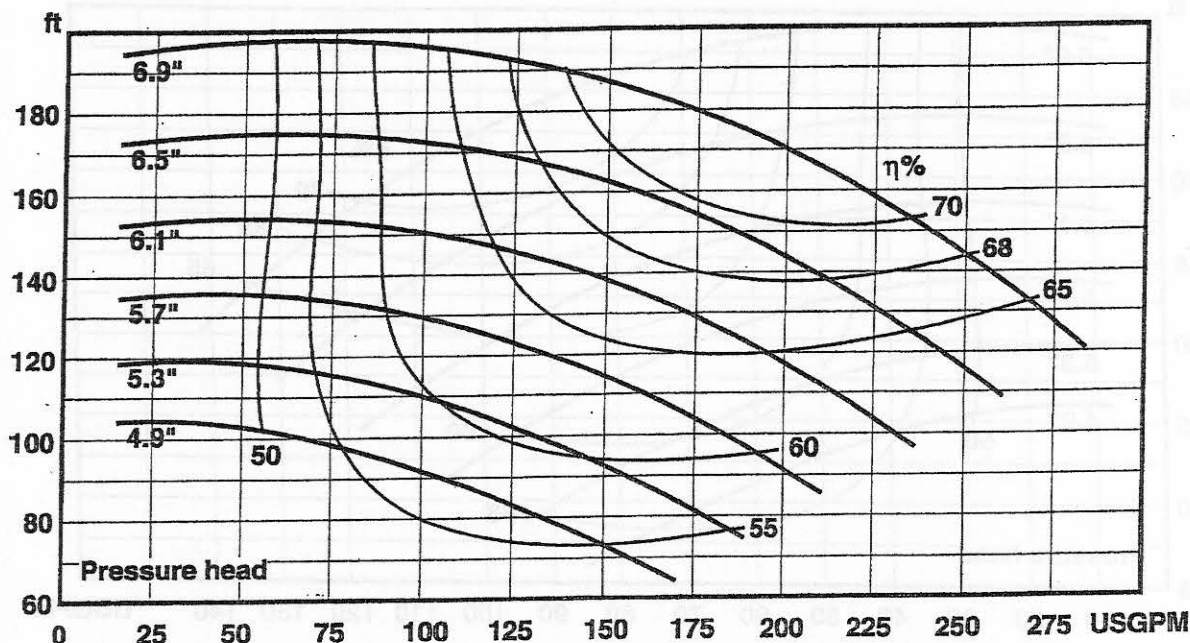

W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE
63,5 mm INLET - 51 mm OUTLET, 1450 RPM, 50 Hz

NOTE: _____




Impeller dia: Max: Ø175 mm
Performance data refer to water at 20°C
Permissible tolerance $\pm 5\%$

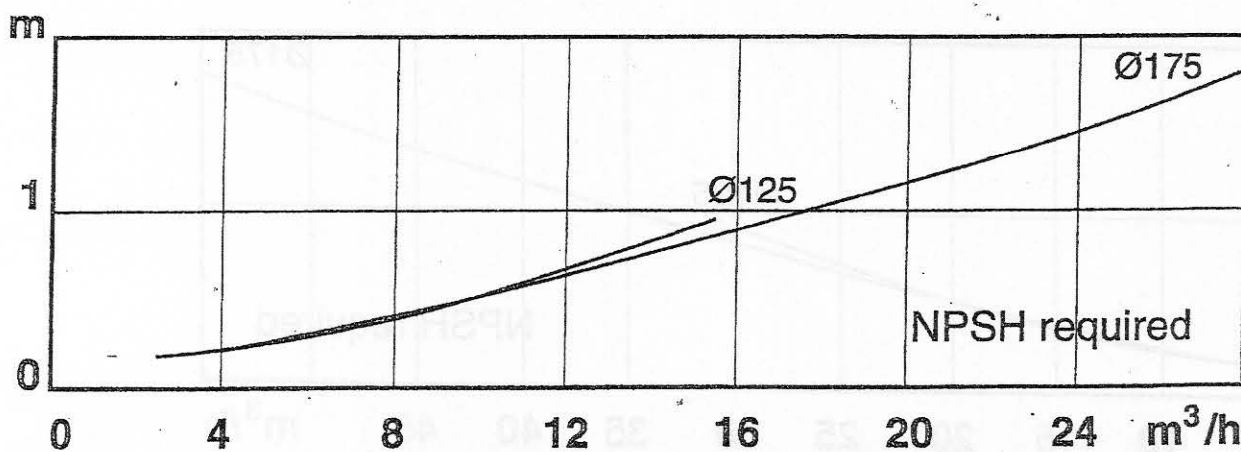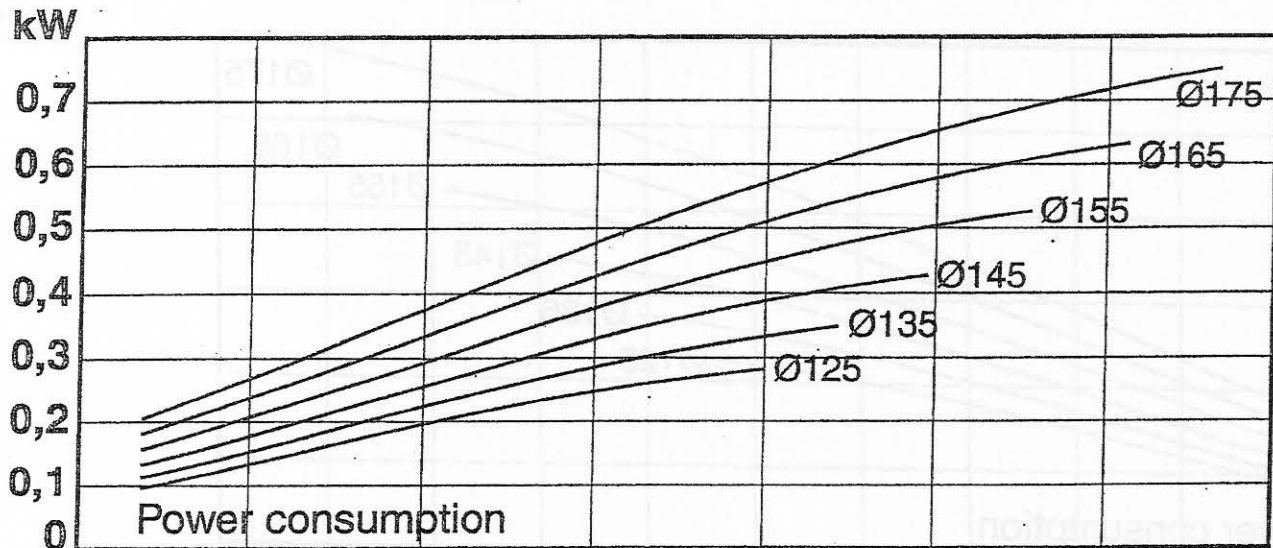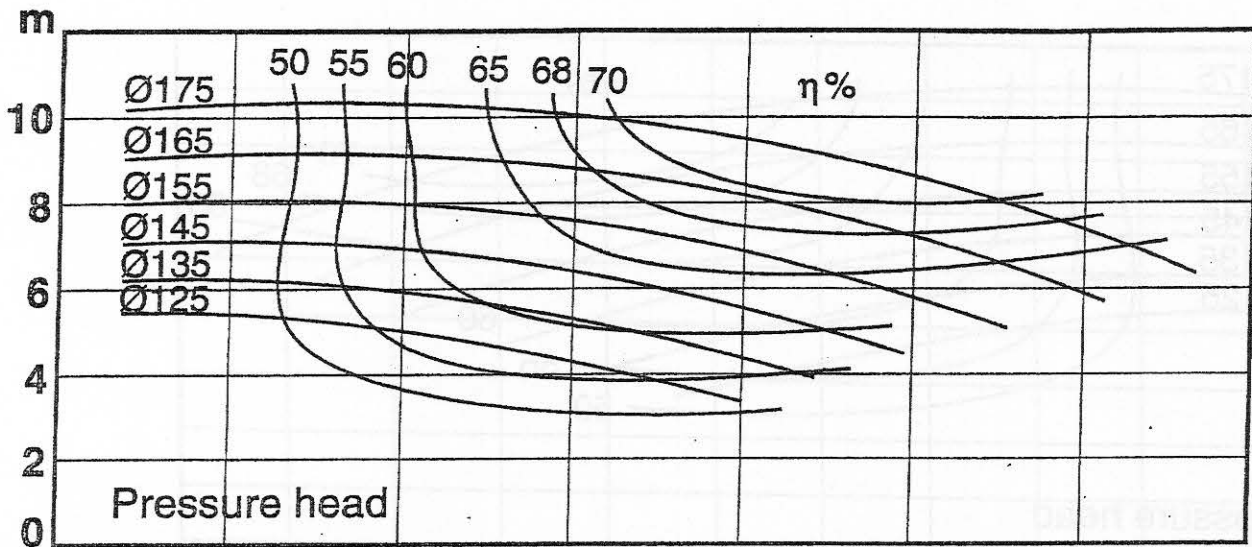

W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE
63,5 mm INLET - 51 mm OUTLET, 2900 RPM, 50 Hz

NOTE: _____




Impeller dia: Max: Ø175 mm
Performance data refer to water at 20°C
Permissible tolerance ± 5%

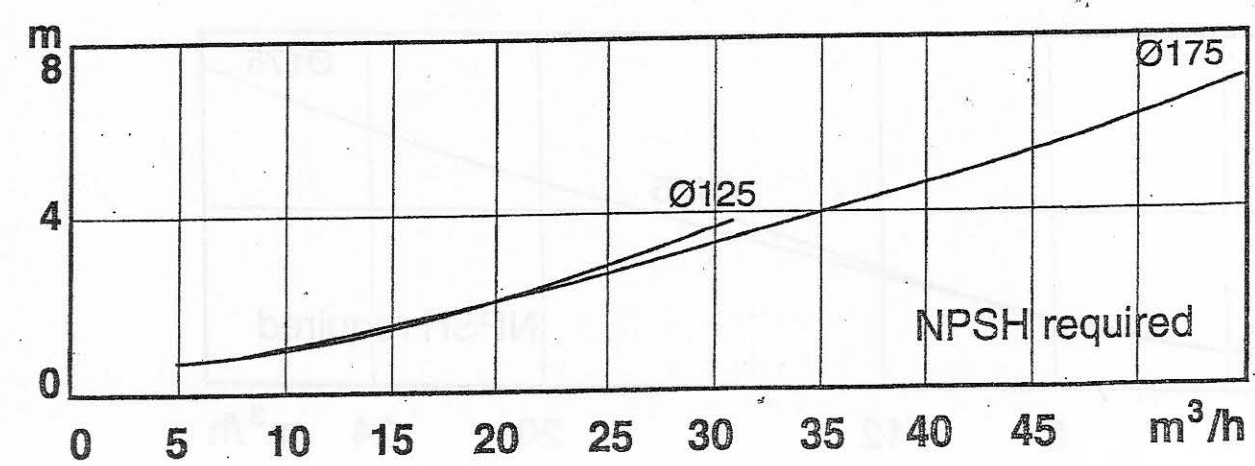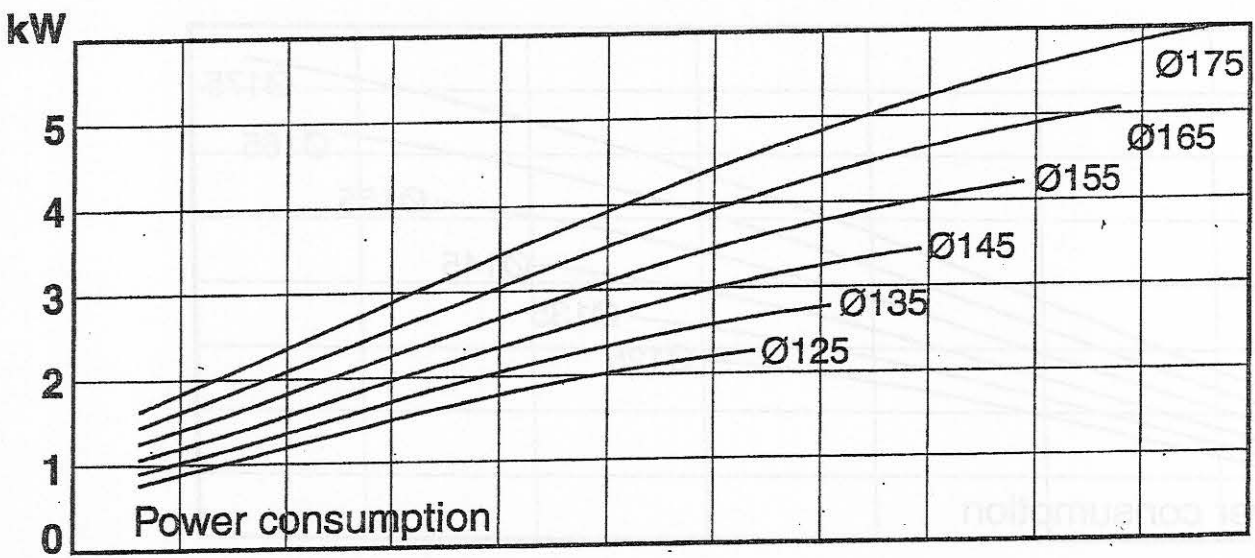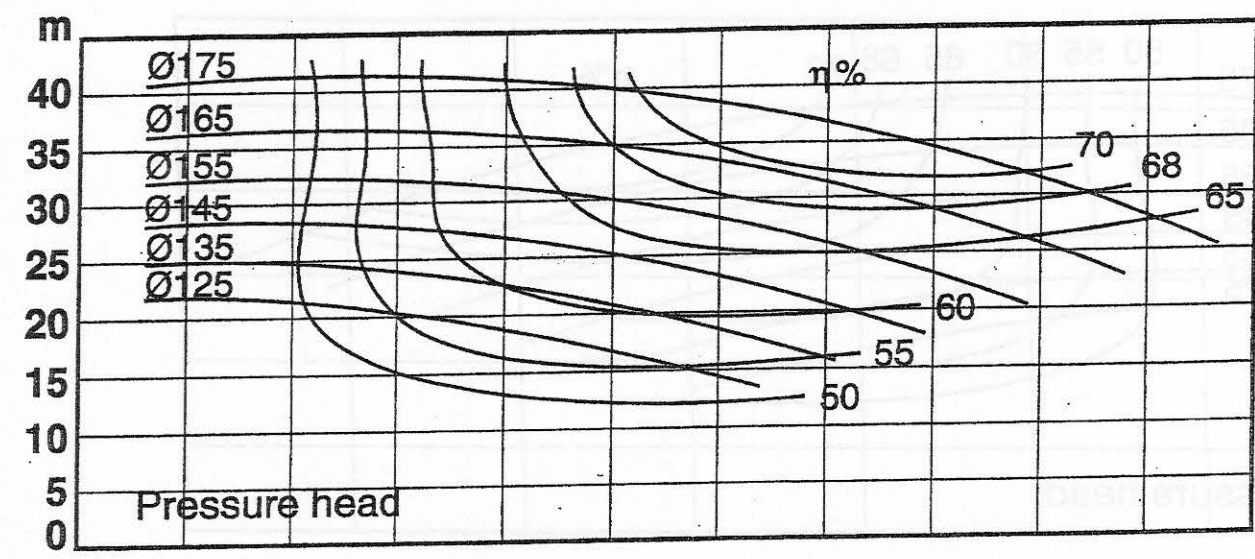

W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE
63,5 mm INLET - 51 mm OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: Ø175 mm
Performance data refer to water at 20°C
Permissible tolerance $\pm 5\%$

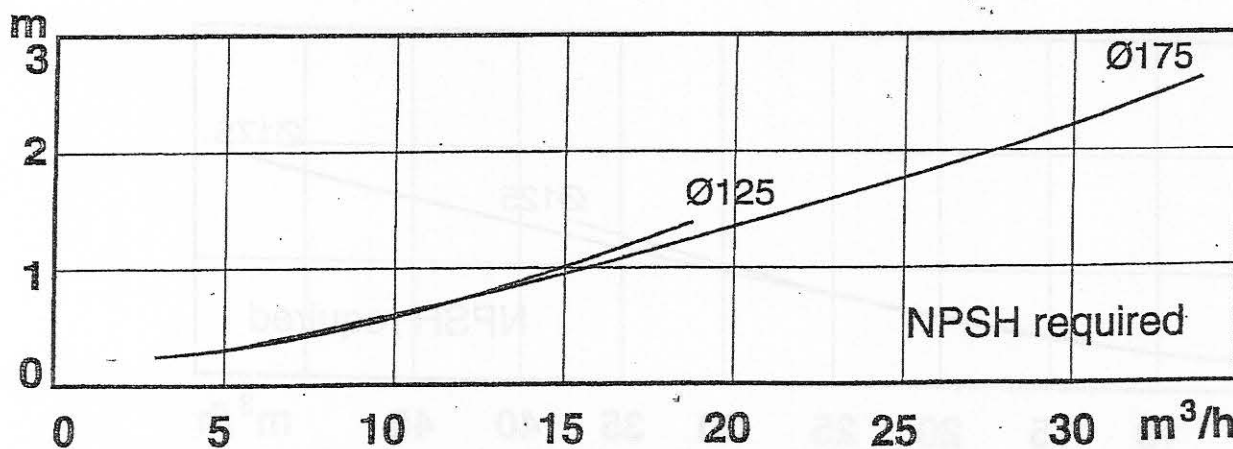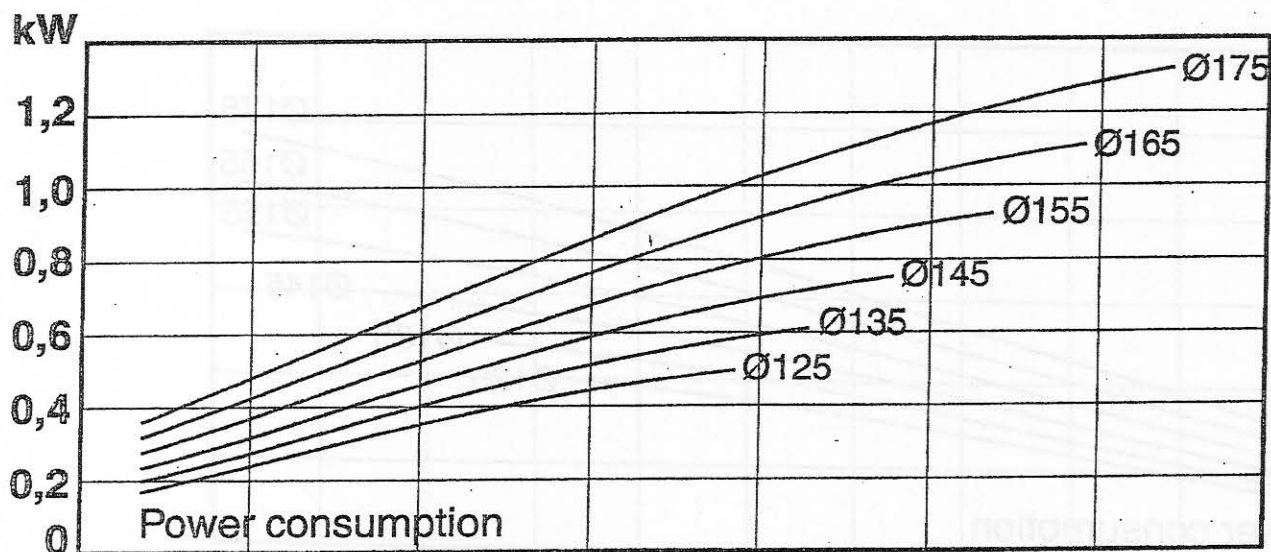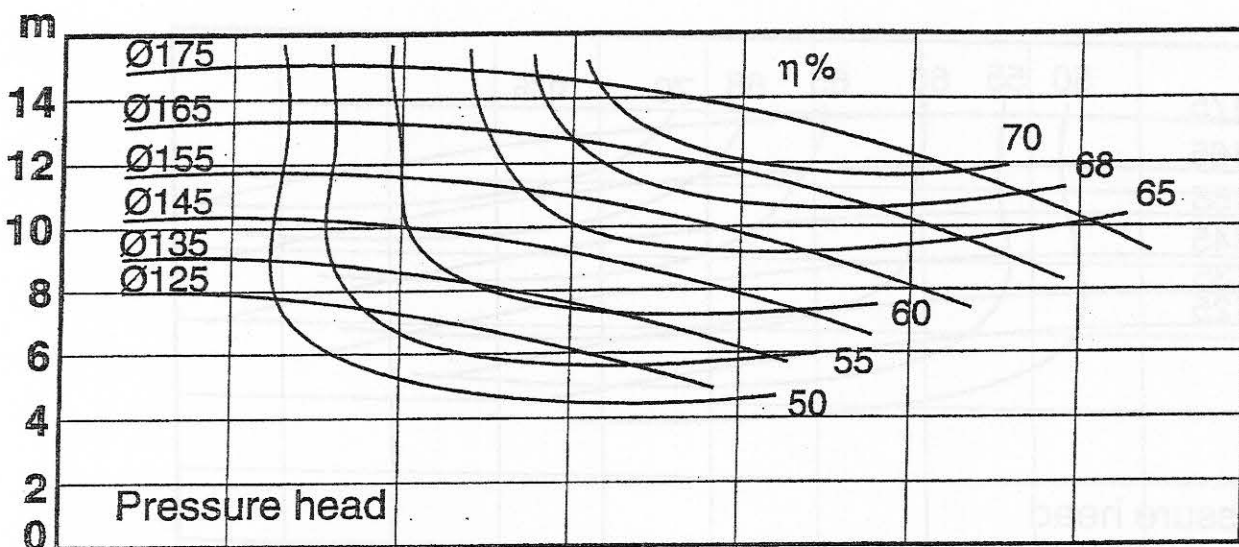

W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE
63,5 mm INLET - 51 mm OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: Ø175 mm
Performance data refer to water at 20°C
Permissible tolerance ± 5%

