
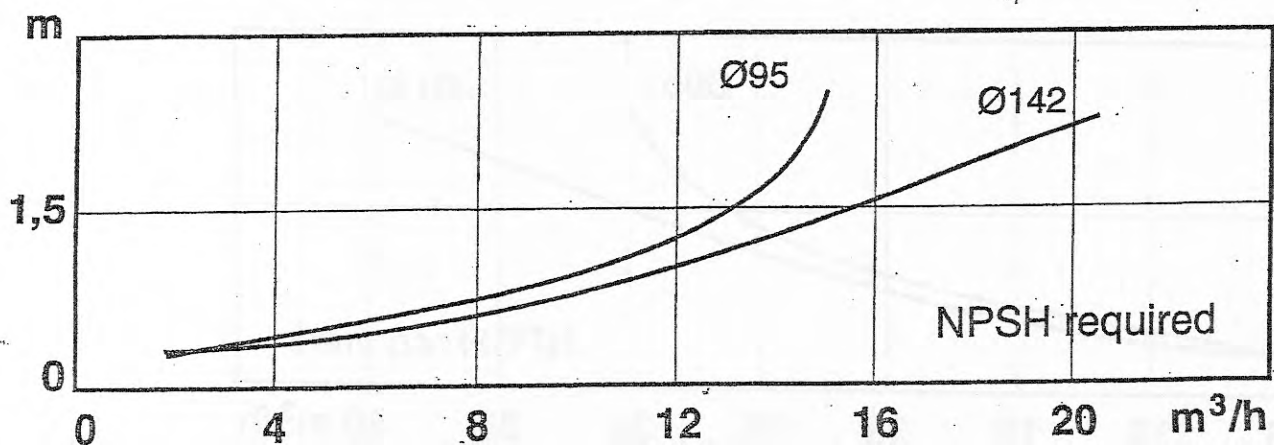
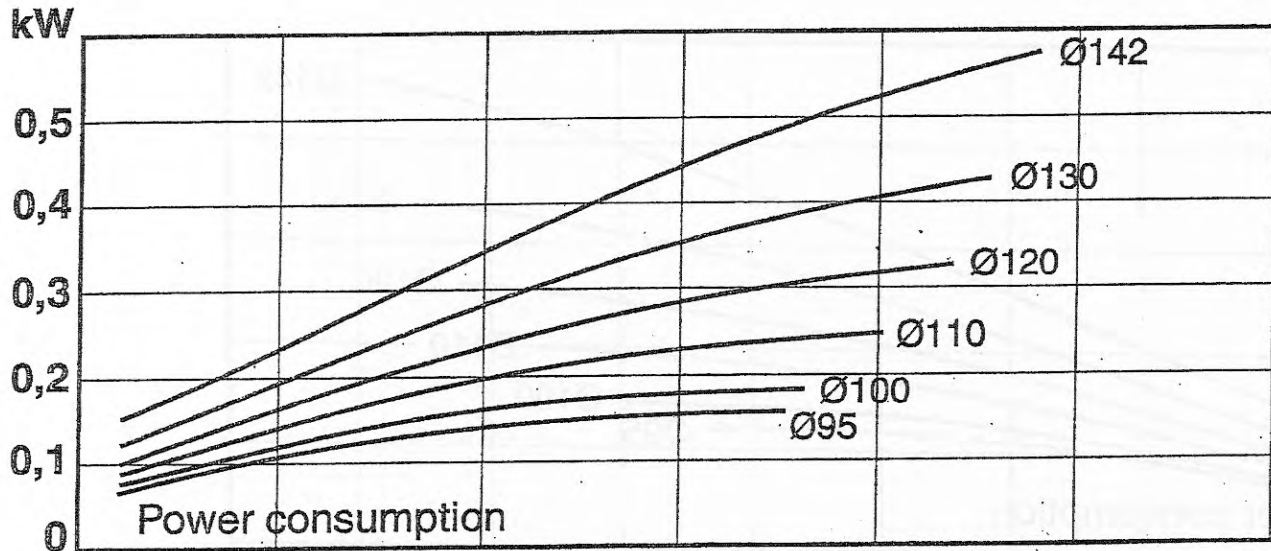


**W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE**  
**51 mm INLET - 51 mm OUTLET, 1750 RPM, 60 Hz**

NOTE: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Impeller dia: Max: Ø142 mm  
Performance data refer to water at 20°C  
Permissible tolerance  $\pm 5\%$

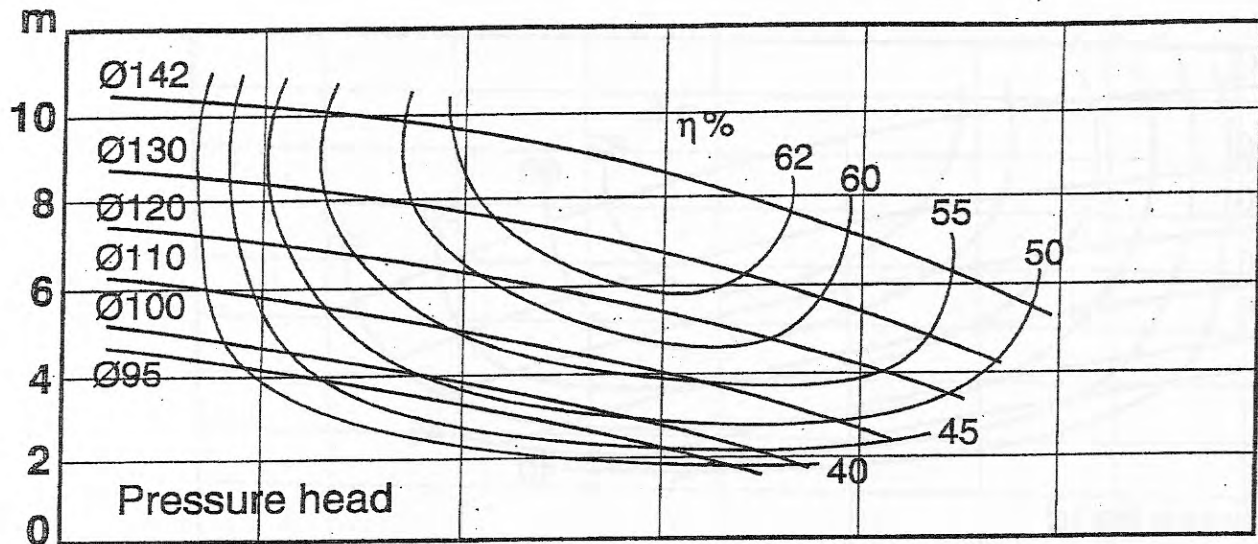

# APV Fluid Handling America W+ Performance Curves

W+ SERIES  
A-1-201.210  
PAGE 6 of 8  
EFFECTIVE 1-1-97

## W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE 51 mm INLET - 51 mm OUTLET, 3500 RPM, 60 Hz

NOTE: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Impeller dia: Max: Ø142 mm  
Performance data refer to water at 20°C  
Permissible tolerance  $\pm 5\%$

