

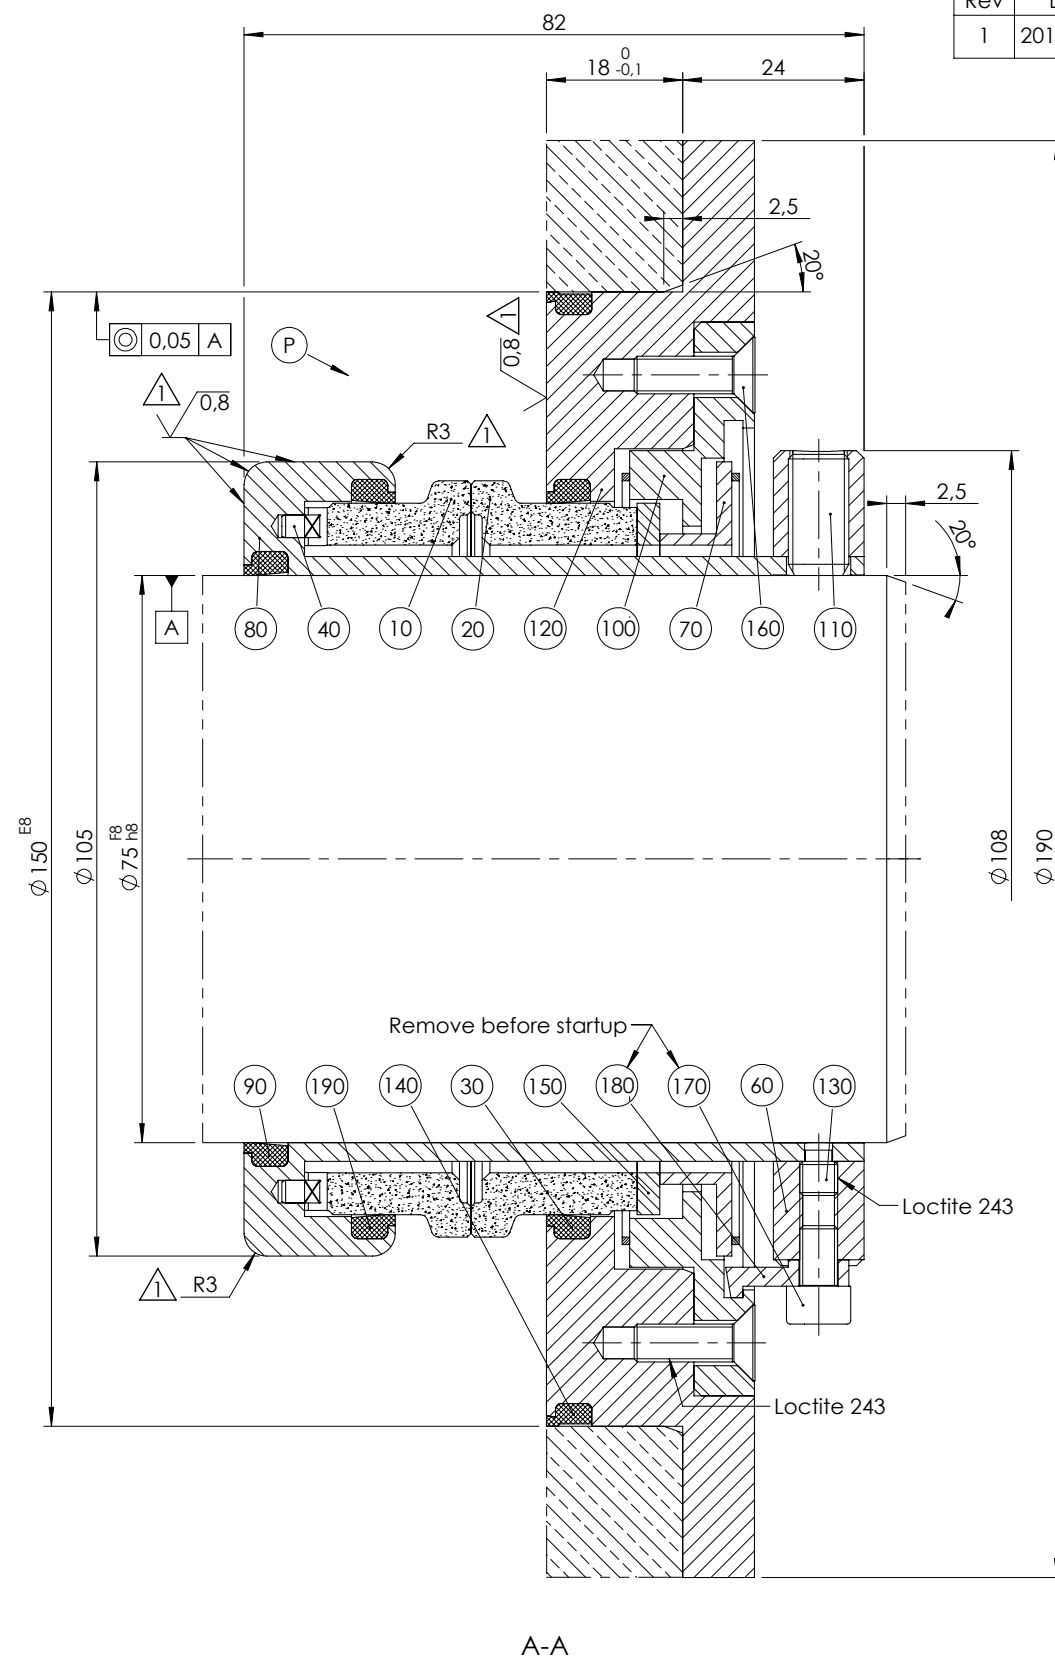
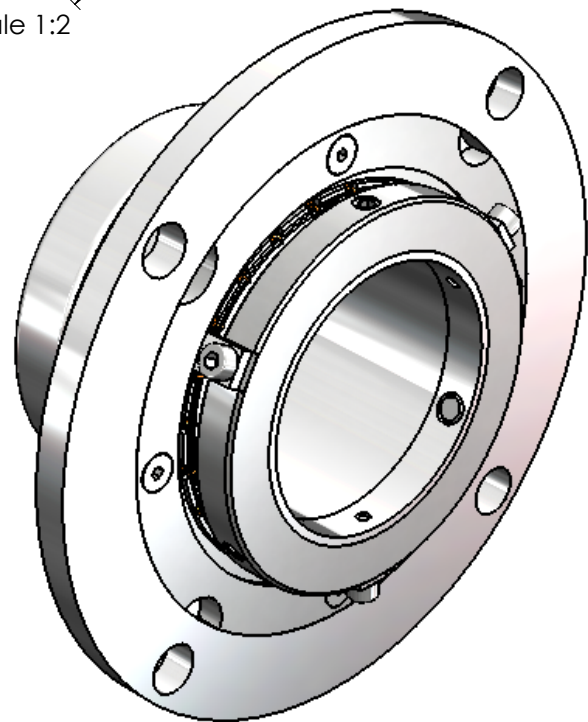
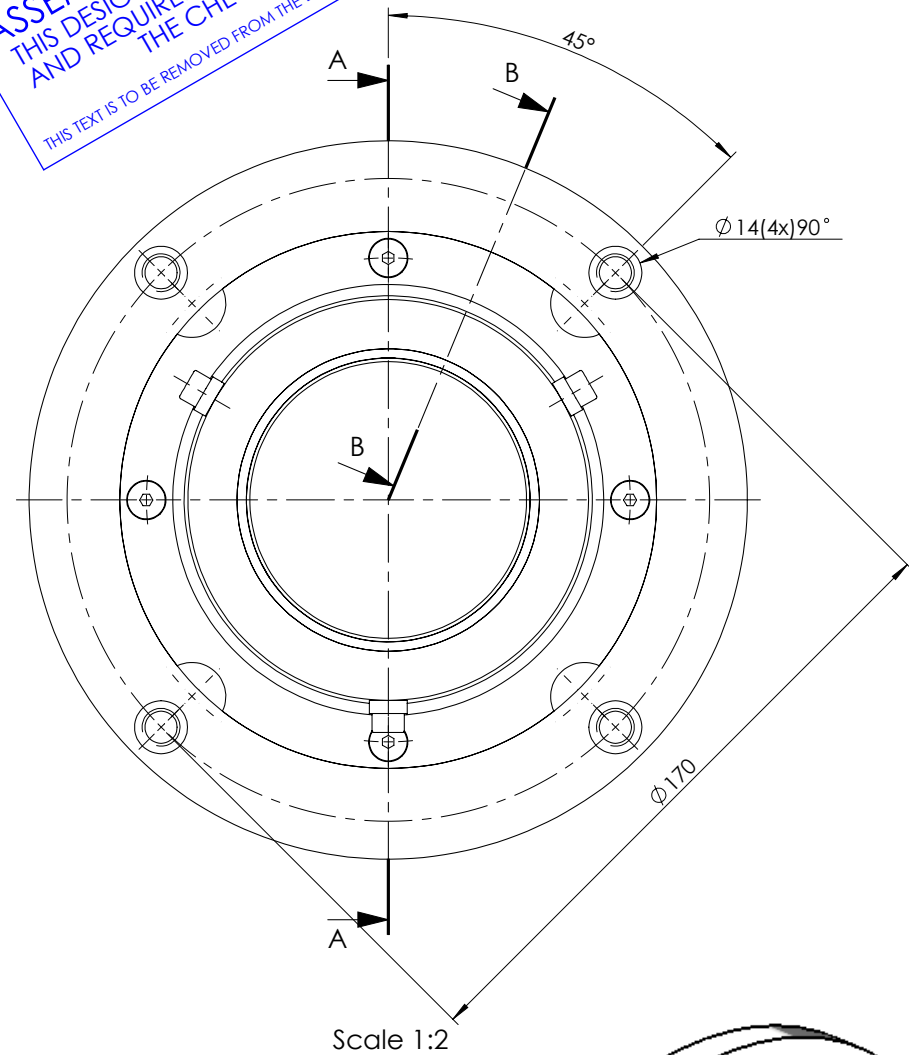


ASSEMBLY FINAL APPROVAL REQUIRED  
THIS DESIGN IS EITHER NEW OR RECENTLY CHANGED  
AND REQUIRES APPROVAL BY EITHER THE DESIGNER,  
THE CHECKER OR THE APPROVER!  
THIS TEXT IS TO BE REMOVED FROM THE DRAWING AFTER APPROVAL AND BEFORE DELIVERY

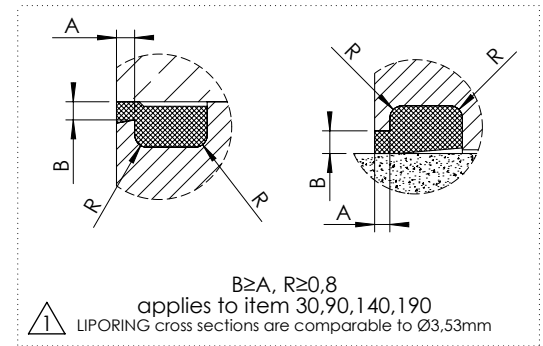

A-A

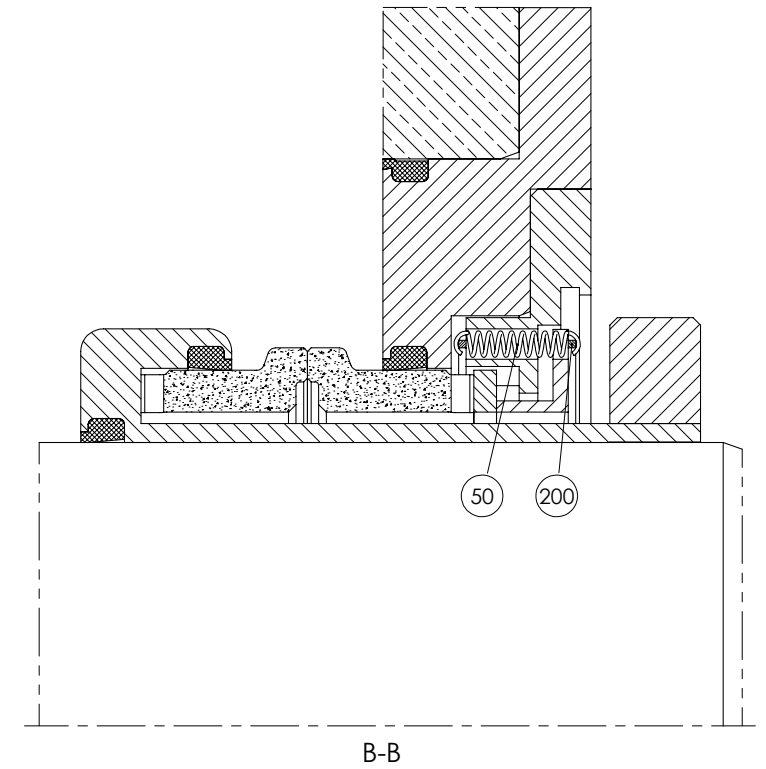

Item	Description	Qty	Drawing
10	Inboard rotor	1	ED-Z00
20	Inboard stator	1	ED-Z00
30	LIPORING HRI	1	524.14379-3
40	Drive pin	4	653940
50	Tension spring	24	524.14101-5
60	Stop ring	1	ES-67
70	Spring ring	1	ES-77
80	Shaft sleeve	1	900794
90	LIPORING HRI	1	214.12318-14
100	Cover	1	ES-107
110	Socket set screw, cup point	3	-
120	Inboard flange	1	900793
130	Socket set screw, dog point	3	-
140	LIPORING HRO	1	654457
150	Drive disc	1	ED-157
160	Socket flat head screw	4	-
170	Socket head cap screw	3	-
180	Mounting spacer	3	ED-183
190	LIPORING HRI	1	524.14379-3
200	Spring holder	2	ES-207

	General tolerance ISO 2768-mK		Application Processtec Inc. Agitator Type VJ600.080G		Seal category PF6O17	
	Design TS 2012-04-24	Checked 120425 EJ	Approved -	Customer drw. -	Project no. EP9622-01	Replaced by -
Weight (kg) 4.2		Replaces -		Drawing no. 16060-90		Rev. 1
Scale/Size 1:1 A3		Drawing no. 16060-90		Rev. 1		

HUHNSEAL

ESU-075