

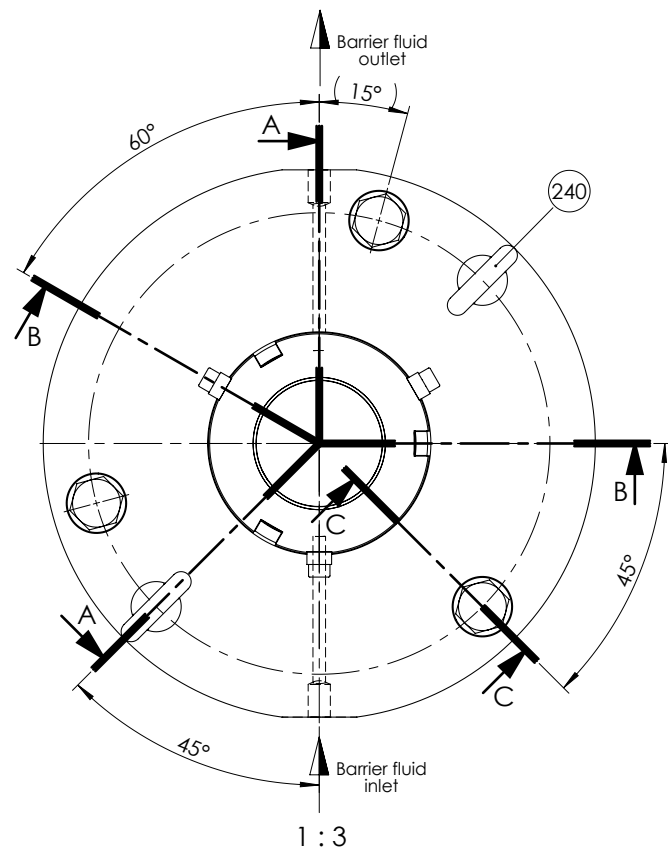
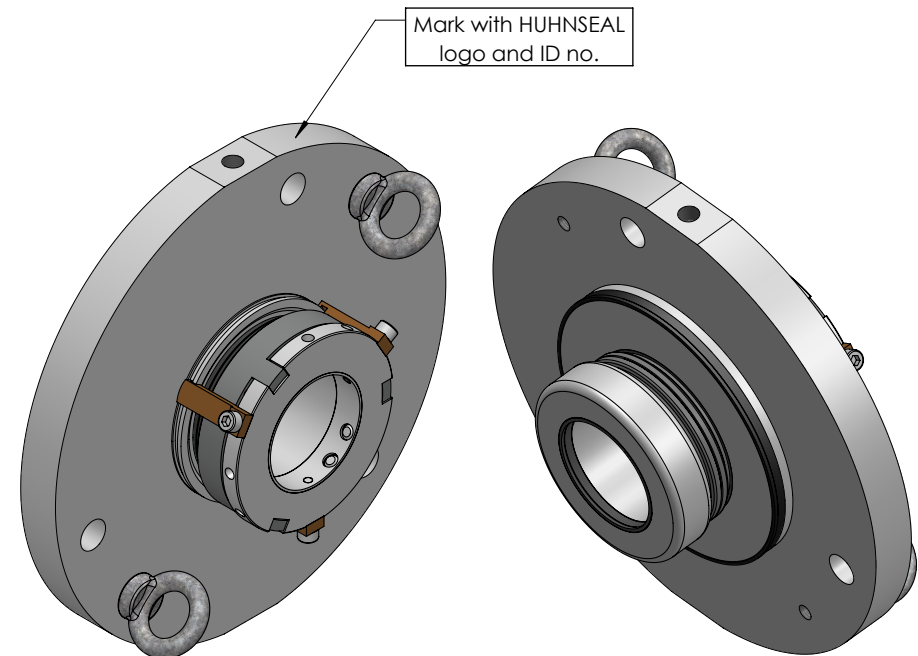
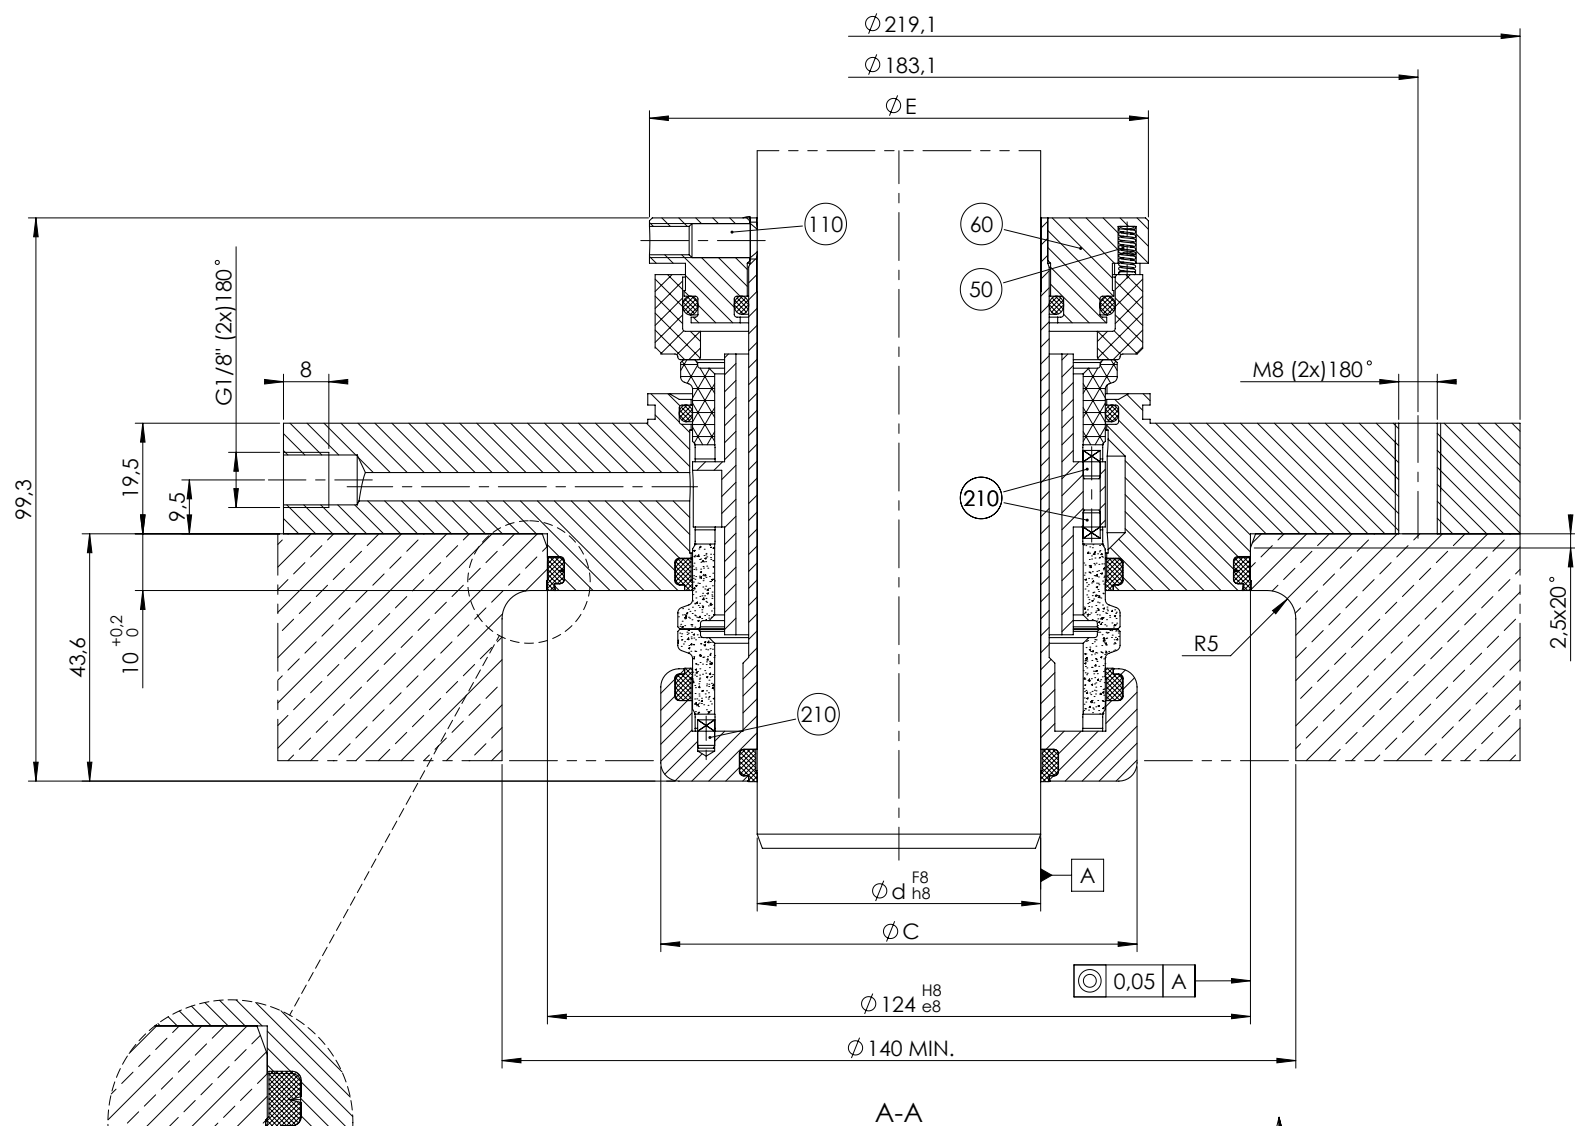


This drawing is the property of Huhnseal. Without our written consent in each particular case, it must not under penalty of law be reproduced or improperly used or otherwise communicated to a third party.

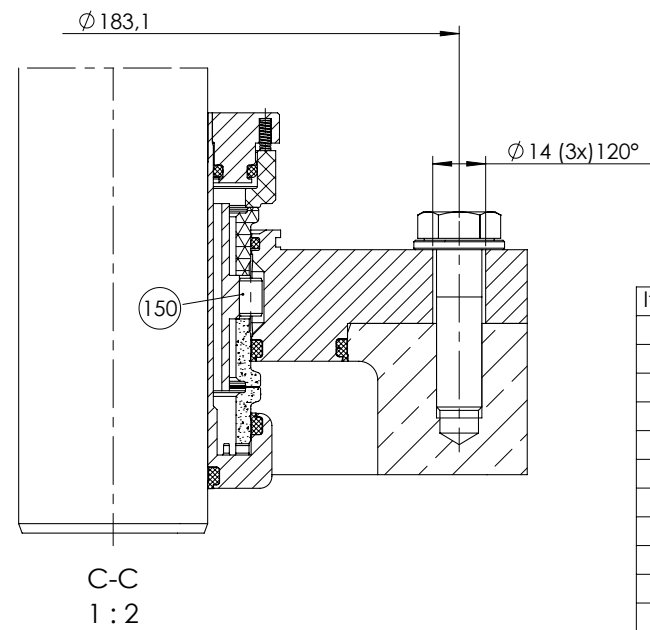

Seal	d	C	E	Weight (kg)
EDH-030	30	64	68	7.2
EDH-050	50	84	88	7.3

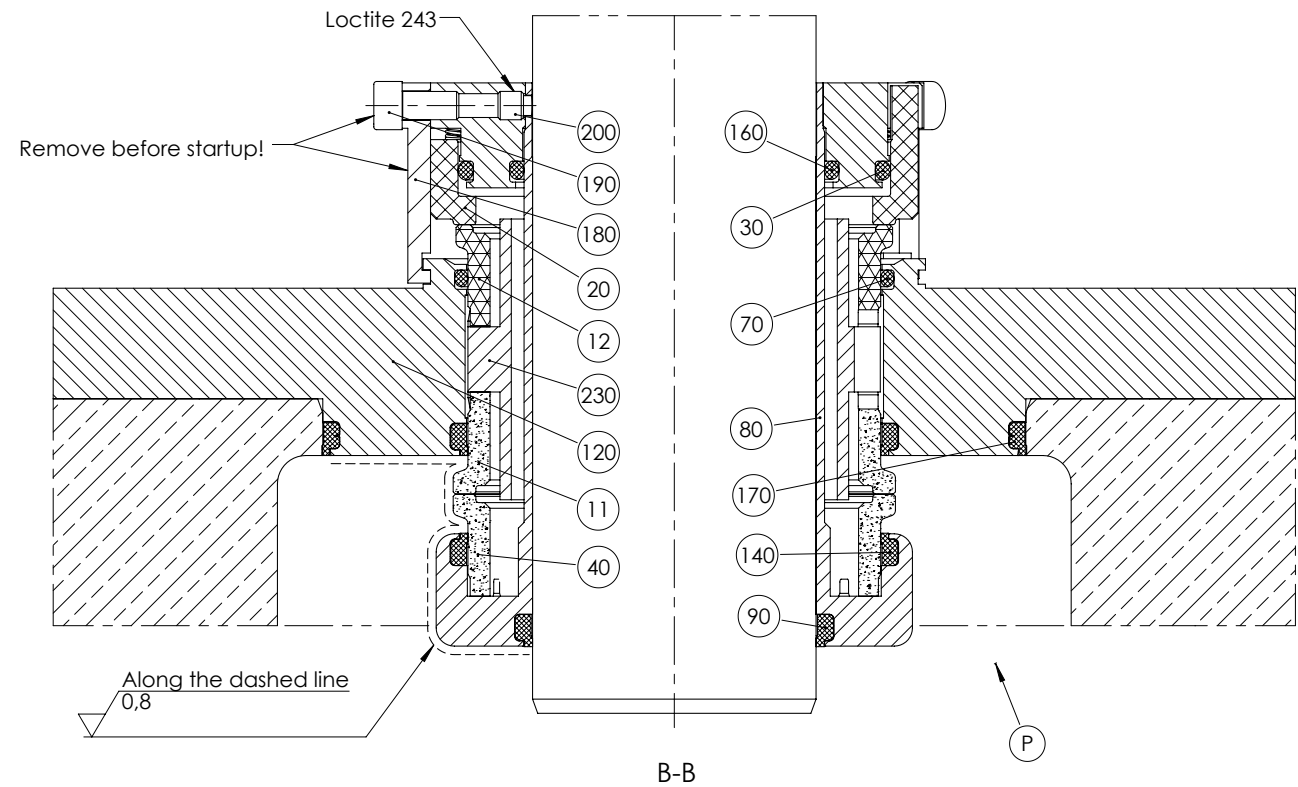

Item	Description	Quantity	Drawing
11	Inboard stator	1	ED-Z00
12	Outboard stator	1	ED-C00
20	Outboard rotor	1	ED-280
30	O-ring	1	-
40	Inboard rotor	1	ED-Z00
50	Compression spring	6/12	-
60	Stop ring	1	EDH-60
70	O-ring	1	-
80	Shaft sleeve	1	EDH-80
90	LIPORING™ HRI	1	-
110	Socket set screw, cup point	3/6	-
120	Flange	1	3428
140	LIPORING™ HRI	2	-
150	Dowel pin	2	-
160	O-ring	1	-
170	LIPORING™ HRO	1	655193
180	Mounting spacer	3	ED-187
190	Socket head cap screw	3	-
200	Socket set screw, dog point	3	-
210	Drive pin	6	1863
230	Flushing collar	1	BAU-230
240	Lifting eyebolt	2	-

This seal can handle ±1,5mm axial displacement

General tolerance ISO 2768-mK	Weight (Kg) 7.3	Application ViscoTec vertical tank	Seal Pos. Top Mounted	Design MHG	Approved	Checked by EJ	Release date 2017-04-19
----------------------------------	--------------------	---------------------------------------	--------------------------	---------------	----------	------------------	----------------------------

		EDH-030/050	Customer drw.		Project no. EP9622-07	
			Drawing no. 18027-90	Scale 3:4	Size A3	Rev. 0