
## SK 872.1/873.1 - Motor SK 872.1F/873.1F - Motor

11.81






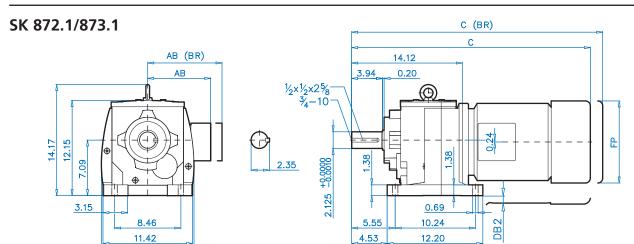

SK 872.1F/873.1F



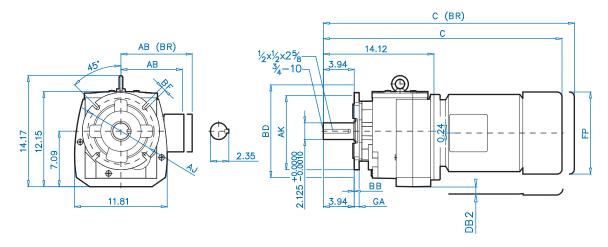

## **Mounting Flange**

BD (mm)	AJ	А	K	BB	BF	GA
9.84 (250)	8.46	7.087	+0.0005 -0.000	0.16	0.53	0.63
11.81 (300)	10.43	9.055	+0.0006 -0.001	0.16	0.53	0.79
13.78 (350)	11.81	9.843	+0.0000 -0.001	0.20	0.69	0.79

## **Motor Dimensions**

Standard eff.	90S/L	100L	112M		132S/M	160M/L		180MX	180LX		
Energy eff.	90SH/LH	100LH		112MH	132SH/MH	160M/H	160LH			180MH/LH	
AB	5.79	6.65	7.05	7.05	8.03	9.53	9.53	9.53	9.53	10.04	
AB (BR)	5.79	6.77	7.17	-	7.91	9.53	-	9.53	9.53	-	
С	24.97	26.19	27.06	28.06	30.49	33.54	35.30	33.54	35.30	38.66	
C (BR)	27.93	29.80	30.77	-	34.70	38.86	-	38.86	40.58	-	
FP	7.19	7.90	8.87	8.87	10.45	12.56	12.56	12.56	12.56	14.26	
DB2	-	-	-	-	-	-	-	-	-	0.04	

(BR) Denotes Brakemotor