

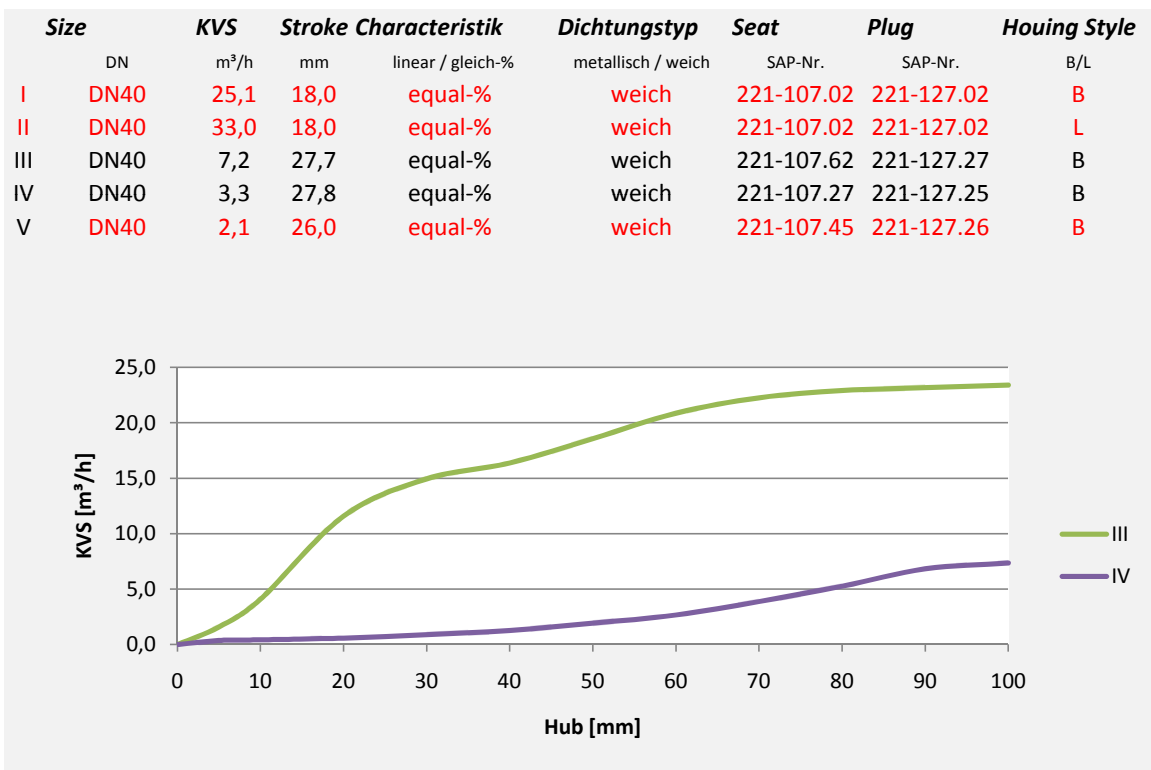
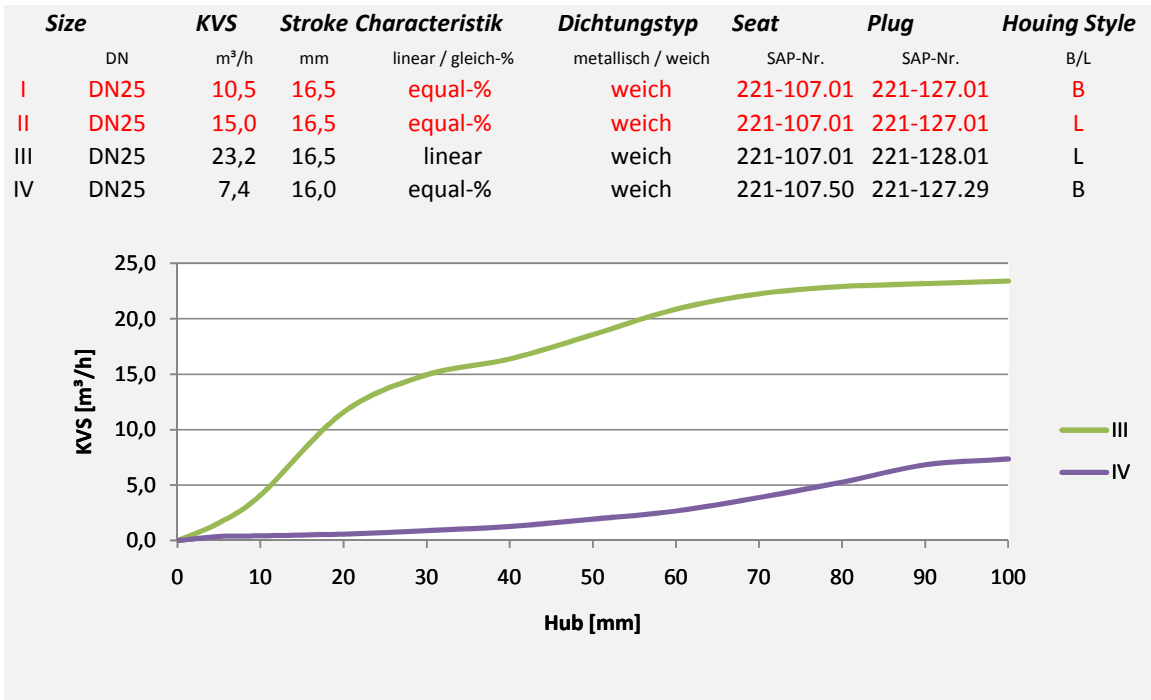




VARIVENT® N-Valve with control cone
DN25-125 / OD1"-4" / IPS6"

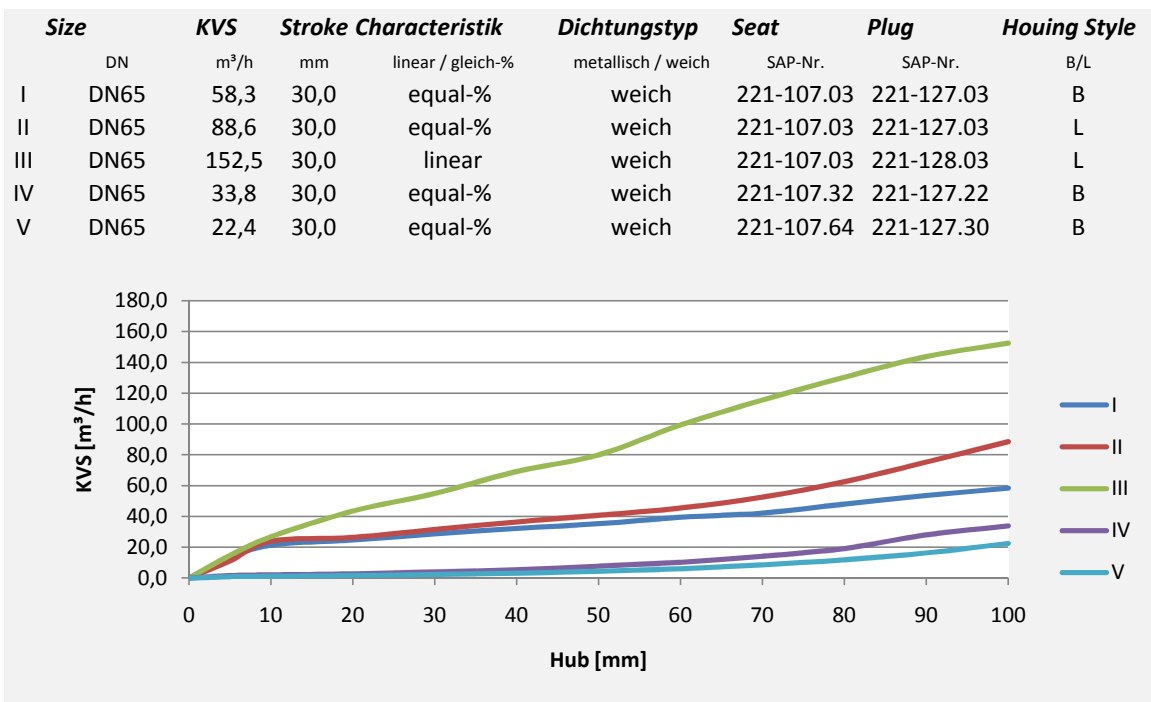


VARIVENT® N-Valve with control cone
DN25-125 / OD1"-4" / IPS6"

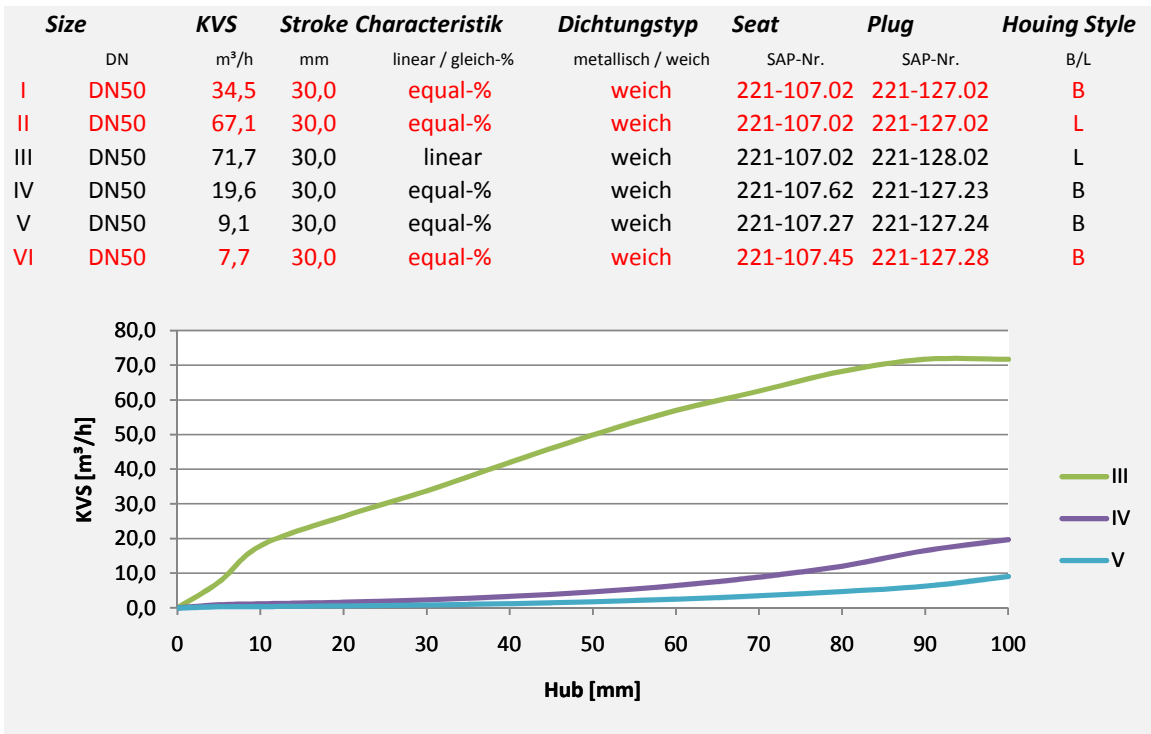

VARIVENT® N-Valve with control cone
DN25-125 / OD1"-4" / IPS6"

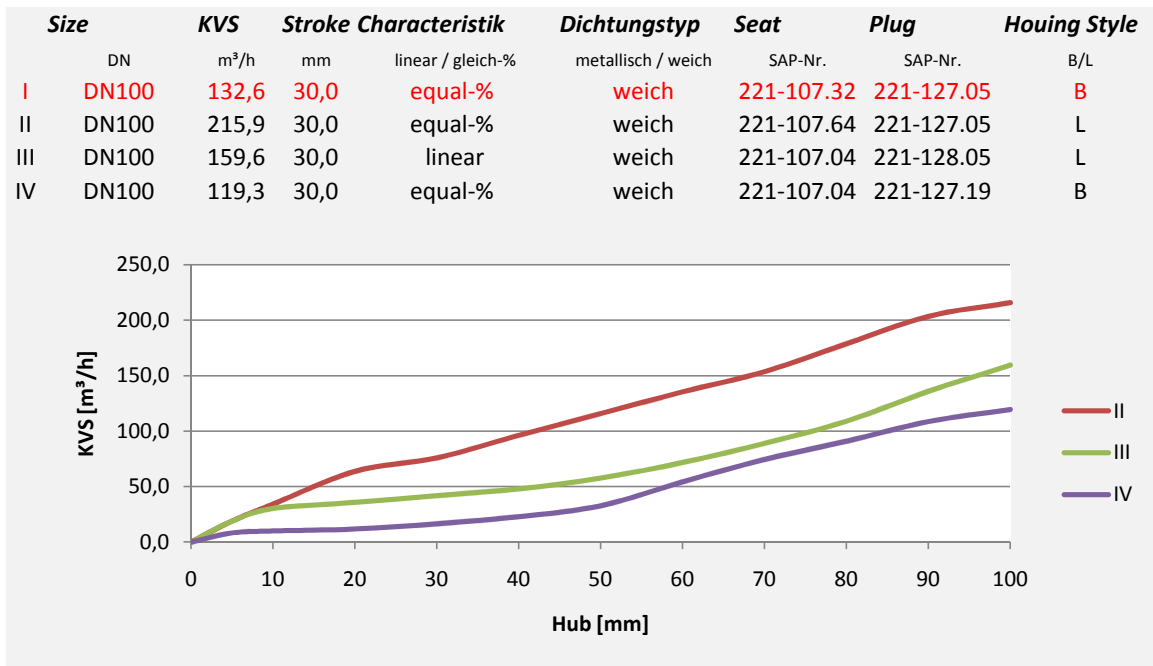
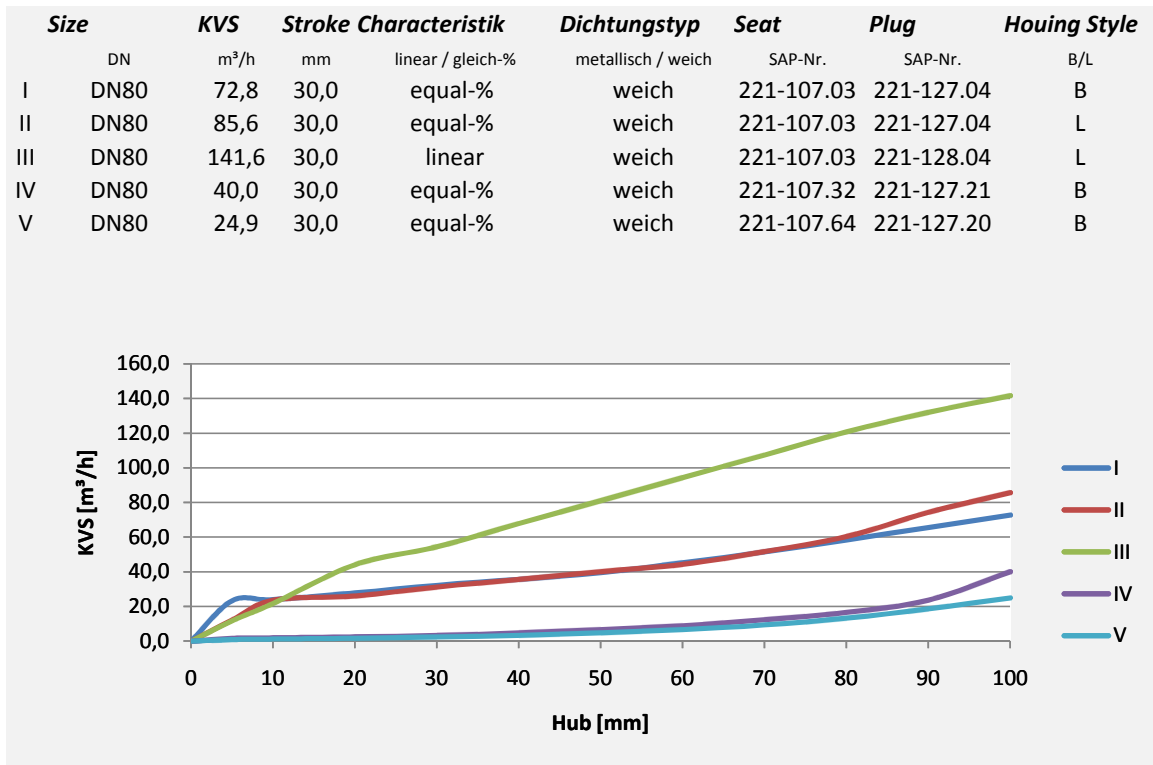


VARIVENT® N-Valve with control cone
DN25-125 / OD1"-4" / IPS6"

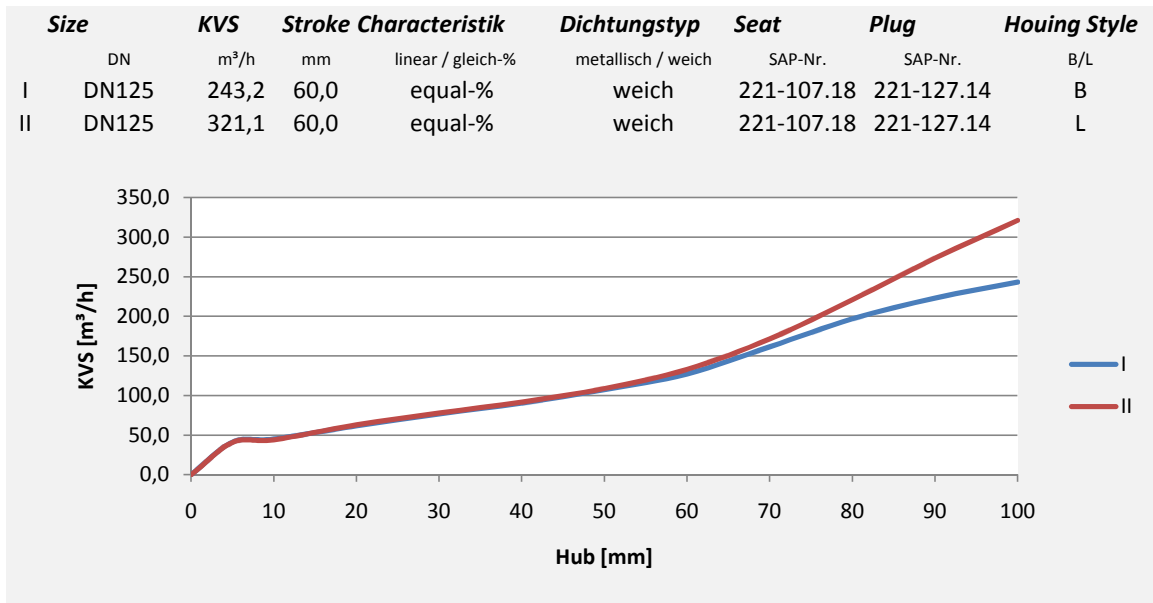



VARIVENT® N-Valve with control cone

DN25-125 / OD1"-4" / IPS6"

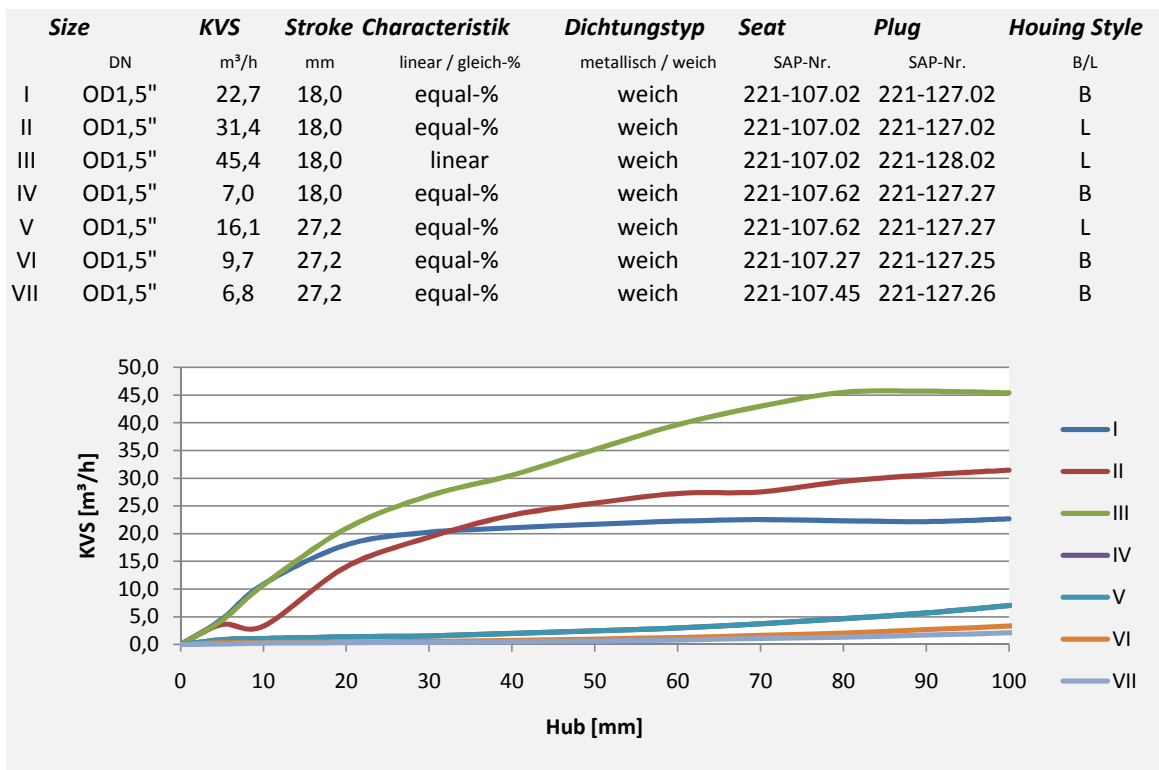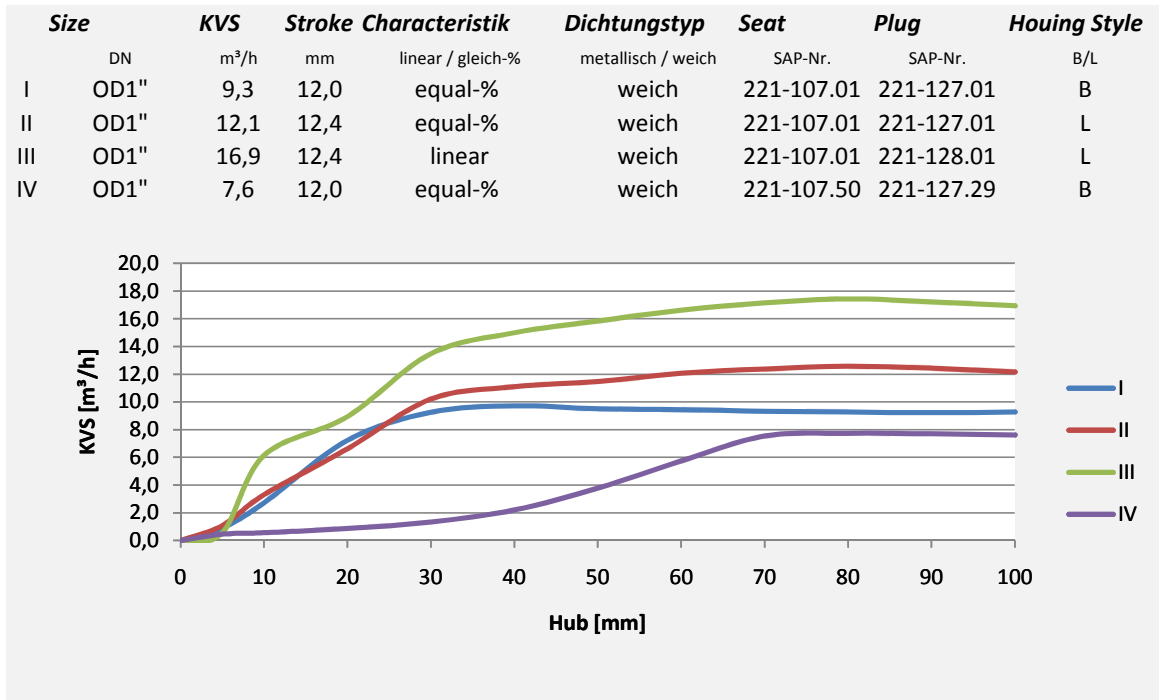


VARIVENT® N-Valve with control cone


DN25-125 / OD1"-4" / IPS6"

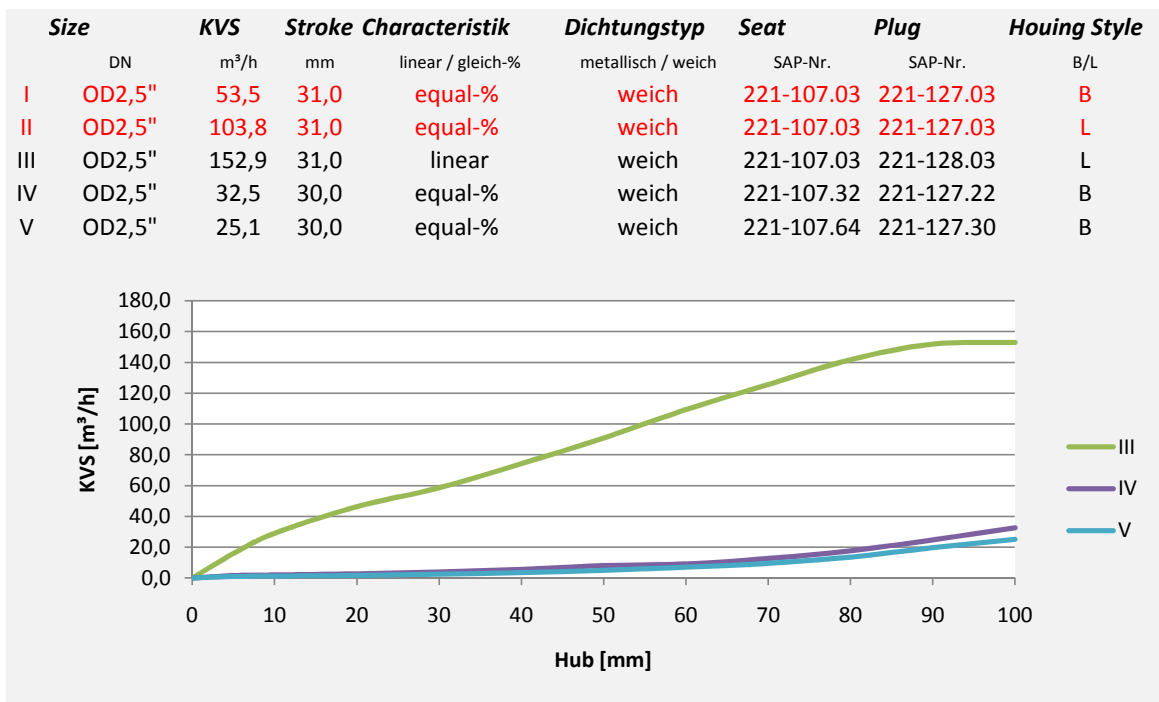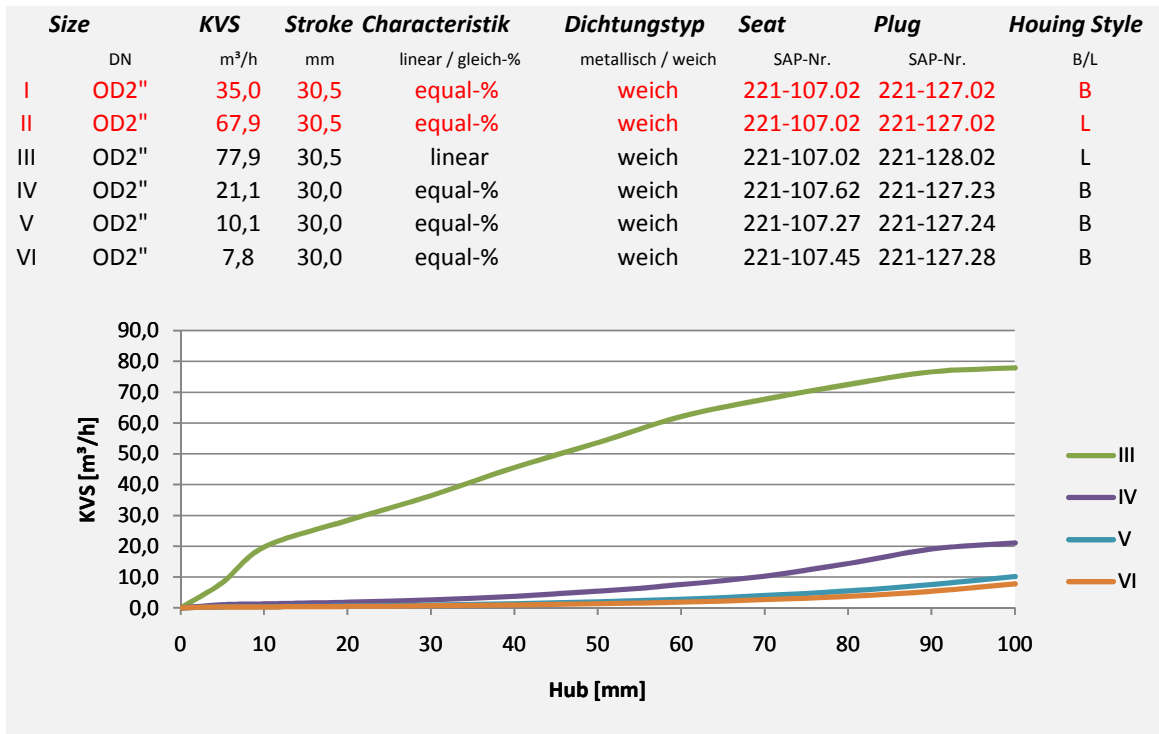

Size	DN	KVS	Stroke	Characteristic	Dichtungstyp	Seat	Plug	Housing Style
		m ³ /h	mm	linear / gleich-%	metallisch / weich	SAP-Nr.	SAP-Nr.	B/L
I	OD3"	63,1	30,0	equal-%	weich	221-107.03	221-127.04	B
II	OD3"	81,7	30,0	equal-%	weich	221-107.03	221-127.04	L verschweißt
III	OD3"	154,2	30,0	linear	weich	221-107.03	221-128.04	L verschweißt
IV	OD3"	37,5	30,0	equal-%	weich	221-107.32	221-127.21	B
V	OD3"	43,3	30,0	equal-%	weich	221-107.32	221-127.21	L verschweißt
VI	OD3"	23,1	30,0	equal-%	weich	221-107.64	221-127.20	B
VII	OD3"	27,1	30,0	equal-%	weich	221-107.64	221-127.20	L

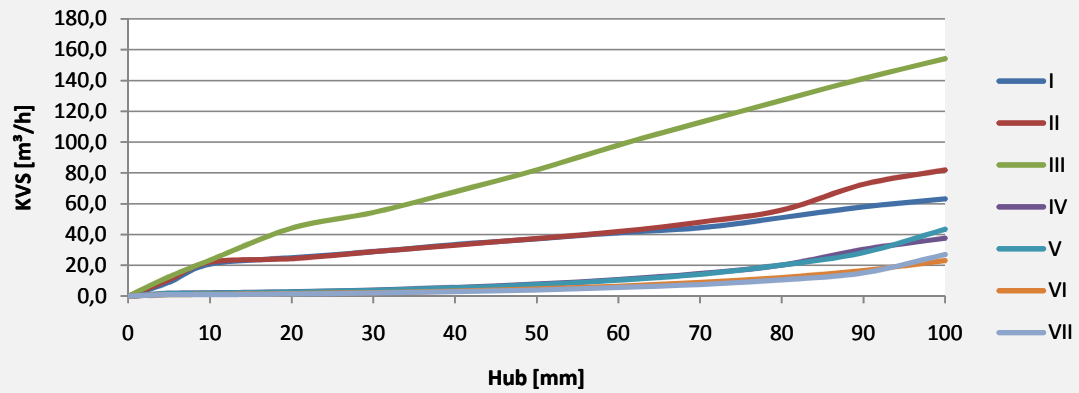

Size	DN	KVS	Stroke	Characteristic	Dichtungstyp	Seat	Plug	Housing Style
		m ³ /h	mm	linear / gleich-%	metallisch / weich	SAP-Nr.	SAP-Nr.	B/L
I	OD4"	134,6	30,5	equal-%	weich	221-107.04	221-127.05	B
II	OD4"	163,4	30,5	equal-%	weich	221-570.13	221-127.05	L
III	OD4"	227,4	30,5	linear	weich	221-107.04	221-128.05	L
IV	OD4"	119,5	30,0	equal-%	weich	221-107.70	221-127.19	B

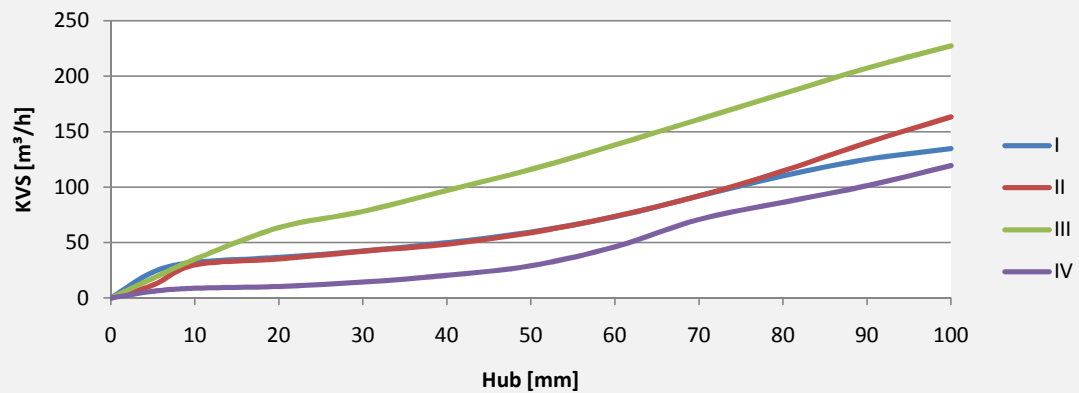

VARIVENT® N-Valve with control cone
DN25-125 / OD1"-4" / IPS6"

