SK 92372









ALTERNATE SHAFTS SEE PAGES 566 - 573

SK 92372AX

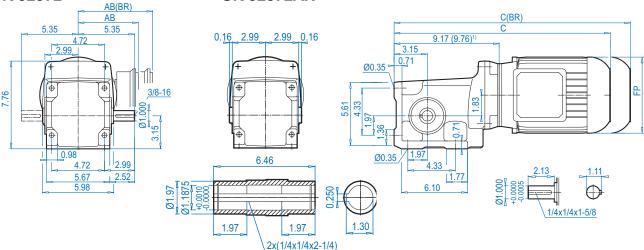

SK 92372VF

SK 92372AF

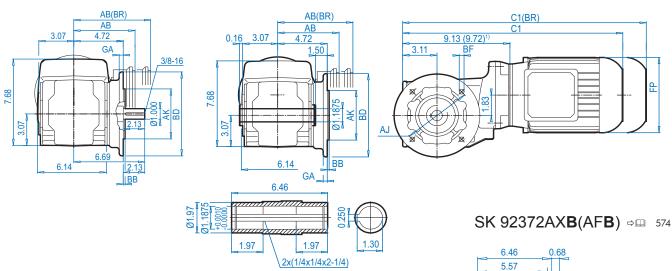

Mounting flange

BD (mm)	AJ	AK	BB	BF	GA
6.30 (160)	5.12	4.331 + 0.0005 - 0.0004	0.14	0.35	0.47
7.87 (200)	6.50	5.118 ^{+ 0.0005} _{- 0.0004}	0.14	0.43	0.47

Motor dimensions

Standard efficiency	63S/L	71S/L	80S/L	90S/L ¹⁾	100L ¹⁾		For Other Connection	
Energy efficiency			80LH	90SH/LH ¹⁾	100LH ¹⁾	112MH ¹⁾	Possibilities please see ⇒ □ 554 & 556	
AB	4.53	4.88	5.59	5.79	6.65	7.05		
AB (BR)	4.84	5.24	5.63	5.83	6.26	6.69		
C1	16.69	17.56	18.43	20.59	21.77	22.56	***************************************	
C1 (BR)	18.90	19.84	20.94	23.54	25.35	26.22		
С	16.73	17.60	18.46	20.63	21.81	22.60		
C (BR)	18.94	19.88	20.98	23.58	25.39	26.26	12	
FP	5.12	5.71	6.50	7.20	7.91	8.98		

(BR) denotes Brakemotor

Ø1.1875