
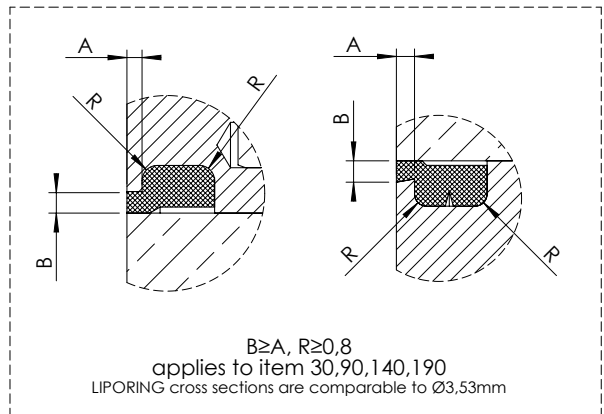
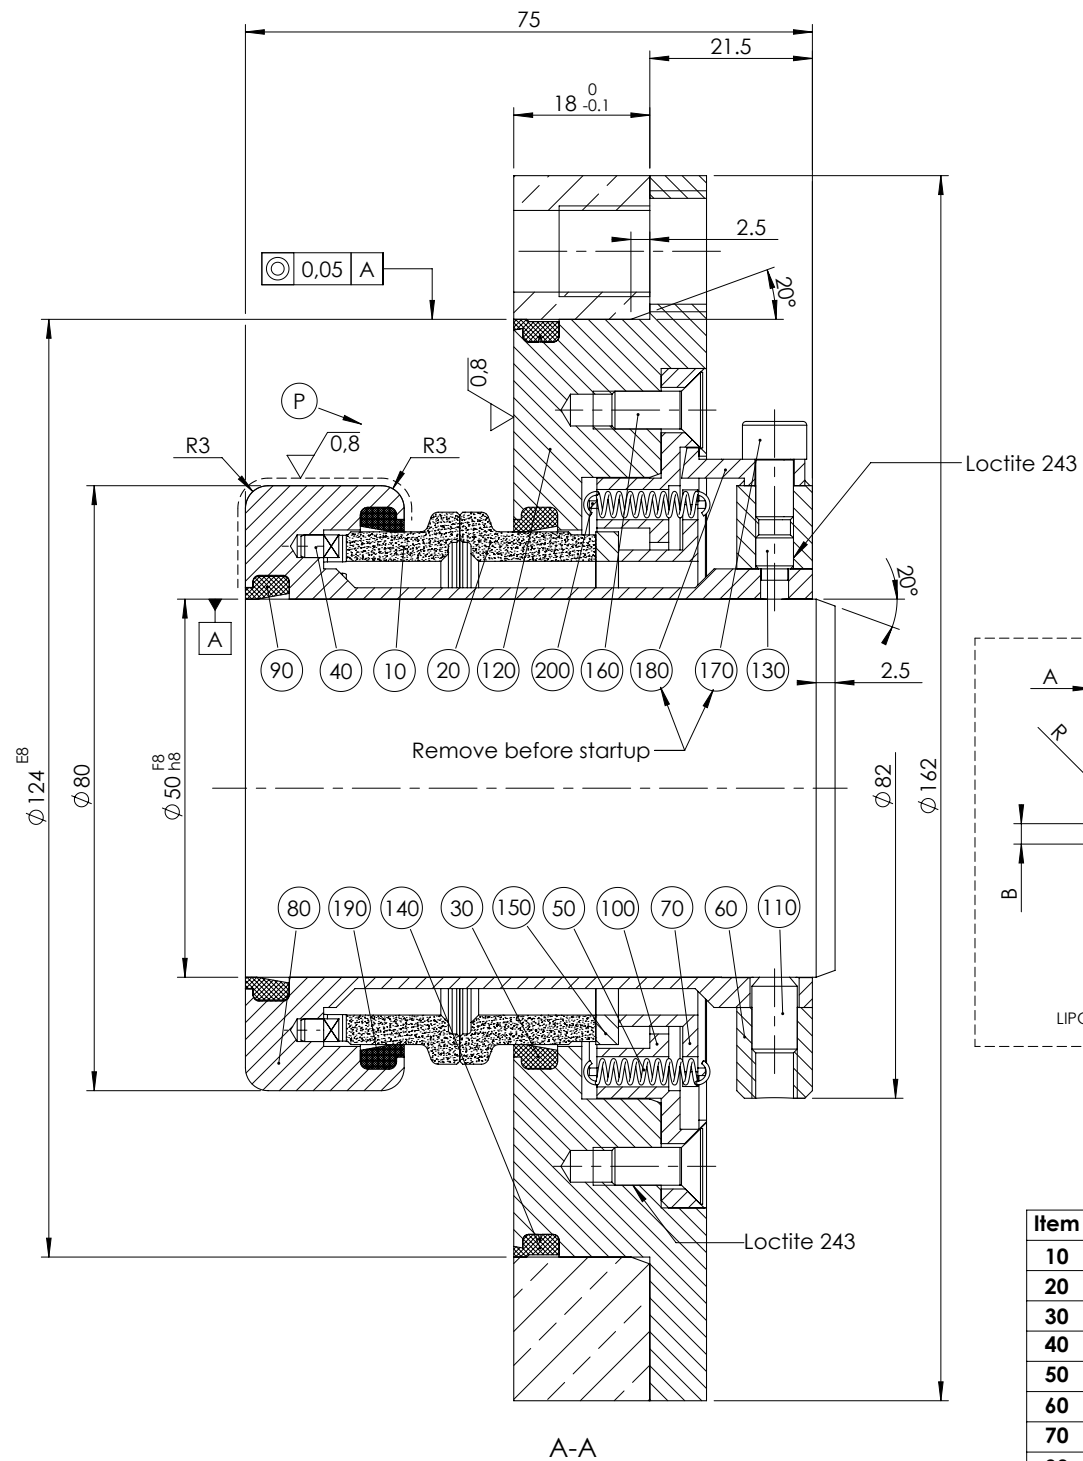


This drawing is the property of Huhnseal. Without our written consent in each particular case, it must not under penalty of law be reproduced or improperly used or otherwise communicated to a third party.

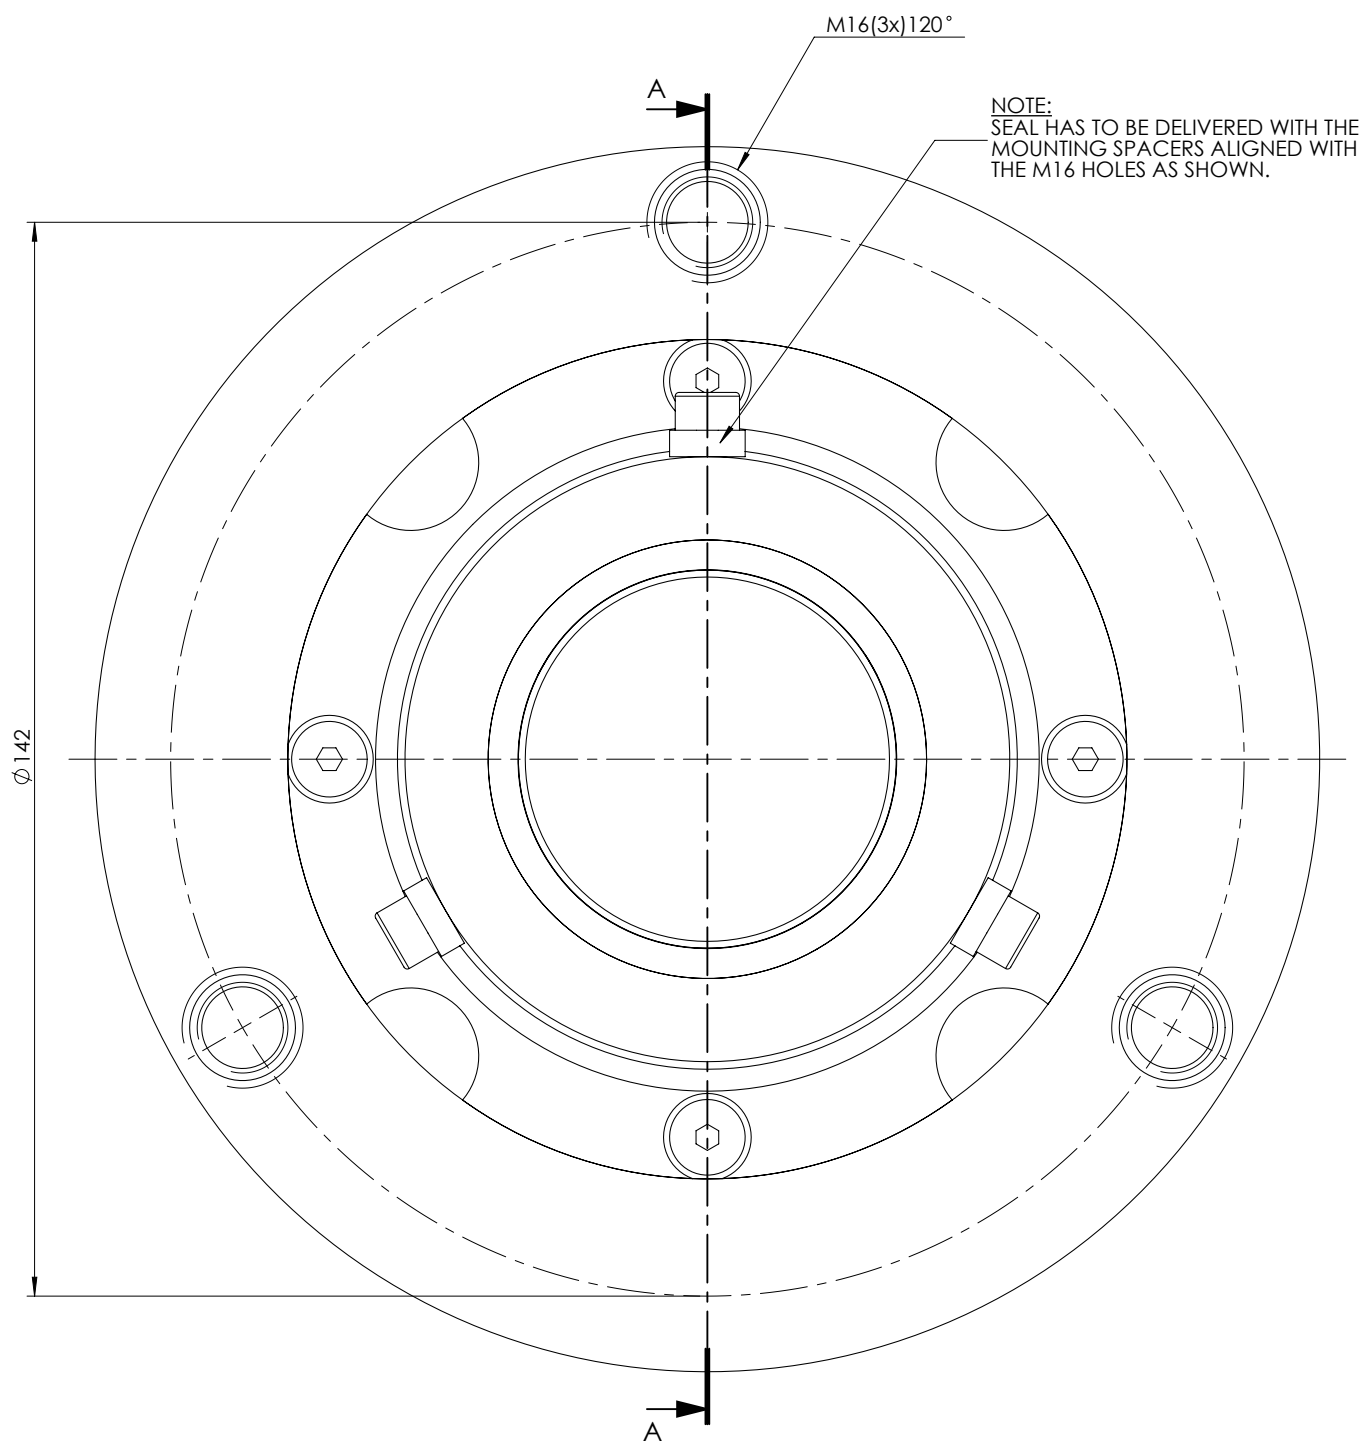

Item	Description	Qty	Drawing
10	Inboard rotor (Diamond)	1	ED-Z00
20	Inboard stator	1	ED-Z00
30	LIPORING HRI	1	13159-15
40	Drive pin	4	653940
50	Tension spring	12	14101-5
60	Stop ring	1	ES-67
70	Spring ring	1	ES-77
80	Shaft sleeve	1	904049
90	LIPORING HRI	1	11991-3
100	Cover	1	ES-107
110	Socket set screw, cup point	3	-
120	Inboard flange	1	904050
130	Socket set screw, dog point	3	-
140	LIPORING HRO	1	655193
150	Drive disc	1	ED-157
160	Socket flat head screw	4	-
170	Socket head cap screw	3	-
180	Mounting spacer	3	ED-187
190	LIPORING HRI	1	13159-15
200	Spring holder	2	ES-207

QUOTATION DRAWING
FOR DISCUSSION PURPOSES ONLY!
TU 2014-11-17

This seal can handle an axial displacement of ± 2 mm

	General tolerance ISO 2768-mK	Application ViscoTec Inc		Seal position	Item group PF6O17
	Design TU 2014/11/12	Checked -	Approved -	Customer drw. -	Project no. P9622-04
Weight (kg) 2.8		Replaces -		Replaced by -	
Scale 1:1	Size A3	Drawing no. 16406-90		Rev. 0	

ESU-050