

STSC 70-26

	I	II	II	IV	V	VI
speed [rpm]	1802	1423	1259	1123		
diff. pressure [psi]	100	100	155	155		
kinem. viscosity [mm ² /s]	12	12	50	50		
capacity [USGPM]	29.0	15.0	15.0	10.0		
power [hp]	5.8	4.4	5.7	5.0		
operating torque [lbf*ft]	17.0	16.3	23.7	23.3		
total efficiency [%]	28.9	19.8	23.9	18.1		
mech./hydr. efficiency [%]	67.4	70.4	75.1	76.5		
volumetric efficiency [%]	42.9	28.1	31.8	23.7		
NPSHr [ft]	2.34	2.10	2.07	2.00		
noise level [dB(A)]	68.9	67.6	67.4	66.8		
max. diff. pressure [psi]	232.1	232.1	232.1	232.1		
max. speed [rpm]	3600	3600	3600	3600		

made by: George W. Doan
date: 2/2/2011
Hyghspin_2.1

STSC 70-26

CLIENT:

LOCATION:


ENQUIRY NO:

PROJECT TITLE:

MEDIUM:

TAG NO(S):

QUOTATION/ORDER NO.:

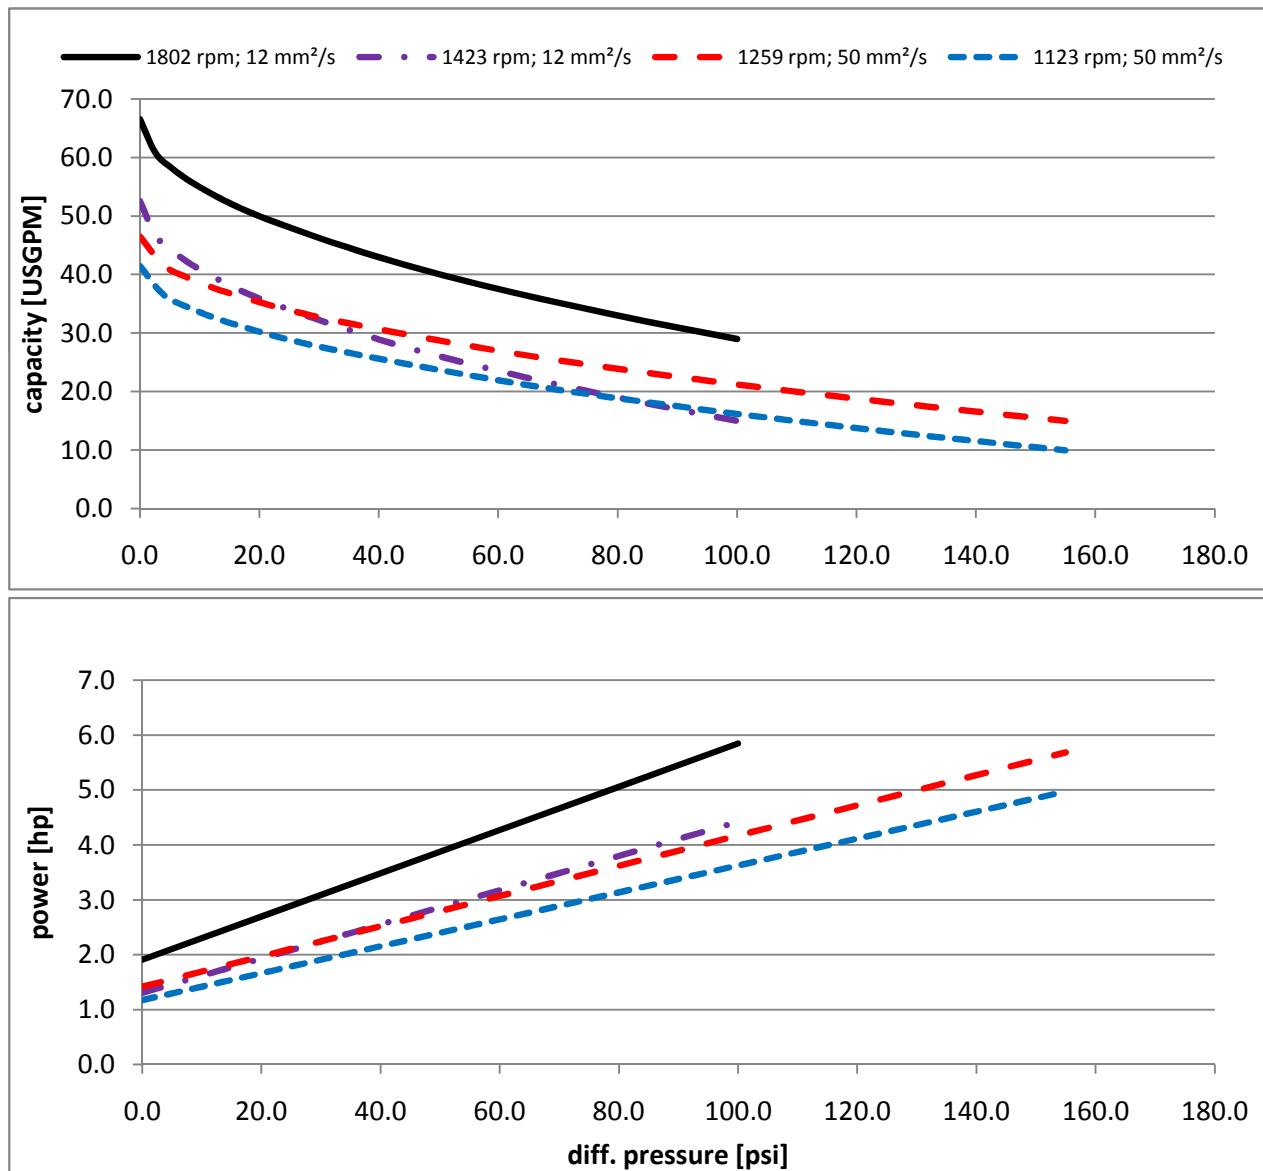


made by: George W. Doan

date: 2/2/2011


Hyghspin_2.1

STSC 70-26

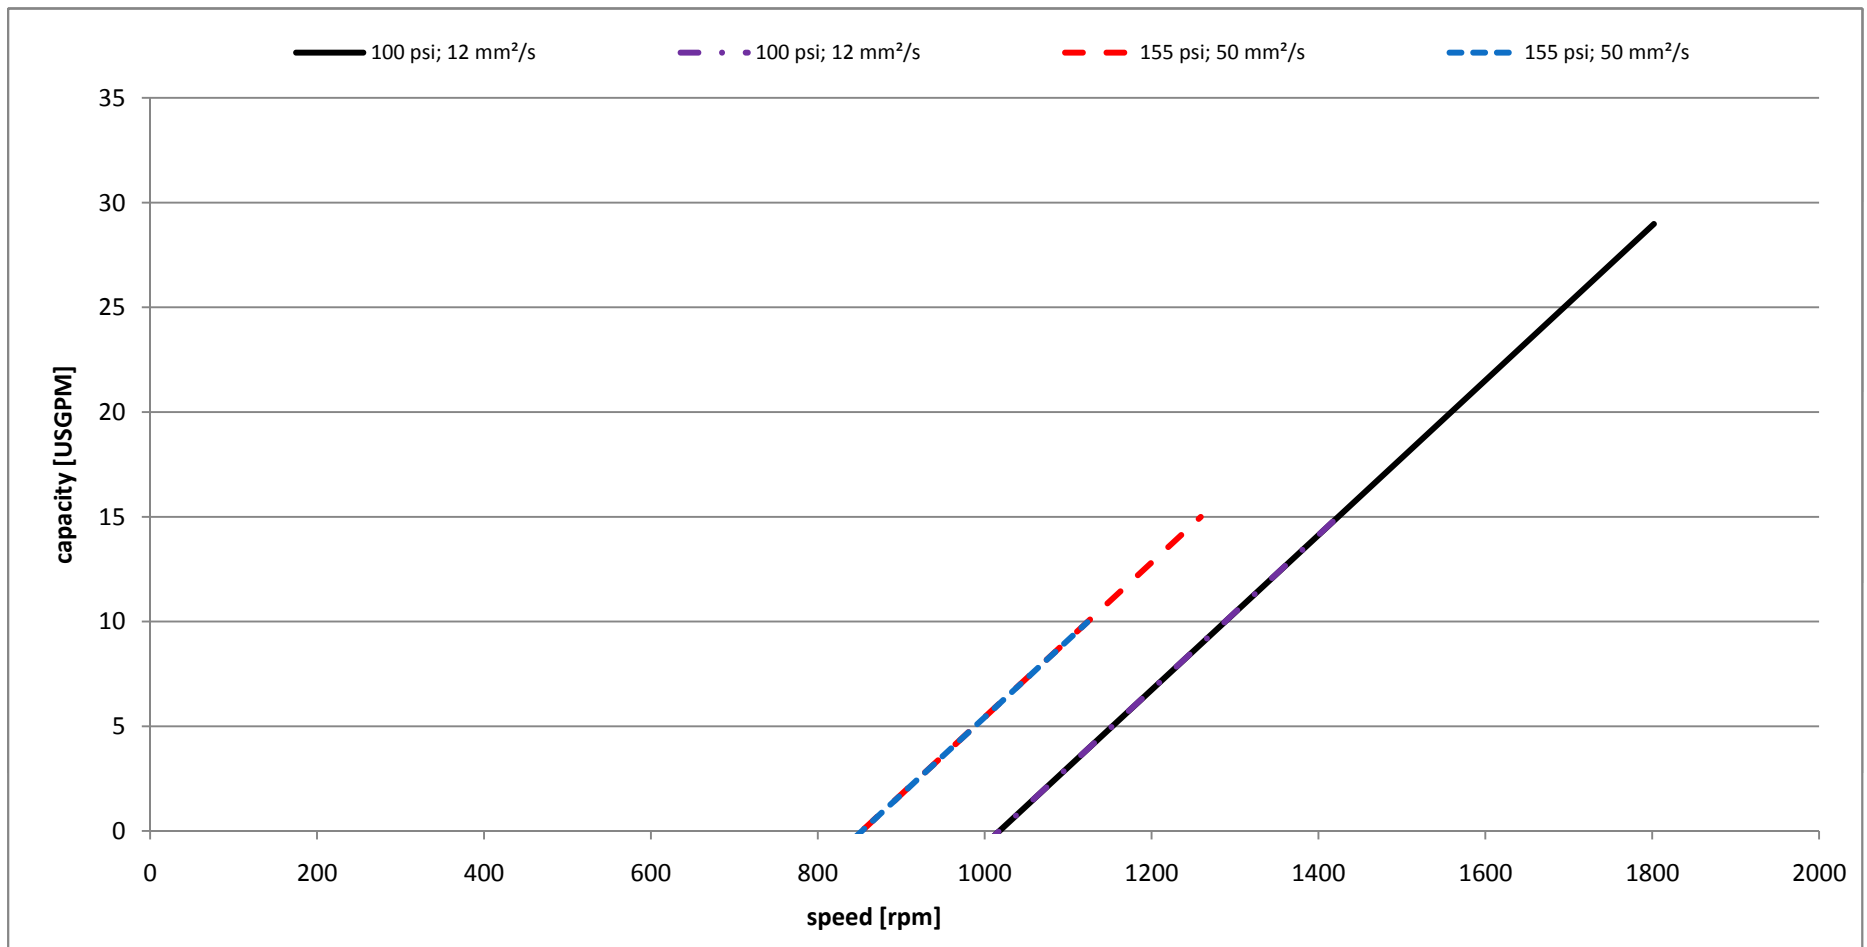


made by: George W. Doan
date: 2/2/2011
Hyghspin_2.1

STSC 70-26

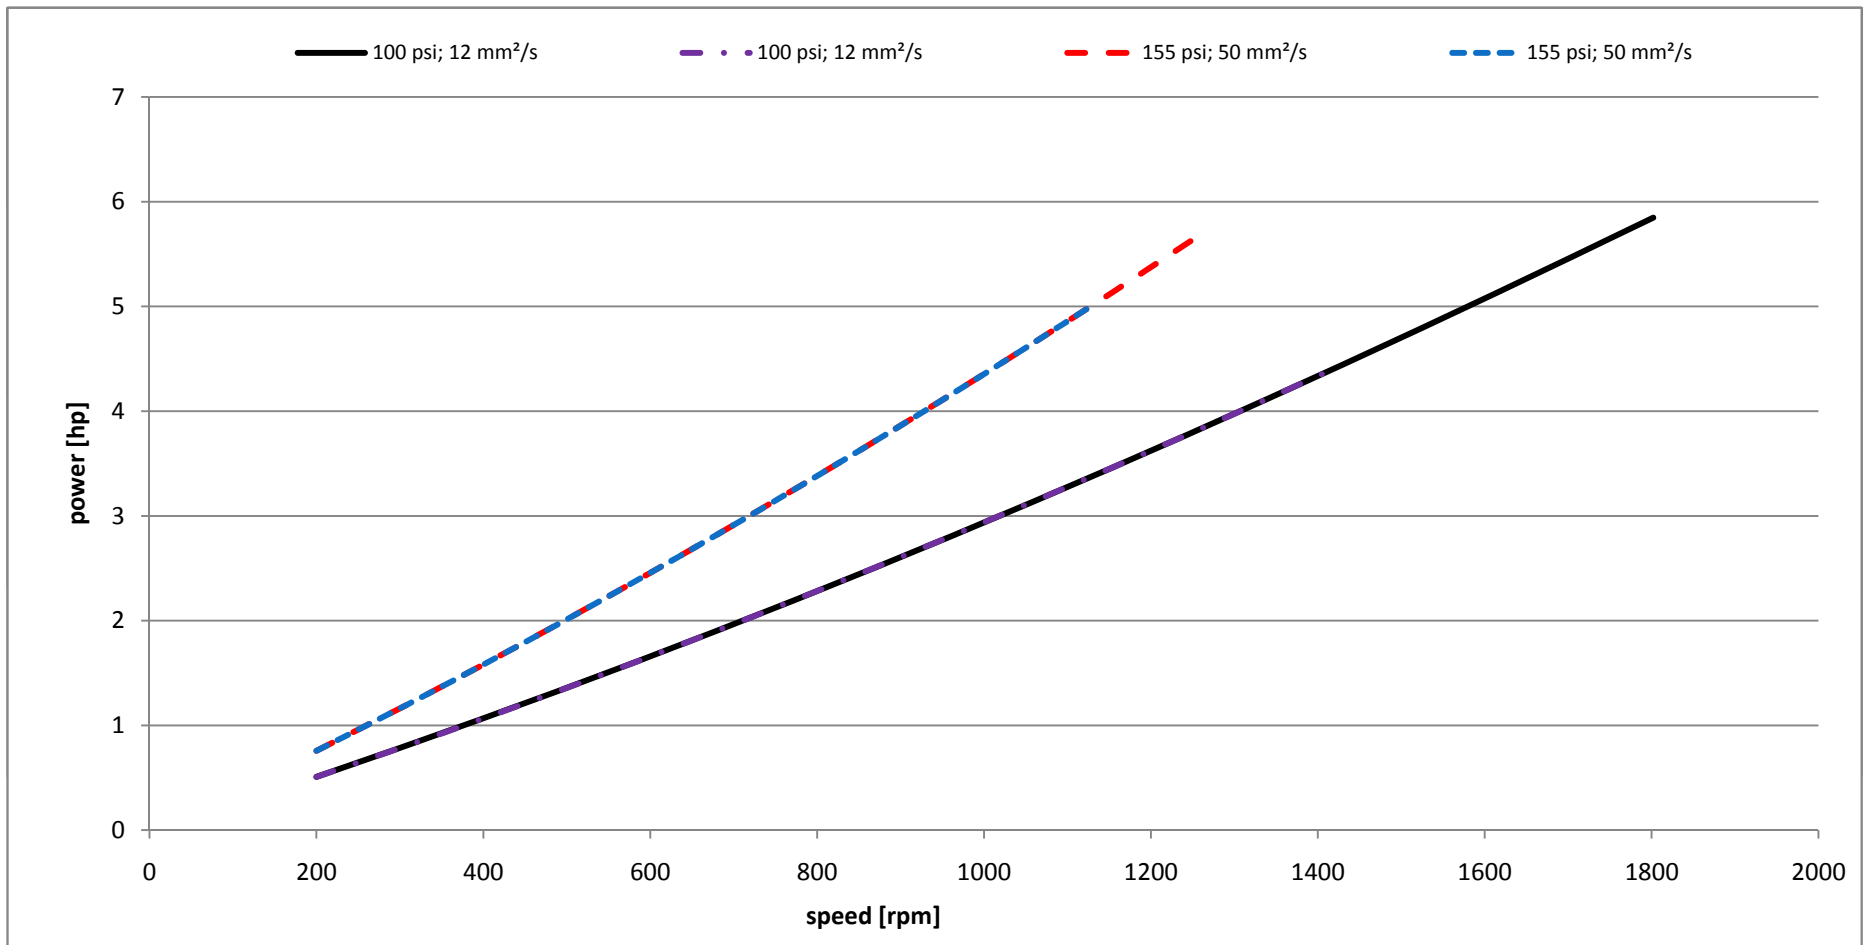

made by: George W. Doan
date: 2/2/2011
Hyghspin_2.1


STSC 70-26

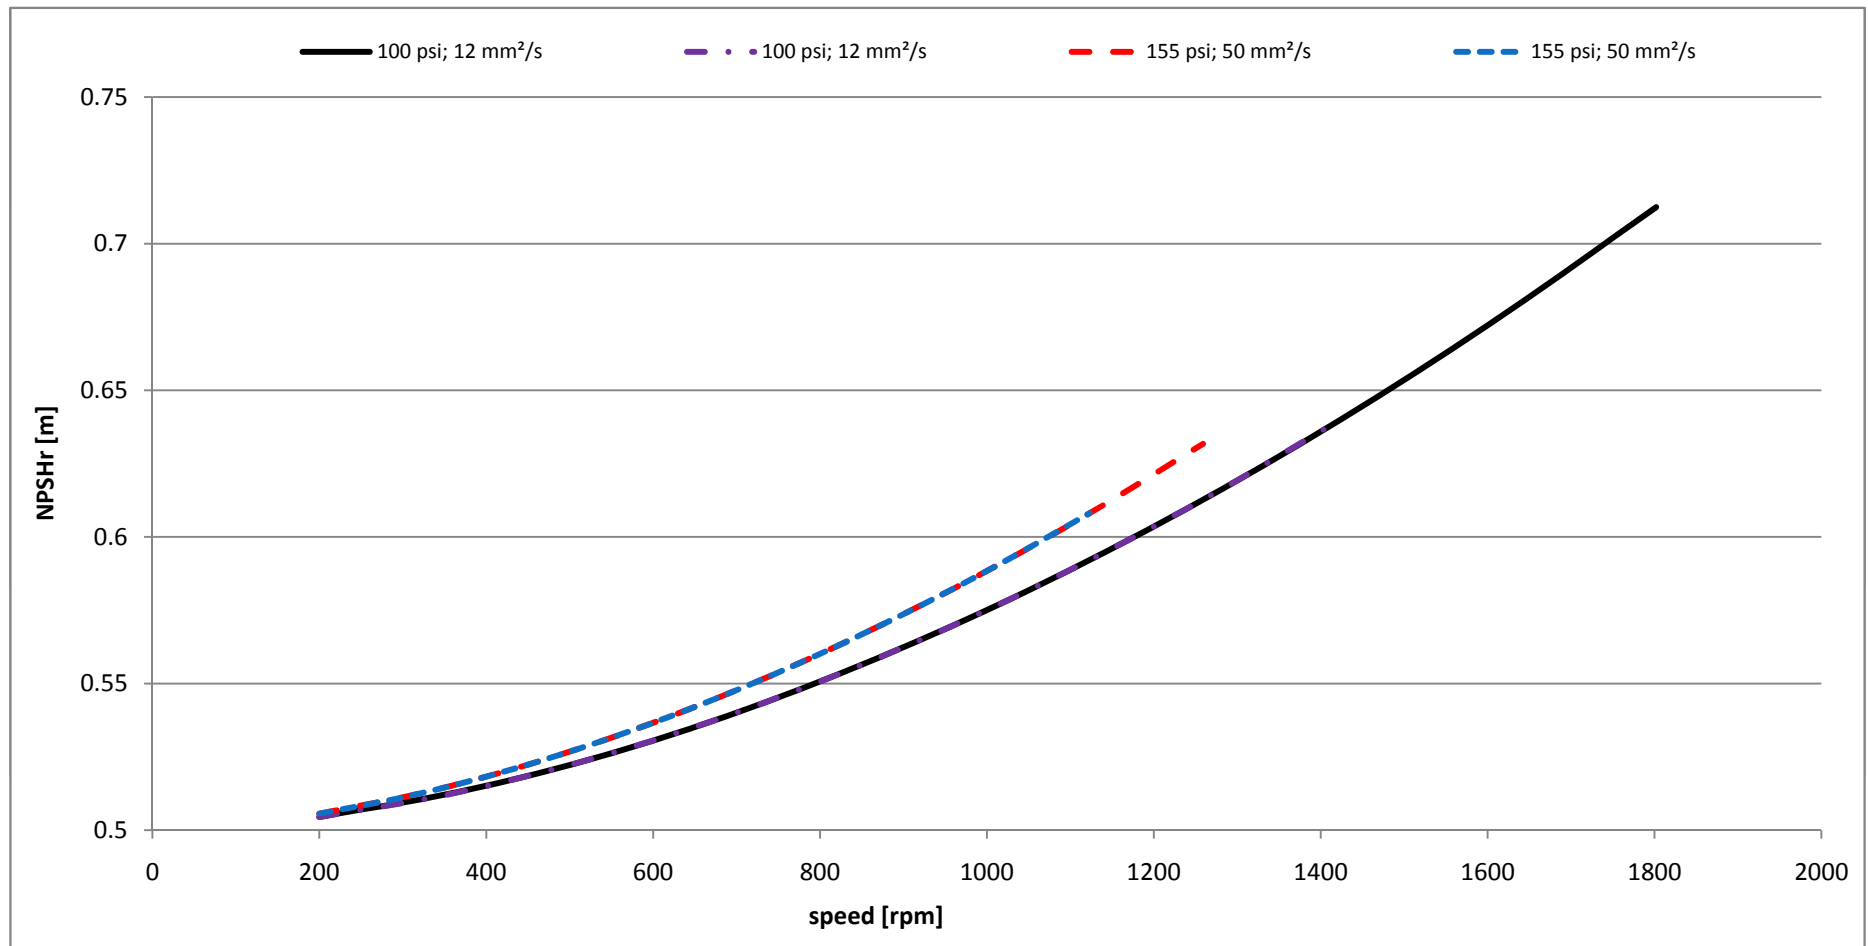

made by: George W. Doan
date: 2/2/2011
Hyghspin_2.1

AXIFLOW

Screw Spindle Pumps – Hygienic, high-performance, gentle treatment.

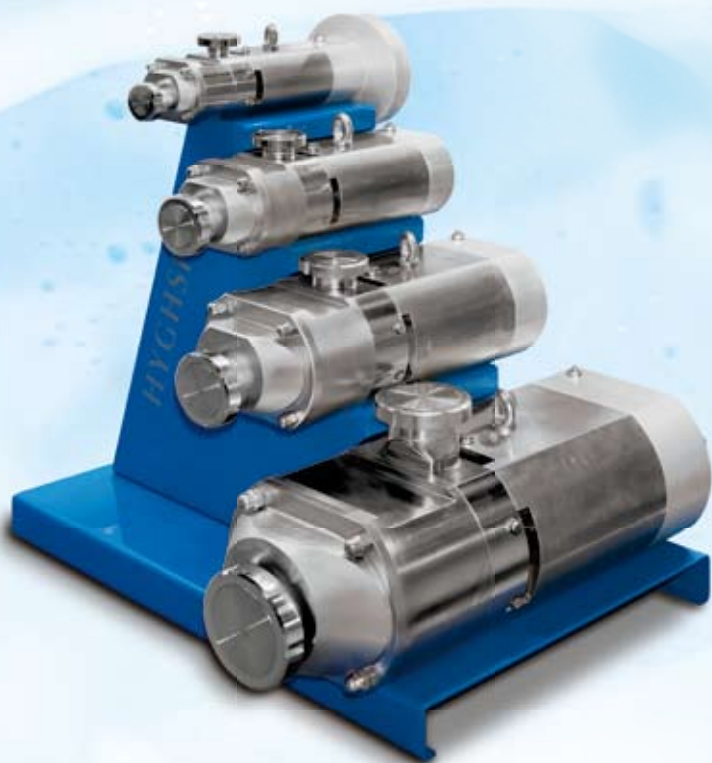

- ➔ Pumping of aqueous and highly viscous media
- ➔ High suction capacity
- ➔ Handling of product and CIP media with only one pump
- ➔ Gentle treatment
- ➔ Abrasion-free





Development, Manufacture, Assembly.

The series AXIFLOW was developed in Germany under the name HYGHSPIN for highest demands with regard to precision and hygiene: AXIFLOW complies with the quality requirements for the food and beverage industry and is also optimally suitable for many appliances in the chemical and pharmaceutical industry. Our own production site offers flexibility and is certified as per ISO 9001:2008.

Characteristics.

- Pumping of aqueous and highly viscous media
- High suction performance
- Product and CIP with only one pump
- Pumping of fibrous media and products containing pieces
- Gentle treatment
- Abrasion-free – no contact between the feeding elements
- Supply rates up to 900 gpm
- EHEDG certified
- Simple assembly and disassembly
- Technical advisory service and optimization for all fields of application
- GOST R-certification
- 3A

Outputs

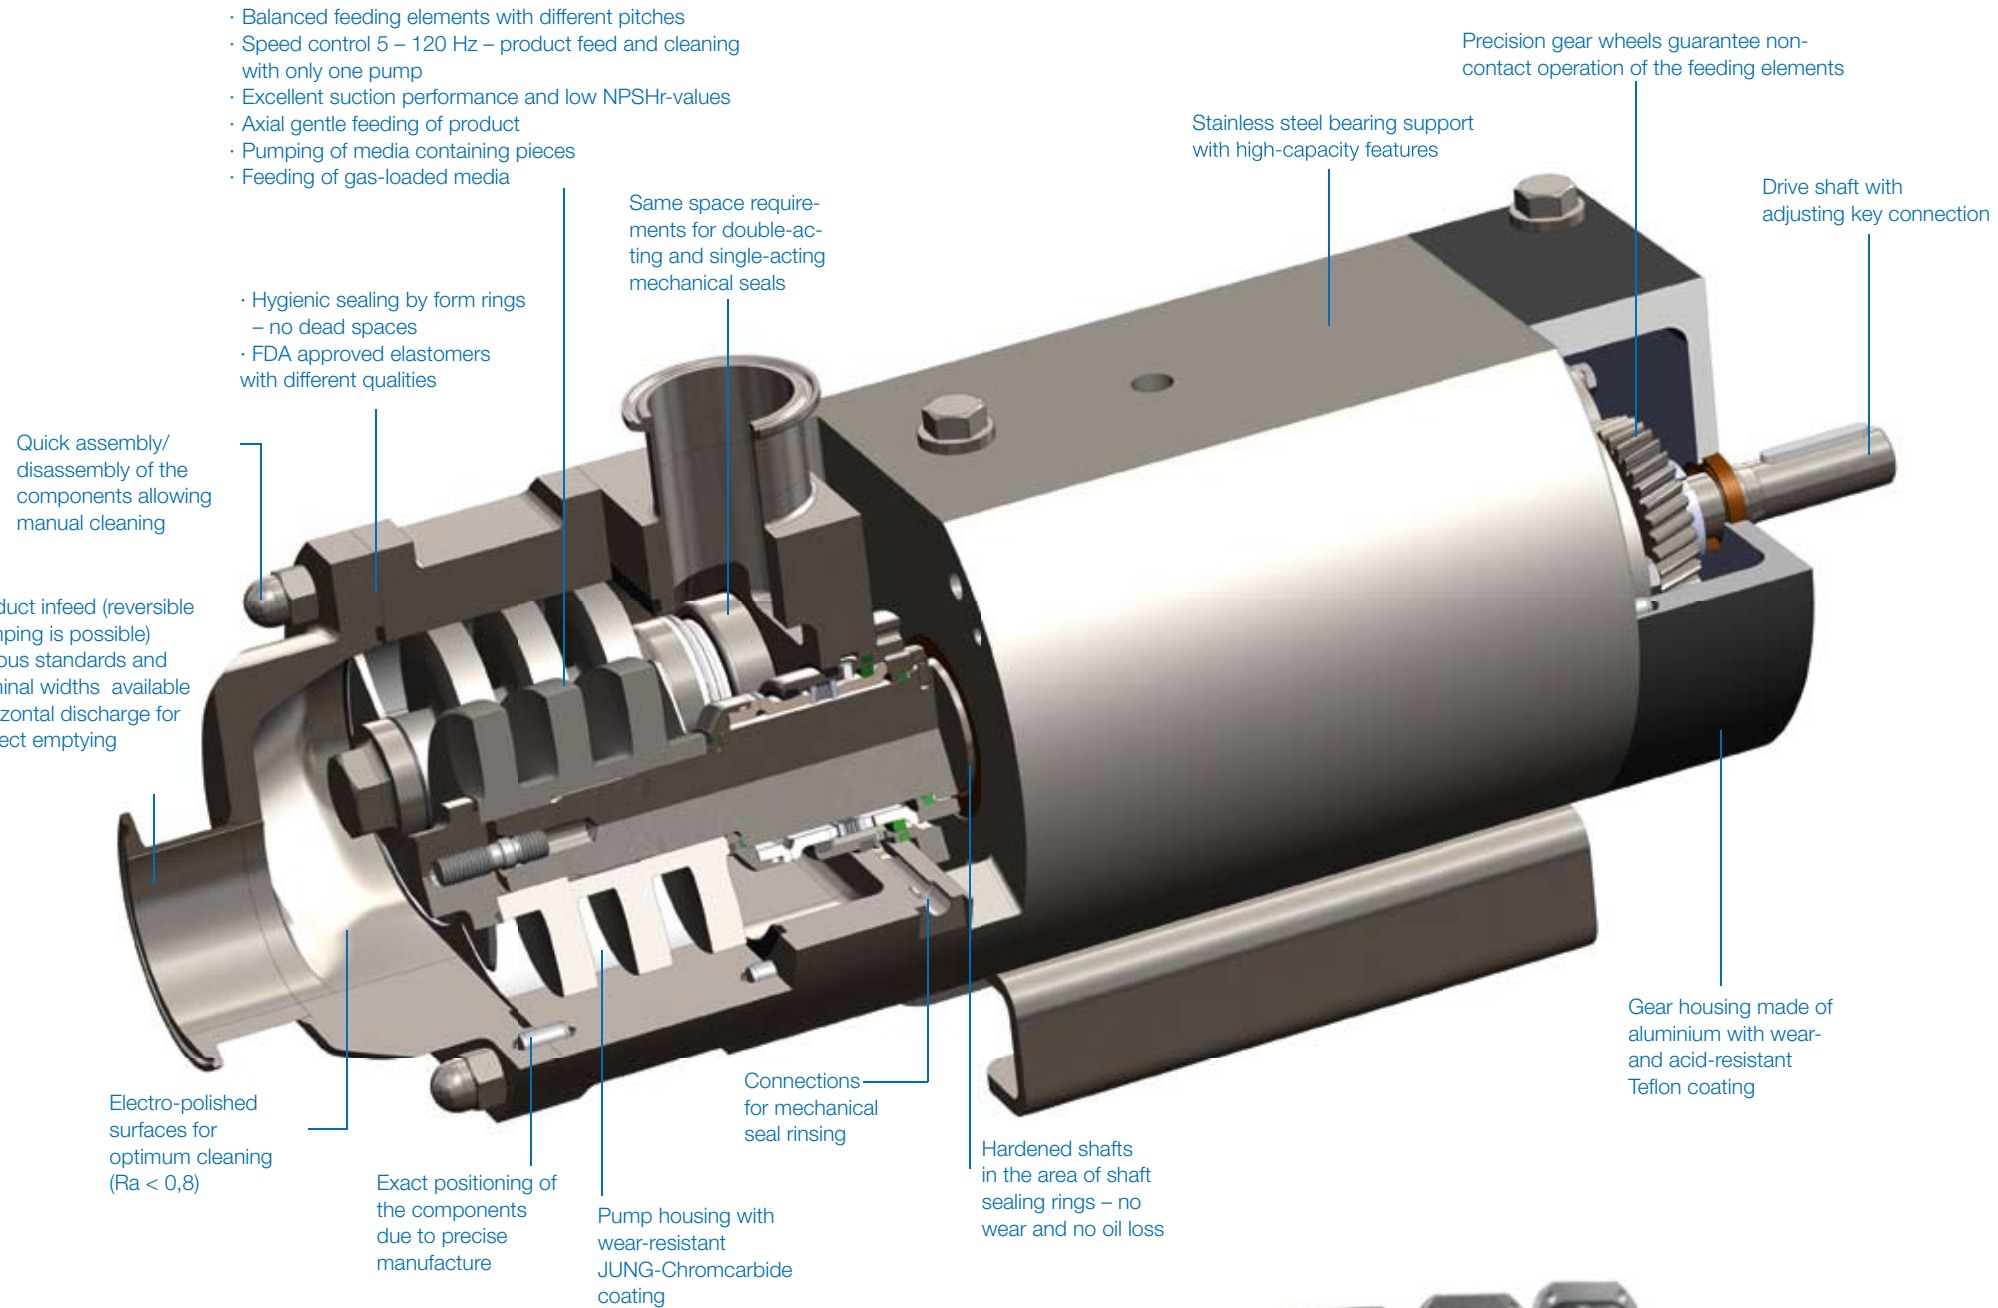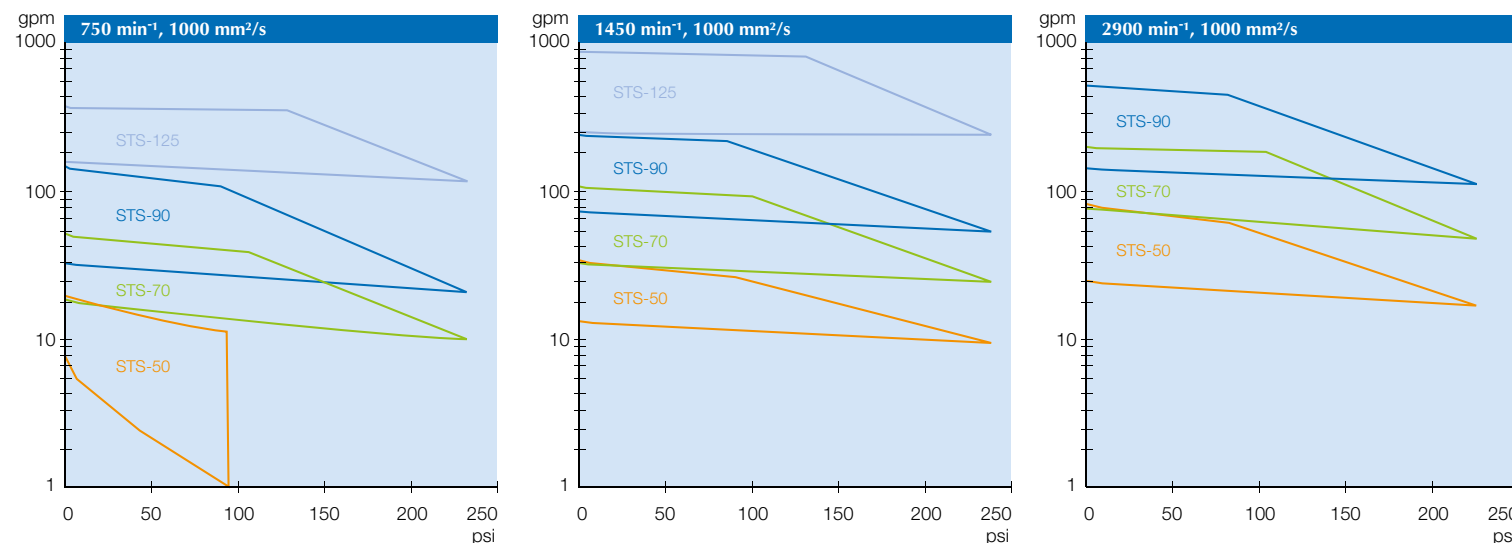


* This pump is assembled in the U.S.A. with precision parts manufactured in Germany by Jung Process Systems GmbH

One pump for numerous industries.


- Beverage industry
- Breweries
- Delicatessen industry
- Bakery products
- Confectionery
- Dairies and the milk industry
- Butchers
- Cosmetics and pharmacy

Technical Data.

Overview of the individual pump sizes.

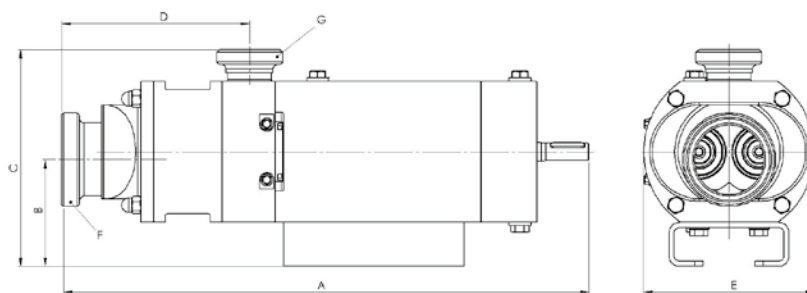

Type	Capacity	Max. diam. of solid matter Ø	Dimensions (mm)					Connection flange	cover	weight
			A	B	C	D	E			
STS-70	0,44 – 132 gpm	1 – 1/16"	615	124	252	219	199	2" or DN50	2" or DN50 3" or DN80	65 kg
STS-90	4,4 – 352 gpm	1 – 1/8"	723	146	342	275	259	3" or DN80	3" or DN80 4" or DN100	128 kg
STS-125	44 – 900 gpm	1 – 5/8"	1004	212	491	280	249	4" or DN100	4" or DN100 6" or DN150	365 kg

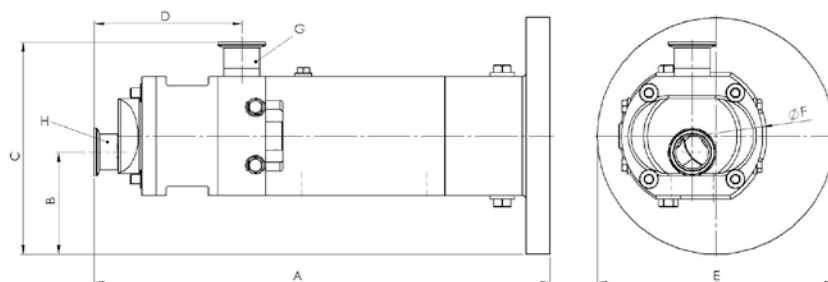

Type	Capacity	Max. diam. of solid matter Ø	Dimensions (mm)						Connection flange	cover	weight
			A	B	C	D	E	F			
STSC-50	0,15 – 66 gpm	9/16"	495	108	224	156	250	149	1½" or DN40	1½" or DN40 2" or DN50	37 kg
STSC-70	0,44 – 132 gpm	1 – 1/16"	650	200	295	209	350	199	2" or DN50	2" or DN50 3" or DN80	68 kg
STSC-90	4,4 – 352 gpm	1 – 1/8"	785	148	334	275	350	259	2,5" or DN65	3" or DN80 4" or DN100	150 kg



Overview.

Performance features

Capacity	0,15 – 900 gpm
Differential pressure	230 Psi, optional 360 Psi
Suction capacity	NPSHr up to 0,5 m
Viscosity	0,5 – 1.000.000 cSt
Product temperature	14°F – 266°F, with oil cooler 320°F
Cleaning temperature	284°F
Sterilization temperature	up to 293°F
Product-contact parts made of	1.4404 with 3.1 certificate (other materials upon request)
Elastomers	HNBR and FDA approved (other elastomers upon request)

www.axiflowtechnologies.com

Jung Process Systems distribution partner

AXIFLOW TECHNOLOGIES INC.

A Division of Process Integration Technologies Inc.

1955 Vaughn Road Suite 103 · Kennesaw, GA 30144

Tel.: 800 889 5699 · Fax: 877 569 0775