



VALVE DIMENSIONS (IMPERIAL: INCHES)																			
SIZE	A	B	C *	C (SS)	C (AB)	D	E	F	G	H	J	L	M	N	P	S	Q	KEY	ADAPTABILITY CODE
2	3.04	5.09	5.75	4.69	3.93	1.63	4.00	1.25	0.56	0.38	0.406	3.00	3.25	.625-11	4.75	4	1.41	-	BAB
2 1/2	3.25	5.81	6.25	-	4.50	1.75	4.00	1.25	0.56	0.38	0.406	3.00	3.25	.625-11	5.50	4	1.82	-	BAB
3	3.54	6.25	6.50	4.87	4.87	1.75	4.00	1.25	0.56	0.38	0.406	3.00	3.25	.625-11	6.00	4	2.62	-	BAB
4	4.63	7.81	7.25	6.00	6.00	2.00	4.00	1.25	0.63	0.43	0.406	3.00	3.25	.625-11	7.50	8	3.62	-	BAC
5	5.69	8.75	7.75	-	6.00	2.12	4.00	1.25	0.75	0.50	0.406	3.00	3.25	.750-10	8.50	8	4.67	-	BAD
6	6.37	9.75	8.38	6.50	6.50	2.14	4.00	1.25	0.75	0.50	0.406	3.00	3.25	.750-10	9.50	8	5.68	-	BAD
8	7.94	12.00	9.62	8.31	8.31	2.35	6.00	1.25	0.88	0.63	0.562	5.00	-	.750-10	11.75	8	7.54	-	CAE
10	9.38	14.50	11.00	9.50	9.00	2.63	6.00	2.00	1.12	-	0.562	5.00	-	.875-9	14.25	12	9.65	1/4 X 1/4	CAF
12	10.69	17.50	12.50	10.78	10.28	3.00	6.00	2.00	1.37	-	0.562	5.00	-	.875-9	17.00	12	11.49	5/16 X 5/16	CAG

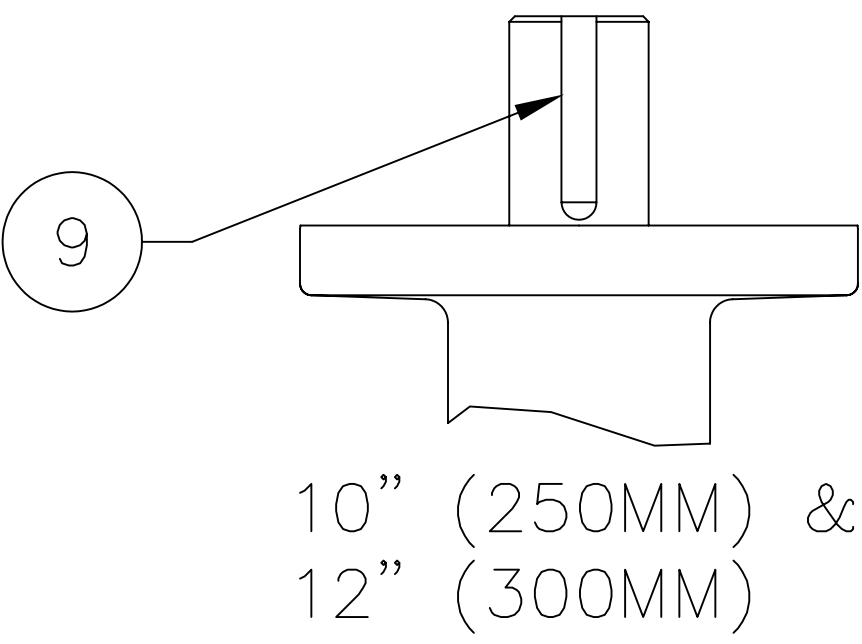

NOTES:

- *1. DIMENSIONS APPLY TO CAST IRON AND DUCTILE IRON BODIES ONLY.
- ** 2. "Q" DIMENSION IS THE MINIMUM ALLOWABLE PIPE OR FLANGE INSIDE DIAMETER AT THE CENTERED BODY FACE TO PROTECT THE DISC SEALING EDGE AGAINST DAMAGE WHEN OPENING THE VALVE.

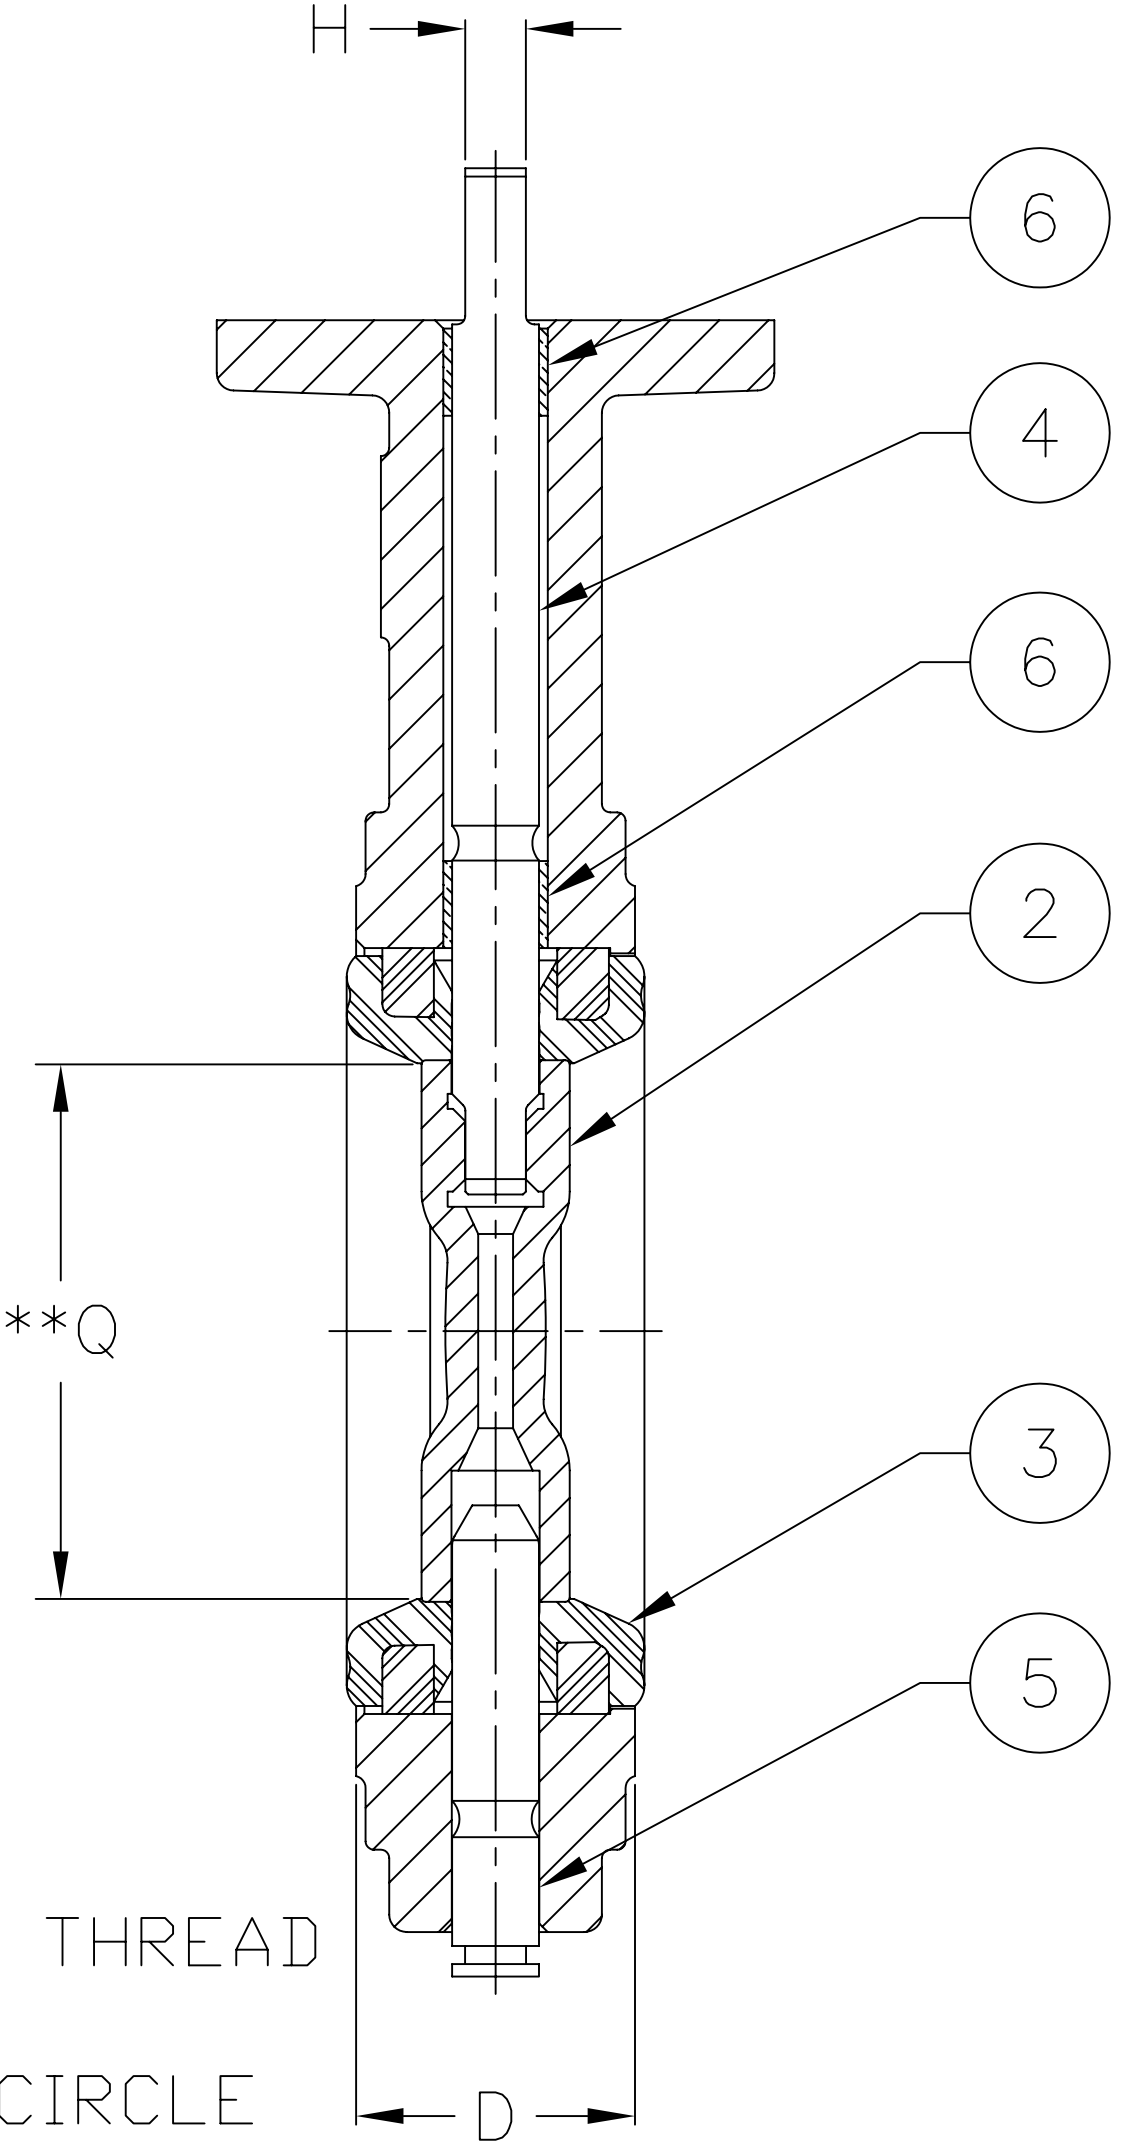

PARTS LIST			
ITEM NO.	NAME	NO. REQ'D.	REMARKS
1	BODY	1	
2	DISC	1	
3	LINER ASSEMBLY	1	
4	STEM, UPPER	1	
5	STEM, LOWER	1	
6	BEARING	1	
7	PIN, RETENTION	2	
8	TAG	1	
9	KEY	1	10" (250MM) AND 12" (300MM) ONLY

GRINNELL FIGURE 802
VALVE ASSEMBLY
2" (50MM) THRU 12" (300MM)

SIZE

SM1251


17359RDB03/12/07JB03/26/07

NO ECN DRAWN DATE CHECK DATE


SCALE

NTS

SHEET 1 OF 2

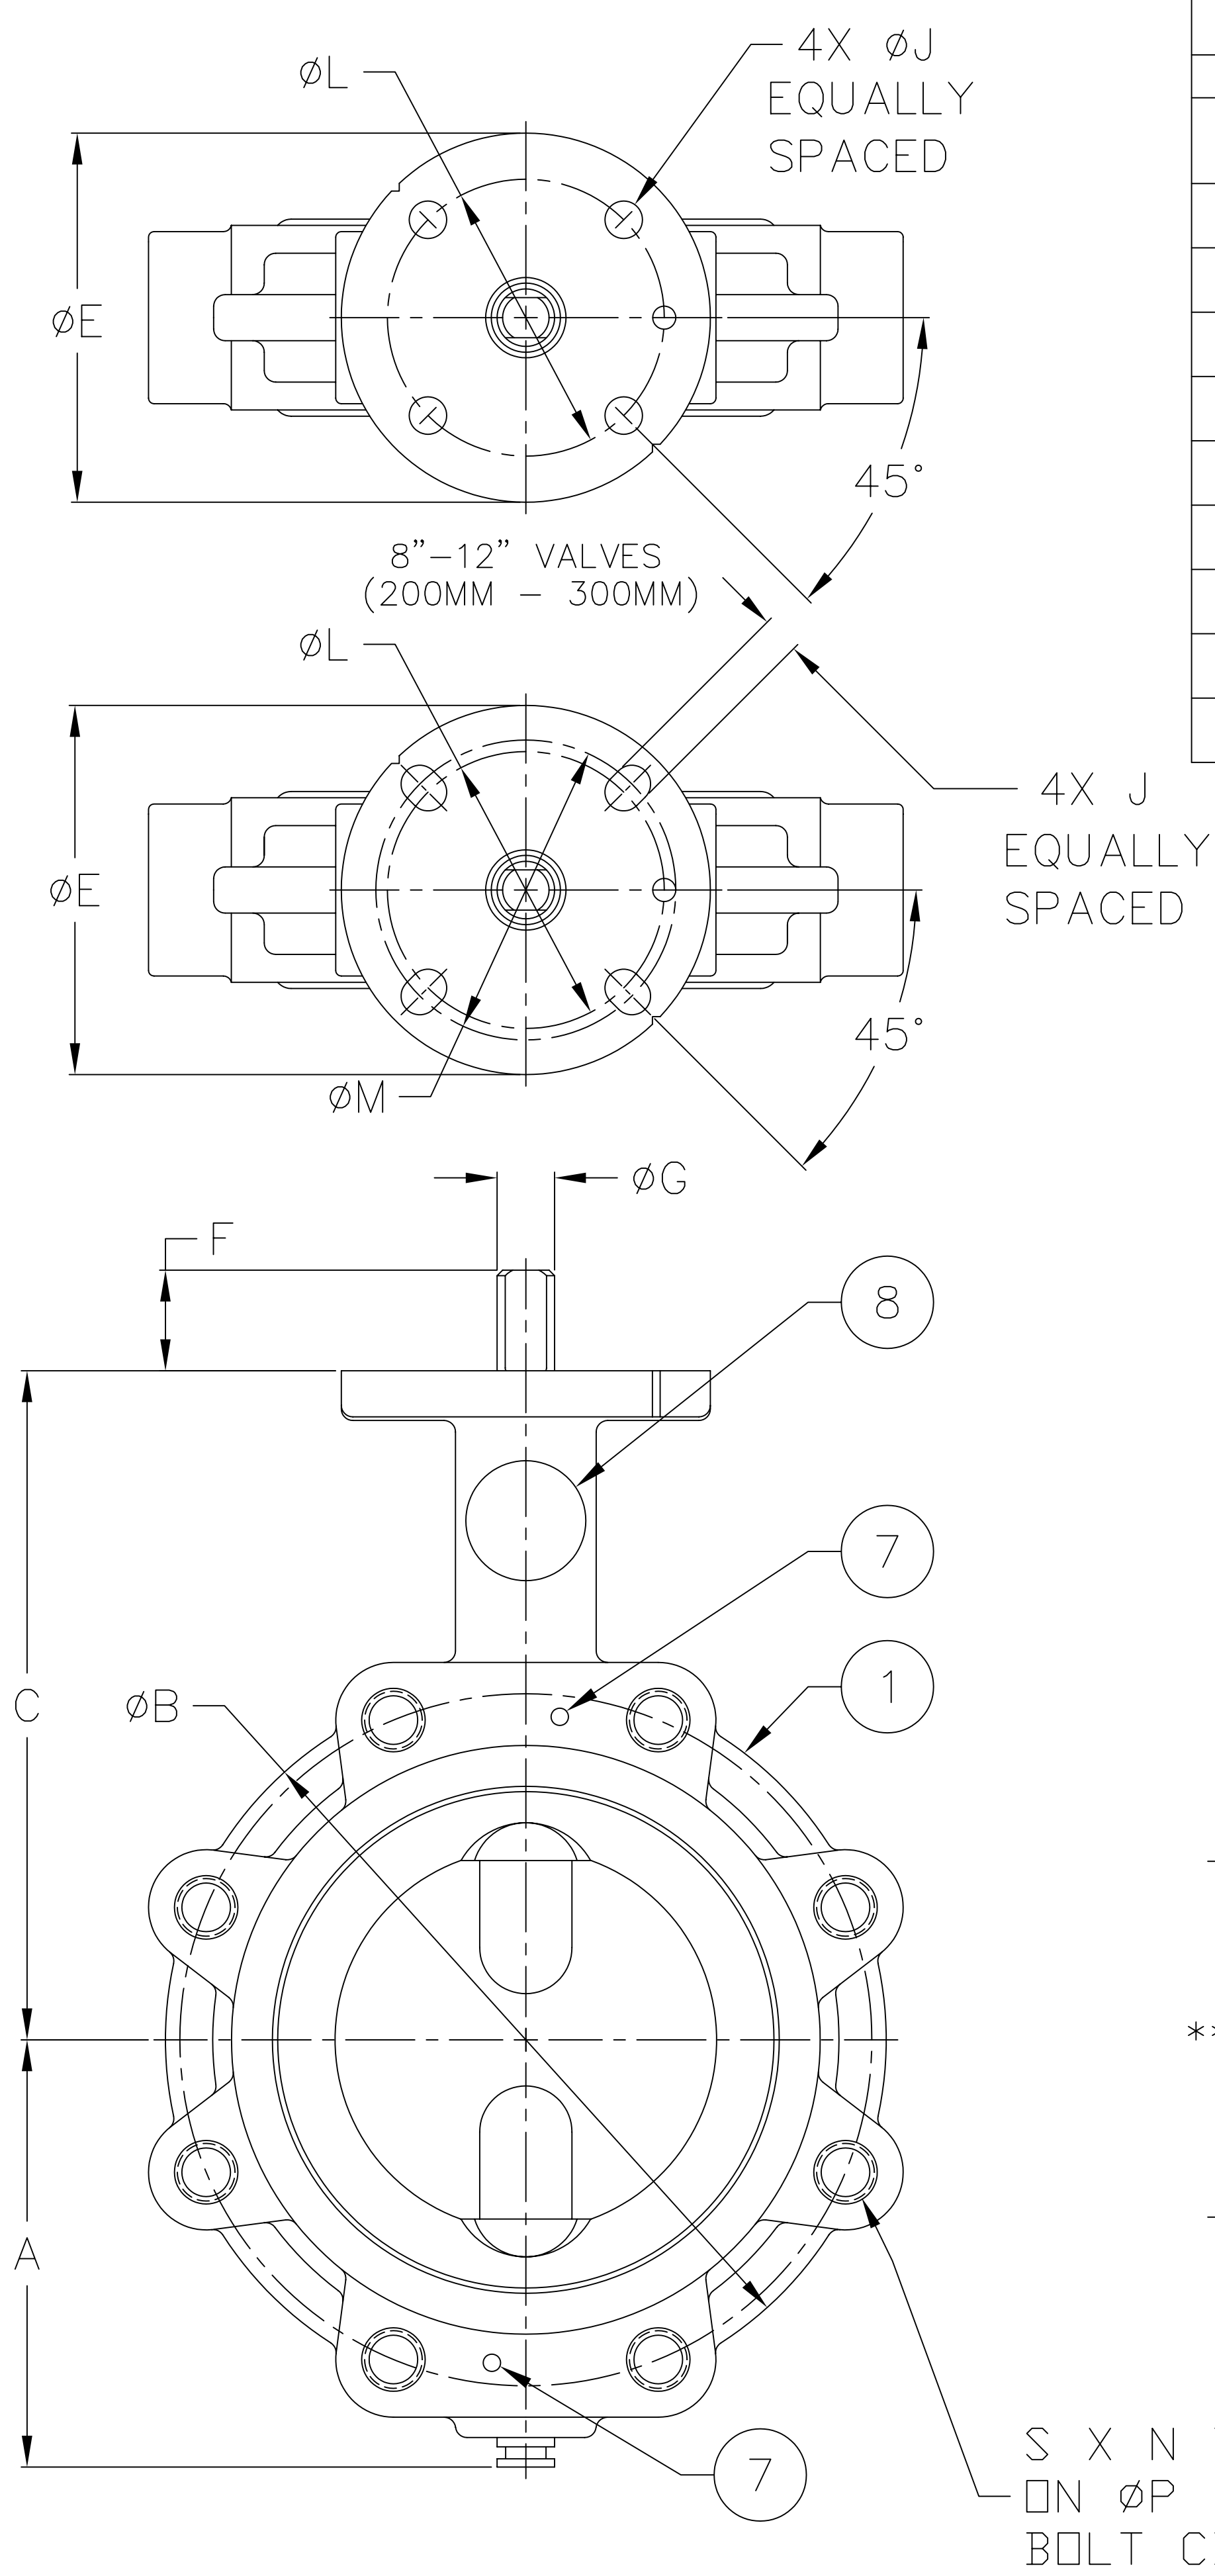


VALVE DIMENSIONS (METRIC: MM)																			
SIZE	A	B	C *	C (SS)	C (AB)	D	E	F	G	H	J	L	M	N	P	S	Q	KEY	ADAPTABILITY CODE
50	77.2	129.3	146	119.1	99.8	41.4	101.6	31.8	14.2	9.4	10.3	76.2	82.6	.625-11	120.6	4	35.8	-	BAB
65	82.6	147.6	158.8	-	114.3	44.5	101.6	31.8	14.2	9.4	10.3	76.2	82.6	.625-11	139.7	4	46.2	-	BAB
80	89.9	158.8	165.1	123.7	123.7	44.5	101.6	31.8	14.2	9.4	10.3	76.2	82.6	.625-11	152.4	4	66.5	-	BAB
100	117.6	198.4	184.2	152.4	152.4	50.8	101.6	31.8	15.8	10.9	10.3	76.2	82.6	.625-11	190.5	8	91.9	-	BAC
125	144.5	222.3	196.9	-	152.4	53.8	101.6	31.8	19.1	12.7	10.3	76.2	82.6	.750-10	215.9	8	118.6	-	BAD
150	161.8	247.7	212.9	165.1	165.1	54.4	101.6	31.8	19.1	12.7	10.3	76.2	82.6	.750-10	241.3	8	144.3	-	BAD
200	201.7	304.8	244.3	211.1	211.1	59.7	152.4	31.8	22.1	15.7	14.3	127	-	.750-10	298.5	8	191.5	-	CAE
250	238.3	368.3	279.4	241.3	228.6	66.8	152.4	50.8	28.4	-	14.3	127	-	.875-9	362	12	245.1	6.4 X 6.4	CAF
300	271.5	444.5	317.5	273.8	261.1	76.2	152.4	50.8	34.8	-	14.3	127	-	.875-9	431.8	12	291.8	7.9 X 7.9	CAG

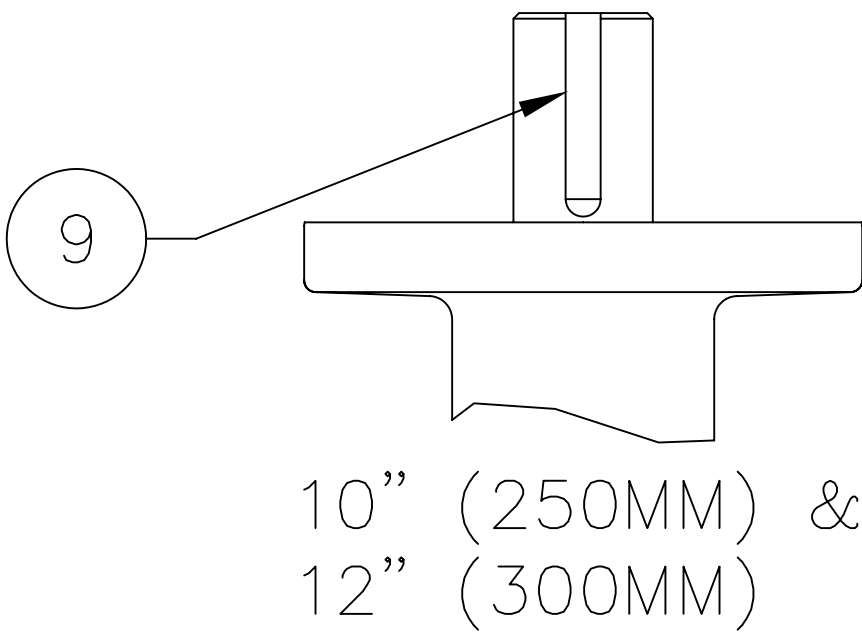

NOTES:

*1. DIMENSIONS APPLY TO CAST IRON AND DUCTILE IRON BODIES ONLY.

** 2. "Q" DIMENSION IS THE MINIMUM ALLOWABLE PIPE OR FLANGE INSIDE DIAMETER AT THE CENTERED BODY FACE TO PROTECT THE DISC SEALING EDGE AGAINST DAMAGE WHEN OPENING THE VALVE.

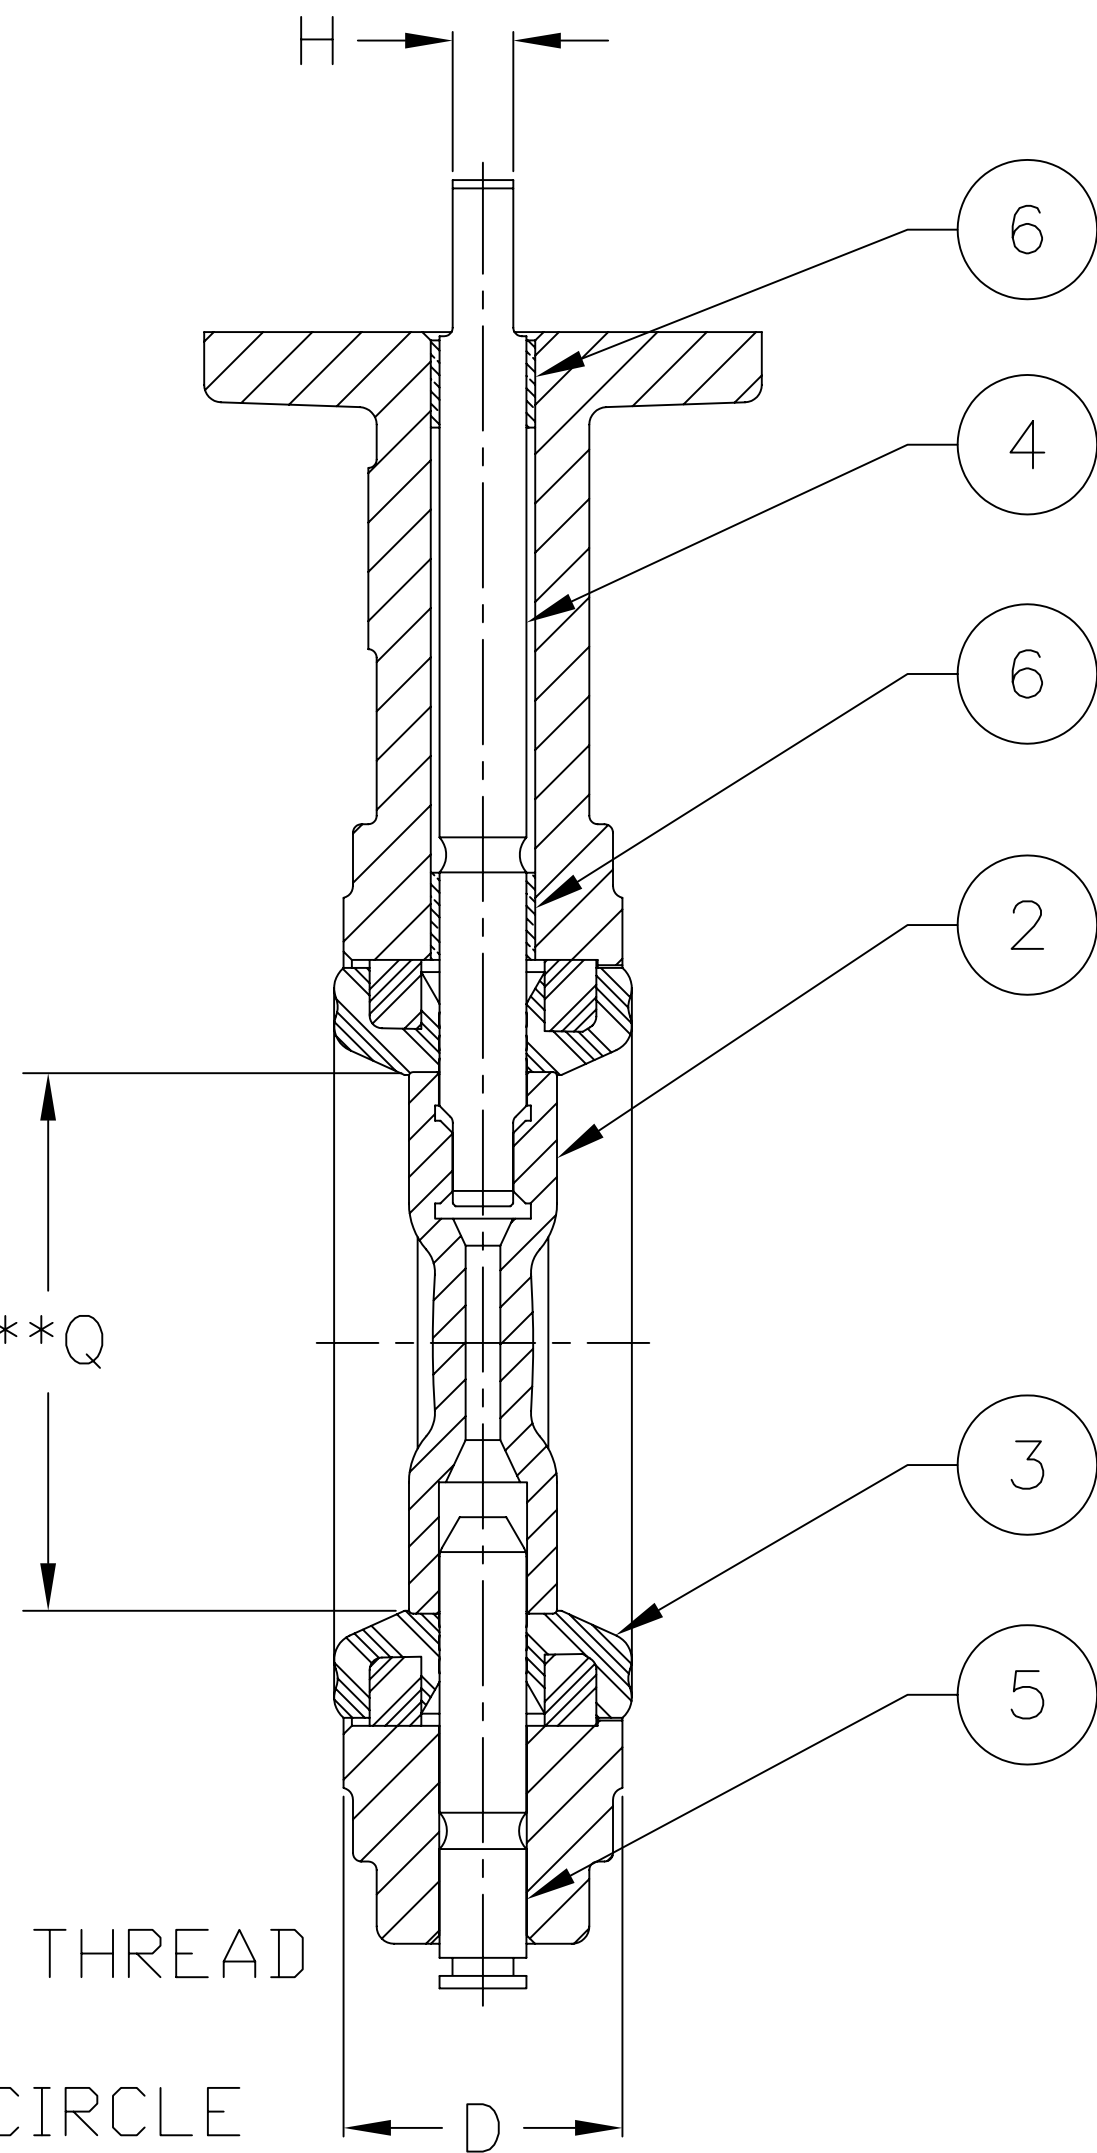

PARTS LIST			
ITEM NO.	NAME	NO. REQ'D.	REMARKS
1	BODY	1	
2	DISC	1	
3	LINER ASSEMBLY	1	
4	STEM, UPPER	1	
5	STEM, LOWER	1	
6	BEARING	1	
7	PIN, RETENTION	2	
8	TAG	1	
9	KEY	1	10" (250MM) AND 12" (300MM) ONLY

GRINNELL FIGURE 802
VALVE ASSEMBLY
2" (50MM) THRU 12" (300MM)

SIZE

SM1251

1	7359	RDB	03/12/07	JB	03/26/07
NO	ECN	DRAWN	DATE	CHECK	DATE

SCALE NTS SHEET 2 OF 2