

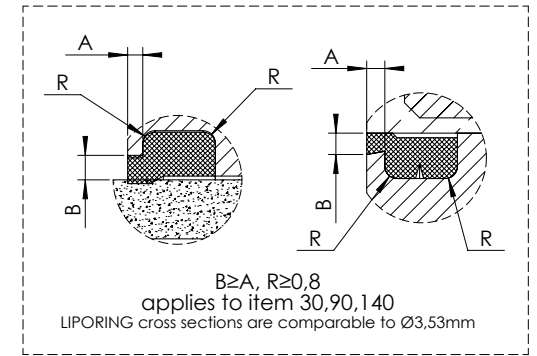
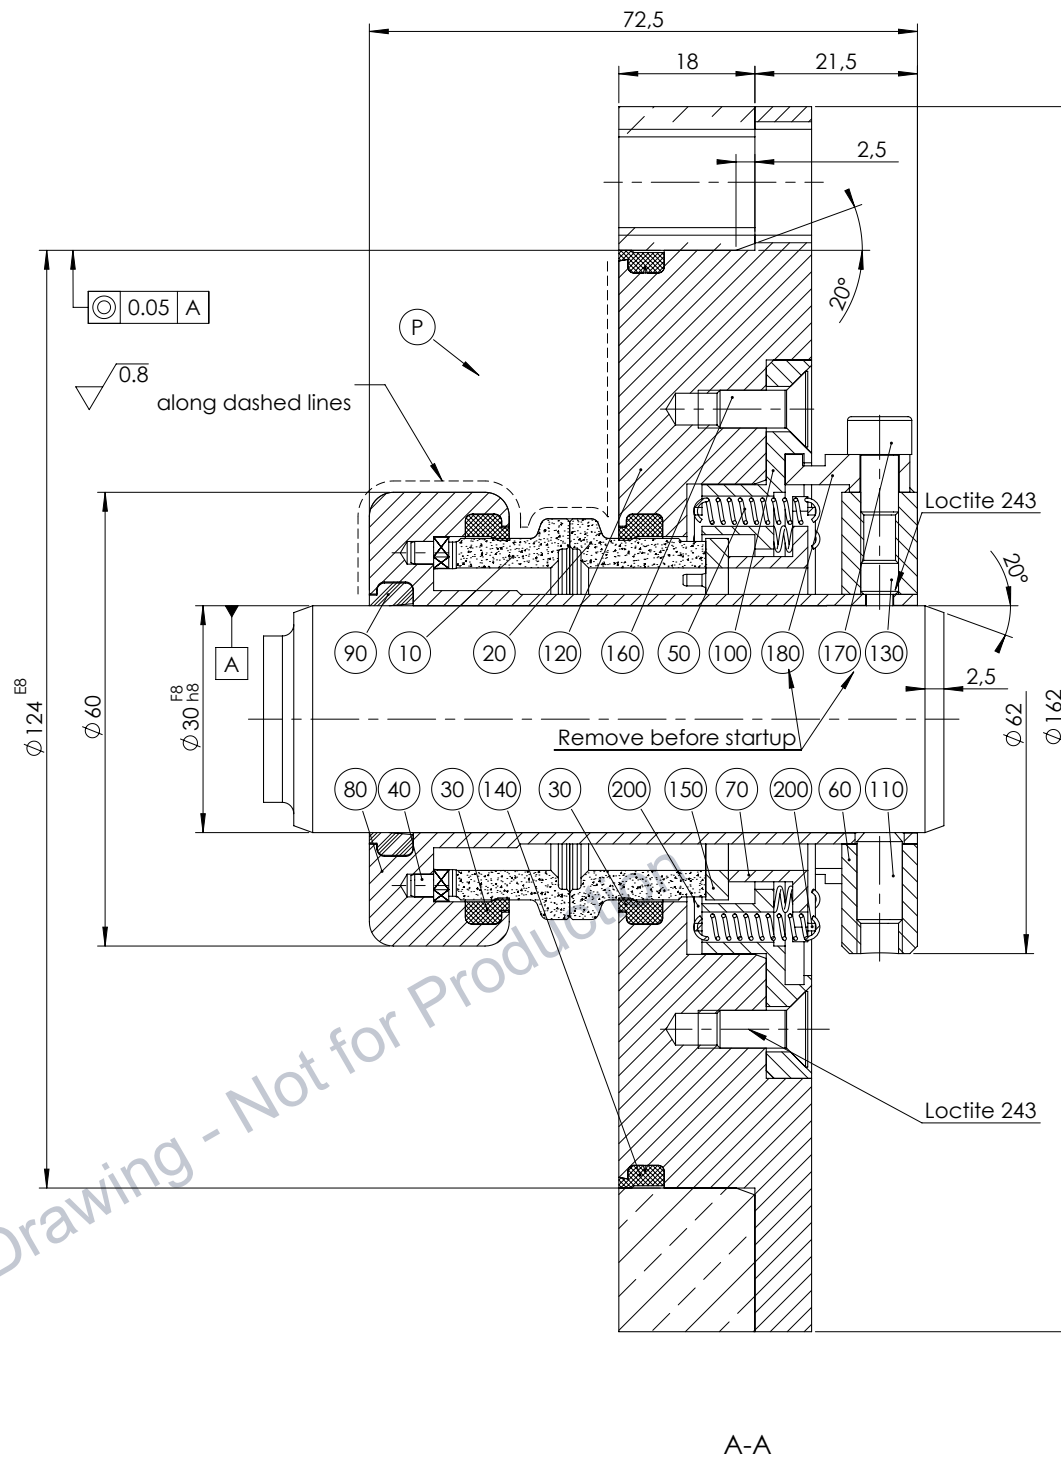


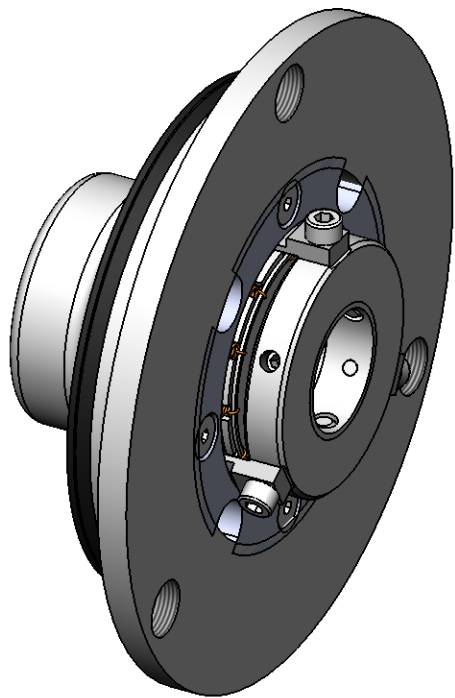

This drawing is the property of Huhnseal. Without our written consent in each particular case, it must not under penalty of law be reproduced or improperly used or otherwise communicated to a third party.

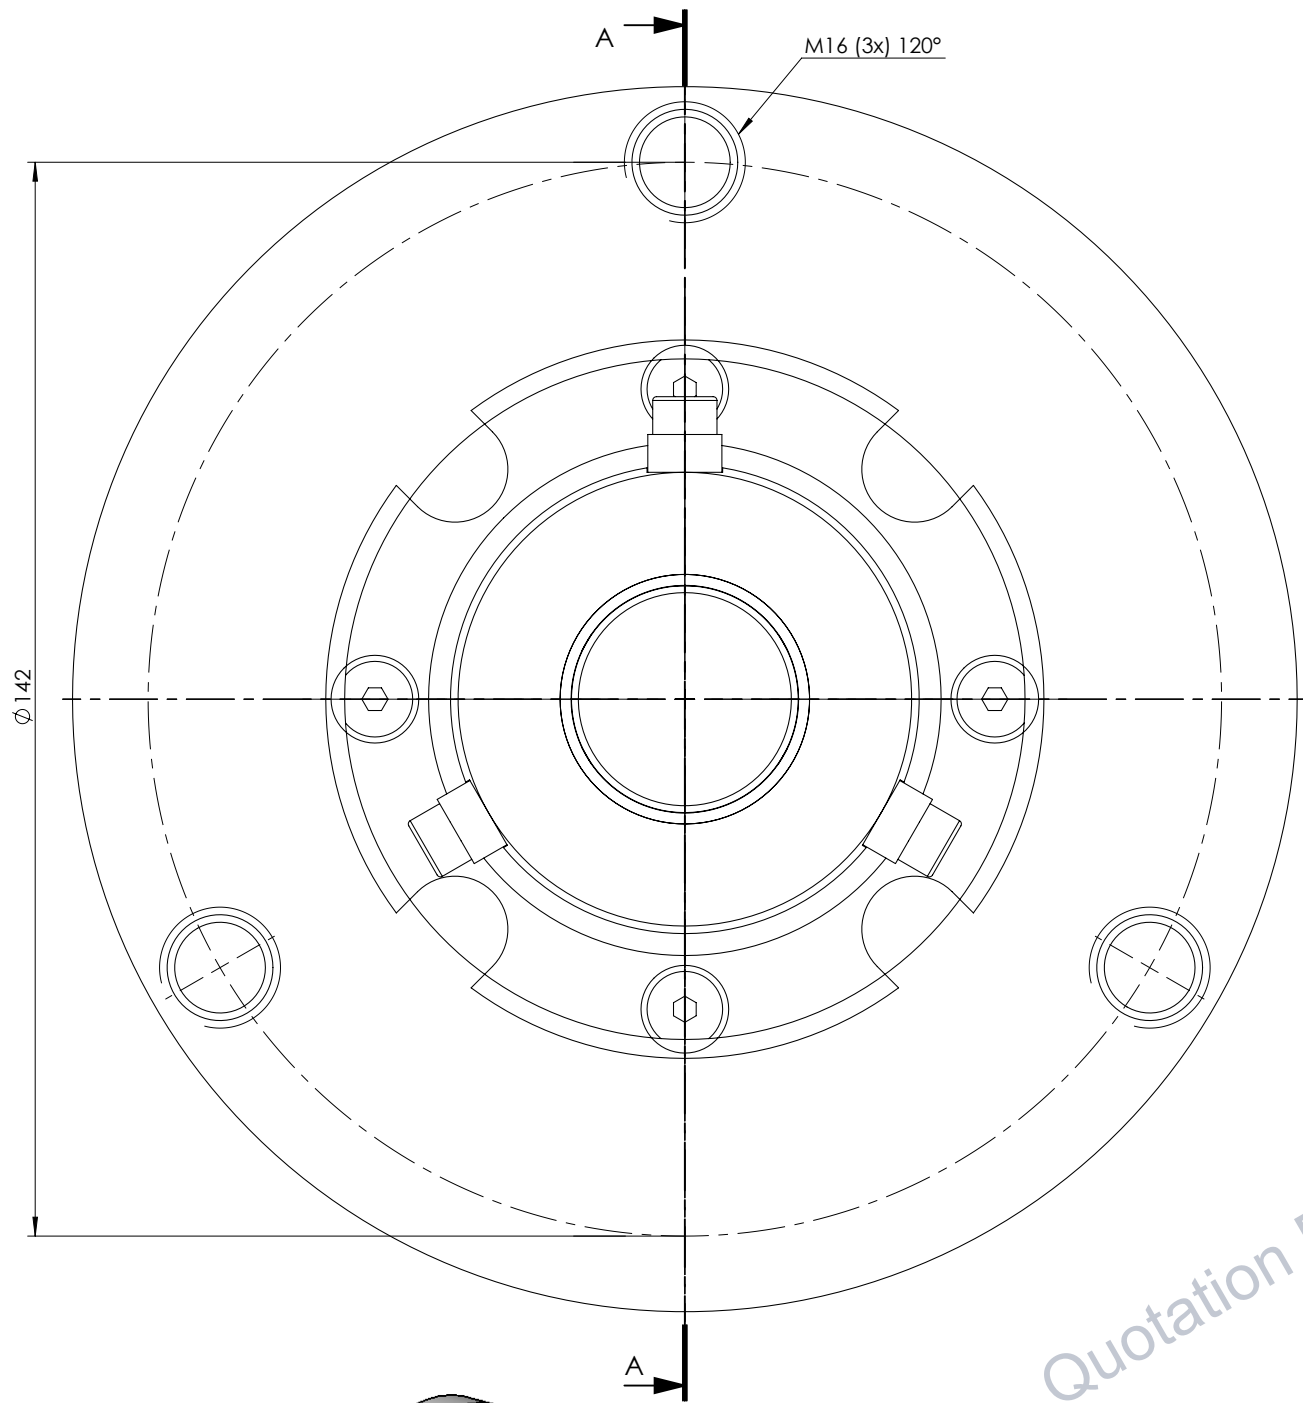

Item	Description	Qty	Drawing
10	Seal face (Diamond)	1	ED-Z00
20	Seal face	1	ED-Z00
30	Liporing	2	HRI-E
40	Drive pin	4	653940
50	Tension spring	12	524.14101-5
60	Stop ring	1	ES-67
70	Spring ring	1	ES-77
80	Shaft sleeve	1	1107
90	Liporing	1	12990-3
100	Cover	1	ES-107
110	Socket set screw, cup point	3	-
120	Flange	1	1233
130	Socket set screw, dog point	3	-
140	Liporing	1	655193
150	Drive disc	1	ED-157
160	Socket flat head screw	4	-
170	Socket head cup screw	3	-
180	Mounting spacer	3	-
200	Spring holder	2	ES-207

This seal can handle 2mm axial displacement				Seal Pos.	Design	Approved/Checked by	Release date
General tolerance	Weight (Kg)	Application	Visco Tec	DD	ZB /		
ISO 2768-mK	3.2						
				ESU-030		Customer drw.	Project no.
						Drawing no.	Scale Size Rev.
						17065-90	1:1 A3 Q0