

AIR FLOW


Constant Airflow

Constant airflow technology can realize the airflow output is not affected by installation conditions and use conditions, ensuring the constant airflow supply.

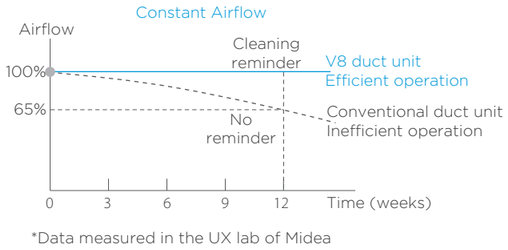

*Data measured in the UX lab of Midea






EASY INSTALLATION


Ultra-thin Body

Ultra-thin body design, the body height of the whole series is only 199mm, greatly saving space and more flexible installation.

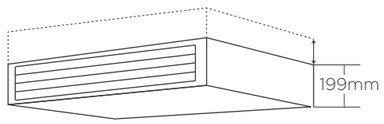


High-lift drain pump

A drain pump with a 1200mm raise height is fitted as standard, simplifying installation of the drain piping.



Fault Feedback

Early warning of drain pump fault.



SPECIFICATIONS

Duct

Model			MI2-05T3DHN18(At)	MI2-06T3DHN18(At)	MI2-07T3DHN18(At)	MI2-09T3DHN18(At)
Power supply			1-phase, 220-240V, 50/60Hz			
Cooling[1]	Capacity	kBtu/h	5.1	6.1	7.5	9.6
		kW	1.5	1.8	2.2	2.8
	Power input	W	28	28	28	28
Heating[2]	Capacity	kBtu/h	6.1	7.5	8.9	10.9
		kW	1.8	2.2	2.5	3.2
	Power input	W	21	21	22	28
Air flow rate[4]		m^3/h	465/432/407/381/352/321/301			
External static pressure[5]		dB(A)	10 (10-50)			
Sound pressure level[6]		dB(A)	33/31/30/29/27/26/25			
Unit	Net dimensions[5] (W×H×D)	mm	550×199×450			
	Packed dimensions (W×H×D)	mm	715×275×525			
	Net/Gross weight	kg	11.5/13.5			
Refrigerant type			R410A/R32			
Pipe connections	Liquid/Gas pipe	mm	Ø6.35/ Ø12.7			
	Drain pipe	mm	OD Ø25			

Model			MI2-12T3DHN18(At)	MI2-15T3DHN18(At)	MI2-18T3DHN18(At)
Power supply			1-phase, 220-240V, 50/60Hz		
Cooling[1]	Capacity	kBtu/h	12.3	15.4	19.1
		kW	3.6	4.5	5.6
	Power input	W	31	43	58
Heating[2]	Capacity	kBtu/h	13.7	17.1	21.5
		kW	4	5	6.3
	Power input	W	31	43	58
Air flow rate[4]		m^3/h	603/547/502/456/407/361/321	820/722/687/624/558/514/435	893/779/743/655/581/560/472
External static pressure[5]		dB(A)	10 (10-50)		
Sound pressure level[6]		dB(A)	32/30/29/27/25/23/22	34/32/31/30/29/25/23	38/35/34/31/29/28/26
Unit	Net dimensions[5] (W×H×D)	mm	700×199×450	900×199×450	
	Packed dimensions (W×H×D)	mm	865×275×525	1065×275×525	
	Net/Gross weight	kg	13.0/15.5	16.5/19.5	
Refrigerant type			R410A/R32		
Pipe connections	Liquid/Gas pipe	mm	Ø6.35/ Ø12.7		
	Drain pipe	mm	OD Ø25		

Notes:
1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Air flow rate are from the highest speed to the lowest speed, total 7 rates for each model.
4. Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured 1.5m below the unit in an anechoic chamber.
5. The dimension is only the body size, excluding the size of the installation lug, connecting copper pipe, etc. For detailed dimensions, please refer to the installation manual.
6. Exposed height of the panel after being installed on the ceiling.