
SPECIFICATIONS

Duct

Model			MI2-24T3DHN18(At)	MI2-28T2DHN18(At)	MI2-32T2DHN18(At)
Power supply			1-phase, 220-240V, 50/60Hz		
Cooling[1]	Capacity	kBtu/h	24.2	27.3	30.7
		kW	7.1	8	9
	Power input	W	65	106	108
Heating[2]	Capacity	kBtu/h	27.3	30.7	34.1
		kW	8	9	10
	Power input	W	65	106	108
Air flow rate[4]		m^3/h	1118/999/928/840/750/664/578	1457/1344/1233/1121/1008/896/785	1585/1465/1348/1231/1113/996/878
External static pressure[5]		dB(A)	10 (10-50)	40 (10-160)	
Sound pressure level[6]		dB(A)	38/35/33/31/29/27/25	38.0/36.5/35.0/33.0/31.5/30.0/28.0	40.0/38.0/36.0/34.0/32.0/30.0/28.0
Unit	Net dimensions[5] (W×H×D)	mm	1100×199×450	1050×245×750	
	Packed dimensions (W×H×D)	mm	1300×275×525	1715×305×890	
	Net/Gross weight	kg	20/23.5	30/33	
Refrigerant type			R410A/R32		
Pipe connections	Liquid/Gas pipe	mm	Ø9.52/Ø15.9		
	Drain pipe	mm	OD Ø25		

Model			MI2-40T2DHN18(At)	MI2-42T2DHN18(At)	MI2-48T2DHN18(At)	MI2-56T2DHN18(At)
Power supply			1-phase, 220-240V, 50/60Hz			
Cooling[1]	Capacity	kBtu/h	38.2	42.7	47.8	54.6
		kW	11.2	12.5	14	16
	Power input	W	115	170	172	210
Heating[2]	Capacity	kBtu/h	42.7	47.8	54.6	61.4
		kW	12.5	14	16	18
	Power input	W	115	170	172	210
Air flow rate[4]		m^3/h	1656/1536/1418/1300/1180/1062/945	2177/2020/1866/1711/1554/1400/1246	2098/1948/1798/1649/1499/1349/1199	2350/2160/2015/1871/1776/1533/1400
External static pressure[5]		dB(A)	50 (10-160)			
Sound pressure level[6]		dB(A)	41/39/37/35/33/31/29	44/42/40/38/36/34/32	42/40/38/36/34/32/31	42/40/38/36/34/33/31
Unit	Net dimensions[5] (W×H×D)	mm	1050×245×750	1400×245×750		
	Packed dimensions (W×H×D)	mm	1715×305×890	1565×305×890		
	Net/Gross weight	kg	31/34.5	37/41	37/41	37/41
Refrigerant type			R410A/R32			
Pipe connections	Liquid/Gas pipe	mm	Ø9.52/Ø15.9			
	Drain pipe	mm	OD Ø25			

Notes:
1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Air flow rate are from the highest speed to the lowest speed, total 7 rates for each model.
4. Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured 1.5m below the unit in an anechoic chamber.
5. The dimension is only the body size, excluding the size of the installation lug, connecting copper pipe, etc. For detailed dimensions, please refer to the installation manual.
6. Exposed height of the panel after being installed on the ceiling.

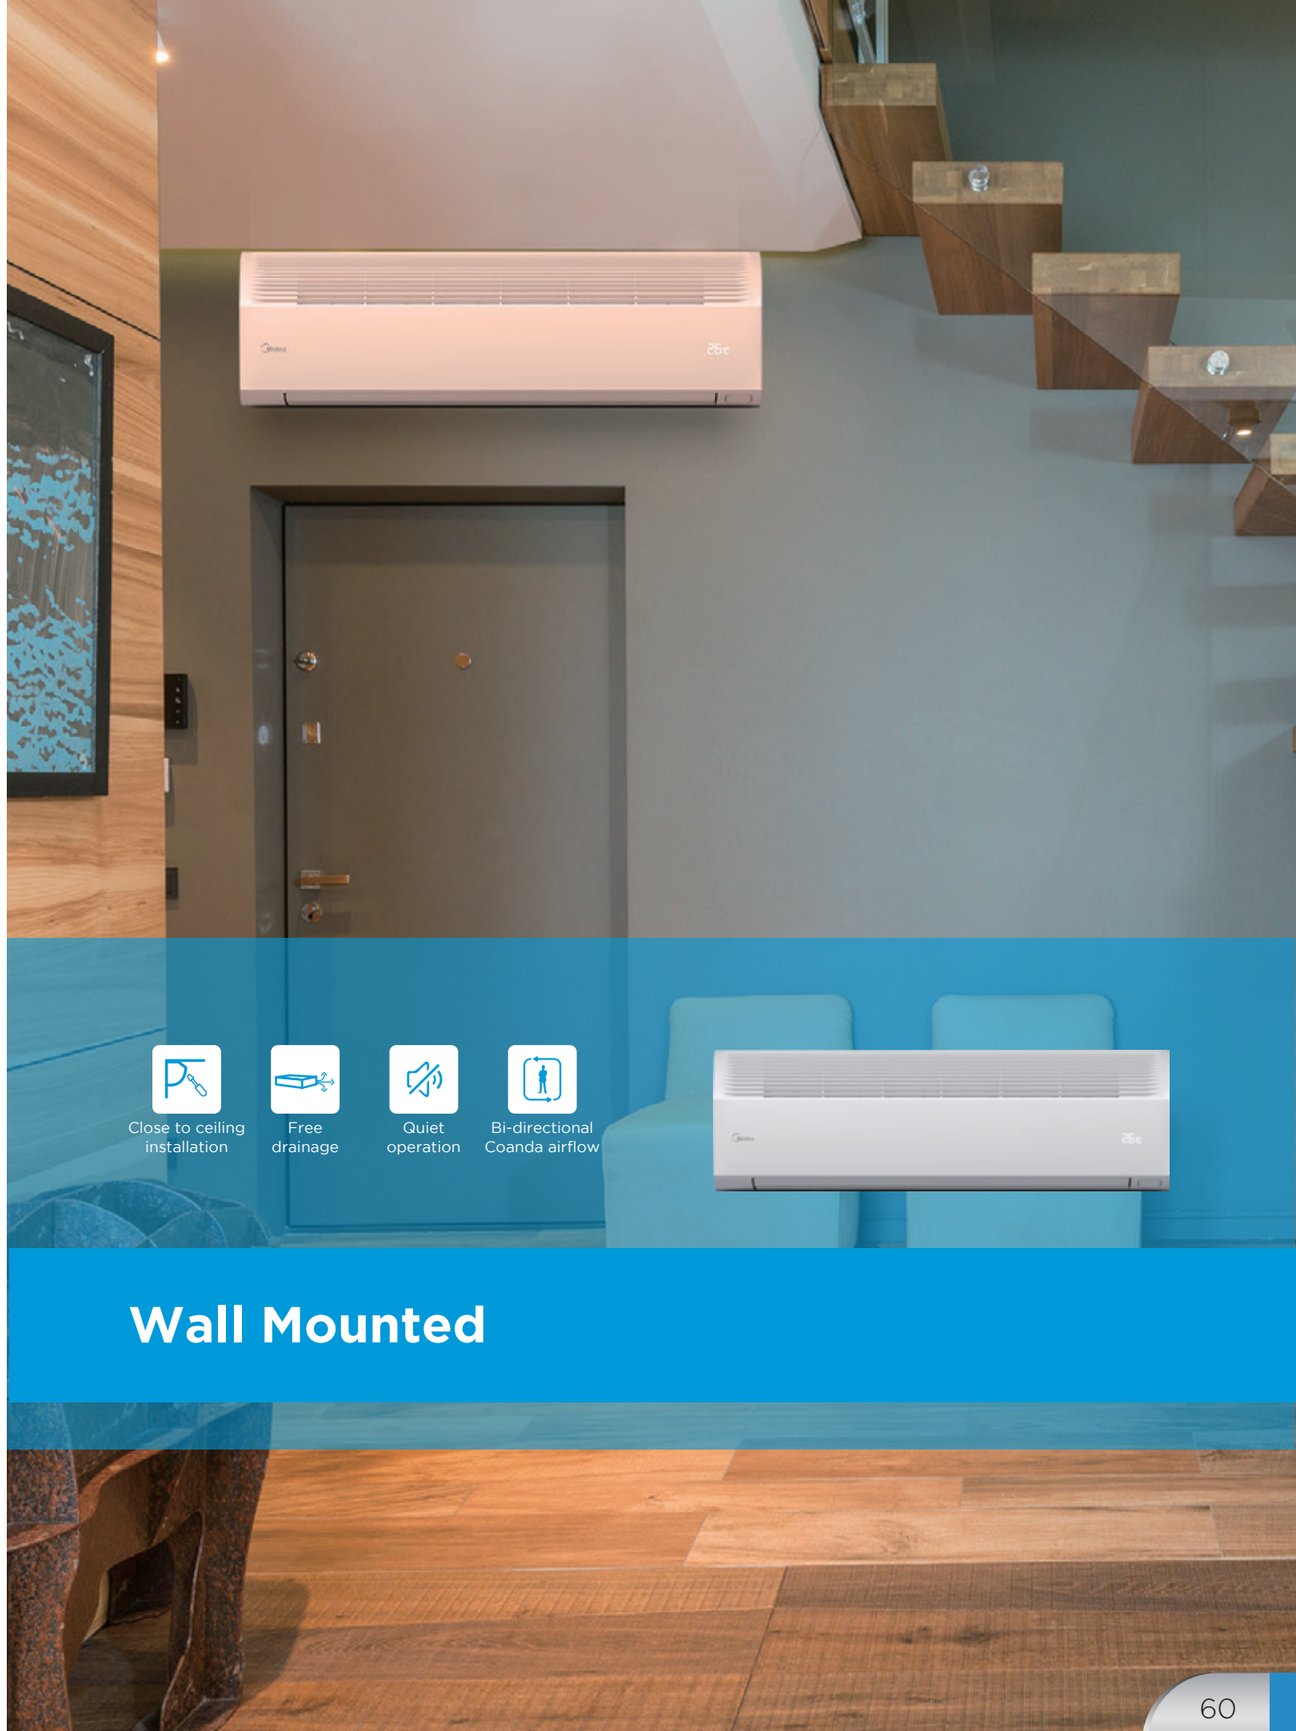

Wall Mounted