
EASY INSTALLATION

Ceiling Mounting


The Wall Mounted new heat exchanger is designed to meet the installation requirements close to the ceiling, and the minimum distance from the ceiling is 3cm.

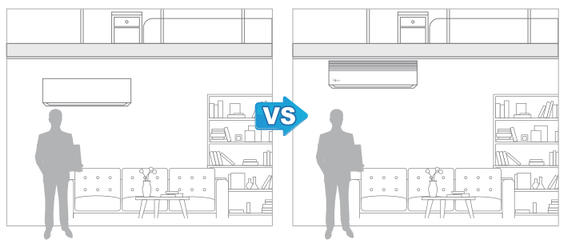


There is some distance from ceiling The distance from the ceiling is 3cm


Free Drainage without Space Restrictions

The Wall Mounted can realize horizontal drainage, downward drainage, upward drainage, making installation more flexible.





Most conventional Wall Mounted unit does not have a drain pump and the condensate pipe can only be installed underneath the unit, relying on gravity to drain the condensate to the nearest window.




When the condensate pipe is blocked, condensate can drip down onto the floor and damage it.



High-lift drain pump*

A drain pump with a 1200mm raise height is fitted as a customization option, simplifying installation of the drain piping.



*The drain pump is available as a customization option

SPECIFICATIONS

Wall Mounted

Model			MI2-05GDHN18(At)	MI2-07GDHN18(At)	MI2-09GDHN18(At)	MI2-12GDHN18(At)
Power supply			1-phase, 220-240V, 50/60Hz			
Cooling[1]	Capacity	kW	1.5	2.2	2.8	3.6
		kBtu/h	5.0	7.0	9.0	12.0
	Power input	W	18	21	24	27
Heating[2]	Capacity	kW	1.7	2.4	3.2	4
		kBtu/h	5.0	8.0	10.0	13.0
	Power input	W	18	21	24	27
Air flow rate[3]		m^3/h	460/440/420/400/380/360/340	500/470/440/410/390/370/340	540/510/470/430/400/370/340	580/540/500/460/420/380/340
Sound pressure level[4]		dB(A)	32/31/30/30/29/28/27	33/32/31/30/29/28/27	35/34/33/32/31/30/28	37/36/34/33/31/30/28
Sound power level		dB(A)	45/44/43/43/42/41/40	46/45/44/43/42/41/40	50/49/48/47/46/44/42	54/53/51/50/48/46/44
Unit	Net dimensions5 (W×H×D)	mm	750×295×265	750×295×265	750×295×265	750×295×265
	Packed dimensions (W×H×D)	mm	875×385×360	875×385×360	875×385×360	875×385×360
	Net/Gross weight	kg	9/11.5	9/11.5	10/12.5	10/12.5
Refrigerant type			R410A/R32			
Pipe connections	Liquid/Gas pipe	mm	Ø6.35/Ø12.7	Ø6.35/Ø12.7	Ø6.35/Ø12.7	Ø6.35/Ø12.7
	Drain pipe	mm	OD Ø16	OD Ø16	OD Ø16	OD Ø16

Model			MI2-15GDHN18(At)	MI2-18GDHN18(At)	MI2-24GDHN18(At)	MI2-28GDHN18(At)
Power supply			1-phase, 220-240V, 50/60Hz			
Cooling[1]	Capacity	kW	4.5	5.6	7.1	8
		kBtu/h	15.0	19.0	24.0	27.0
	Power input	W	30	40	50	65
Heating[2]	Capacity	kW	5	6.3	8	9
		kBtu/h	17.0	21.0	27.0	30.0
	Power input	W	30	40	50	65
Air flow rate[3]		m^3/h	720/670/620/560/510/460/410	860/780/700/620/550/480/410	1220/1120/1030/940/850/750/660	1380/1260/1140/1020/900/780/660
Sound pressure level[4]		dB(A)	37/35/33/32/31/30/29	41/39/37/35/33/31/29	44/42/40/38/36/34/32	45/43/41/39/37/35/32
Sound power level		dB(A)	54/52/50/49/48/46/44	56/54/52/50/48/46/44	58/56/54/52/50/48/46	60/57/55/53/50/48/46
Unit	Net dimensions5 (W×H×D)	mm	950×295×265	950×295×265	1200×295×265	1200×295×265
	Packed dimensions (W×H×D)	mm	1075×385×360	1075×385×360	1315×385×360	1315×385×360
	Net/Gross weight	kg	11.5/14	11.5/14	15/18	15/18
Refrigerant type			R410A/R32			
Pipe connections	Liquid/Gas pipe	mm	Ø6.35/Ø12.7	Ø6.35/Ø12.7	9.52/ 15.9	9.52/ 15.9
	Drain pipe	mm	OD Ø16	OD Ø16	OD Ø16	OD Ø16

Notes:
1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Air flow rate are from the highest speed to the lowest speed, total 7 rates for each model.
4. Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured 0.8m below the unit in an anechoic chamber.
5. The dimension is only the body size, excluding the size of the installation lug, connecting copper pipe, etc. For detailed dimensions, please refer to the installation manual