
HEALTH


Mildew proof of heat exchanger

When the indoor unit is turned off in cooling mode, the fan is still on, and dry the heat exchanger to avoid mold on the heat exchanger.



Silver Ions drain pan (optional)


Slow-released nano-silver ions can keep the drain pan free of mold for a long time.

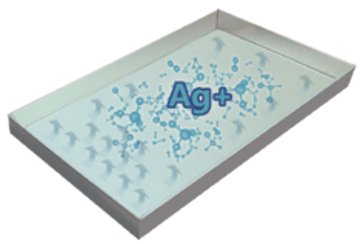


EASY INSTALLATION

Air baffle fittings for irregular rooms

Some air discharge ports can be blocked with air baffle to optimize air distribution in irregular shaped rooms. Air outlets can be blocked with accessories, which can be found in the packing material.




At the corner



In the narrow room

High-lift drain pump

A drain pump with a 1200mm raise height is fitted as standard, simplifying installation of the drain piping.

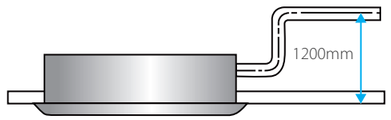

Water level switch

When the drain pipe is blocked or the drain pipe is poor, the water level switch is turned off, and there is no need to worry about overflowing the ceiling.



SPECIFICATIONS

Four-way Cassette

Model			MI2-09Q4DHN18(At)	MI2-12Q4DHN18(At)
Power supply			1-phase, 220-240V, 50/60Hz	
Cooling[1]	Capacity	kW	2.8	3.6
		kBtu/h	9.0	12.0
	Power input	W	17.0	17.0
Heating[2]	Capacity	kW	3.2	4.0
		kBtu/h	10.0	13.0
	Power input	W	17.0	17.0
Air flow rate[3]		m^3/h	790/740/691/641/591/542/492	790/740/691/641/591/542/492
Sound pressure level[4]		dB(A)	30/29/28/27.5/27/26/25	30/29/28/27.5/27/26/25
Sound power level		dB(A)	44/43/42/42/41/40/39	
Main body	Net dimensions[5] (W×H×D)	mm	840×204×840	840×204×840
	Packed dimensions (W×H×D)	mm	940×250×940	940×250×940
	Net/Gross weight	kg	18/20.8	18/20.8
Panel	Net dimensions6 (W×H×D)	mm	950×53×950	950×53×950
	Packed dimensions (W×H×D)	mm	1030×95×1030	1030×95×1030
	Net/Gross weight	kg	5.6/8.0	5.6/8.0
Refrigerant type			R410A/R32	
Pipe connections	Liquid/Gas pipe	mm	Ø6.35/Ø12.7	Ø6.35/Ø12.7
	Drain pipe	mm	OD Ø25	

Model			MI2-15Q4DHN18(At)	MI2-18Q4DHN18(At)	MI2-24Q4DHN18(At)
Power supply			1-phase, 220-240V, 50/60Hz		
Cooling[1]	Capacity	kW	4.5	5.6	7.1
		kBtu/h	15.0	18.0	24.0
	Power input	W	36.0	23.0	32.0
Heating[2]	Capacity	kW	5.0	6.3	8.0
		kBtu/h	17.0	21.0	28.0
	Power input	W	36.0	23.0	32.0
Air flow rate[3]		m^3/h	910/840/770/701/631/561/491	840/791/741/692/642/593/543	1000/943/886/829/772/715/658
Sound pressure level[4]		dB(A)	37/35/34/32/30/29/27	33/32/31/30/29/28/27	37/36/34/33/31/30/28
Sound power level		dB(A)	52/51/49/47/45/43/40	49/48/47/47/46/45/44	52/51/50/48/47/45/44
Main body	Net dimensions[5] (W×H×D)	mm	840×204 840	840×204×840	840×204×840
	Packed dimensions (W×H×D)	mm	940×250 940	940×250×940	940×250×940
	Net/Gross weight	kg	18/20.8	19.5/22.4	19.5/22.4
Panel	Net dimensions6 (W×H×D)	mm	950×53×950	950×53×950	950×53×950
	Packed dimensions (W×H×D)	mm	1030×95×1030	1030×95×1030	1030×95×1030
	Net/Gross weight	kg	5.6/8.0	5.6/8.0	5.6/8.0
Refrigerant type			R410A/R32		
Pipe connections	Liquid/Gas pipe	mm	Ø6.35/Ø12.7	Ø6.35/Ø12.7	Ø9.52/Ø15.9
	Drain pipe	mm	OD Ø25		

Notes:
1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Air flow rate are from the highest speed to the lowest speed, total 7 rates for each model.
4. Sound pressure level is from highest level to lowest level, total 7 levels for each model. Sound pressure level is measured 1.5m below the unit in an anechoic chamber.
5. The dimension is only the body size, excluding the size of the installation lug, connecting copper pipe, etc. For detailed dimensions, please refer to the installation manual.
6. Exposed height of the panel after being installed on the ceiling.